INTERNATIONAL EDITION

BYTE

OCTOBER 1988 A McGRAW-HILL PUBLICATION

REVIEWS

- Dell's System 310
- Sprint
- Amstrad and Epson laptops
- Mac Scanners
- C_Talk
- Turbo Prolog 2.0

PRODUCT FOCUS



20 *Affordable* 80386s

Hypertext

What it is—and isn't
How it works
How you can use it

FIRST IMPRESSIONS

Presentation Manager and LAN Manager for OS/2

New Borland Turbos: Debugger, Pascal, C

PLUS

- Adobe Illustrator
- Apple's CD-ROM Drive
- PC power protection
- Super PC-Kwik/Spooler
- PolyBoost II
- Tickler/2
- Toshiba color printer

£1.95 U.K./A $6.95 AUSTRALIA
Lit. 7,000 ITALY/$3.50 U.S.A.
0360-5280

ebugger, Turbo Pascal 5.0


New! Turbo C® 2.0 with integrated source-level debugger

New Turbo C 2.0 is the *one* C compiler that does it all; nothing is half done or not done at all—instead, your every programming need is met. We wrote our best-selling word processor Sprint® with Turbo C; now you can write your own best seller with Turbo C 2.0.

At better than 16,000 lines a minute,* Turbo C 2.0 compiles your code 20-30% faster than its predecessor Turbo C 1.5 which was already faster than any other C compiler.

Make bugs bug off

Nice bugs are dead bugs, and Turbo C 2.0's integrated source-level debugger lets you find them and flatten them in a flash. You can set multiple breakpoints, watch variables and evaluate expressions—all from inside your integrated C environment.

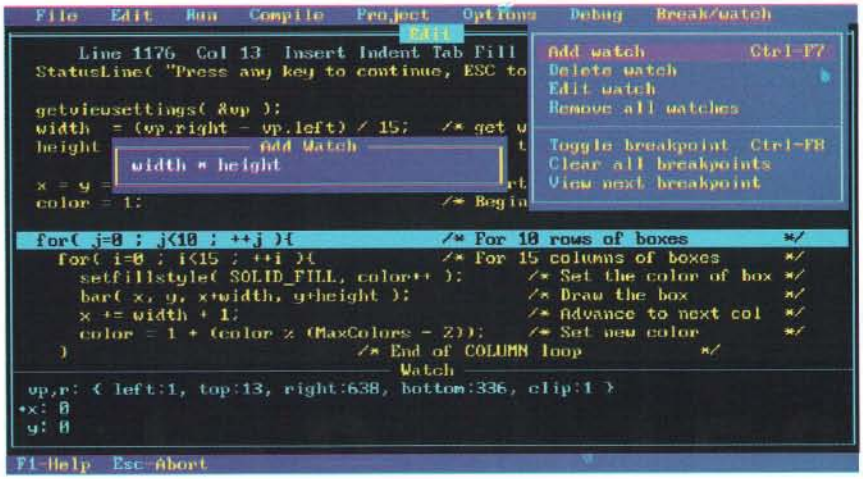

Debugging in the Turbo environment: shown here an expression is being added to the Watch window in Turbo C. The Execution Bar highlights the next line the debugger will execute.

Minimum system requirements: For the IBM PS/2™ and the IBM® family of personal computers and all 100% compatibles. PC-DOS (MS-DOS) 2.0 or later. Turbo Debugger minumum 384K. Turbo Assembler minimum 256K. Turbo C and Turbo Pascal minimum 448K (256K comment line version).

*Customer satisfaction is our main concern; if within 60 days of purchase this product does not perform in accordance with our claims, call our customer service department, and we will arrange a refund.

Prices and specifications subject to change without notice.

All Borland products are trademarks or registered trademarks of Borland International, Inc. Other brand and product names are trademarks or registered trademarks of their respective holders. Copyright ©1988 Borland International, Inc. BI 1290

TURBO C 2.0

HEAPSORT BENCHMARK	TURBO C 2.0	Microsoft® C 5.1
.OBJ size (bytes)	843	945
.EXE size (bytes)	6896	7731
Execution time (seconds)	8.1	12.2
FEATURE COMPARISON		
Integrated debugger	Yes	No*
Inline assembly	Yes	No
Auto dependency checking	Yes	No
EMS support for edit buffer	Yes	No
Device-independent graphics	Yes	No
Number of memory models	6	5
Price	$149.95	$450.00

Heapsort compiled with full optimization. Benchmark run on an IBM PS/2 Model 60.
*Integrated debugger included with Quick C.

Turbo C and Turbo Pascal owners, upgrade now! CALL (800) 543-7543

If you're a registered Turbo C and/or Turbo Pascal owner, you can upgrade and get the latest version of your favorite language, plus both Turbo Assembler and Turbo Debugger, all at special upgrade prices. Whether you order by phone or mail, be sure to include your old Turbo Pascal and/or Turbo C serial numbers and the code PL02.

Mail coupon to: Borland, Attn: Dept. PL02, 1800 Green Hills Road, P.O. Box 660005, Scotts Valley, CA 95066-0005.

UPGRADE OFFERS For registered Turbo Pascal* and Turbo C* owners! (Unregistered owners, see below*)

Name

Shipping address

City State Zip

( )
Telephone

To qualify for the upgrade price you must give the serial number of the equivalent product you are upgrading.

Turbo Pascal Serial Number

Turbo C Serial Number

Upgrades for registered Turbo C and Turbo Pascal owners	Suggested Retail	Upgrade Price
Please check box(es)		
1 ☐ Turbo C 2.0 Professional (Includes both Turbo Assembler and Turbo Debugger)	250.00	99.95
2 ☐ Turbo Pascal 5.0 Professional (Includes both Turbo Assembler and Turbo Debugger)	250.00	99.95
3 ☐ Turbo Pascal with 5.0 upgrade manual and disks	N/A	49.95
4 ☐ Turbo C with 2.0 upgrade manual and disks	N/A	49.95

Please specify diskette size: Either ☐ 5¼" OR ☐ 3½"

Total product amount $ _____

CA and MA residents add sales tax $ _____

In US please add $5 shipping/handling for each product $ _____

In Canada please add $10 shipping/handling for each product $ _____

Total amount enclosed $ _____

Payment: ☐ VISA ☐ MC ☐ Check ☐ Bank Draft Credit card expiration date: ____/____

Card # | | | | | | | | | | | | | | | | |

Name as it appears on card _____

*If you have not registered your Turbo Pascal or Turbo C, you may qualify for the special price by including your completed registration card with this coupon and payment. Offer good September 1 through November 30, 1988. Coupon must be postmarked before December 15, 1988. Offer good in U.S. and Canada only. This offer limited to one upgrade per valid product serial number. Not good with any other offer from Borland. CODs and purchase orders will not be accepted by Borland.

Circle 37 on Reader Service Card (DEALERS: 38)

Turbo Assembler, Turbo D

What started modestly enough in November of 1983 with the launch of Borland's first program, Turbo Pascal® 1.0, became a revolution and it's been going like a rocket ever since.

We've changed the way you program.

We invented integrated environments with Turbo Pascal and we brought them to all our languages. Borland continues to bring you the best programming tools in the world.

New! Turbo Assembler & Turbo Debugger

Two state-of-the-art development tools in one package for only $149.95.

New Turbo Debugger® debugs all sizes


With EMS support, remote debugging, and 386 virtual machine debugging, there's no limit to the size of program you can debug. In fact with 386 virtual machine mode, debugging takes ***zero,*** bytes of conventional memory!

See what's happening

Overlapping windows give you multiple views of the program you're debugging: source code, variables, CPU registers, call stack, watches, breakpoints, memory dump, and more. And a new "session-logging" feature tracks and records your every move.

You're in control

Our breakpoints give you more control than anyone else's. Ordinary debuggers only get you to a stop, then they stop. When our breakpoints are triggered you can simply stop, or you can print expressions, run code, send messages to the session log, or even evaluate an expression with user-defined function calls. And ***all*** our breakpoints are conditional.

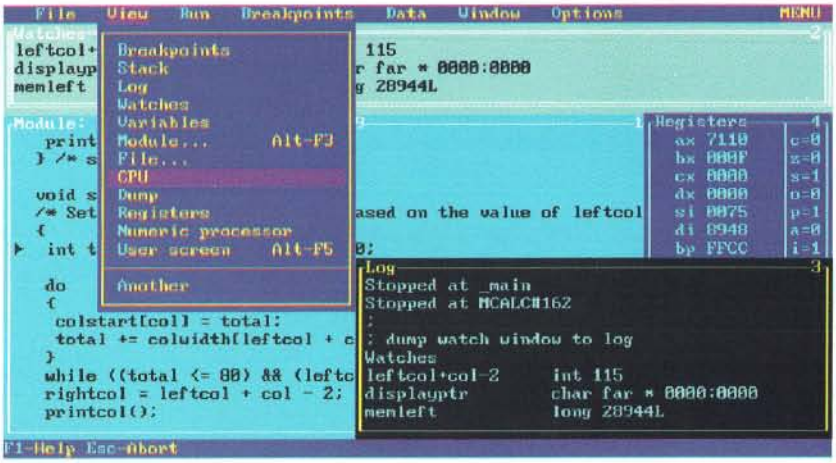

Shown here are views of source code, CPU registers, watch expressions, and a session log.

Unique Data Debugging

Plain Vanilla debuggers can only give you ***code*** debugging. Our new Turbo Debugger give you ***data*** debugging too. You can browse through your data from the simplest byte to the hairiest data structure, inspect arrays, and walk through linked lists. All by point and shoot.

Feature highlights

Breakpoints

- Actions: stop, run code, log expression
- Break on condition, memory changed
- Software ICE capabilites
- 386 debug register support
- Support for hardware debuggers

Debug any program

- Turbo Pascal, Turbo C, Turbo Assembler
- EMS support
- 386 virtual machine and remote machine debugging
- Supports CodeView® and .MAP-compatible programs

Data Debugger

- Follow pointers through linked lists
- Browse through arrays and data structures
- Change data values

New Turbo Assembler® lets you write the tightest, fastest code

Turbo Assembler is faster than other assemblers, and you can use it on your existing code. It's fully MASM compatible, 4.0, 5.0, and 5.1; even MASM can't say that. Turbo Assembler takes you beyond MASM, with significant new Assembly language extensions, more complete error checking, and full 386 support.

Turbo Assembler is designed for easy interfacing with high-level languages like Turbo Pascal and Turbo C. We use Turbo Assembler on Quattro,® our best-selling spreadsheet program; now you can write your own best-seller with Turbo Assembler!

Feature highlights

- Faster than other assemblers
- MASM compatible (4.0, 5.0, and 5.1)
- Significant new assembly language extensions
- Easy interfacing with high-level languages including Turbo C and Turbo Pascal
- Full 386 support


TURBO DEBUGGER FEATURE COMPARISON	TURBO DEBUGGER	CodeView®
Multiple overlapping views	Yes	No
386 virtual-86 mode debugging	Yes	No
Remote debugging	Yes	No
Data debugging	Yes	Partial
Generalized breakpoints	Yes	No
Session logging	Yes	No
Conventional memory used—80386	Zero K	230K
Conventional memory used—remote	15K	N/A

Turbo Debugger version 1.0, Microsoft CodeView version 2.2.

TURBO ASSEMBLER BGIDEMO BENCHMARK	TURBO ASSEMBLER	Microsoft® Assembler
Assembly time (seconds)	9.34	27.46
Link time (seconds)	4.15	10.51
FEATURE COMPARISON		
MASM compatible (4.0, 5.0, 5.1)	Yes	No
Thorough type checking	Yes	No
Nested structures and unions	Yes	No
Multimodule cross reference	Yes	No
Assemble multiple files	Yes	No

Run on IBM PS/2 model 60 using Turbo Assembler version 1.0, Turbo Linker version 2.0, Microsoft Macro Assembler version 5.10, Microsoft Overlay Linker version 3.64.

The Revolution continues with our new . . .

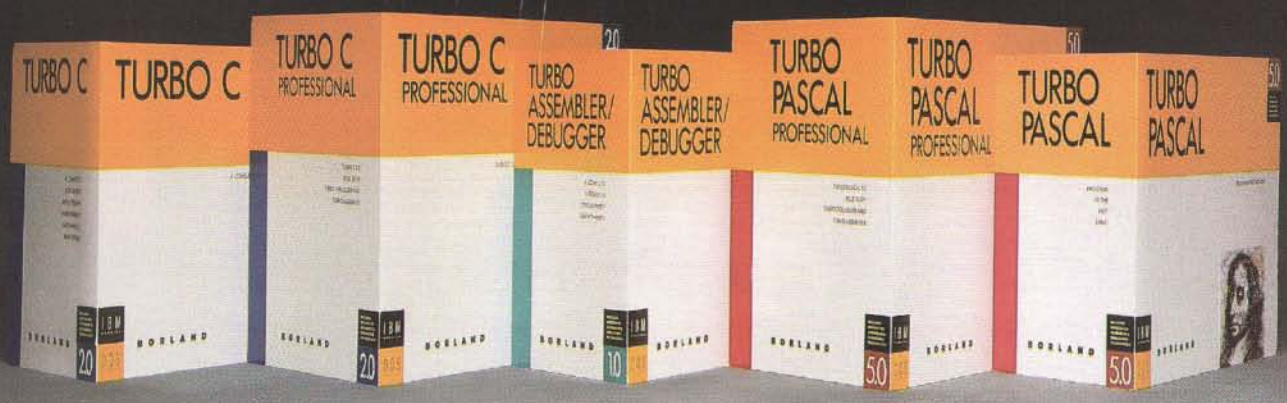

and Turbo C 2.0!

Turbo C 2.0 has the best of everything

- Includes the compiler, editor, and debugger, all rolled into one
- Integrated source-level debugger lets you step code, watch variables, and set breakpoints
- Develop and debug production-quality code in all six memory models
- Inline assembler support
- Support for Turbo Assembler and Turbo Debugger
- Make facility with automatic dependency checking
- Over 430 library functions, including a complete graphics library
- Only $149.95


New Turbo C Professional

Turbo C 2.0 plus *both* Turbo Assembler & Turbo Debugger: all three programs rolled into one—the ***one*** C package that has everything. A complete set of tools that caters to every level of programming expertise. Turbo C Professional: $250. Includes coupon for free T-shirt (while supplies last).

New! Turbo Pascal® 5.0 with integrated source-level debugger

Turbo Pascal, the worldwide favorite with over a million copies in use, just got even smarter. The best got better. Meet Version 5.0. In a word, it's revolutionary.

Not only do you go code-racing at more than 34,000 lines a minute,* you also now go into a sophisticated debugging environment—right at source level.

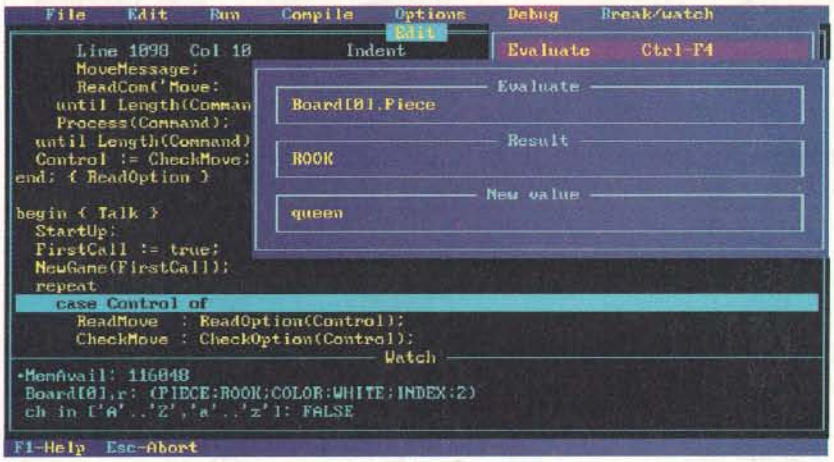

Shown here is the Evaluate/Modify window of Turbo Pascal: look at expressions, examine structured data types, change variables on the fly.

It's completely integrated and bullet-fast.

Turbo Pascal's new integrated debugger takes you inside your code for fast fixes. You step, trace, set multiple breakpoints. You modify variables as you debug and watch full expressions at runtime.

Separate Compilation

Break your code into units. Your separately compiled units can be shared by multiple programs and linked in a flash with Turbo Pascal's built-in Make utility and smart linker. We give you a powerful library of standard units including the spectacular Borland Graphic Interface and our state-of-the-art overlay manager.

Feature highlights

- Includes the compiler, editor, and debugger, all rolled into one
- Integrated source-level debugger lets you step code, watch variables, and set breakpoints
- Overlays, including EMS support
- 8087 floating-point emulation
- Support for Turbo Assembler and Turbo Debugger
- Procedural types, variables, and parameters
- Smaller, tighter programs: Smart Linker strips both unused code and data
- Constant expressions
- EMS support for editor
- Only $149.95

Debugging: The inside story

Turbo Pascal's new integrated source-level debugger takes you inside your code to fix errors fast. Don't worry about errors, everyone makes them; but with the right debugger, this one, it's a fast fix.

Turbo Pascal Professional®

Turbo Pascal 5.0 plus *both* Turbo Assembler & Turbo Debugger: all three programs rolled into one—the ***one*** Pascal package that has everything. A complete set of tools that caters to every level of programming expertise. Turbo Pascal Professional: $250. Includes coupon for free T-shirt (while supplies last).

TURBO PASCAL 5.0	TURBO PASCAL 5.0	Turbo Pascal 4.0
SIEVE BENCHMARK		
.EXE size (bytes)	1440	1504
Execution time (seconds)	6.15	7.25
FEATURE COMPARISON		
Integrated debugger	Yes	No
Overlays, including EMS support	Yes	No
8087 floating-point emulation	Yes	No
Turbo Debugger support	Yes	No
Procedural types, variables, parameters	Yes	No
Smart linking of code and data	Yes	No
Constant expressions	Yes	No
EMS support for editor	Yes	No

Benchmark (25 iterations) run on an IBM PS/2 Model 60.

60-day money-back guarantee†

BORLAND

For the dealer nearest you
Call (800) 543-7543

Circle 39 on Reader Service Card (DEALERS: 40)

BYTE

OCTOBER 1988 VOL. 13/NO. 10

PRODUCTS IN PERSPECTIVE

67 **What's New**

89 **Short Takes**

Toshiba 3-in-One P321SLC, *a color dot-matrix printer*
Illustrator 88, *PostScript drawing gets better*
AppleCD SC, *a new CD-ROM drive*
Super PC-Kwik and **PolyBoost II,** *two great caching programs*
Tickler/2, *a powerful personal scheduler*
Zortech Comm Toolkit, *some eye-opening programs*


FIRST IMPRESSIONS

151 **Borland Beefs Up Its Languages**
by Rick Grehan and Tom Thompson
Turbo C and Turbo Pascal get upgrades, but the big news is an assembler and a debugger.

157 **Presentation Manager and LAN Manager**
by Steve Apiki and Stanford Diehl
A graphical interface and network support carry OS/2 well beyond the traditional DOS environment.

REVIEWS

164 **Product Focus: 80386s for the Masses**
by Steve Apiki and Stanford Diehl
Twenty 80386-based clones offering a revolutionary feature—affordability.

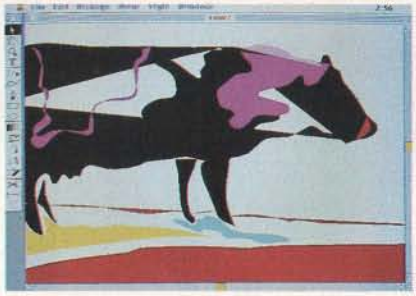

Adobe Illustrator/89

EXPERT ADVICE

101 **Computing at Chaos Manor: Stick Shift or Automatic?**
by Jerry Pournelle
Jerry takes a look at Windows and Sprint.

119 **Applications Plus: Sprint with Caution**
by Ezra Shapiro
Ezra tests Borland's new word processor.

129 **Down to Business: Be Secure, Not Sorry**
by Wayne Rash Jr.
Your computers and data need protection from accidents and malice.

133 **Macinations: MS-DOS, MiniFans, Math, and Mice**
by Don Crabb
These tools make the Mac a multifaceted machine.

137 **OS/2 Notebook: The Good News and the Bad News**
by Mark Minasi
There's a price to pay for all OS/2's features.

143 **COM1: Back to the Future Again**
by Brock N. Meeks
Prodigy may be the breakthrough computer conferencing system.

179 **Bucking the System**
by John Unger
Dell's System 310 provides optimized performance at a minimized price.

185 **The Odd Couple**
by Wayne Rash Jr.
The Amstrad PPC640 and the Epson Equity LT have little in common beyond portability.

194 **Bringing the Outside World into a Macintosh**
by Laurence H. Loeb
A look at five low-end scanners that bring text and graphics to the Mac.

201 **Smalltalk à la C**
by Namir Clement Shammas
C_Talk provides powerful object extensions to C in a Smalltalk-like environment.

209 **Turbo Prolog Revisited**
by Alex Lane
Version 2.0 is a cut above the original version with enhanced database and graphics features.

215 **D the Data Language**
by Pam Oppenheim
An alternative to dBASE for developing custom applications.

223 **Suit Yourself with Sprint**
by Lamont Wood
A high-end word processor that you can customize.

230 **Review Update**

COVER PHOTOGRAPHY: ROBERT TINNEY © 1988

INTERNATIONAL SECTION
begins after page 88

IN DEPTH

234 Introduction: Hypertext

237 A Grand Vision
by Janet Fiderio
After 43 years, hypertext applications are coming out of research labs and into the market.

247 From Text to Hypertext
by Mark Frisse
Convert on-line printed documents into hierarchically structured hypertext.

255 The Right Tool for the Job
by Michael L. Begeman and Jeff Conklin
Hypertext offers an ideal model for the systems design process.

268 Hyper Activity
Hypertext products, services, and information.

FEATURES

270 PC Power, Part 1: Power Protection
by Mark Waller
Just what do those power protection devices do, and how well do they do it?

HANDS ON

283 Ciarcia's Circuit Cellar: A Supercomputer, Part 1
by Steve Ciarcia
Steve discusses the basics of multiprocessing.

293 Some Assembly Required: Floating-Point without a Coprocessor, Part 2
by Rick Grehan
Getting numbers to and from a binary floating-point mathematics package.



Hypertext/235



PC Power Protection/270

DEPARTMENTS

6 Editorial: The Russians Are Coming
11 Microbytes
22 Letters
33 Chaos Manor Mail
38 Ask BYTE
50 Book Reviews
339 Coming Up in BYTE

READER SERVICE

338 Editorial Index by Company
340 Alphabetical Index to Advertisers
342 Index to Advertisers by Product Category
Inquiry Reply Cards: after **344**

PROGRAM LISTINGS

From BIX: see **232**
From BYTEnet: call (617) 861-9764
On disk or in print: see card after **312**

BYTE (ISSN 0360-5280) is published monthly with an additional issue in October by McGraw-Hill Inc. **Postmaster:** Send address changes, USPS Form 3579, undeliverable copies, and fulfillment questions to BYTE Subscriptions, P.O. Box 7643, Teaneck, NJ 07666-9866. Second-class postage paid at Peterborough, NH 03458 and additional mailing offices. Postage paid at Winnipeg, Manitoba. Registration number 9321. Printed in the United States of America.

Not responsible for lost manuscripts or photos. Opinions expressed by the authors are not necessarily those of BYTE.

Copyright © 1988 by McGraw-Hill Inc. All rights reserved. Trademark registered in the United States Patent and Trademark Office.

Subscription questions or problems should be addressed to: BYTE Subscriber Service, P.O. Box 7643, Teaneck, NJ 07666-9866.

BYTE

EDITOR IN CHIEF
Frederic S. Langa

PUBLISHER/GROUP VICE PRESIDENT
J. Burt Totaro

OPERATIONS
Glenn Hartwig *Associate Managing Editor*

REVIEWS (Hardware, Software, Product Focus)
Cathryn Baskin *Associate Managing Editor*, Dennis Allen *Senior Technical Editor, Software*, Stephen Apiki *Testing Editor, BYTE Lab*, Stanford Diehl *Testing Editor, BYTE Lab*

NEWS AND TECHNOLOGY (Microbytes, What's New, Short Takes)
Rich Malloy *Associate Managing Editor*, D. Barker *Senior Editor, News and Technology*, Anne Fischer Lent *Senior Editor, New Products*
Peterborough: Roger Adams *Associate News Editor*, David Andrews *Associate News Editor*, Martha Hicks *Associate News Editor*
West Coast: Gene Smarte *Bureau Chief*, Costa Mesa, Nicholas Baran *Technical Editor*, San Francisco, Frank Hayes *Associate News Editor*, Marlene Nesary *Associate News Editor*, Jeffrey Bertolucci *Editorial Assistant*, San Francisco

SENIOR TECHNICAL EDITORS
Ken Sheldon *Features*, Jane Morrill Tazelaar *In Depth*, Richard Grehan *At Large*, Tom Thompson *At Large*

TECHNICAL EDITORS
Janet J. Barron, Janet Fiderio, Jon Udell, Stanley Wszola

ASSOCIATE TECHNICAL EDITOR
Robert Mitchell

CONSULTING EDITORS
Steve Ciarcia, Jerry Pournelle, Ezra Shapiro, Don Crabb, Brock N. Meeks, Mark Minasi, Wayne Rash Jr.

CONTRIBUTING EDITORS
Jonathan Amsterdam *Programming Projects*, Mark Dahmke *Video, Operating Systems*, Mark Haas *At Large*, Rik Jadrnicek *CAD, Graphics, Spreadsheets*, Robert T. Kurosaka *Mathematical Recreations*, Alastair J. W. Mayer *Software*, Stan Miastkowski *New Technology*, Alan R. Miller *Languages and Engineering*, Dick Pountain *Algorithms*, Roger Powell *Computers and Music*, Phillip Robinson *Semiconductors*, Jon Shiell *High-Performance Systems*, Ernest Tello *Artificial Intelligence*

COPY EDITORS
Lauren Stickler *Chief*, Susan Colwell, Judy Connors-Tenney, Jeff Edmonds, Nancy Hayes, Cathy Kingery, Margaret A. Richard, Warren Williamson

EDITORIAL ASSISTANTS
Peggy Dunham *Office Manager*, Linda C. Ryan, June N. Sheldon, Lynn Susan Valley

ART
Nancy Rice *Director*, Joseph A. Gallagher *Assistant Director*, Jan Muller *Assistant*, Alan Easton *Technical Artist*

PRODUCTION
David R. Anderson *Director*, Virginia Reardon *Senior Editorial Production Coordinator*, Denise Chartrand *Editorial Production Coordinator*, Michael J. Lonsky *Editorial Production Coordinator*

TYPOGRAPHY
Sherry Fiske *Systems Manager*, Donna Sweeney *Applications Manager*, Christa Patterson

ADVERTISING/PRODUCTION (603) 924-6448
Lisa Wozmak *Director*, Lyda Clark *Senior Account Coordinator*, Karen Cilley, Linda Fluhr, Jeanne Gatcombe, Brian Higgins, Rod Holden, Wai Chiu Li *Quality Control Manager*, Julie Murphree *Advertising/Production Coordinator*

MARKETING COMMUNICATIONS
Horace T. Howland *Director*, Pamela Petrakos-Wilson *Promotion Manager*, Wilbur S. Watson *Marketing Services Manager*, Dawn Matthews *Public Relations Manager*, Lisa Jo Steiner *Marketing Assistant*, Stephanie Warnesky *Marketing Art Director*, Sharon Price *Associate Art Director*, Julie Perron *Market Research Analyst*

PLANNING AND RESEARCH
Michele Perron *Director*
Faith Kluntz *Copyrights Coordinator*, Cynthia Damato Sands *Reader Service Coordinator*

FINANCIAL SERVICES
Philip L. Penny *Director of Finance and Services*, Kenneth A. King *Business Manager*, Christine Monkton *Assistant*, Marilyn Haigh, Diane Henry, JoAnn Walter, Jaime Huber

CIRCULATION
Dan McLaughlin *Director*
James Bingham *Newsstand Sales Manager*, Vicki Weston *Assistant Manager*, Karen Desroches *Distribution Coordinator*, Donna Healy, *Direct Accounts Coordinator*, Louise Menegus *Back Issues*

PERSONNEL
Patricia Burke *Personnel Coordinator*, Beverly Goss *Receptionist*

BUILDING SERVICES
Tony Bennett *Manager*, Cliff Monkton, Mark Monkton, Agnes Perry

BIX BYTE INFORMATION EXCHANGE

DIRECTOR
Stephen M. Laliberte

EXECUTIVE EDITOR
George Bond

ASSOCIATE EDITOR
Tony Lockwood

MICROBYTES DAILY
D. Barker *Coordinator, Peterborough*, Rich Malloy *New York*, Gene Smarte *Costa Mesa*, Nicholas Baran *San Francisco*, Rick Cook *Phoenix*, Frank Hayes *San Francisco*, Jason Levitt *Austin, TX*, Larry Loeb *Wallingford, CT*, Brock N. Meeks *La Mesa, CA*, Stan Miastkowski *Peterborough*, Wayne Rash Jr., Sue Rosenberg *Washington, DC*, David Reed *Lexington, KY*

GROUP MODERATORS
David Allen *Applications*, Frank Boosman *Artificial Intelligence*, Leroy Casterline *Other*, Marc Greenfield *Programming Languages*, Jim Howard *Graphics*, Gary Kendall *Operating Systems*, Steve Krenek *Computers*, Brock N. Meeks *Telecommunications*, Barry Nance *New Technology*, Donald Osgood *Computers*, Sue Rosenberg *Other*, Jon Swanson *Chips*

BUSINESS AND MARKETING
Patricia Bausum *Secretary*, Denise A. Greene *Customer Service*, Brian Warnock *Customer Service*, Tammy Burgess *Customer Credit and Billing*

TECHNOLOGY
Clayton Lisle *Director, Business Systems Technology, MHIS*, Jack Reilly *Senior Business Systems Analyst*, Bob Dorobis *Business Systems Analyst*, Fred Strauss *Senior Business Systems Analyst*

ADVERTISING SALES
Dennis J. Riley *Director*, **(603) 924-9281**
Sandra Foster *Administrative Assistant*

NEW ENGLAND
ME, NH, VT, MA, RI, ONTARIO, CANADA & EASTERN CANADA
John C. Moon **(617) 262-1160**

ATLANTIC
NY, NYC, CT, NJ (NORTH)
Leah G. Rabinowitz **(212) 512-2096**
(203) 968-7111

EAST
PA, KY, NJ (SOUTH), MD, VA, W.VA, DE, DC
(215) 496-3833

SOUTHEAST
NC, SC, GA, FL, AL, TN
Thomas Tolbert **(404) 252-0626**

MIDWEST
IL, MO, KS, IA, ND, SD, MN, WI, NE, IN, MI, MS, OH
Bob Denmead **(312) 751-3740**

Jennifer L. Bartel *West Coast Sales Manager*, **(214) 644-1111**

SOUTHWEST, ROCKY MOUNTAIN
CO, WY, OK, TX, AR, LA
Karl Heinrich **(713) 462-0757**

SOUTH PACIFIC
SOUTHERN CA, AZ, NM, LAS VEGAS
Jack Anderson **(714) 557-6292**
Tom Harvey **(213) 480-5243**

NORTH PACIFIC
HI, WA, OR, ID, MT, NORTHERN CA, NV (except LAS VEGAS), UT, WESTERN CANADA
Mike Kisseberth **(415) 362-4600**
Bill McAfee **(415) 349-4100**

TELEMARKETING
L. Bradley Browne *Director*
Susan Boyd *Administrative Assistant*

BYTE BITS (2x3)
Dan Harper **(603) 924-6830**

THE BUYER'S MART (1x2)
Mark Stone **(603) 924-3754**

REGIONAL ADVERTISING SECTIONS
MID-ATLANTIC, METRO NY & NEW ENGLAND, SOUTHERN CALIFORNIA
Elisa Lister **(603) 924-6830**

MIDWEST, PACIFIC NORTHWEST, METRO NY & NEW ENGLAND
Scott Gagnon **(603) 924-6830**

SOUTHEAST, SOUTHWEST
Denise Vernier **(603) 924-9281**

BYTE DECK MAILINGS
National
Ed Ware **(603) 924-6166**

A/E/C COMPUTING DECK
COMPUTING FOR ENGINEERS DECK
Mary Ann Goulding **(603) 924-9281**

INTERNATIONAL ADVERTISING SALES STAFF
See listing on page 341.

EDITORIAL AND BUSINESS OFFICE:
One Phoenix Mill Lane, Peterborough, NH 03458, (603) 924-9281.
West Coast Branch Offices: 425 Battery St., San Francisco, CA 94111, (415) 954-9718; 3001 Red Hill Ave., Building #1, Suite 222, Costa Mesa, CA 92626, (714) 557-6292.
New York Branch Editorial Office: 1221 Avenue of the Americas, New York, NY 10020, (212) 512-3175.
BYTEnet: (617) 861-9764 (set modem at 8-1-N or 7-1-E; 300 or 1200 baud).
Fax: (603) 924-7507. **Telex:** (603) 924-7861.
SUBSCRIPTION CUSTOMER SERVICE: Outside U.S. (201) 837-1315; Inside U.S. (800) 423-8272.


Officers of McGraw-Hill Information Services Company: President: Walter D. Serwatka. Executive Vice Presidents: Kenneth E. Gazzola, Aerospace and Defense; Ira Herenstein, Computers and Communications; Russell C. White, Construction; Robert P. McGraw, Healthcare; Brian H. Hall, Legal. Senior Vice Presidents–Publishers: Laurence Altman, Data Communications; David J. McGrath, Engineering News-Record. Senior Vice Presidents: Robert D. Daleo, Finance; Michael J. Koeller, Human Resources. Group Vice Presidents: J. Burt Totaro, BYTE; Norbert Schumacher, Energy/Process Industries. Vice Presidents: George Elsinger, Circulation; Julia Lenard, Systems Planning and Technology.

Officers of McGraw-Hill, Inc.: Joseph L. Dionne, Chairman, President, and Chief Executive Officer; Robert N. Landes, Executive Vice President, General Counsel, and Secretary; Robert J. Bahash, Executive Vice President and Chief Financial Officer; Frank D. Penglase, Senior Vice President, Treasury Operations.

Founder: James H. McGraw (1860–1948). Executive, editorial, circulation, and advertising offices: One Phoenix Mill Lane, Peterborough, NH 03458, phone (603) 924-9281. Office hours: Monday through Thursday 8:30 AM–4:30 PM, Friday 8:30 AM–1:00 PM, Eastern Time. Address subscriptions to BYTE Subscriptions, P.O. Box 7643, Teaneck, NJ 07666-9866. Subscriptions are $22.95 for one year, $39.95 for two years, and $55.95 for three years in the U.S. and its possessions. In Canada and Mexico, $25.95 for one year, $45.95 for two years, $64.95 for three years. $75 for one-year air delivery to Europe. Y28,800 for one-year air delivery to Japan, Y14,400 for one-year surface delivery to Japan, $40 surface delivery elsewhere. Air delivery to selected areas at additional rates upon request. Single copy price is $3.50 in the U.S. and its possessions, $3.95 in Canada, $4.50 in Europe, and $5 elsewhere. Foreign subscriptions and sales should be remitted in U.S. funds drawn on a U.S. bank. Please allow six to eight weeks for delivery of first issue. Address editorial correspondence to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458. Unacceptable manuscripts will be returned if accompanied by sufficient postage. Where necessary, permission is granted by the copyright owner for libraries and others registered with the Copyright Clearance Center (CCC) to photocopy any article herein for the flat fee of $1.50 per copy of the article or any part thereof. Correspondence and payment should be sent directly to the CCC, 29 Congress St., Salem, MA 01970. Specify ISSN 0360-5280/83, $1.50. Copying done for other than personal or internal reference use without the permission of McGraw-Hill, Inc. is prohibited. Requests for special permission or bulk orders should be addressed to the publisher. BYTE is available in microform from University Microfilms International, 300 North Zeeb Rd., Dept. PR, Ann Arbor, MI 48106 or 18 Bedford Row, Dept. PR, London WC1R 4EJ, England.

BYTE and **BYTE** are registered trademarks of McGraw-Hill, Inc.

Integrated Software for Schematics & PCB Artwork

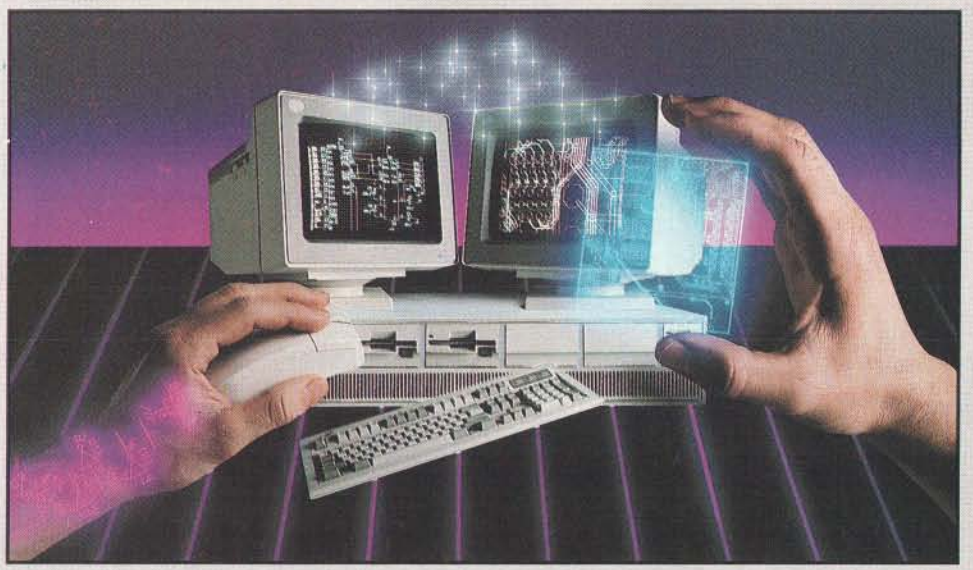

Introducing HiWIRE®-Plus

Wintek's smARTWORK® pioneered low-cost printed-circuit-board CAD. Then HiWIRE set the standard for productivity and ease-of-use in schematic capture. Now Wintek introduces HiWIRE-Plus, integrating HiWIRE's schematic features with a powerful printed-circuit-design facility.

Creating Schematics

With HiWIRE-Plus, simply connect library symbols with wires and buses. Creating and changing symbols is fast and painless. Produce your drawing using a dot-matrix printer, laser printer, or pen plotter.

Circuit-Board Design

HiWIRE-Plus gives you all the design freedom you want: you choose the grid size, trace widths, and pad shapes. The board size and number of layers are virtually unlimited. HiWIRE-Plus is perfect for surface-mount, microstrip, and ECL applications.

CURRENT VERSIONS
HiWIRE, V1.1r4; smARTWORK, V1.4r1

HiWIRE-Plus Advantages

- ☐ One tool for schematics and printed-circuit artwork
- ☐ Easy-to-learn menu-driven operation; complete documentation and tutorial
- ☐ Schematic libraries with TTL, CMOS, ECL, ladder, microprocessor, and discrete components
- ☐ Netlist and bill-of-materials utilities included
- ☐ Circuit boards up to 60x60 inches and 256 layers
- ☐ Variable grid size, trace width, and pad size (.001″ resolution)
- ☐ PCB library with DIPs, SIPs, SMDs, PGAs, TOs, and edge and D connectors
- ☐ Schematic-to-layout cross-checking
- ☐ Design-rule checker
- ☐ 800 number for free support

WINTEK®

"HiWIRE", "smARTWORK", "Wintek", and the Wintek logo are registered trademarks of Wintek Corporation.

System Requirements

- ☐ IBM PC, XT, AT, or PS/2 with 512K RAM, printer port, color monitor, and CGA, EGA, or VGA graphics card
- ☐ Microsoft Mouse
- ☐ IBM ProPrinter or Epson dot-matrix printer, and/or
- ☐ Houston Instrument or Hewlett-Packard pen plotter

Higher Performance Better Value

Still only $895, HiWIRE-Plus delivers quality schematics and PCB artwork. You don't need to guess if HiWIRE-Plus is right for you—*we guarantee it!* Try it for 30 days at absolutely no risk. Call toll free today and put HiWIRE-Plus to work for you.

Wintek Corporation
1801 South Street
Lafayette, Indiana 47904-2993
(800) 742-6809 or
(317) 742-8428
FAX: (317) 448-4823
Telex: 70-9079

Europe: RIVA Ltd., England,
Phone: 0420 22666, FAX: 0420 23700
Australia: Entertainment Audio Pty, Ltd.,
Phone: (08) 363-0454

Circle 277 on Reader Service Card

THE RUSSIANS ARE COMING

And they're looking to do business with some very interesting software

On a steamy Friday in New York late last summer, some members of BYTE's staff met with a group of senior Soviet computer scientists. The purpose was to learn about the state of the art in Russian computer technology and to see demonstrations of IBM PC AT–based software that they hope to export to the West.

Almost the entire Soviet delegation was made up of members of the USSR Academy of Sciences. Attendees included Boris Batalov, head of the Scientific Research Institute; Lev Bogdanov, chief of the Department of Applied Physics and Mathematical Sciences for the Presidium; Vadim Kotov, deputy director of the Siberian Computer Center; and Alexander Vasenkov, head of the State Committee for Computer Technology.

Their software demonstration is a self-running "film" (their word)—sort of a Dan Bricklin–like demonstration: a fast-moving, sound-and-color canned presentation of mock-up screens that are meant to reflect the actual product. Lots of colored windows pop up everywhere, with native Russian explanations of what's going on translated (and, sometimes, confusingly transliterated) into English. In all, it's very interesting.

The demonstration includes a powerful equation solver; a simpler, for-fun program for solving mathematical puzzles; a database you can query in natural language to find out (using their examples) when *Good Night, Little Ones* is playing on State TV; a time planner/project management package (interestingly, they call it "plan" management); a macroeconomics modeler (their demonstration actually models the Russian State economy through the year 2000); and lots of information on the expert-system technology they used to construct these programs from "modules."

Vadim Kotov, who did most of the talking for the group, stressed that their system was not just a set of tools, but a "factory" of interconnected applications that can be used to create complex programs in a very short time.

It all looks very flexible and modular; it's written in a powerful hybrid of Prolog and Smalltalk—sort of an object-oriented Prolog.

The whole demonstation is clever, flashy, and unabashedly commercial—they're looking for American companies to market their "software factory" technology. (And vice versa: DataEase International set up their visit to the United States and as a result will be selling a database program in Russia.)

Because the demonstration software gives a glimpse into a heretofore largely unknown portion of the microcomputing community, we'll make the program available in the listings area of BIX so you can see it for yourself: Look for RUSSIAN1.ARC, RUSSIAN2.ARC, and RUSSIAN3.ARC in the FromBYTE area. You'll need a computer with EGA to see all the demonstration, although some parts of it will work on monochrome systems.

We also saw another program separately demonstrated: Lexikon is a Russian word processor similar to WordStar but not a clone. Kotov said he was particularly proud of the thesaurus included with this product; Russian uses a number of declensions, so a thesaurus has to be clever to work well.

Kotov's group has been busy. For example, it designed the typesetting system for *Pravda* (with a circulation of 10 million, it's one of the world's largest publications). The *Pravda* system uses multiprocessing, and it has a "flat" structure (i.e., one layer of modules rather than a hierarchy of modules and submodules).

Kotov's group also recently designed the first Soviet 32-bit microcomputer: It looks more like a PDP-1140 than a desktop system. At its heart is a basic multiprocessing chip with reduced-instruction-set-computer-like architecture. The processor is "something like a Transputer," but they do not use Occam, the multiprocessing programming language developed for the Transputer by INMOS. Nor do they use the asynchronous communication bus developed by INMOS. Instead, they use a FIFO synchronous channel.

By coincidence, we had brought along a Definicon two-Transputer board to show them; the chips occupied barely half of one AT-style card. Kotov said the equivalent Soviet silicon and support circuitry would fill a volume about half that of an entire AT *system*.

One of the Russians mentioned that there were 200,000 personal computers in the Soviet Union, most of them Russian-made clones of the IBM PC and AT. They would like to buy or build 80386-based systems, but the most advanced chip that can be legally sold to them is an 80286 running at 12.5 MHz or slower.

The most popular programming language in the Soviet Union is C, followed by Pascal and Modula-2. The Soviets use C primarily under the Unix operating system.

Most computers are in offices, but a small number of programmers are able to take their computers home to work there.

Because of a shortage of Western currency, most Soviet institutions get only one copy of BYTE, which goes in the library. When the issue arrives, Kotov says, a line of people forms to sign up to read it. Kotov says he and his colleagues refer to the magazine as "PlayBYTE, because it has so many interesting things to look at."

—Fred Langa
Editor in Chief
(BIX name "flanga")



Maxell Corporation of America, 22-08 Route 208, Fair Lawn, NJ 07410

Never before has this level of Reliability
and Durability been available in floppy disks.
Introducing the new RD Series from Maxell.
Twice the durability of the disks you're now using.
Twice the resistance to dust and dirt.
And the RD Series is ten times more reliable
than conventional floppy disks.
The Gold Standard has always meant maximum
safety for your data. Now it means even more.

maxell RD

maxell®
THE GOLD STANDARD

Zero To 200
All Day

Whether you need the blazing speed of a 2000 lpm band printer, the precision of a 24-wire desktop matrix printer, the versatile functionality of laser page printers, or anything in between, your prime source is Genicom.

We design and build an incredibly broad spectrum of printers for almost every application. Machines that are as durable as they are functional.

And now, we've added four new printers to one of the industry's broadest product lines.

A 2000 lpm letter quality band printer.



In 60 Seconds. Long.

Two shuttle matrix line printers for graphics and bar code printing, at speeds up to 1600 lpm. And a superb 24-wire letter quality desktop matrix printer.

Don't forget that these new models, along with all Genicom printers, are backed by a responsive, nationwide service network.

So put your trust in Genicom printers. No matter how fast they go, they always outrun the competition.



GENICOM®

Ideas that work as hard as you do.

Genicom Drive, Waynesboro, Virginia 22980
1-800-4-GENICOM


Circle 104 on Reader Service Card



New Prices

OS/2

WINDOWS FOR DATA®

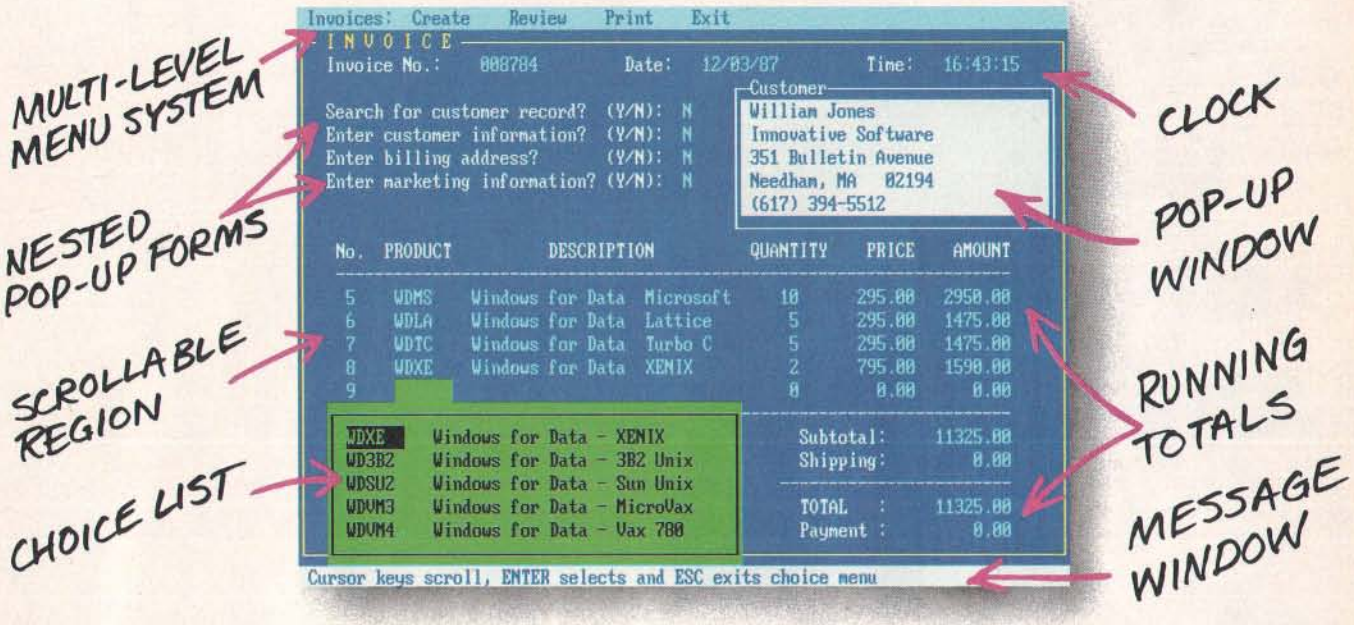

If you program in C, take a few moments to learn how Windows for Data can help you build a state-of-the-art user interface.

- ☑ **C**reate and manage menus, data-entry forms, context-sensitive help, and text displays — all within windows.
- ☑ **D**evelop window-based OS/2 programs right now, without the headaches of learning OS/2 screen management. Run the same source code in PCDOS and OS/2 protected mode.
- ☑ **B**uild a better front end for any DBMS that has a C-language interface (most popular ones do).



FROM END TO BEGINNING

Windows for Data begins where other screen packages end, with special features like nested pop-up forms and menus, field entry from lists of choices, scrollable regions for the entry of variable numbers of line items, and an exclusive built-in debugging system.

NO WALLS

If you've been frustrated by the limitations of other screen utilities, don't be discouraged. You won't run into walls with Windows for Data. Our customers repeatedly tell us how they've used our system in ways we never imagined — but which we anticipated by designing Windows for Data for unprecedented adapatability. You will be amazed at what you can do with Windows for Data.

YOU ARE ALWAYS IN CHARGE

Control functions that you write and attach to fields and/or keys can read, compare, validate, and change the data values in all fields of the form. Upon entry or exit from any field, control functions can call up subsidiary forms and menus, change the active field, exit or abort the form, perform almost any task you can imagine.



OUR WINDOWS WILL OPEN DOORS

Our windows will open doors to new markets for your software. High-performance, source-code-compatible versions of Windows for Data are now available for **PCDOS, OS/2, XENIX, UNIX,** and **VMS.** PCDOS versions are fully compatible with Microsoft Windows. **No royalties.**

MONEY BACK GUARANTEE

You owe it to yourself and your programs to try Windows for Data. If not satisfied, you can return it for a full refund.

Prices: PCDOS $295, Source $295. OS/2 $395. XENIX $795. UNIX, VMS, please call.

Call: (802) 848-7731 **ext. 51**

Telex: 510-601-4160 VCSOFT FAX 802-848-3502

Vermont Creative Software

21 Elm Ave.
Richford,
VT 05476

MICROBYTES

Staff-written highlights of developments in technology and the microcomputer industry

Language Lets Anyone Do Windows, Develop Programs with Modern Look, Graphics Interface

Developers at Carnegie-Mellon University in Pittsburgh say they've got a computer language that will let nonprofessional programmers write programs that use those hot graphics-oriented features characteristic of today's operating systems, such as windows, pull-down menus, and multifont text. The language is cT, short for CMU Tutor. Tutor was originally part of the PLATO educational system at the University of Illinois, but according to Bruce Sherwood, associate director of Carnegie-Mellon's Center for the Design of Educational Computing and one of cT's developers, this new language goes far beyond the original.

The language is "really designed for any kind of computer programming, including research computing. It's a general-purpose language for any situation where you're going to have a modern user interface," Sherwood said. It's also highly machine-independent, he said, because cT implementations are designed for font and graphics rescaling; the same cT source code will run on a Mac, a Sun, an IBM RT PC, and a microVAX—and on most of those machines, Sherwood said, cT is the only language that lets ordinary people program using graphics and multifont text.

"One way of describing Tutor languages is to say that their goals and methods are reminiscent of a very good BASIC," Sherwood said, but cT begins "from the expectation that you're writing a program for somebody else to use." For example, Tutor's input statement lets the program not only get input from the user, but also make sure it's the right kind of input. "The programmer doesn't have to do all the analysis to make the validity checks. You're encouraged to look," Sherwood said.

"There are five things any language has to do. Calculate, display, sequence, analyze input, and read and write files. Where cT is strong is display, sequence, and analysis."

A cT program consists of a set of root-level procedures called "units"; these can accept parameters by value or address and return a result. Units are linked with the commands **next** and **previous**: A user can pull down a menu and click on **previous** and review the previous unit. "With Tutor-class languages, a program is really a whole archipelago of these unit islands, and there are some interesting structures between the islands," Sherwood said.

Source and execution windows are both active; because fonts and graphics can be scaled, you can see a miniature version of your execution window if you like. A programmer can select a source-code coordinate by clicking the mouse at a point in the execution window. There's also an online reference manual, complete with working examples that you can cut and paste into the source window and execute. "It's a fabulous situation for programming by example," Sherwood said.

At Carnegie-Mellon, cT has been in use for a year, but it's only now becoming commercially available. The Macintosh version, which runs on the Mac Plus, the Mac SE, or the Mac II, is $92.50 from cT Distribution, Center for the Design of Educational Computing, Carnegie-Mellon University, Pittsburgh, PA 15213, (412) 268-5638. An IBM PS/2 version will follow shortly, and a Unix version (running under X-Windows) should be available later this year.

Texas Instruments Mixes GaAs and Silicon on Same Chip

In the chip-making business, silicon and gallium arsenide (GaAs) are like water and oil—they just don't mix. The standard ways to make chips from each substance are almost completely incompatible; silicon chips use TTL-level inputs and outputs, for example, while GaAs typically runs at microwave frequencies. It's only recently that one company, Gazelle, has created a GaAs chip that can be used in conjunction with conventional silicon chips.

But Texas Instruments researchers have now demonstrated the first ICs that contain both silicon and GaAs transistors on the same piece of silicon. Ac-

continu

NANOBYTES

• "Computer Chip Saves Nation from Attack of Killer Bees." We might be seeing that headline sometime in the future if researchers at a Martin Marietta lab in Oak Ridge, Tennessee, succeed in a project that will use **a chip** to track the infamous **killer bees**. The device, which a spokesperson said weighs "about as much as a grain of salt," will transmit an infrared signal that can be picked up as far as a mile away. Researchers, who want to monitor the mating and foraging habits of the aggressive creatures, have managed to glue the chips to captured bees, and the bees have been able to fly with the chips stuck to their bellies. The engineers hope to have a working transmitter by next year. The deadly buzzers are projected to cross the Texas border into the U.S. in the next few years.

• The new **MathStation** program from **MathSoft** (Cambridge, MA) not only cuts coding chores but also lets you laser-print a screenful of equations and formulas and get a page that looks like it came from a typeset textbook. The program, which is an interesting combination of page-layout and equation-solving software, converts the material on screen (displayed in WYSIWYG style) to PostScript.

You control the fonts and spacing. But the pro-

continued

NANOBYTES

gram also parses and compiles the equations you input, using the host system's FORTRAN compiler. MathStation, which company VP and MathCAD creator Allen Razdow said is based on the concept of an incremental compiler, interprets equations as mathematical objects and generates executable FORTRAN code, which can be used in other applications. Any equation can be converted into a FORTRAN77 routine, he said, freeing the user from such chores as coding and debugging. Although the first version ($9500 per license) runs only on Sun 3 and 4 workstations, the company intends to do an edition for the Sun 386i. A Mac II version will have to wait until the machine supports X-Windows, Razdow said.

• Despite U.S. software companies swooping like Chuck Norris into Far East countries where piracy is said to be rampant, the problem of **illegal copying** is probably going to get worse, says one attorney who has studied the problem. You can go to Hong Kong and get Lotus 1-2-3, dBASE, Word, or other programs for about **$6 a package**, Los Angeles lawyer Mike Scott told us after a fact-finding mission to Hong Kong and China, neither of which has laws protecting software copyrights. Software pirating is worse in Hong Kong, where it's an industry controlled by organized crime, he said. Customers from the U.S., Australia, and Singapore buy suitcases full of software, Scott said. And a contact in

continued

cording to Hisashi Shichijo, who developed the new process along with Richard Matyi, "This means we can take advantage of the merits of gallium arsenide and silicon on the same chip."

Shichijo said the new process is significantly more complicated than the Gazelle approach, which will allow designers to mix GaAs and silicon chips on the same circuit board. The new TI process mixes the materials on the same chip. "A chip designer traditionally has to choose between the two," Shichijo said. "Gallium arsenide is faster, but it has problems—it's small, it's fragile, it breaks, it has defects—so it's not possible to build large-scale circuits. What we've done is to deposit localized gallium arsenide films on a silicon substrate, so you can add GaAs devices or circuits to silicon circuits."

This makes large-scale GaAs circuits practical, but because the silicon and GaAs circuits can be mixed on a chip, large-scale GaAs won't usually be necessary, Shichijo said. "You can put the GaAs where you'd really like to have speed, and use silicon for the rest of it." For example, silicon memory could incorporate GaAs control logic for better response time; a dense silicon microprocessor might have an integrated GaAs register file or cache.

In developing the GaAs-on-silicon epitaxial growth technique, the TI researchers aimed to develop a process that could be applied directly to high-volume production. According to Richard Matyi, "Because silicon processing is extremely sensitive to the presence of impurities—and GaAs essentially represents an impurity—we completed silicon processing before we added the GaAs. And although it would have been simpler to grow the GaAs atop the silicon in layers 2 to 3 micrometers thick, we decided to embed the GaAs islands in the wafer to produce a coplanar surface. Devices with such flat surfaces are easier and more cost-effective to manufacture in high volume, and they're more reliable."

Shichijo said GaAs optical devices, such as lasers, could be included on silicon chips to speed up chip-to-chip communication by a factor of 10. To demonstrate the new chip, the researchers produced several ring oscillators that mixed silicon CMOS and GaAs metal semiconductor field-effect transistor circuits.

But some designers say GaAs has a long way to go before it's a commercially viable component of desktop computers. They think it will be a long time before chip makers can produce GaAs on silicon substrates at good yields, and they may never overcome problems inherent in GaAs circuitry.

DCA/Intel Spec Could Mean Communications without Bit-Twiddling

The new DCA/Intel Communicating Applications Specification (CAS), put into the public domain in August, could simplify electronic communications if enough hardware and software vendors use it to develop communications interfaces for use in their applications.

CAS is a specification for writing code that intermediates between an application and a communications service. Using CAS, applications can transparently direct output to the communications device in much the same way that data is transparently sent to a printer. The initial release of CAS supports communications only via facsimile modem hardware (such as Intel's new Connection CoProcessor). However, subsequent releases will support Hayes-compatible modems and PC-mainframe communications boards.

A software developer can use the CAS to write a communications program, which can be integrated with the primary application. Symantec has already integrated CAS functions with its Q&A software, allowing Connection CoProcessor users to transparently send Q&A files to other fax machines by selecting a menu option from within Q&A. Other software vendors, such as WordPerfect, Borland, Lotus, and Ashton-Tate, said that they will support the CAS.

The CAS consists of two hardware-independent software components. The Resident Scheduler controls the destination and scheduling of file transmissions between the sender and the recipient. The Transfer Agent, similar to a device driver, handles the details of connecting to the recipient, ensuring accurate data transmission, and disconnecting from the communications session. CAS provides rules, codes, and functions for implementing the scheduling and device driver tasks.

Widespread support of CAS could have a major impact on the often-incompatible world of electronic communications. One company is working on using CAS and the Connection CoProcessor as a gateway to allow remote users to access LANs at 9600 bps. With

continued

Circle 273 on Reader Service Card →

The Bus Stops Here!

Introducing Wells American's CompuStar® Multi-Bus Business Computers. The world's first and only multi-processor, convertible bus™ microcomputers.

Ask any computer expert about what type of system you should buy nowadays and you'll likely get a "pass the bus" response. Something like — "Well, uh, the PC/AT* bus is your best buy but, then again, the new PS/2* bus may become the next industry standard." Great advice, right? If trying to decide on a processor weren't tough enough, now you're expected to pick a bus, too.

RELAX, NOW THERE'S COMPUSTAR®.

The all new CompuStar® from Wells American not only lets you interchange microprocessors, you can also mix and match buses — a PC/AT bus, a PS/2 bus or. . .both. As your computing needs change, simply snap in a new processor or add an extra bus. You'll never again have to worry about buying the *wrong* computer system!

FOUR COMPLETE SYSTEMS IN ONE.

The CompuStar can be configured with any of four microprocessors — an 8086, an 80286, an 80386SX, or an 80386. The processor and up to *16* megabytes of user memory have all been combined, using the latest VLSI technology, on a single, plug-in CPU module. Plus, any time during the first year of ownership, CompuStar users can "trade-in" the CPU module they initially selected toward the purchase of any of the other more powerful modules. *Nobody* but Wells American gives you this kind of value.

CONVERTIBLE BUS? YOU'RE KIDDING!

No, we're not. In fact, it may well be the most practical microcomputer innovation ever. Say you've selected an AT compatible CompuStar and later want to add PS/2 compatibility. No problem! Snap in a PS/2 Bus and Adapter Module and you can use *both* buses in the same system. Likewise, if you've selected a PS/2 compatible CompuStar and decide you want to add an AT bus, just snap in an AT Bus Module. Depending on configuration, the CompuStar can have up to *13* bus expansion slots — all AT slots, all PS/2 slots or a "split-bus" of AT *and* PS/2 slots. Best of all, you can reconfigure your CompuStar whenever you want.

$1995



The CompuStar is also easily expanded. That's because there are *seven* CompuStar disk/tape compartments — six accessible from the front and an additional full-height bay inside. All this in a sleek, compact tower design that actually leaves *more* room on your desktop than any of the so-called "desktop" models.

A NEW IDEA FROM AN OLD COMPANY.

The CompuStar® Multi-Processor, Convertible Bus™ Microcomputer. It's no surprise that our engineers invented it. After all, we've been making microcomputers longer than anyone else. . .even longer than IBM! And if that kind of experience doesn't impress you, CompuStar's service programs surely will. You can select an optional overnight module swap-out plan or on-site service from General Electric Corporation — one of the most respected names in consumer electronics. And, of course, every CompuStar carries a full one-year factory warranty.

FINALLY, AFFORDABLE TECHNOLOGY.

Think all this technology sounds expensive? It's not. CompuStar 20MHz 80286 systems start as low as $1995†. There are also inexpensive 8086 and powerhouse 25MHz 80386 systems available. Plus, there is a wide variety of CompuStar display, tape and disk options including a one gigabyte erasable optical disk. You can choose a factory preconfigured CompuStar or custom design one yourself. Just unlock the front panel and literally "snap-in" a bus, CPU or disk module in a matter of seconds. It's system flexibility never before available. . .at *any* price.

While one of our competitors (we won't mention any names) threatens you with "missing the bus," most simply *pass* the bus. Our new CompuStar however, *eliminates* the bus problem altogether. Not to mention the processor problem. Even the expansion problem. Prove it to yourself. Call today about our CompuStar 31-day trial offer. Oh, and by the way, the next time anyone asks, tell 'em you know where the bus stops.

Wells American

Corporate Headquarters: 3243 Sunset Boulevard • West Columbia, SC 29169 • 803/796-7800 • TWX510-601-2645

*Personal Computer AT, AT and PS/2 are trademarks of International Business Machines Corporation. †Photograph depicts optional equipment. Complete price list available upon request. CompuStar 80286 base system ($1995) includes built-in VGA/EGA display adapter, one diskette drive with controller, two serial/one parallel/one mouse port, keyboard and 220 watt power supply.

NANOBYTES

Singapore said residents there can easily go to Malaysia and pick up pirated products. Relentless legal pressure could make it too expensive for pirates to operate, Scott said. "Doing one raid and having a news conference won't solve the problem."

• **Unix** and **OS/2** will be the prevalent operating systems in **server environments**, according to a new report from Forrester Research (Cambridge, MA). And why's that? Primarily because they stay basically the same across different vendors' hardware and free users of client/server systems from proprietary designs, a Forrester researcher said. By 1992, Unix will be the big operating system on **high-end database** and **fault-tolerant machines**, and OS/2 will be used with more than half the file and print servers, the researchers say.

• Unix is also the best environment for **electronic publishing**, says another research group, because of its multitasking, multiuser features. "Efficient handling of graphics is the name of the game," said Ajit Kapoor, vice president of CAP International (Norwell, MA). And Unix does that better than any other operating system currently available, he said. Unix skeptics, though, say it lacks the applications to woo new users. But Kapoor said all that will change. And how about that user interface? According to CAP, Unix proponents expect that the cosmetic surgery proposed by AT&T/Sun and the Open Software

continued

built-in support of CAS in software applications, transparent file transfers and electronic messaging will be possible between incompatible or remote systems. As Borland's Rob Dickerson put it, "You won't have to be a bit-twiddler to use communications."

Contact Intel PCEO at Mail Stop CO3-07, 5200 Northeast Elam Young Pkwy., Hillsboro, OR 97124 or call (800) 538-3373.

Memory Chips Have Brains, Do Processing Jobs

After hitting too many snags and nixing a project to build a massively parallel matrix-multiplication analog chip for pattern-recognition applications, Oxford Computer (Oxford, CT) founder Steven Morton hit upon the idea of what he calls "intelligent memory chips." With Morton's design, adding memory also adds processing power. The chips, which are strung together in a module that fits in the palm of a hand, do more than serve as memory devices; they also take care of some of the processing chores, which gets around the slowdown caused by moving bits back and forth between memory and the central processor.

In an interview at the International Conference on Neural Networks, Morton said that standard memory is inefficient for matrix-intensive applications, such as three-dimensional graphics and pattern recognition, because data must be moved out of memory to a separate processor for computations and then returned to memory for output of the results. Intelligent memory chips have the capacity to perform "intense computations and work cooperatively," he said. The capability to perform on-board matrix manipulation also distinguishes the chips from so-called smart memories, such as video dynamic RAMs, that include on-board shift registers.

Morton points out that his chips are not suited for applications that don't require intense matrix manipulation—so don't plan to replace your conventional memory chips and expect a blazing performance increase with your word processor. And he's currently looking for financial support to manufacture the chips and expects availability in the third quarter of 1989.

The chips can be configured in "intelligent memory modules" that contain from 64K bytes to 1 megabyte of storage to provide 1.28 billion 8-bit multiplications and additions per second for image processing; 40 million 32-bit multiplications and additions per second for 2-D fast Fourier transforms and real-time 3-D graphics; or 80 million floating-point operations per second.

Each chip provides its part of the matrix solution; the partial results are then accumulated to come up with a final solution. A control chip manages the partial results and provides interfacing to the host bus. All this occurs without transporting blocks of data in and out of memory, tying up the bus, and slowing down the central processor. Morton envisions a graphics board with his special chips that plugs into a system's bus.

Morton claims that his approach skirts the Von Neumann bottleneck encountered when intense computational activity can clog the data bus and overload the processor. "With memory actually manipulating the matrix information, the central processor can go off and do other things," he said.

Program Will Help with Conceptual 3-D Design

Most CAD and solid modeling programs today are intended for preparing detailed, completed designs. However, conceptual and preliminary design tools are mainly limited to 2-D drawing programs. Most designers still do most of their preliminary work on paper and then transfer the design to the computer. One of the main problems with conceptual design on the computer is the difficulty of locating and specifying points or features of the object in 3-D space. Of course, you can specify any point if you know its coordinates, but in the early stages of design, you're not thinking about dimensions or coordinates. You want to be able to intuitively locate the point on the screen.

To facilitate conceptual design on computers, researchers at Stanford University are working on a geometric editor called a "cut-plane solids editor." Instead of using a cursor to locate a point on the screen, the cut-plane editor uses a transparent plane that you can move through space with a mouse or some other pointing device. The plane provides a perspective in relation to other points on a 3-D object. According to grad student Larry Edwards, "the objective is to enable the user

continued

Circle 156 on Reader Service Card (DEALERS: 157) →

Reach for ultimate portability

Faster, more powerful and reliable than removable cartridges



120 MBytes of power, speed and security in a revolutionary, removable hard drive.

At last, the Disk Pack gives you everything you've always wished for in a data storage system. The speed and high storage capacity of a hard drive. The ease and convenience of a floppy diskette. And the safety of a tape backup. All wrapped up in a state-of-the-art rugged unit, about the size of a paperback book. Designed to make your life a lot simpler and more secure.

True portability is here


Just picture this: With the Disk Pack you carry your whole work environment with you, wherever you go. All your files, all your data stay organized and configured just the way you created them. Between your office and remote sites. Or home. Or another department. You can even mail a Disk Pack. It's that rugged.



The Disk Pack frees you from the constraints of fixed computers. Your whole work environment fits in the palm of your hand.

Total security for your data

Simply slide out a Disk Pack module and lock away your entire business customer base and payroll figures in a drawer or safe. Same for lawyer, banker or accountant sensitive data and Uncle Sam confidential information. All fully secured in a snap.



Get full data portability and security on the computer of your choice. Macintosh, PC-Compatible or PS/2.

Blazing speed
Rock-solid reliability
Limitless expansion

Breakthrough technology makes the Disk Pack four to five times more reliable than other removable products. Access times as low as 13 ms make it one of the fastest hard drives on the market. The Disk Pack doesn't limit you to a single storage capacity either. You can interchange 20-, 40-, 80- or 120-MByte modules in your system and between systems. Link modules up for a whopping Half-GByte + of on-line data. Store them for unlimited off-line data. And do lightning-fast data backups.

That's not all. The Disk Pack turns a shared computer into your fully personal machine within seconds. It's ideal for space grabbing applications such as color graphics, CAD, or music. One Disk Pack module does the job of 100 diskettes. Ten times faster. And with a lot less hassle.



The Disk Pack is ideal for data security. Lock it away and forget about accidental or intentional data loss.

And thanks to the Disk Pack's unique architecture, you'll use it equally well on any Mac, Apple, PC-compatible or PS/2 computer. It's that advanced.

Dealer inquiries welcome

For more information call

1-800-322-4744

DISK PACK®

The new standard in data storage technology

MEGADRIVE SYSTEMS

1801 Avenue of the Stars, Suite 507
Los Angeles, CA 90067

20 Valuable Facts About Hard Disk Care and Maintenance

YES! *I want to know more about Mega Drive Systems' new data storage technology. Please rush me more information about the Disk Pack and your free booklet "20 Valuable Facts About Hard Disk Care and Maintenance" today.*

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone (_____) _____

Mega Drive Systems, Inc.
1801 Ave. of the Stars, Suite 507,
Los Angeles, CA 90067 (213) 556-1663

Number of Micros _____ Mac _____ PC

NANOBYTES

Foundation will make Unix more attractive to people baffled by `grep` and `awk`. As for another multitasking system, CAP said those Unix users surveyed say OS/2 won't affect their commitment to Unix.

• If you think **LCDs** are used only in watches and laptop computers, check this out. Hitachi America (Sunnyvale, CA) has a new LCD-based display that measures 2 meters across, has a resolution of 2000 by 2000, and has three lasers projecting the primary colors through high-resolution LCD light valves. The display is controlled by its own computer, which has a serial port and hard disk

continued

to see visual clues between the cursor and the object in question."

The plane can be translated and rotated in real time to intersect an object at any location or angle, thereby eliminating the need for multiple views and giving the user more of a feeling of actually working with a 3-D object.

Once you have positioned the plane, all manipulations (line drawings, intersections, addition of object primitives) are constrained to occur within the plane. Currently, the cut-plane editor uses a polyhedral model to represent objects. The researchers can rotate and manipulate points in the cut-plane/object intersection, rotate the object independently or in conjunction with the cut-plane, rotate about an edge or intersection line, or extrude a cross section of the object.


Eventually, the editor will have other object primitives, such as curved surfaces, granularity, and visual features needed for conceptual design. The current version is written in C and runs on a Silicon Graphics 1400. Edwards said that Lisp would have been ideal, since the program involves the manipulation of lists, but that performance would have been too slow. The cut-plane project is under the supervision of the Stanford Institute of Manufacturing and Automation.

Prototype "3-D Computer" Stacks Processors

The prototype for a 3-D integrated circuit that packs 1024 processors into a single chip has been developed by scientists at Hughes Research Laboratories (Malibu, CA). The so-called 3-D computer is the first step in developing an ultrafast machine that squeezes supercomputer power into a processor about the size of a tuna can.

"The 3-D computer is an array processor, architecturally and behaviorally," Hughes staff scientist Mike Little told Microbytes Daily (available weekdays on BIX). "That means it has a certain range of applications—for example, image processing, radar signal

continued

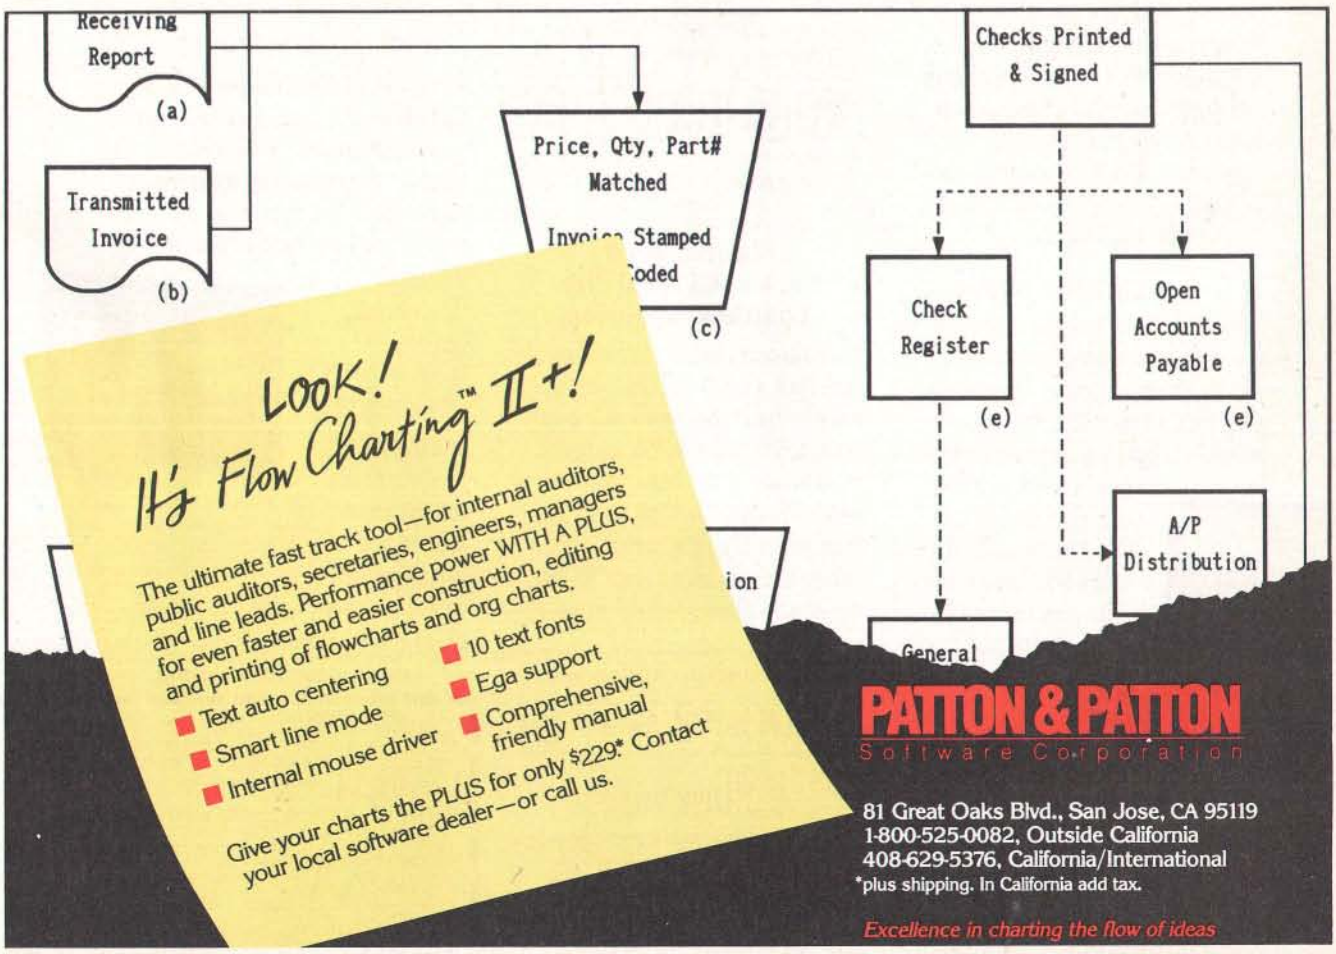

Circle 194 on Reader Service Card



Everything it takes to add PostScript to your LaserJet II, including HP's blessing.

Hewlett-Packard® and QMS® have made it easy to give your LaserJet Series II® the desktop publishing power of the PostScript® page description language.

The new QMS JetScript™.

JetScript is the only Adobe PostScript controller upgrade authorized by HP and designed specifically for the LaserJet Series II. JetScript gives your printer the industry-standard page description language to accompany HP's PCL printer language. This expands your laser printing capabilities. Increases overall printer performance. Yet preserves HP functionality and warranties.

Do it yourself JetScript is easy to install. Just plug in two cards (one in your personal computer*, the other in your printer), connect a cable and install the software.

The result is a PostScript system with 35 resident Adobe typefaces, three megabytes of RAM, and QMS ASAP™ (Advanced System Architecture for PostScript) proprietary technology for superior performance. All for less than half the cost of a new PostScript laser printer.

New forms of expression The speed and power of JetScript combine to give your LaserJet Series II a form of expression that's found only with PostScript.


Simply, PostScript opens up the full range of possibilities for desktop publishing. You have complete control over the final look of the page, down to the last exacting detail. PostScript allows for an infinite number of font variations and sizes. That makes PostScript's limitless flexibility and power the perfect complement to your LaserJet Series II, giving you the high-quality output you require.

Impressive results People have come to expect impressive results from QMS—one of the first companies to bring the power of PostScript to laser printing, and now with more PostScript-based products than any other company.

You'll get the same results from the new JetScript. After all, it has HP's blessing.

Laser Connection is a sales and marketing subsidiary of QMS. Call **1-800-523-2696** for the location of your nearest Laser Connection dealer.

**JetScript available for IBM PC-XT™, IBM PC-AT™, HP Vectra™ and compatible personal computers, or the IBM PS/2™ Model 30.*







LASER CONNECTION™

A QMS® Company

Circle 138 on Reader Service Card

The following are trademarks of their respective companies: HP, Hewlett-Packard, LaserJet Series II, HP Vectra of Hewlett-Packard. QMS, JetScript, ASAP, Laser Connection of QMS, Inc. PostScript of Adobe Systems. IBM PC-XT, IBM PC-AT and IBM PS/2 of International Business Machines Corp.

©1987 Laser Connection

NANOBYTES

drive. The cost is $300,000.

• To help solve the problems involved in dealing with massive amounts of information, the National Science Foundation has awarded grants to several universities with top-notch computer science departments. At the University of California at Berkeley, they'll be working on a hierarchical storage system based on an experimental "super information server" that has an 80-million-instruction-per-second processor, 1 gigabyte of primary memory, 1 terabyte of optical disk storage, 100 high-capacity disk drives, and a fiber-optic network.

processing, weather modeling, and finite-element analysis."

The chip consists of a set of stacked silicon wafers. Each wafer contains an array of 32 by 32 processor segments, each of which is connected to its four neighbors on the wafer as well as to the other wafers in the stack. "We developed two technologies," Little said. "One involves connections through a wafer; the other involves the connections from wafer to wafer. The new technology allows us to rethink how to partition circuits."


To make a connection from one wafer to another, Little's team uses a "microbridge": an inverted U on top of one wafer and on the bottom of another. "When you stack the wafers, the pair of U's intersect and form the connection between the two wafers," Little said. To make connections through a wafer, the Hughes scientists use an innovative form of thermal migration to create 10,000 channels at a time in each wafer.

To make the 3-D computer, Little explained, "First we put the channels in, then we add the circuits—conventional circuit fabrication from a commercial foundry." Instead of putting a complete processor on each wafer, only one section of the processor appears on each wafer; when the wafers are stacked, each column forms a complete processor. As a result, "the complexity of the processor is how deep it is, not its lateral extent," Little said; a more complex processor could be constructed by stacking more wafers on top of those already there.

The current 3-D computer contains 1024 processors in a 32- by 32-processor array; it's a fixed-point, 16-bit computer in a chunk of silicon 3 inches square and a half-inch high.

TECHNOLOGY NEWS WANTED. *The news staff at BYTE is interested in hearing about new technological and scientific developments that might have an impact on microcomputers and the people who use them. If you know of advances or projects relevant to microcomputing, please contact the Microbytes staff at (603) 924-9281, send mail on BIX to Microbytes, or write to us at One Phoenix Mill Lane, Peterborough, NH 03458. An electronic version of Microbytes, which offers a wider variety of computer-related news on a daily basis, is available on BIX.*

With *MapInfo*, More Ways Than Ever To Map Your Data




Pin Map. Automatically use your existing database (from dBASE III or others) with street maps that we can supply. Maps from over 300 U.S. cities and towns contain all addresses, accurate to the correct block and side of the street. Type any address and MapInfo will find it for you. Call to the screen your complete record.



Thematic. Use our boundaries (state or county) or draw your own (sales regions, election districts, etc.). Create a database for the region (population, average income, etc.) Color code boundaries or entire regions based on parameters you define.



Presentation. Use powerful graphics commands to add your own titles, legends and text. Create arrows, windows or callouts. Turn on or off labels of points, streets, bridges, regions, etc.



Visual Database. Draw anything from a floor plan to aircraft design. Store data on any point or region. Create multiple layers to add flexibility to your display.


And that's just a sample. If you need to map your data, MapInfo can do it for as little as $750. IBM PC or 100% compatibles, with 640K memory, a hard disk drive, and graphics capability.

To order, call 1-800-FASTMAP. In New York State, call 1-518-274-8673 (Telex 371-5584).
MapInfo Corp., 200 Broadway, Troy, NY 12180


MapInfo


dBASE III is a trademark of Ashton-Tate. IBM and IBM PC are trademarks of International Business Machines Corp.

Circle 153 on Reader Service Card



These unretouched print samples show the superior print quality of QMS-PS 810 over printers using first-generation print engines.

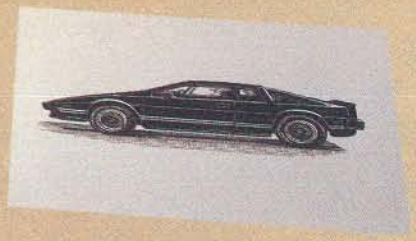

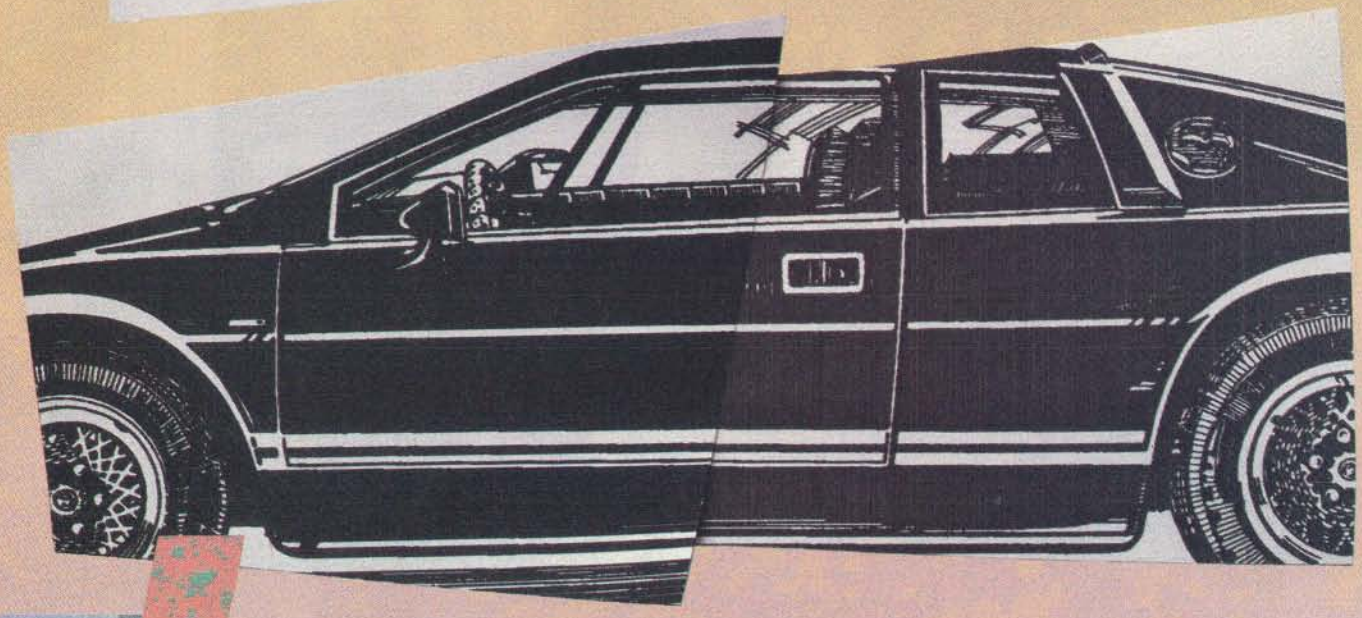

ntroducing the PostScript laser printer that blacks out at high speeds.

The new QMS-PS® 810 can compose and print the most complex pages in record times, with richer, more saturated blacks than ever before. All with the desktop publishing power of Adobe PostScript®, and the superior print know-how of QMS, an industry leader.

Under the hood QMS ASAP™ (Advanced System Architecture for PostScript) is proprietary technology that helps eliminate the hardware bottlenecks that hinder other PostScript printers. As a result, QMS-PS 810 boasts processing speeds remarkably faster than other PostScript printers in its class. And faster output means greater productivity. In addition, the QMS-PS 810 laser printer's new Canon® SX® print engine covers solid areas and prints fine detail better than previous-generation engines.

The new 8-page/minute QMS-PS 810 laser printer



Fast start, strong finish You can adorn your documents with one or all of the 35 Adobe typefaces. Thanks to PostScript, there's an infinite number of font variations available. You can also make type as large or as small as you want. And put it anywhere on the page. In fact, with PostScript you enjoy total control over the design of your page. It gives you the complete desktop publishing power to do things that would otherwise be virtually impossible. So you get high-quality output exactly how you want it.

Along with PostScript, the HP LaserJet+™, Diablo® 630 and HP-GL™ printer emulations are added for your non-PostScript software.

The QMS-PS 810 laser printer is easy to use, maintain, and comes with a one-year warranty. It's available from Laser Connection dealers. Laser Connection is a sales and marketing subsidiary of QMS. For the dealer nearest you call **1-800-523-2696**.

LASER CONNECTION™

A QMS® company

©1987 Laser Connection

The following are trademarks of their respective companies: QMS, QMS-PS, ASAP, Laser Connection of QMS, Inc. PostScript of Adobe Systems, Inc. Canon, Canon SX of Canon, U.S.A. LaserJet +, HP-GL of Hewlett-Packard. Diablo of Xerox Corp.

KEYBOARD

You Can Never Be Too Powerful Or Too Thin.

As portable PCs go, ours may look a bit on the skinny side. But they're by no means undernourished.

After all, each 286 and 386 powered Toshiba portable has an easy-to-read gas plasma screen. Each is IBM-compatible. And each gives you a wide range of features you'd expect only from a desktop PC.

The T3100/20, for example, weighs a scant 15 pounds, yet has an abundance of power. It comes with an 80286 microprocessor and 640KB of RAM that's extendable to 2.6MB. Plus, there's a built-in 20MB hard disk.

Our T3200 has the advantages of a 12MHz 80286 microprocessor, an EGA display system, a 40MB hard disk and 1MB of RAM expandable to 4MB. Also, its two IBM-compatible internal expansion slots let you connect your PC to mainframes, LANs and more. But what's even more impressive is how we managed to fit all this into a slim, 19-pound package.

Then there's our T5100. As amazing as it seems, we managed to squeeze a 16MHz 80386 microprocessor into a slim package that weighs less than 15 pounds. To that we added an EGA display system and a 29 msec 40MB hard disk. As your thirst for power grows, its 2MB RAM can be upgraded to 4MB. And for a limited time, your T5100 purchase entitles you to buy the powerful Paradox 386® database software for only $299 (nearly $600 off the retail price).

For more information on Toshiba computers and printers, call 1-800-457-7777. And rest assured that whichever Toshiba PC you choose, you'll be getting the kind of power once reserved for cumbersome desktop computers.

All of which proves you can maintain a position of great power without having to throw a lot of weight around.

Toshiba PCs are backed by the Exceptional Care program (no-cost enrollment required). See your dealer for details. IBM is a registered trademark of International Business Machines Corp. Paradox is a registered trademark of Borland Corp.



In Touch with Tomorrow

TOSHIBA

Toshiba America Inc., Information Systems Division

See us at COMDEX
Booth #1458-1468

Circle 167 on Reader Service Card

Save Money on Quality Software

$1.99 Per Disk



Membership Special

For only $19.95 (reg. $34.95/year) become a MicroCom Systems member and receive:

- *"The Shareware Book", a 300+ page guide to shareware for the IBM PC. Includes helpful information for the new PC user! $12.95 if ordered separately.*
- *A one year subscription (6 issues) to "Shareware Review", each issue featuring a free new-release diskette from The MicroCom Collection.*
- *Reduced member prices!*
- *Any disks below for only $1.99 each, ($2.99 for 3.5") w/money back guarantee!*

Hundreds of disks available. Free catalog with any order!

☐ BUSINESS 1—Easily create, fill in and print business forms.
☐ BUSINESS 2—Chart data on bar, pie graphs. Find trends! ★
[2] CAD 1a,b—(2 disks) Paint, draw, design w/Fingerpaint. ★
[2] CAD 2a,b—(2 disks) Create advncd 2D/3D designs. 640K. ★
☐ CAD 3—Generate your own custom flowcharts with PC-Flow.
[4] COMM 1a,b,c,d—(4 disks) Log onto bulletin board systems.
[2] DATABASE 1a,b—(2 disks)The File Express database mgr.
☐ EDUCATION 1—New PC users can painlessly learn DOS.
☐ EDUCATION 3—Build dazzling typing speed w/PC-Fastype.
☐ EDUCATION 8—Improve your Spanish w/o dry, dull books!
☐ EDUCATION 9—Learn French skills w/o boring teachers!
☐ EDUCATION 10—Practice German with these easy drills.
[2] FINANCE 1a,b—(2 disks) A personal bookeeping manager.
[2] FINANCES 3a,b—(2 disks) Prepare financial spreadsheets.
☐ GAMES 1—3-D Pacman, Kong, Spacewar, missiles, etc. ★
☐ GAMES 2—Qubert, Pango, Centipede, Hopper (Frogger). ★
☐ GAMES 3—Blackjack (you set rules), Armchair QB, Empire.
☐ GAMES 4—Star Trek, the orig Colossal Caves Advent, more.
☐ GAMES 5—Hack, you and your trusty dog in a wild adventur.
☐ GAMES 6—Pinball, Othello, Dragons, Sopwith (fly one!). ★
☐ GAMES 8—Blast enemies w/Striker, conquer world w/Risk.★
☐ GAMES 11—High res Aldo's adventure, MahJongg. EGA.
☐ GAMES 12—Try backgammon or Wordplay fortune wheel!
[5] GAMES 13a,b,c,d,e—(5 disks) Make yr own advent games!
☐ GRAPHICS 1—Make color slide shows for demos/training! ★
[3] GRAPHICS 2a,b,c—(3 disks) Produce great 3D graphics. ★
☐ HUMOR 1—Amuse w/fun faces, unfriendly DOS & more!
[2] INFO 1a,b—(2 disks) 150+ grt cooking recipes. Add yr own!
[2] INFO 2a,b—(2 disks) Search for addresses w/Zip-Phone xref.
[4] INFO 3a,b,c,d—(4 disks) Access famous quotes from history.
[2] LANGUAGE 3a,b—(2 disks) A86 macro assembler/debuggr.
[2] MUSIC 1a,b—(2 disks) Play tunes or use editor/composer. ★
[2] MUSIC 2a,b—(2 disks) Record or play tunes w/Piano Man!
☐ ORGANIZER 1—DeskTeam (Sidekick clone) & Judy calnder.
☐ PRINTER 1—Packed w/utils for print spooling, banners, etc.
☐ SHELL 1—A simple, fast and easy DOS menu prog for PCs.
☐ SIMULATION 1—Fireworks, maze maker, roving eye, etc! ★
☐ SIMULATION 3—Birdsongs, aquarium w/fish, stars, more. ★
☐ SIMULATION 4—High res flowers, landscapes, fish. EGA.
☐ UTILITIES 1—A collection of invaluable gen'l DOS utilities.
☐ UTILITIES 2—More great DOS utils, incl burnout protection.
[2] UTILITIES 3a,b—(2 disks) Total debugger/diagnostic progs.
☐ UTILITIES 5—Hard dsk utils to verify, format, park dsk drives.
☐ UTILITIES 7—More adv utils; undelete files from hard disks.
[2] WORD 1a,b—(2 disks) Powerful PC-Write word processor.

★ Disks so marked above require a color graphics adapter.

Phone or mail your order today for 24-hour shipment!

MicroCom Systems
3673 Enochs Street
Santa Clara, CA
95051

Cost of disks
Membership $19.95
Shipping $3.00
CA res tax
Total encl.

VISA ©1988, MCS

(408) 737-9000
Mon-Fri 7am-9pm, Sat-Sun 8am-5pm

MasterCard

BY-10/88

LETTERS

Lab Lift

Your lab staff has been a magnificent help over the past months. I'm brand new to the microcomputer world, and the lab staff has been instrumental in helping me map that world. Their assistance on general questions, benchmarks, and video has allowed me to take a lead role in the Air Force Small Computer Office.

Please pass along my thanks to your entire staff for their help and for bringing me an incredibly good magazine every month.

Johnathan M. Wilson, *2d Lt., USAF*
Computer Systems Test Engineer
Gunter AFS, AL

Where Credit Is Due

The companion articles "The CPU Wars" and "What They Did Wrong" (May) were excellent nostalgia pieces for me. However, both articles attributed the 6502 to Mostek, a Dallas-area firm. The 6502 was originated by some ex-Motorola designers and first produced by MOS Technology, a silicon foundry later purchased by Commodore.

I started with personal computing about the time the 6502 was introduced, and my first "personal computer" was a KIM-1. I still have that computer, and it's in working condition. This machine has a six-digit LED display, a 24-key keyboard, and 1K byte of static RAM.

In 1977, at least one computer scientist rated the KIM-1 as having the "most bang for the buck" in terms of classroom hands-on applications. This capability was generated by the two PIA-style support chips, one 6530-5 (operating system in masked ROM) and one 6530 (no ROM). To this day, more than 12 years after its introduction, the KIM-1 remains a strong example of the effectiveness of dedicated support chips in computer design.

Ralph Tenny
Richardson, TX

Everyone into the Spool

In "Weighing the Options" (July), Brett Glass states that "spool" stands for "simultaneous peripheral operation online." That acronym seems to be a recent ad hoc creation. In the old mainframe days, output could be sent to a "spool" of tape to be printed later. That is the origin of the terms "spool" and "spooling." Well, it could have been called "reeling."

Jud McCranie
Valdosta, GA

Environmental Impact Statement

I have a comment regarding "A Turbo TSR" by Scott Robert Ladd (July). While he correctly notes that a terminate-and-stay-resident (TSR) program should free up the environment segment, his program should not wait until deinstalling itself to do this. A TSR program should free the environment when it installs itself.

One of the seemingly little known aspects of writing TSR programs under DOS is the proper handling of the environment segment. Unless the resident part of your program uses the environment segment, it should be released during the installation process, before making the TSR call. Unfortunately, many programs—including a lot of commercial TSRs—do not do this; thus, each one I install gobbles up another 600 bytes for a copy of the environment that it never uses. It seems especially strange that programmers waste space in this way when I see some of the tricks some of them do to try to save a few bytes in a TSR program.

The process that Mr. Ladd outlined for releasing the environment block is

continued

WE WANT TO HEAR FROM YOU. *Please double-space your letter on one side of a page and include your name and address. We can print listings and tables along with a letter if they are short and legible. Address correspondence to Letters Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.*

Because of space limitations, we reserve the right to edit letters. Generally, it takes four months from the time we receive a letter until we publish it.

dBASE® Users—Attack the Mac with FoxBASE+/Mac

New Frontiers, No Fears.

FoxBASE+/Mac gives you the unprecedented ability to run your dBASE programs on the Macintosh immediately—*without changing a single line of code!* But there's much more. ***With FoxBASE+/Mac you can create beautiful, robust applications that are truly Mac-like—using the familiar dBASE language!***

Speed and Power.

FoxBASE+/Mac gives you speed to burn—plus the power and performance you've come to expect from Fox. In fact, FoxBASE+/Mac is *by far* the fastest database system available on the Mac today—up to *200 times* faster!

View Window.


The View Window is the master control panel for FoxBASE+/Mac's graphical, non-programming interface. Use it to open and close files, set up indexes, establish relations, access BROWSE, and even to modify database structures!

BROWSE.

FoxBASE+/Mac's BROWSE feature brings new convenience and power to database display and editing! You're in complete control—BROWSE lets you dynamically adjust the size and order of fields displayed, add or delete records, and split the window to show different database sections side-by-side. Together, BROWSE and View Windows *eliminate* the need to write programs for common database operations!

Integrated Graphics.

Copy and paste graphs, charts, diagrams and even pictures into your database—instantly! FoxBASE+/Mac gives you the power to display these graphics, or merge them into reports and documents!

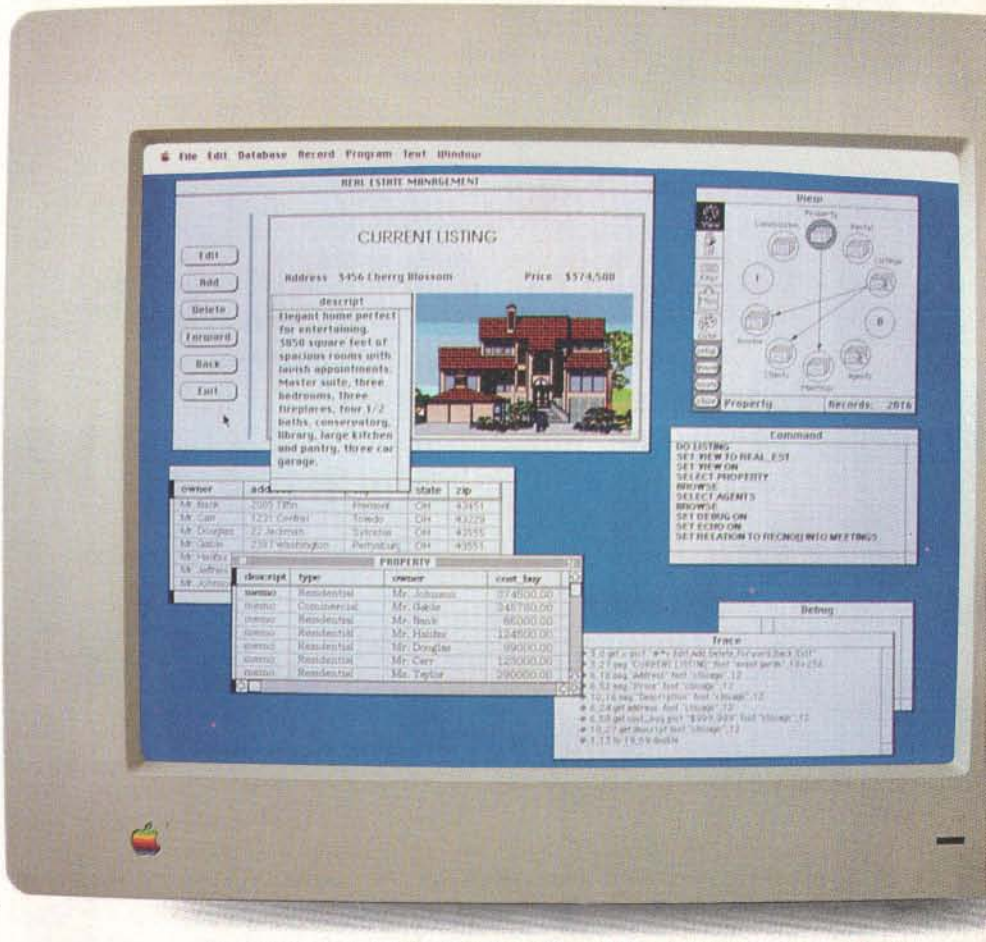

You can create stunning screens like this with FoxBASE+/Mac—*immediately!* This actual FoxBASE+/Mac screen photo illustrates the View Window, Command Window, Integrated Graphics, Memo field editing, Trace and Debugging Facilities, and the BROWSE feature.

Command Window.

FoxBASE+/Mac's Command Window gives both experienced developers and novice user ultra-convenient access to the dBASE command language—just type a command into the Command Window, and it's executed!

Get The FoxBASE+/Mac Facts *Now!*

Call (419) 874-0162 Ext. 320 for more information about FoxBASE+/Mac. Or visit your local software retailer.



FoxBASE+/Mac is part of the award-winning family of products from Fox Software. For two years in a row, FoxBASE+ has been given the prestigious Editor's Choice award by *PC Magazine,* and scored an impressive 9.2 out of a possible 10 when tested by *InfoWorld*'s Review Board!


FoxBASE and FoxBASE+ are trademarks of Fox Software. dBASE and dBASE III PLUS are trademarks of Ashton-Tate. Macintosh is a trademark of McIntosh Laboratory, Inc., licensed to Apple Computer, Inc.

Fox Software

Nothing Runs Like a Fox.

Fox Software, Inc.
118 W. South Boundary
Perrysburg, OH 43551

(419) 874-0162 Ext. 320
FAX: (419) 874-8678
Telex: 6503040827

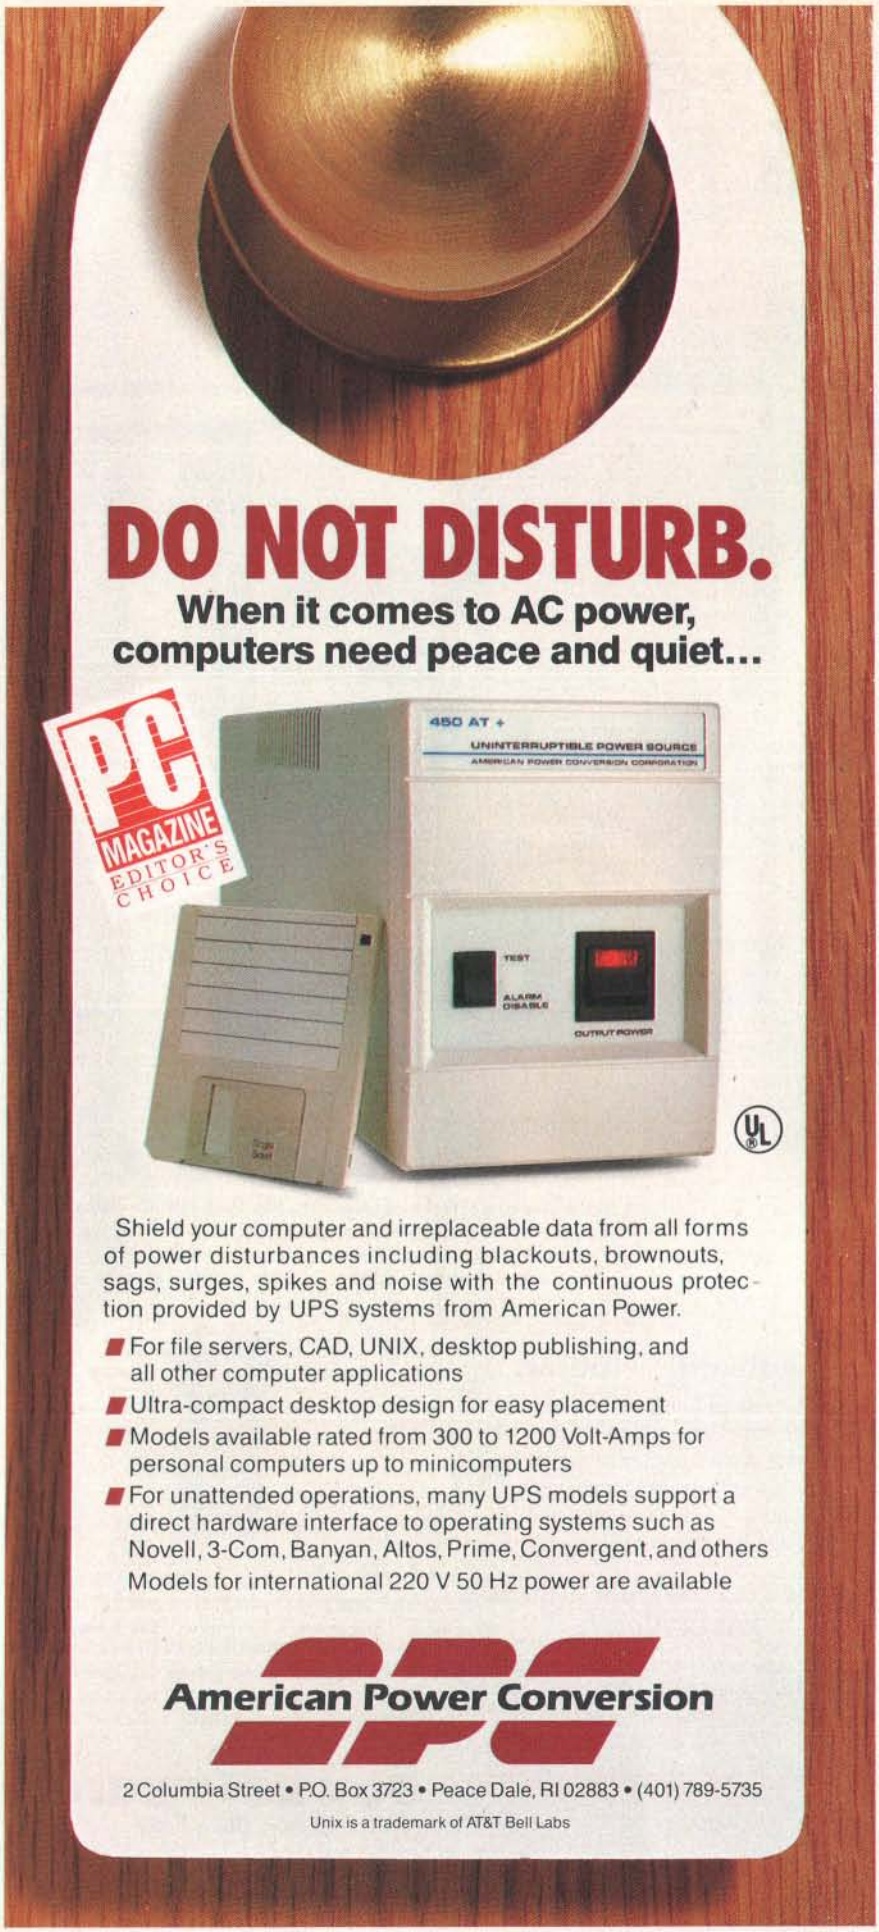

correct. He just should have made his program do it upon installation, rather than upon deinstallation. I hope you will pass this tip on to your readers and that they, in turn, will use it to write better-behaved TSRs that don't use up more of our precious RAM than they need.

It seems likely to me that DOS dies with a memory allocation error when Mr. Ladd tries to deinstall QT because he is trying to deallocate memory that belongs to a different program. Since his TSR is no longer the running program, DOS probably regards its attempt to release memory as coming from whatever program QT interrupted, which does not own the segment in which QT resides; hence, the `memory allocation error`. I have never written a TSR that tries to release its memory on deinstallation, so I don't know the fix for this.

Michael Hanson
Seattle, WA

Another Option to Weigh

I have a comment regarding the letter from Dan Mick ("Multiplying Integers," July) and the article entitled "Weighing the Options" by Brett Glass (July).

First, a flaw exists in Mr. Mick's recommended solution. Merely adding the multiplication by (floating-point) 1 is not guaranteed to prevent the integer overflow. The parsing algorithm used by the compiler may detect (and generate code for) the integer-integer multiplication and then perform the promotion to floating point for the "1.0" multiplication. At the very least, place the "1.0" factor between the two integers. Even better, use parentheses to force the floating-point conversion first. For example,

```
20 A = (1.0 * B%) * B%
```

The best solution would be to use an intrinsic conversion function, which should be supplied with the compiler and/or run-time system—something on the order of the following (the actual function name may vary with the compiler and language):

```
20 A = B% * CSNG(B%)
```


Now for a comment on Mr. Glass's comparison of Amiga signals to semaphores. As the owner of an Amiga A-1000, I could not let this mistake stand, especially as KickStart 1.2 implements both signals and semaphores.

Amiga signals are closer in nature to the event flags of VAX/VMS. Each Amiga task has its own set of signal bits;


continued

Circle 16 on Reader Service Card

Hands down, the best selling most compatible graphics tablet you can buy.

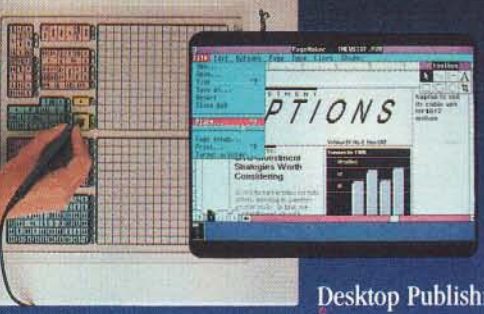

Desktop Publishing

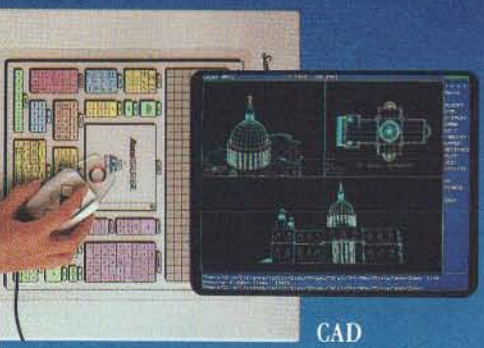

CAD




Universal Mouse Emulator™




Drawing / Tracing



Microsoft® Windows



CAM



CAE

SummaSketch® is the world's best selling tablet because it's filled with "Plus's". Like full IBM connectivity with the PC, AT and PS/2. Plus full Microsoft® compatibility through a Universal Mouse Emulator™. Plus a separate tablet driver for Microsoft Windows. Plus a two-year warranty. Add that to our standard features — like high resolution and accuracy with the most software compatibility — and you have the tablet with all the Plus's. The 12″ × 12″ SummaSketch Plus.

New 18″ × 12″ Version. Now you can get all these great features in our larger SummaSketch® Professional tablet. All the Plus's, plus more active area to work with!

Summagraphics®
Fairfield, CT 06430 • **203-384-1344**

Circle 247 on Reader Service Card

FREE! $245 TEMPLATE.

Your choice: AutoCAD®, VersaCAD®, CADkey® or Microsoft® Windows tablet template, free. Details inside SummaSketch box.

( ) Send me more information on the AutoEase template offer and on SummaSketch tablets.

Type of industry: _____
Type of application: _____
( ) I'm interested in OEM information.

Name: _____ Title: _____
Company: _____
Address: _____
City: _____ State: _____ Zip: _____

Mail to: Summagraphics Corporation
777 State Street Ext.
Fairfield, CT 06430

B 10/88

© 1988 Summagraphics Corporation. All rights reserved.

EVEREX

Everex, Step and AMMA are trademarks of Everex Systems, Inc. All other product names are registered trademarks of their manufacturers.



"We created a monster."

Apparently, we have surprised a few people. It's not every day that someone builds the world's fastest 386/20.

Our marketing people call the concept AMMA – for Advanced Memory Management Architecture.

I don't care what you call it. This is the computer that has left everybody behind, including Compaq.

For the moment, we are overjoyed. But this is a game of leapfrog and we do not intend to rest.

The Step 386/20 from Everex is a monster of a machine.

For price and performance facts, call Everex Computer Systems Division at 1-800-356-4283. Everex, 48431 Milmont Drive, Fremont, CA 94538.

"If this is a race, we are out in front."

Steve Hui, President
Everex Systems, Inc.

IBM PS/2 Model 80 (20 MHz)	3.52 MIPS
Compaq DeskPro 386/20	4.59 MIPS
Everex Step 386/20	4.91 MIPS

Power Meter MIPS Version 1.2. The Database Group.



EVEREX
STEP


Circle 92 on Reader Service Card (DEALERS: 93)

in use, a bit will be allocated to some event that the task is interested in (mostly I/O completion), and the task then waits for the bit to be set. Semaphores, on the other hand, tend to be global to the system, where multiple tasks can obtain access to a single semaphore.

In fact, the Amiga implements two different types of semaphores. An immediate bit-test form allows for a simple test-and-set call (which returns immediately, with a success/failure status) or an unconditional wait-for-semaphore call (which does not return until the semaphore has been obtained). The message-based form allows for semaphore requests to be queued; a task can submit a request for the semaphore, continue processing, and, at a later time, test (or even wait) for the availability of the semaphore.

A bit of humor appears here. The Amiga calls `Procure(s)` and `Vacate(s)` bear a suspicious resemblance to the classical `P(s)` and `V(s)` semaphore primitives of Dijkstra—which *Principles of Concurrent Programming* (M. Ben-Ari, Prentice-Hall International) claims are derived from the Dutch words for Wait and Signal, respectively (Wait and Signal already having been taken up by earlier releases of the Amiga Exec).

Dennis Lee Bieber
Sunnyvale, CA

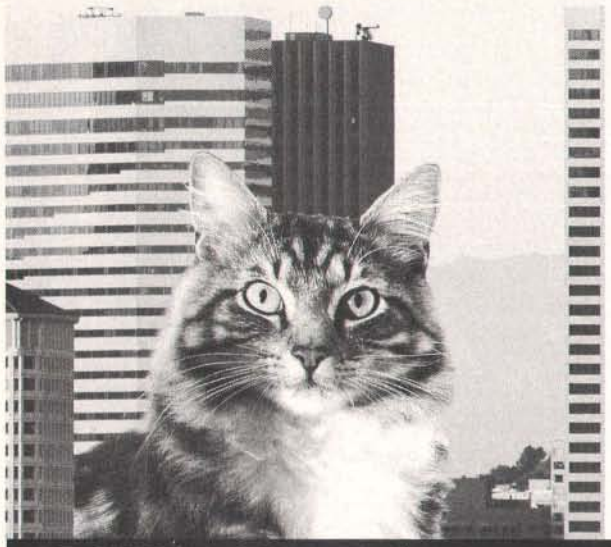

Power. Speed. Performance.
We listened to you and added hundreds of features to PC-Write.

Larger Files — Break the 60K file limit! Use all available DOS memory to edit large documents. Rapidly search and switch between related files. Lock files on a network.

More Formats — Edit multiple columns on-screen. Or mark text as a box, then position and format it. Create tables and scripts faster.

Easier To Use — Stay on track with on-screen "reminder" lines. Select page layout and fonts with new menus. Fix typing mistakes with our improved spelling checker.

New catalog adds value.
We offer popular products that work well with PC-Write.

PC-Write 3.0 — Working on a whole new scale.



New Capabilities — Choose products such as InSet™ graphics, WordFinder™ thesaurus, or popular soft font, grammar checker, foreign language, and scientific packages.

Special Discounts — Registered PC-Write users get phone support and reduced prices for all products.

Still only $89.
The $89 registration fee gives you software, user's guide with tutorial, phone support, two free updates, and our newsletter. PC-Write 3.0 is still shareware, so you can give copies to others to try, free!

Order PC-Write 3.0 today.
Call 1-800-888-8088 BYTX

90-day money-back guarantee

PC-Write is not shareware outside the U.S. and Canada. PC-Write™ Quicksoft. WordFinder™ Microlytics. InSet™ InSet Systems. Quicksoft, Inc., 219 First Ave N #224-BYTX, Seattle, WA 98109. 206-282-0452.



Quicksoft

Going from .MAC to .ASM

First, I'd like to thank Rick Grehan and all the people responsible for the Small-C compiler. Rick's suggestion about changing the output of the compiler from `.MAC` files to `.ASM` files is a good one, since I'm basically lazy and don't like typing the extension when I'm assembling the files.

If any of your readers want to make the change from `.MAC` to `.ASM`, the code is contained in the `CC11.C` file under the `openfile()` function. Simply change `strcpy(outfn + j, ".MAC");` to `strcpy(outfn+j, ".ASM");`.

While in the `CC21.C` file, users might want to fix a small problem with the usage line. When `cc86` and any invalid character is typed, a usage line is presented that informs the user of the options available to the compiler. For example, if you type `cc86`, the response usage will be `cc [file]...[-m] [-a] [-p] [1#] [-o]`.

The usage will give you all this and a few garbage characters. To fix it, you simply look at the end of the `ask()` function after the last `#endif` and change `sout(NEWLINE, stderr);` to `sout("\n", stderr);`. The explanation of this is that `sout` is expecting a string, and although `NEWLINE` is a linefeed (character 10), `sout` has a problem with this. It really goes deeper; it has to do with the way `fputc` expects `"\n"` to escape for a new line, while `NEWLINE` is a raw linefeed.

Enough of that. Thanks again for the compiler. I'm having a blast with it.

Gary Flynn
San Gabriel, CA

Practically Speaking

Peter Wayner's remarks on "Error-Free Fractions" (June) are correct from a theoretical point of view. Practical application, however, will be difficult, even if special processors and compilers could be realized for calculating the way he suggests.

The problem is the degree of precision that can be obtained, in relation to memory use and execution time. For in-

continued

Circle 223 on Reader Service Card

BRIDGES



The *easy* way to move files between the 5¼" world of PCs, and the 3½" world of PS/2s, Laptops, and 386s: Sysgen's Bridge family.

Because your PCs, PS/2s, 386s and laptops all talk to different floppy disk sizes and formats, they can become frustrating *islands* of information.

For the simplest way to get files back and forth, just install Sysgen's Bridge products. Presto: Your different computers can talk to common diskettes.

Sysgen pioneered bridges. Now here are three ways to simplify your life in a multi-computer office.

Solution 1: Our Bridge-File 5.25 floppy disk drive.



A best seller, with over 50,000 installed. Attach it to your PS/2, and you can read and write files from PCs. Critics and users alike have raved about its small footprint, ease of use, and dual density capacity of 360Kb and 1.2Mb. (IBM's drive is twice the size, yet stores only one-fourth the data.)

Every PS/2 user deserves this easy connection to the world of PCs.

Solution 2: Our Bridge-File 3.5 floppy disk drive.



You get 720Kb *and* 1.44Mb capacities. Connect it to any PC, and you can read and write files from PS/2s, 386s, laptops, and other 3½" machines.

Now all your PCs can share files with your newer systems.

And here's the ideal controller: The Omni-Bridge Controller.



Controls up to four drives, so you can mix and match 5¼", 3½", and floppy tape drives as you need. This hot card gives you big storage, plus twice the floppy disk and floppy tape transfer performance rates! At only $95, this is a winner.

Get your computers talking. Call the Sysgen Hotline for the name of your nearest dealer. 1-800-821-2151.

SYSGEN
INCORPORATED
556 Gibraltar Drive, Milpitas, CA 95035

Trademarks: Sysgen, Bridge-File, Omni-Bridge—Sysgen Inc.; PS/2—International Business Machines Corporation.
Registered Trademark: IBM—International Business Machines Corporation.

Circle 251 on Reader Service Card


stance, for a precision equivalent to 64 bits, or 19 decimals, only rational numbers can be used whose denominators contain no prime factors larger than 22. Prime-number denominators of more than 5 digits can't be gotten through, not even on the biggest computers, within an acceptable lapse of time.

I think an easier, but less interesting, way of exact calculation with fractions is to simply store the numerator and denominator separately. Memory use and execution time then remain of the same order (say, 3 or 4 times as much) as with normal floating-point calculation.

Even then, error-free fraction calculation is not useful, because the improved precision is of no importance compared to the loss of speed—except in very special projects. Mr. Wayner's examples of errors in floating-point calculation are rather far-fetched, whereas his results by using factorial-base notation deal with denominators that are composed of very small prime factors only.

The article is interesting for two reasons. First, the mathematical theory is explained in a clear-cut way. Second, it illustrates an amazing lack of contact, on the whole, between mathematics and computer programming, apart from small circles of super specialists. In high school and college, very little is done on behalf of this (I'm speaking of Holland, but I suppose it's the same in the U.S.).

Derk Boonstra
Amstelveen, The Netherlands

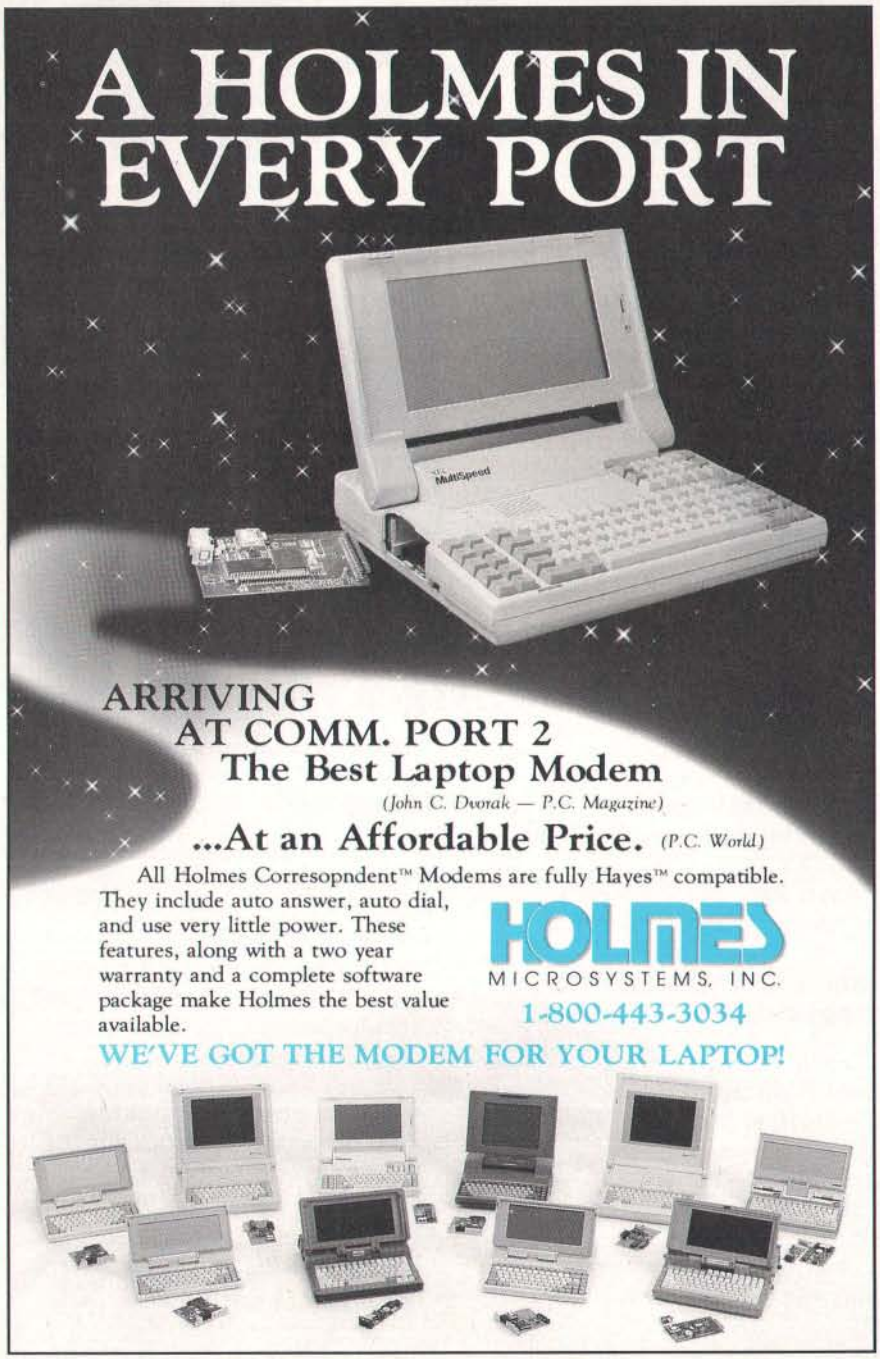

You Can't Be Too Careful

I have a few comments on articles in the June issue.

Regarding "Computers on the Brain, Part 1" in Ciarcia's Circuit Cellar: Warnings notwithstanding, an electrical device attached to the human body should include isolation as close to the signal source (i.e., flesh) as possible. Burns have been documented resulting from battery-powered, FDA-reviewed, professionally manufactured medical devices; the potential is certainly greater in the case of a hobbyist-constructed (and possibly hobbyist-modified) device. Would opto-isolation be possible before the preamps?

Now on to my second comment. Peter Wayner's "Error-Free Fractions" asserts that "it's hard to tell if 501/1024 is greater or less than 5203/10456 without calculating the quotient." In fact, comparing ratio-represented real numbers simply requires a common-denominator cross-multiplication and comparison:

Given $r_1 = n_1 / d_1, d_1 > 0;$
$r_2 = n_2 / d_2, d_2 > 0;$

Let $p_1 = n_1 \times d_2,$
$p_2 = n_2 \times d_1;$

If $p_2 > p_1$, then $r_2 > r_1,$

Else if $p_2 < p_1$, then $r_2 < r_1,$

Else $r_2 = r_1.$

In this case, $p_1 = 501 \times 10456 = 5238456$, and $p_2 = 5203 \times 1024 = 5327872$; $p_2 > p_1$, so $r_2 > r_1$. By stipulating that the sign is carried in the numerator and the denominator is always positive, this operation works for arbitrary real numbers. Thus, the cost of comparison is two integer multiplies (with double-precision products) and one double-precision compare.

James L. Reuss, Ph.D.
Boca Raton, FL ■

Circle 114 on Reader Service Card (DEALERS: 115)



Natural selection provides unique passive protection for the porcupine.

The Block -- Natural Selection For Software Protection



Inventor and entrepreneur Dick Erett explains how "The Activator" provides sane protection for your intellectual property.

"In any industry, just as in nature, the process of natural selection raises one solution above another. Natural selection is the most elegant of engineers.

In the area of software protection The Block has been selected by the marketplace as the solution that works. Over 500,000 packages are protected by our device.

For the past 4 years our philosophy has been; *'You have the right and obligation to protect your intellectual property.'*

A New Ethic For Software Protection

In allowing end-users unlimited copies of a software package and uninhibited hard disk and LAN operation, The Block has created a new ethic for software protection.



By removing protection from the magnetic media we remove the constraints that have plagued legitimate users.

They simply attach our key to the parallel port and forget it. It is totally transparent, but the software will not run without it.

A New Technology For Software Protection

Our newest model, The Activator, builds on our current patented design, and establishes an unprecedented class of software protection.

We have migrated and enhanced the circuitry of The Block to an ASIC (Application-Specific Integrated Circuit) imbedded in The Activator.

This greatly improves speed and performance, while reducing overall size. Data protection can also be provided.

Programmable Option

The Activator allows the software **developer** the option to program serial numbers, versions, or other pertinent data known only to the developer, into the circuit, and access it from the program.


Once you program your part of the chip, even we have no way to access your information.

The ASIC makes emulation of the device virtually impossible. It also presents an astronomical number of access combinations.

Full 100% Disclosure

Since The Activator is protected by our patent we fully disclose how it works. Once you understand it, endless methods of protection become evident.

Just as no two snowflakes are the same, no two implementations of The Activator are identical. And like the snowflake the simplicity of The Activator is its greatest beauty.



We never cramp your programming style or ingenuity. Make it as simple or complicated as you desire.

Let us help safeguard what's rightfully yours. Please call today for additional information or a demo unit. *It's only natural to protect your software.*"

1-800-333-0407
In Connecticut 203-329-8870
Fax 203-329-7428

Software Security inc.
870 High Ridge Road
Stamford, CT 06905


Unlimited Copies • Programmable • Small Size • Fast • Patented • Data Protection

The Block and The Activator are trademarks of Software Security

Circle 244 on Reader Service Card

MODEL 24
high performance
DATA EXCHANGE SYSTEM

UP TO 4½MB BUFFER

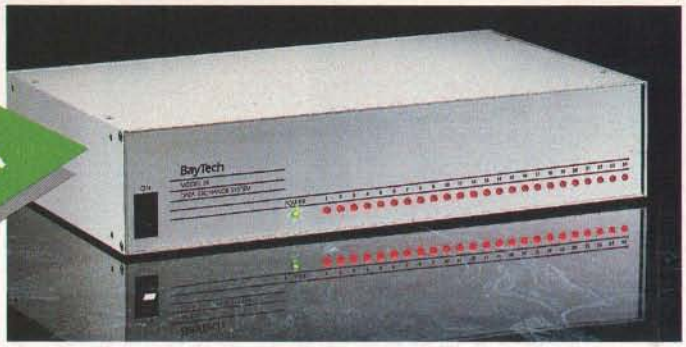

Engineered for speed, flexibility and expandability

CHECK THE SPECS

- The Data Exchange System, Model 24, allows high speed exchange of data between computers, printers and other peripherals.
- Powerful 16-bit CPU plus multiple high performance I/O processors allow super high speed transfer of data demanded by new faster computers and software.
- Optimum flexibility: Select the right combination of serial and parallel ports, and set *any* of these ports as a peripheral port or as a computer port.
- Basic unit expandable to 24 ports by 4-port modules offered in serial/parallel combinations.
- Standard 512KB buffer expandable to 4½ megabytes, to handle big print/plot jobs and many small ones.
- Buffer memory dynamically allocated to maximize buffer utilization.
- Simultaneous data input and output on *all* ports, so no devices are kept waiting.
- Computer-to-computer communication concurrent with all other operations.
- Full duplex communication allows file transfer capability with many communications software packages.
- Compatible with virtually all computers, printers, plotters, modems and other peripherals.
- Pop-up RAM resident PC support software allows peripheral selection via hot key.
- Super fast throughput allows data to pass through with no apparent processing delays.
- Many user-definable parameters including separate baud rates, flow control and parity for each port.
- Internal serial-to-parallel and parallel-to-serial conversion.
- Cascading capability to increase available number of ports.
- Unlimited hotline tech support.
- Designed and manufactured in the U.S.A.

BayTech

Bay Technical Associates, Inc., Data Communications Products Division
200 N. Second St., Bay Saint Louis, MS 39520 USA
Telex 910-333-1618 BAYTECH, Telephone 601-467-8231 or toll-free

800-523-2702

Circle 31 on Reader Service Card

CHAOS MANOR MAIL

Jerry Pournelle answers questions about his column and related computer topics

The European Market

Dear Jerry,

In your February column ("Life after Las Vegas," page 182), you seemed surprised that in Europe the Atari ST has gained a "serious machine" status, which perhaps it lacks in the U.S. In fact, most Americans don't realize that the computer market here in Europe is quite different from what they're used to. Prices here tend to be much higher for most brand-name machines, and some interesting products are hard to find.

To give you an example, I recently bought an Atari Mega ST2. Its list price, including a 20-megabyte Atari hard disk drive, was about $2700 here in Italy. Such a price might sound expensive in the U.S., but, for reasons beyond my comprehension, Apple is selling a comparably equipped Macintosh SE (with 1 megabyte of RAM and a 20-megabyte hard disk drive) for $5700. And dealer margin is low enough that you can't get a discount of more than 10 percent (which is comparable to what you can get on the Atari). As you can see, over here the Atari—even the Mega series—still gives you the most computer for your buck, at least in the 68000 world. In fact, I can buy an Atari Mega ST2 with a hard disk drive and the Atari laser printer for less than I'd have to pay for the Apple laser printer alone.

Given this, if you decide to get off the MS-DOS or OS/2 bandwagon and you don't have a little fortune to spend on the Mac, the Atari seems a good choice. As a result, many small businesses, professionals, consultants, and independent offices are turning to the Atari as a system that is inexpensive and easy to use. The Atari also lets them do their tasks (e.g., word processing, desktop publishing, and communications) at a reasonable price.

Why Apple is pursuing such a policy is a mystery to me, but I think Atari's big success is partly due to Apple's absurd pricing policy. If Macs here sold for what they do in the U.S., the market might be different. But in the current situation, the Atari is very strong, especially in England and in West Germany, where there's an impressive range of locally written software for the Atari computers.

As for the 80x86 world, the business here is lagging behind the U.S. developments; people are still buying 8088 machines as their first machines, not realizing that those are already obsolete. People are also very confused about the whole OS/2 story—whether it is real, whether it will be real some day, and so on. In fact, with so many hardware and software standards, doing system integration in the PC-compatible game is something short of a nightmare—more so here, because many things that would make your life easier just aren't available here. Often, if you decide to go with MS-DOS, you're stuck between either true-blue IBM (it costs a little less than $10,000 for a PS/2 Model 60 with a dot-matrix printer) or Taiwanese equipment, which is often sold by dealers with very little competence. Clone machines are usually a good deal, but you'd better know what you're doing, because no dealer will be out there to help you.

Macs are easily available (not so for the software, though, and I know of some official Apple dealers who make good money on pirated software), but at their high prices they have found their natural niche in the academic market.

As you see, the market situation here is quite different, and that explains why some machines—such as the Commodore 64—have been big hits in Europe. On the other hand, the American market tends to be provincial; both users and companies think nothing exists beyond the U.S. Good products (especially software) get developed in Europe, too.

Fabio Favata
Palermo, Italy

continued

Jerry Pournelle holds a doctorate in psychology and is a science fiction writer who also earns a comfortable living writing about computers present and future. He can be reached c/o BYTE, One Phoenix Mill Lane, Peterborough, NH 03458, or on BIX as "jerryp."

Circle 54 on Reader Service Card

Three ways to build better Turbo Pascal programs...

NEW! POWER SCREEN $129

Screen I/O manager.
Features: ◆ screen painter ◆ virtual screens ◆ data validation ◆ context sensitive help ◆ unlimited screens ◆ definable keys ◆ & much more!

POWER TOOLS PLUS $129

Full featured function library.
Features: ◆ TSR support ◆ direct video access ◆ VGA and EGA support ◆ windows and menus ◆ DOS memory allocation ◆ interrupt service routines ◆ & much more!

ASYNCH PLUS $129

Asynchronous communication manager.
Features: ◆ speeds to 19.2K baud ◆ XON/XOFF protocol ◆ hardware handshaking ◆ XModem file transfer ◆ I/O buffers up to 64K ◆ & much more!

We're Blaise Computing, manufacturers of high quality function libraries designed to reduce the time and technical expertise required for serious applications development.

All of these packages include Peter Norton's Online Instant Access Program, a comprehensive user reference manual with extensive examples, and full sample programs.

Satisfaction guaranteed or return within 30 days for a full refund.

We have a full line of products for C and Pascal. For a free brochure or to order call

800-333-8087!

BLAISE COMPUTING INC.
2560 Ninth Street, Suite 316 Berkeley, CA 94710 (415) 540-5441

Thank you for the report. One reason Atari and Amiga sell in Europe is because they don't have to pay so much attention to certifications by the FCC. I do wonder if the FCC's real purpose here is to help the administration deal with the "too strong" dollar. If so, I have news; they've been wildly successful.—Jerry

The Trouble with MIS Professionals

Dear Jerry,

I'm writing about the letter Charles Hahn wrote you attempting to defend the behavior of corporate data-processing departments ("In Defense of DP Departments," March, page 36). When I first read the letter, I dismissed it as just another point of view that raised some interesting points even if I didn't fully agree with it. However, after more thought, it strikes me that Mr. Hahn's letter is a classic case of what's wrong with many MIS (and managerial) professionals. I also can't help but think that there's another side to his story, and I'd like to hear it.

On one hand, Mr. Hahn is upset about the lack of initiative shown by the people in his company, since they don't like to work voluntary, unpaid overtime and won't learn how to use their machines on their own time. (I suspect what he means is that peopie won't take the often boring manuals home to study them to a point just short of memorization. Has he ever tried letting people take both machines and manuals home to experiment with? I've found that technique works.) On the other hand, Hahn is angry that his ex-director, who actually showed some initiative, used his own programs and hardware instead of Lotus and WordStar, which are apparently the only two MIS-approved programs.

I can't help but wonder what the situation would have been if Mr. Hahn's company had a policy of listening to its employees and had actually bought the director an IBM PC AT and first-rate software to go with it in the first place. I also wonder what it was that caused the director to leave the company. Corporate attitudes, perhaps?

Frankly, I think the fundamental problem is that many managers forget that no matter what sort of equipment and hardware they may buy to improve productivity, the people who run the machines still determine the ultimate success and/or failure of the operation. While it may be unfortunate for business, the fact is that the people running the machinery aren't machines themselves.

George P. Nelson
Springfield, VA

Well, I had much the same thought myself; the purpose of small computers is to enhance productivity, and I doubt very seriously if even the cleverest MIS director has thought of all the ideas. Giving intelligent people good tools and watching to see what they will develop with them has always seemed to me a much better idea.—Jerry

Users versus Businesspeople

Dear Jerry,

I'm writing in response to Richard H. Goodyear's letter ("No Mac Clones," August 1987). He says that while users have written a lot about the Macintosh, businesspeople have spoken "eloquently by their silence," as there are no Macintosh clones.

It was, as you remarked, an "interest-

continued

THE BEST MOST COST-EFFECTIVE STATISTICS PACKAGE AVAILABLE



Whether for industry, education, government, or pure research, no other statistics package can compare to Microstat-II in areas of coverage, accuracy, ease of use, and value. Just some of Microstat-II's features include

- Descriptive statistics (mean, standard deviation, variance, kurtosis, skewness, etc.)
- Regression Analysis: Simple, Multiple, Stepwise Multiple, forward and backward
- Correlation Analysis: matrix and cross products table
- ANOVA: Oneway, Twoway, Twoway with replicate
- LSD, Duncan's, Tukey, Newman-Keuls
- Crosstabs and Chi-square
- Hypothesis tests: mean or proportion
- Nonparametrics: Wald-Wolfowitz, Kruskal-Wallis, Wilcoxon, etc.
- Time Series: moving average, centered moving average, deseasonalization, exponential smoothing
- Probability Distributions: Normal, t, F, Poisson, etc.
- Frequency Distributions: value or range.
- Scatterplots (with simple regression)
- Factorials, Permutations, Combinations
- Up to eight times faster than the competition without loss of accuracy
- Online help plus easy to use keyboard or mouse input; no complex command language to learn
- Unequal case sizes, missing data, and aliased data
- Easy to use data entry system with file import capability
- Only three disks—not copy protected
- Expanded user's manual

Requires an IBM PC, XT, AT, PS2 or compatible with 512K of memory 2 floppy disks or a hard drive. Price: $395.00 with 30 day money back guarantee. Demo available for $19.95. Please include $4.00 for shipping. For information, call or write:

ECOSOFT INC.
6413 N. College Ave. ■ Indianapolis, IN 46220

1-800-952-0472
1-317-255-6476


MasterCard VISA

ECOSOFT

Circle 89 on Reader Service Card

C Programmers


Choosing the Right Database Development System Just Got Easier.

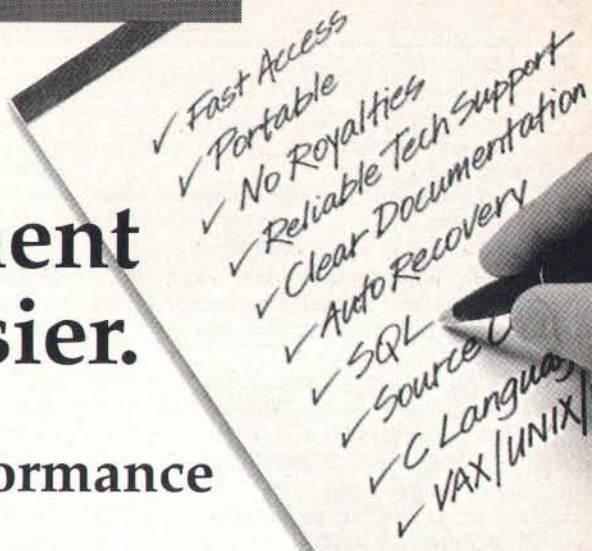


db_VISTA III™ Delivers High Performance With No Hidden Costs.

For database applications development, you want a system with performance, portability, and full functionality at a competitive price. But there's more to it than that. The long term costs associated with extended development schedules, frequent maintenance, excessive royalties, or the inability to handle complex data relationships are often overlooked. These hidden costs can be quite a shock after you have made a commitment and are midway through application development, or worse yet, in production.

With db_VISTA III from Raima, there are no surprises. It provides powerful database capability with tremendous overall cost savings. The heart of the system is db_VISTA, a high performance DBMS that uses B-tree indexing and the network database model file structure to minimize overhead and provide fast data access. Our SQL-based db_QUERY provides a relational view of the network structure, without sacrificing performance. And db_REVISE lets you easily redesign your database. The entire db_VISTA III system is fault tolerant and complete source code is available.

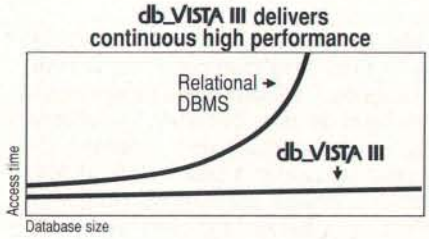



db_VISTA: High Performance DBMS
Multi-user
Fast data access: B-tree indexing, network database model, virtual memory disk caching
Multiple Database Access
Referential integrity
Automatic recovery
Record and file locking
Database consistency check
Easy-to-use interactive access programs
Data Definition Language patterned after C

db_QUERY: SQL-based Query
Relational interface to db_VISTA databases
Yields extraordinary performance
Build ad hoc queries & reports

db_REVISE: Database Restructure Program
Redesign your database
Converts existing data to revised design
Upgrade remote end user locations easily

Add WKS Library for Lotus 1-2-3
Fast C interface to Lotus, dBASE and others

Operating Systems: VMS, ULTRIX, UNIX System V, BSD 4.2, SunOS, QNX, XENIX, OS/2, MSDOS, Macintosh, MS Windows

C Compilers: VAX, UNIX, XENIX, SunOS, Microsoft, Lattice, TurboC, LightspeedC, MPW

LANs: NFS, 3Com, NetWare, LifeNet, Banyan, and any other MS-DOS NetBIOS-compatible LAN. AppleShare and network-independent versions also.

Thousands of C programmers in over 50 countries worldwide have chosen Raima's db_VISTA III. Here are the reasons why:

- Fast data access
- Minimal data redundancy
- C source code available
- Automatic recovery
- Multi-user support
- Portable to VMS, UNIX, OS/2, MS-DOS and Macintosh
- SQL-based relational query
- No royalties
- Professional services
- Superior support

Maybe it's time that you checked out db_VISTA III. Consider *all* the costs. It could be the easiest choice you ever made.

CALL:

1-800-db-RAIMA

(that's 1-800-327-2462)

Ask about the many other products and services Raima Corporation offers, including consulting, application development, and training.

See us at
COMDEX/Fall '88
Booth 9607 Sahara Hotel
Nov. 14-18, 1988 Las Vegas, Nevada

RAIMA™ CORPORATION

Raima Corporation 3245 146th Place S.E., Bellevue, WA 98007 USA **(206)828-4636** Telex: 6503018237 MCI UW FAX: (206)828-3131 In **Texas** call: (214)231-3131
International: **U.K.**: (0992)500919 **Germany**: 07127/5244 **Switzerland**: (01)725 04 10 **France**: (1)47 72 77 77 **Benelux**: (02159)46 814 **Sweden**: (013)124780
Finland: (90)42 051 © 1988 Raima Corporation

BY108

ing observation."

I don't like to be judgmental, but I fear Mr. Goodyear is guilty of leading the gullible down that well-known garden path. What makes "users" and "businesspeople" mutually exclusive? If you accept that premise, then you enter the garden.

The absence of Mac clones is another misleading premise. What are GEM and Microsoft Windows if not user interfaces that copy the look and feel of the Mac's operating system?

What inspired the Commodore Amiga and Atari ST series?

And what is all this about an OS/2 for the new IBM systems that has something called the Presentation Manager? Could it be that it will use a mouse and have the look and feel of a Mac interface?

Looks like some businesspeople are about to become users.

Brian Farley
Saipan, Mariana Islands

Actually, it will have a mouse and the look and feel of the Lilith, or perhaps early Xerox systems. . . .

I keep trying to start the rumor that Apple is going to sue Xerox for look and feel.—Jerry

Computing on the Go

Dear Jerry,

I'm writing in response to the letter from Bren Jacobson ("Floatable Computer?" March, page 36), who wants to use a computer in a boat. I can't offer much about corrosion problems, but I use computers in motor homes.

People have tried 12-volt DC battery voltage for the drives, plus a few resistors for the 5-V circuitry. And I've found problems because cheap power supplies often depend on one load to balance out another. Then there are all those voided warranties.

My ancient CP/M machines would run on a one-lung light plant, albeit with a flickering CRT that could provoke terminal mal de mer. But when I went to a hard disk, a mechanically governed alternator just couldn't hack it. Nor could a hard disk endure prairie summers with power lines harvesting every lightning strike from Vancouver to Halifax. Problems were exacerbated by RV parks with inadequate wiring. Somebody plugs in one more coffee maker, and there go the last 10 pages. . . .

Five photovoltaic panels and four deep-cycle batteries just about break even for boondocking in the desert. This, of course, also maintains lights, swamp cooler, TV, CB, water pumps, furnace fans, and all the usual hardships of wilderness life.

The 1-kilowatt Vanner inverter turns 12-V DC into 110-V, 60-Hz, pulse-width modulation with 87 percent efficiency, and it will drive any small computer more dependably than most electric companies. It will also drive kitchen appliances for short periods. It cost $1000 2 years ago, and now it sells for $500.

G. C. Edmondson
Lakeside, CA

From what I've seen you do over the years, you probably have more experience at mobile computing than anyone else in the world. Thanks for sharing it with us.—Jerry

Should We Worry about Viruses?

Dear Jerry,

My wife and I work at home in south-

INDUSTRIAL STRENGTH OOPS.

You have three options in today's world; lead, follow or get out of the way. You've already taken a leadership position in hardware with the latest 286 or 386 system. Now you can use that triple-digit architecture to blast ahead of the pack with the most powerful new Object Oriented Programming (OOPS) software on the market: Smalltalk/V286.

Smalltalk/V, the original OOPS tool for the PC, gave scientists, engineers, programmers and educators a brand new way to solve problems. And soon they were developing exciting new applications in everything from economics to medicine to space.

Now Smalltalk/V286 gives you true work station performance with industrial strength capabilities like: push-button debugging; multi-processing; portability between DOS, OS/2 and Presentation Manager operating environments; integrated color graphics; a rich class library; and access to 16 MB of protected mode memory, even under DOS.

The new Smalltalk/V286, which is even easier to learn and use than Smalltalk/V, retails for just $199.95. Or you can buy Smalltalk/V, still the world's best selling OOPS, for only $99.95. And both come with our 60 day money-back guarantee.

Check out the new Smalltalk/V286 at your dealer. If he doesn't have it, order toll free, 1-800-922-8255. Or write to: Digitalk, Inc., 9841 Airport Blvd., Los Angeles, CA 90045. And let us put you ahead of the power curve.

Smalltalk/V286

Circle 81 on Reader Service Card (DEALERS: 82)

ern France, and, having just bought two 20-MHz Compaq 80386 computers, we are wary of installing French Minitel internal modem cards for fear of malicious computer virus programs that spread through networks and destroy data on hard disks.

We heard about viruses in a *Herald Tribune* article (February 1, 1988) that mentioned a preventive program called Data Physician, edited by Digital Dispatch in Minneapolis, Minnesota.

How serious is this problem, and does the program work?

Peter Clark
Forcalquier, France

Well, computer viruses are indeed real enough, but the best preventive is to be sure you don't put unknown software into your machine. There are also a number of companies that sell virus protection programs; just how badly you need one is a matter of judgment.—Jerry

QuickBASIC 3.0 versus 4.0

Dear Jerry,

I can't agree with your praise of the QuickBASIC 4.0 debugger (Computing at Chaos Manor, March). You did note its weakness—you can't see the trace and the output at the same time. What you probably fail to realize is the intense inconvenience this causes, with seemingly dozens of strokes to go between tracing and viewing the output and back. When tracing, the output does appear for a fraction of a second with each `PRINT`, as you note, but you didn't emphasize how visually annoying it is. Further, it is too fast to serve any purpose at all.

I wrote an impassioned letter to Bill Gates about this problem, and I even received a telephone call in response (though not from him). I simply refuse to use version 4.0 until this is corrected. (The 3.0 trace is quite workable. In fact, version 3.0 is quite good.)

I just tried to use the 4.0 debugger once again, but it's still terrible. I'll just have to forgo the goodies like the record structure until Microsoft fixes the crucial debugging operations.

There are some factual errors in your column. First, QuickBASIC will accept the one-line `IF...THEN...ELSE` structure you worked so hard to eliminate. Granted, it's unreadable, but the compiler rejection is limited to Turbo Basic and is a drawback to using that language if you're running old programs.

Second, QuickBASIC (including 4.0) still supports use of the same name assignments to different types of variable. Thus, you can indeed declare `TEACHER`, `TEACHER$`, `TEACHER#`, and so on. Your problem was that the error duplicate definition is a bug. The correct error, which I found by using 3.0 with your problem, is `missing =`. Add the `=`, and the error changes or disappears.

Peter J. Lunde
West Simsbury, CT

I haven't had the debugging problems you have, and with QuickBASIC 4.0's ability to step through code, set breakpoints and history, and the rest of the goodies, I much prefer it to QuickBASIC 3.0; but everyone to his own taste.

You're right: QuickBASIC will take one-line statements; I'd already cleaned them up to get them through Turbo Basic, so I never even tried them on QuickBASIC. Your other point is correct, too, as I found out just after I approved the galleys of the article. Oh, well.—Jerry ■



ASK BYTE

Circuit Cellar's Steve Ciarcia answers your questions on microcomputing

Mac to PC, Over

Dear Steve,

I am experiencing a disturbing problem as I try to connect my IBM PC XT to my Macintosh 512KE through the RS-422 serial communication port. Although Apple claims that the Mac's serial communication port conforms to the RS-422 standard, I find that the Mac has fewer handshaking lines than the PC. I have no problem connecting data signal lines, but what about the handshaking lines? The Mac has only "handshaking in" and "handshaking out," while the PC has both "+" and "−" for every in and out handshaking line. How can I connect them directly without burning my circuit board?

Chester H. Lin, M.D.
Taipei, Taiwan, Republic of China

For years, computer users have been struggling with the nonstandard RS-232C serial interface protocol. There is much less uniformity than the designation "standard" implies. The newer RS-422 protocol has come along and isn't being implemented with any more consistency than the older standard. With both methods, workable connections are frequently dictated by individual software packages—for example, some software watches the RTS/CTS pair for handshaking and ignores DTS/DSR, while other software may do the reverse. Other programs do both or neither, ignoring handshaking entirely or doing it in software with XON/XOFF.

As with many RS-232C situations, the solution to your problem of connecting a Macintosh and an IBM PC XT is a null-modem cable or adapter. That's the easy part, without the handshaking connections. Connect the transmitted data pins on each computer with the received data pins on the other. The handshaking connections are a bit uncertain, and a bit of trial and error with a breakout box may be needed to determine the exact configuration. I'd suggest you first try tying the Mac port's pin 6 to the PC's 17 and 18, and the Mac's pin 7 to the PC's 9 and 16. If that doesn't work, try the Mac's pin 6 to the PC's 5 and 6, and the Mac's pin 7 to the PC's 4 and 20. As a last resort, you may be able to tie all handshaking inputs true and use the system without hardware handshaking (do it in software).

Serial interfacing is more a black art than a logical science. Determining the correct connections is often a matter of systematically trying each of the possible hookups until something works. The buffers and level translators used in serial interfaces, such as the 1488/1489 ICs, are designed to withstand connections between two outputs pulling in opposite directions. There is little likelihood of your damaging your computers by experimenting.—Steve

IN ASK BYTE, Steve Ciarcia, a computer consultant and electronics engineer, answers questions on any area of microcomputing and his Circuit Cellar projects. The most representative questions will be answered and published. Send your inquiry to

Ask BYTE
One Phoenix Mill Lane
Peterborough, NH 03458

Due to the high volume of inquiries, we cannot guarantee a personal reply. All letters and photographs become the property of Steve Ciarcia and cannot be returned.

The Ask BYTE staff includes manager Harv Weiner and researchers Eric Albert, Tom Cantrell, Bill Curlew, Ken Davidson, Jeannette Dojan, Jon Elson, Frank Kuechmann, Tim McDonough, Edward Nisley, Dick Sawyer, Robert Stek, and Mark Voorhees.

Include Schematics, Please

Dear Steve,

For about a year, I've been trying to get a schematic and parts for an IBM AT-compatible board without success (the board is the same one JDR Microdevices calls MCT-ATMB). I own two of these boards, but one has a bad programmable array logic (PAL). The good PAL cannot be copied because the security link has been burned away.

I have talked to many wholesalers and retailers, including JDR Microdevices. None of the dealers I talked to can get schematics or parts for the boards. All boards are exchanged and sent to Taiwan for repair.

I am worried about the future of consumer electronics in the country if foreign countries are allowed not to supply data and parts for repairing their products. Has this country come to the sad state of affairs that we will now be dependent on other countries for repairing our products? It wouldn't cost much to include a schematic with a product. Has it come to the point that we need a law requiring all imported electrical products to include a schematic?

What's going to happen two years down the road when the dealer you bought your board from is out of business and you don't know where he got it, as in my case?

Wayne Anderson
Mesa, AZ

The situation you've run into isn't unique. Unfortunately, the solution isn't quite the one you're looking for.

I suspect that the reason you're having trouble getting parts is simply that it's not economical to repair very low-cost electronics. Look at it this way: That motherboard retails for about $350. The actual manufacturing cost is under 30 percent—let's say $100. Repair technician time, counting overhead and test equipment, is about $100 per hour, and diagnosing problems can take more hours than you can shake a stick at.

Figuring your time at $100 per hour, how many system boards did you waste while tracking the problem down to that PAL?

I don't think we need more laws regarding imports on the books. After all, you had a clear choice: Buy a stock IBM system from an established IBM dealer, with all the support and repair built into the price, or buy a clone with no support. You get exactly what you pay for, and I think that's exactly the way it should be. Folks who need the support are buying IBM; the rest of us aren't.

continued

DECLARATION of INDEPENDENCE

in'de-pen'dent (in'di-pen'dent) *adj.* 1. not influenced by others in opinion, conduct, etc. 2. not affiliated; sovereign in authority. *–n.* **(in'de-pen-dence)** someone or something independent.

FACT:
Many major dealers specializing in programming tools for personal computers are legal affiliates of companies who also publish development software.

FACT:
Programmer's Connection is *not* a publisher and is *not* affiliated to any company that has ever been in the business of publishing software.

When you come to Programmer's Connection, you'll find our knowledgeable, non-commisioned salespeople and technical consultants will give you an unbiased look at the products we carry.

Please join us in our Declaration of Independence. Call Programmer's Connection today and be sure to ask for your FREE subscription to the Connection, our 120 page comprehensive buyer's guide. It contains descriptions for over 800 products by more than 300 manufacturers, and informative articles by leaders in the programming industry.

CALL for Products Not Listed Here

USA..... 800-336-1166

Canada..... 800-225-1166
Ohio & Alaska (Collect)..... 216-494-3781
International..... 216-494-3781
FAX..... 216-494-5260
TELEX..... 9102406879

Business Hours: 8:30 AM to 8:00 PM EST Monday through Friday
Prices, Availability, Terms and Conditions are subject to change.
©Copyright 1988 Programmer's Connection Incorporated

PROGRAMMER'S CONNECTION

ORDERING INFORMATION

FREE SHIPPING. Orders within the USA *(lower 48 states only)* are shipped FREE via UPS Ground. Call for APO, FPO, PAL, and express shipping rates.

NO CREDIT CARD CHARGE. VISA, MasterCard and Discover Card are accepted at no extra cost. Your card is charged when your order is shipped. Mail orders please include expiration date and authorized signature.

NO COD OR PO FEE. CODs and Purchase Orders are accepted at no extra cost. No personal checks are accepted on COD orders. POs with net 30-day terms (with initial minimum order of $100) are available to qualified US accounts only.

NO SALES TAX. Orders outside of Ohio are not charged sales tax. Ohio customers please add 5% Ohio tax or provide proof of tax-exemption.

30-DAY GUARANTEE. Most of our products come with a 30-day documentation evaluation period or a 30-day return guarantee. Please note that some manufacturers restrict us from offering guarantees on their products. Call for more information.

SOUND ADVICE. Our knowledgeable technical staff can answer technical questions, assist in comparing products and send you detailed product information tailored to your needs.

INTERNATIONAL ORDERS. Shipping charges for International and Canadian orders are based on product weight. The standard rates used are published in the Fall 1988 issue of our Buyer's Guide. If you do not have a copy, please call or write for the exact cost. All payments must be made with US funds drawn on a US bank. Please include your telephone number when ordering by mail. Due to government regulations, we cannot ship to all countries.

MAIL ORDERS. Please include your telephone number and complete street address on all mail orders. Be sure to specify computer, operating system, diskette size, and any applicable compiler or hardware interface(s). Send mail orders to:

Programmer's Connection
Order Processing Department
7249 Whipple Ave NW
North Canton, OH 44720

	List	Ours
386 products		
386 ASM/386 LINK *by Phar Lap Software*	495	399
386 DEBUGGER *by Phar Lap Software*	195	159
NDP C-386 *by MicroWay*	595	539
NDP ForTran-386 *by MicroWay*	595	539
PC-MOS/386 *Single-User by The Software Link*	195	179
PC-MOS/386 *5-User by The Software Link*	595	539
PC-MOS/386 *25-User by The Software Link*	995	869
VM/386 *by IGC*	245	219
blaise products		
ASYNCH MANAGER *Specify C or Pascal*	175	135
C TOOLS PLUS/5.0	129	99
PASCAL TOOLS/TOOLS 2	175	135
POWER SCREEN *Supports C and Pascal*	129	99
Turbo ASYNCH PLUS/4.0	129	99
Turbo C TOOLS	129	99
Turbo POWER TOOLS PLUS/4.0	129	99
borland products		
Paradox 2.0 *by Ansa/Borland*	725	525
Paradox 386 *by Ansa/Borland*	895	639
Paradox Network Pack *by Ansa/Borland*	995	725
Quattro: The Professional Spreadsheet	247	179
Sidekick Plus	200	129
Sprint: The Professional Word Processor *New*	200	139
Turbo Assembler & Debugger *New*	150	105
Turbo Basic Compiler	100	68
Turbo Basic Support Products *All Varieties*	100	68
Turbo C Compiler *New Version*	150	105
Turbo C Professional *New*	250	179
Turbo Pascal Compiler *New Version*	150	105
Turbo Pascal Professional *New*	250	179
Turbo Pascal Database Toolbox	100	68
Turbo Pascal Developer's Toolkit	395	285
Turbo Pascal Editor Toolbox	100	68
Turbo Pascal Gameworks Toolbox	100	68
Turbo Pascal Graphix Toolbox	100	68
Turbo Pascal Numerical Methods Toolbox	100	68
Turbo Pascal Tutor	70	49
Turbo Prolog Compiler	150	115
Turbo Prolog Toolbox	100	68
Other Borland products	CALL	CALL
c language		
C++ *by ZORTECH* *New*	100	95
C_talk *by CNS*	150	139
Eco-C88 Modeling Compiler *by Ecosoft*	100	69
Guidelines C++ *by Guidelines Software*	295	259
Lattice C Compiler *DOS & OS/2, from Lattice*	450	289
Mark Williams Let's C *with FREE csd*	75	68
Turbo Programmer/C *by ASCII* *New*	499	399
WATCOM C6.5 *by WATCOM Group* *New Version*	295	269
database management		
Clarion Development System *by Clarion* *New*	695	595
Clipper *by Nantucket*	695	459
dBASE III Plus *by Ashton-Tate*	695	399
dBFast *dBASE III Plus Comp by dBFast*	99	89
FoxBASE+ *by Fox Software*	395	249
FoxBASE+/386 *by Fox Software*	500	399
FrontRunner *by Ashton-Tate*	195	175
Genifer *by bytel*	395	269
golden bow products		
Vcache	60	57
Vfeature *Hard Disk Utility*	80	74
Vfeature Deluxe *Hard Disk Utility*	120	111
Vopt *Hard Disk Optimization Utility*	60	57
lahey computer products		
F77L-EM/16	695	649
F77L-EM/32	895	829
F77L-FORTRAN Compiler	477	439
Lahey Personal Fortran 77	95	89
with Toolkit	119	105
microsoft products		
Microsoft BASIC Compiler	295	219
Microsoft C Compiler 5 *w/CodeView*	450	299
Microsoft COBOL Compiler *w/Tools* *New Version*	900	659
Microsoft FORTRAN *Optimizing Comp*	450	299
Microsoft Macro Assembler	150	105
Microsoft Mouse *All Varieties*	CALL	CALL
Microsoft OS/2 Programmer's Toolkit	350	239
Microsoft Pascal Compiler	300	199
Microsoft QuickBASIC 4	99	69
Microsoft QuickC	99	69
Microsoft Windows	99	69
Microsoft Windows 386	195	129
Microsoft Windows Development Kit	500	329
Other Microsoft products	CALL	CALL
modula-2 language		
LOGITECH Modula-2 Development System	249	199
Modula-2 Compiler Pack	99	79
Modula-2 Toolkit	169	139
LOGITECH Modula-2 OS/2 *New*	349	279
LOGITECH Modula-2 Window Package	49	47
TopSpeed Modula-2 *by Jensen & Partners* *New*	100	89
persoft products		
SmartMOVE	149	129
SmarTERM 220	195	179
SmarTERM 240	345	299
periscope products		
Periscope I *with 512K Board*	695	559
Periscope II *with NMI Breakout Switch*	175	139
Periscope II-X *Software only*	145	105
Periscope III *10 MHz version*	1395	1119
peter norton products		
Dan Bricklin's Demo II	195	179
Norton Commander	89	65
Norton Editor	75	59
Norton Guides *Specify Language*	100	65
For OS/2	150	109
Norton Utilities	100	59
Norton Utilities Advanced Edition	150	109
smalltalk language		
Smalltalk/V	100	89
Smalltalk/V 286	200	175
Smalltalk/V Support Utilities *All Varieties*	CALL	CALL
other products		
Actor *by The Whitewater Group*	495	449
APL*PLUS PC *by STSC*	695	529
Brief *by Solution Systems*	195	CALL
Carbon Copy Plus *by Meridian Technology*	195	135
db/LIB Database Library *by AJS Publishing*	139	125
Desqview *from Quarterdeck*	130	115
Desqview API Products *All Varieties*	CALL	CALL
Epsilon *EMACS-type Text Editor by Lugaru*	195	169
Flow Charting II+ *by Patton & Patton*	229	189
Intelligence/Compiler *by IntelligenceWare*	490	479
Mace Utilities *by Paul Mace Software*	99	85
MathCAD *by MathSoft*	349	319
Microport Products *All Varieties*	CALL	CALL
MICROSTAT-II *Statistics Pack by Ecosoft*	395	359
MIRROR II *by SOFTKLONE* *New*	70	63
STATGRAPHICS *by STSC*	895	699
TLIB Version Control *by Burton Systems Software*	100	89
5 Station LAN	300	269
Turbo Programmer *for Turbo Pascal, by ASCII*	389	309
XENIX System V *All Varieties by SCO*	CALL	CALL

PROGRAMMER'S QUALITY INTEGRITY Service SUPPORT PRICE CONNECTION


Established 1984

Circle 208 on Reader Service Card

Circle 107 on Reader Service Card

DATA ACQUISITION ON THE MACINTOSH

Advanced hardware and software solutions for all Macintosh computers.

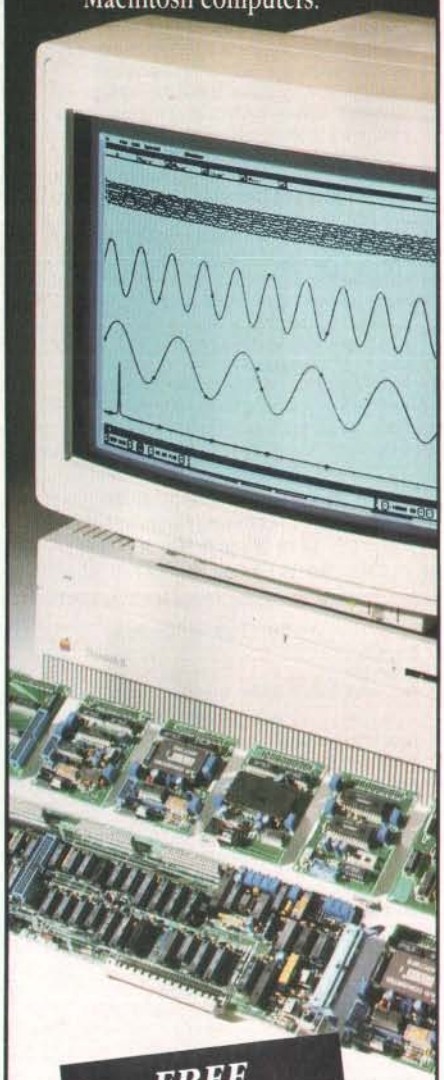

FREE CATALOG

Write, or call to talk to a GW Engineer

617-625-4096

GW Instruments, Inc.

35 Medford St. • Somerville, MA 02143

The Macintosh Data Acquisition Company

But look at the economics again. If that $6000 IBM system dies, the company will swap the board and get you back on the air. The defective board isn't repaired; it's scrapped. After the warranty runs out, you're in the same boat: IBM doesn't supply schematics for its boards any more, either, and the company doesn't repair them. You might have to replace a $2000 system board instead of a $350 one.

All in all, I think the only way out is to buy another system board and use the one you've got for a wall hanging. It's expensive, but any other choice is more expensive still.—Steve

Programming Embedded Microprocessors

Dear Steve,

I am an electrical engineer looking after the operation and maintenance of some of the sophisticated equipment in power stations and substations—equipment like sequential event recorders, digital fault recorders, microprocessor-based alarm systems, and programmable logic controllers. These come under the category of microprocessor-embedded systems.

Last year I subscribed to BYTE to improve my proficiency in troubleshooting and maintenance work. I have had some introductions to microprocessors during my postgraduate education, and I am conversant in 8085 assembly language. While studying BYTE, I felt its contents and coverage were beyond my level, so I decided to seek your guidance.

Please let me know the names of some good books and microprocessor journals dealing with 8-bit microprocessor products being used in industry as embedded controllers. I would specifically welcome books related to troubleshooting procedures, because the documents provided by the manufacturers are invariably sketchy and incomplete. Also, please let me know of any books dealing with the design and application of programmable logic controllers.

Lal Singh
Najran, Saudi Arabia

Listed below are several books that I can recommend to help you with applying and programming embedded microprocessors. In addition to the microcontroller handbook, Intel publishes a complete series of guides and application notes describing the various microprocessors that the company manufactures. Contact Intel at the address listed below to receive a complete catalog of Intel books and literature.

Z-80 and 8080 Assembly Language Programming *by Kathe Spracklen (Rochelle Park, NJ: Hayden Book Co., 1979).*

8080 and Z80 Assembly Language *by Alan R. Miller (New York: John Wiley & Sons, 1981).*

Intel Embedded Controller Handbook *(Intel Literature Sales, P.O. Box 58130, Santa Clara, CA, 95952).*

In addition to my monthly column in BYTE, I have begun publishing a magazine entitled Circuit Cellar Ink, *which specifically deals with applying electronic solutions to real problems. Subscription information is available at the end of my recent columns in BYTE.*—Steve

A Circuit Struck Dumb

Dear Steve,

I'm a longtime reader and fan of Circuit Cellar, and I've learned a lot from reading about your projects over the years. From time to time, I've even built some of my own projects after being influenced by your designs.

Back in June of 1981, your project of the month was a low-cost speech-synthesizer interface using National "Digitalker" components. I obtained such a chip set and built a slightly modified version of the circuit to go on the home-brew bus extension I had placed inside the video monitor of my trusty TRS-80 Model 1. It worked flawlessly from the start. Over the years, I've come to appreciate the clearly enunciated warnings and messages that my computer would speak to me while I was looking in another direction reading data statements, keying in bank transactions, or whatever.

Two years ago, I finally became MS-DOS–compatible when I bought a new Tandy 1000A. At last, I had a built-in bus for projects. Alas, I now have a young family, so I can't spend as much time pursuing hardware projects. One that I really wanted to accomplish, though, was to equip the new machine with voice capabilities. Since nobody seems to be writing articles for simple projects for these new machines, I opted to try and modify my old design for the Tandy's PC-ROM vocabulary that I had purchased. I used the Tandy 1000 technical reference manual and your article entitled "Build the Circuit Cellar MPX-16 Computer System," Parts 1 and 2 (November and December 1982) as guidelines for the circuit I came up with.

Unfortunately, the circuit doesn't work. I get no sound from the speaker.

continued

NASA FLIES WITH PROTEUS PCs. AND SO CAN YOU!

The National Aeronautics and Space Administration is a regular Proteus buyer. So are thousands of professionals, as well as small and large businesses nationwide. Including Xerox, GE, Dupont, the U.S. Government, MIT and Harvard. And with good reason:

NATIONALLY ACCLAIMED PERFORMANCE AND SUPPORT.

"The Proteus is one of the fastest desktop computers we tested. Quality has not been compromised, yet this performance system par excellence was priced so low." Dec., 1987 INFO WORLD

"The Proteus 386/16MHz is markedly faster than any other PC we've worked with—including the Compaq Deskpro 386/20!" Jan., 1988 PERSONAL COMPUTING

COMPATIBILITY GUARANTEED.

Every Proteus is American made from the ground up. And guaranteed compatible with all IBM PC/AT software and add-on products. As well as with DOS, OS/2, UNIX, XENIX, NOVELL and all major CAD systems. None is alien to Proteus!

SATISFACTION GUARANTEED.

If you're not fully satisfied with your Proteus purchase, return it during the first 30 days for a full refund.

THE MOST EXTRAORDINARY SUPPORT IN THE INDUSTRY.

We don't leave you out in orbit after we make the sale, either. Proteus has a contract with a nationwide computer maintenance company.

If something should go wrong with your Proteus system during the first 15 months, we'll send a qualified technician to your site to fix it. Free!

Just call our toll-free technical support hotline any time you have a question or need help. We'll take care of the rest.



STANDARD FEATURES:	386A	pro-CACHE 386	286 GTX	286E
INTEL CPU	80386	80386	80286	80286
SPEED MHZ	20/16/6	20/6	12/6	8/6
WAIT STATE	ZERO	ZERO	ZERO	1
SYSTEM MEMORY	1024K to 16MB	1024K to 16MB	640K to 16MB	640K to 16MB
CACHE MEMORY SIZE	64KB	64KB	32KB	–
KBD. SELECTABLE SPEEDS	YES	YES	YES	YES
COPROCESSOR SUPPORT	80287/387	80387	80287	80287
32-BIT SLOTS	–	1	–	–
16-BIT SLOTS	6	5	6	6
8 BIT SLOTS	2	1	2	2
SERIAL PORTS	2	2	2	2
PARALLEL PORT	1	1	1	1
HARD DISK/FD. CTLR.	YES	YES	YES	YES
1.2MB 5¼" OR 1.44MB 3.5" FD.	YES	YES	YES	YES
ROM BASED SETUP/DIAGNOSTICS	YES	YES	YES	YES
POWER SUPPLY	200W	200W	200W	200W
ENHANCED 101-KEY KBD.	YES	YES	YES	YES

SEAGATE, MINISCRIBE, MAXTOR HARD DISKS FROM $279. VGA/EGA ADAPTORS: VIDEO 7, SIGMA, ATI, EVEREX FROM $149. MEMORY UPGRADES, COPROCESSORS, MODEMS AT LOW PRICES.

PROTEUS 386A opt. 20 MHz

INFO WORLD 8.6

"A 16MHz, zero wait state 'hot rod'!" "Among the top 100 products of the year!"

MONOCHROME SYSTEM WITH A 40MB, 28MS HARD DISK	$2895
EGA COLOR SYSTEM WITH A 40MB, 28MS HARD DISK	$3295
VGA SYSTEM (800x600) WITH A 40MB, 28MS HARD DISK	$3395

PROTEUS 286GTX



"IBM can keep its PC/AT and PS/2 computers; I'll take the Proteus 286GTX before those any time. I never want to be without it again!" Ernest Mau, Editor CompuServe ON LINE TODAY

"Fastest machine in the comparison. A superb value" INFO WORLD

MONOCHROME SYSTEM WITH A 40MB HARD DISK	$1895
EGA COLOR SYSTEM WITH A 40MB HARD DISK	$2295
VGA SYSTEM (800x600) WITH A 40MB HARD DISK	$2509

PROTEUS 286E

"The Proteus 286E is the clear winner. We recommend it." INFO WORLD

MONOCHROME SYSTEM WITH A 20MB HARD DISK	$1612
EGA COLOR SYSTEM WITH A 20MB HARD DISK	$2095

CUSTOM CONFIGURED WITH TOMORROW'S TECHNOLOGY.

Proteus computers were custom configured to meet NASA's specs. And whether you need only one system or a hundred, we'll custom configure to your exact specifications, too.

From a long list of third party, brand name components.

Including 3.5" microfloppy drives, high-speed 1:1 interleave controllers with ESDI and SCSI hard disks and 800x600/640x480 resolution VGA graphics.

ORDER BY PHONE. IT'S EASY.

You don't even have to leave your desk to order a Proteus system. Or systems. Just call us direct.

The exact configuration you want will quickly land on your doorstep. All you have to do is plug it in, turn it on and blast off into the wild, blue yonder!



IN NJ: 201-288-8629
For tech support: 1-800-541-8933

1-800-782-8387

proteus

THE INTELLIGENT CONCLUSION!

377 Rt. 17 So, Airport 17 Ctr, Hasbrouck Hts, NJ 07604 • Telex 510-610-0960 • FAX 201-288-9518

Electronic catalog and 24-hour tech support: set your modem to 1200B/1/8/N dial 201-288-8577

VAR/Reseller/volume discounts available. Payment methods: credit card, COD, company POs

All prices and terms subject to change. All trademarks recognized. All rights reserved.

Circle 211 on Reader Service Card

telemart

SOFTWARE

DATA BASE MANAGEMENT

Clipper	$415
dBase III Plus	369
dBase III LAN	599
DB-XL Diamond	107
Eureka	99
Genifer	188
Nutshell	72
Paradox 2.0	415
PFS: Professional File	119
Q & A	185
Q & A Write	105
Rapid File	182
Revelation	459
R:Base For DOS	425
Reflex	88
VP Expert	109
VP Info	56

PROJECT MANAGEMENT

Harvard Total Project Mgr. II	$309
Microsoft Project 4.0	287
Timeline 2.0	259

WORD PROCESSORS

Easy Extra	$53
Word (Microsoft)	185
Multimate Advantage II	252
PFS: Professional Write	102
Volkswriter 3	132
Volkswriter Deluxe Plus	57
Webster New World Writer	53
Webster Pro Spell Checker	32
Webster Thesaurus	37
Word Perfect	Call
Word Perfect Executive	Call
Word Perfect Library	Call
Wordstar Pro Pack 4.0	Call
Wordstar 2000 Plus Personal	205

DESKTOP PUBLISHING

Newsmaster II	$39
Pagemaker	Call
PFS: First Publisher	65
Ventura Publishing	475

GRAPHICS

Energraphics	$186
Freelance Plus	309
Generic CAD w/Dot Plot 3.0	72
Harvard Graphics 2.1	239
In-A-Vision	260
Microsoft Chart 3.0	229
News Room	30
News Room Professional	42
Printmaster Plus	29
PrintShop	32
Turbo Graphix Tool Box	58
VP Graphix	56
Windows Draw!! w/Clip Art	159

MICE

PC Mouse w/Paint (Buss or Serial)	$85
PC Mouse w/Autosketch (Buss or Serial)	99
Microsoft Buss Mouse 1.0	92
Microsoft Serial Mouse 1.0	92
MS Buss Mouse w/CADD	107
MS Serial Mouse w/CADD	107
MS Buss Mouse w/Windows	122
MS Serial Mouse w/Windows	122
Optimouse (PC Mouse) w/Dr. Halo III	78

INTEGRATIVE SOFTWARE

Ability Plus	$137
Enable 2.0	352
Framework III	425
MS Works	86
PFS: 1st Choice	76
Smart Software System	389
Symphony	435

ACCOUNTING

ACCPAC Easy	$49
Bedford Accounting	139
Computer Associates	Call
DAC Easy Accounting	53
DAC Easy Payroll	53
In-House Accountant	105
One Write Plus 2.0	117
One Write A/R, A/P, Payroll	117
Time Slips III	109

UTILITIES

1 DIR Plus	$46
Bookmark	56
Brooklyn Bridge	69
Carousel 2.0	43
Copy II PC	18
Copywrite	40
Corefast	89
Cruise Control	29
Disk Optimizer 2.0	38
Disk Technician	56
Double DOS 4.0	Call
DS Back-Up Plus	46
Fastback	75
Fastback Plus	86
Keyworks	53
Mace Utilities	47
Microsoft Windows 286	57
Norton Commander	43
Norton Editor	35
Norton Utilities 4.0	46
Note It Plus	45
PC Tools Deluxe	36
Printworks for Lasers	67
Referee	38
Sidekick Plus	Call
Sideways	37
Smart Notes	43
SQZ Plus	53
Superkey	58
Unlock D Plus	49
Unlock Masterkey	95
XTree Professional	61

ACCESSORIES

Copy II Option Board Deluxe	$99
Masterpiece	79
Masterpiece Plus	92
Masterpiece Remote	107
MousePad by Mousetrac	9
Summasketch 12 × 12 Plus	359

LANGUAGES

Basic Compiler (Microsoft)	$175
C Compiler (Microsoft)	259
Cobol Compiler (Microsoft)	512
Fortran Compiler (Microsoft) 4.0	259
Lattice C Compiler	209
Macro Assembler (Microsoft)	86
Pascal Compiler (Microsoft)	175
Quick Basic 4.0	57
Quick C	57
Ryan McFarlan Fortran	379
Ryan McFarlan Cobol	609
Turbo Basic	58
Turbo C	58
Turbo Pascal 4.0	58
Turbo Prolog	89
Turbo Prolog Toolbox	89

TRAINING

Chuck Yeager Adv. Flight Simulator	$25
Lets C	38
Mavis Beacon Typing	29
MS Learning DOS	29
MS Flight Simulator	29
PC Logo	79
Turbo Tutor 4.0	42
Typing Instructor Encore	27
Typing Tutor IV	27

SPREADSHEETS

Cambridge Analyst	$80
4 Word	55
HAL	89
Lotus 1-2-3 Ver. 2.01	295
Lotus Manuscript	309
Lotus Report Writer	67
MS Excel	285
Multiplan 3.0 (Microsoft)	111
PFS Professional Plan	52
Quattro	138
Supercalc 4	275
Twin Classic	32
VP Planner	47
VP Planner Plus	Call

MasterCard VISA

MEMBER MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association Inc.

- **No Charge for VISA and Mastercard**
- **We Do Not Charge Your Card Until Your Order is Shipped**
- You Pay the Ground Shipping $6.00 (except Alaksa and Hawaii) We Pay the Air Difference
- Free Air applies ONLY to orders up to 10 lbs. & Over $50.
- Add 5% for C.O.D. Orders

- All products carry only manufacturer's warranties. We do not honor guarantees, rebates, trial period priviledges or promotional programs offered by manuafactures.
- No APO, FPO, or international orders, please.
- **Call before submitting P.O.'s Ask for National Accounts**
- Personal and Company Checks Will Delay Shipping 3 weeks
- Prices, Terms & Availability Subject to Change Without Notice



telemart ORDER LINE

1-800-426-6659

DOING BUSINESS SINCE 1980
A DIVISION OF CW MARKETING

HARDWARE

FEDERAL EXPRESS
FREE AIR EXPRESS SHIPPING
You Pay The Ground Shipping
We Pay The Air Difference

PRINTERS

Alps
- Allegro ... $339
- ALQ224E ... 599
- ALQ318 ... 610
- ALQ324E ... 749
- 2418 ... 885
- 2424 ... 955
- Other Models ... Call

AST Turbo Lazer ... 4310

Citizen Printers
- 120D ... 149
- 180D ... 165
- MSP 40 ... 319
- MSP 45 ... 465
- MSP 50 ... 399
- MSP 55 ... 529
- Premier 35 ... 509
- Tribute 124 ... Call

Diconix 150 ... 309
- 300 ... 480

Epson Printers ... Call

Hewlett-Packard
- Desk Jet ... 719
- Lazer Jet Series II ... 1805
- Paint Jet ... 1090

NEC
- P2200 ... 335
- P5200 ... 520
- P5300 ... 685
- Other Models ... Call

Okidata ... Call
- 320 ... 330
- 390 ... 465
- Lazerline 6 ... 1339

Panasonic
- 1080 I M2 ... 159
- 1091 I M2 ... 199
- 3131 ... 305
- 3151 ... 475
- Lazer 4450 ... 1635

Star Micronics ... Call

Toshiba
- 321 SL ... 539
- 341 SL ... 709
- 351 SX ... 999
- Page Lazer ... 2415

DISK DRIVES

Bernoulli Box
- 10 Meg ... $889
- 20 Meg ... 1255
- 40 Meg ... 1559
- Beta Ext ... 1019
- Beta Int ... 775

Seagate
- 20 MG w/WD Controller ... 275
- 251-1 ... 469
- AT 40 MEG Full Height ... 435
- Other Models ... Call

Teac
- 1.2 MEG AT ... 89
- Floppy F55 BR ... 79

Toshiba
- 3.5 Dr 720K ... 85
- 3.5 Dr 1.4MB ... 105

HARD CARDS

- Plus 20 MG ... $525
- Plus 40 MG ... 659

KEYBOARDS

Keytronics
- KB5151 ... $119
- KB5153 ... 149
- KB101 ... 85

MONITORS

Amdek 410 ... $130
- 432 ... 149
- V210A ... 85

NEC
- Multisync II ... 585
- Multisync Plus ... 899
- Multisync XL ... 2069
- Monographic System ... 1299
- Other Models ... Call

Princeton Ultrasync ... 485

Samsung ... Call

Sony Multiscan (1303) ... 535

Mitsubishi
- Diamond Scan ... 499

Zenith
- 1490 ... 609

Uninterruptible Power Source ... Call

BOARDS

AST
- Hot Shot ... $359
- Six Pack Plus ... 115

Xformer ... 545
- 3G + II ... 219
- Other Models ... Call

ATI
- EGA Wonder ... 175
- VIP ... 265

Hercules
- Color Card ... 145
- Graphics Card Plus ... 170
- Incolor ... 199

Intel
- Inboard 386 PC ... 935
- Inboard 386 w/cable ... 1029
- 4020 ... 325
- 80287-6 ... 175
- 80287-16 ... 555

Orchid
- Designer VGA ... 299
- Tiny Turbo ... 249
- Twin Turbo ... 359
- VGA ... 220

Paradise
- Autoswitch 350 ... 159
- VGA + ... 259
- VGA Professional ... Call

Video-7
- VGA ... 269
- Vega Deluxe ... 180
- V-RAM ... 475

TERMINALS

Wyse
- 30 ... $285
- 50 ... 369
- 85 ... 439

COMPUTERS

AST
- Model 80 ... $1375
- Model 140 ... 2815
- Model 340 ... 4205
- Model 390 ... 5839
- Other Models ... Call

NEC
- Multispeed EL II ... 1495

Toshiba
- T-1000 ... 785
- T-1200F ... 1565
- T-1200H ... 2285
- 1200FB ... 1699
- 1200HB ... 2415
- T-3200 ... 3789
- T-5100 ... 4899

Wyse
- 386 ... 2735

Zenith Supersport/2 ... 1655
- Supersport 20 MG ... 2479
- Supersport 286/Model 2 ... 3445

MODEMS

Hayes
- 1200 ... $275
- 1200B ... 245
- 2400B ... 385

Prometheus
- 1200B w/Software ... 75
- 2400B w/Software ... 129
- Other Models ... Call

US Robotics
- Password 1200 ... 175
- Courier 2400 ... 289
- Courier 2400E ... 335
- HST 9600 ... 635

- To Place an Order: 1-800-528-1054
- To Follow Up on an Order: (602) 944-2552
- Order Line Hours: Monday-Friday 7:00 a.m.-6:00 p.m. Saturday 9:00 a.m.-1:00 p.m
- Order Processing (602) 944-1037 10:00 a.m-3:00 p.m. Mon.-Fri.
- **We Do Not Guarantee Machine Compatibility**

Mailing Address:
8804 N. 23rd Avenue / Phoenix, Arizona 85021

telemart ORDER LINE

1-800-528-1054

Circle 263 on Reader Service Card for MS-DOS Products. (All others 264).

BASIC calls to the port address produce nothing on OUT instructions, and INP instructions seem to indicate that the bus is still "floating." It's as though the port address is not being decoded. I have limited test equipment, but supply voltages seem correct on the card. I swapped all duplicated components with the old working card from the TRS-80, which continues to work, leading me to believe that the components are fine. I've even checked the point-to-point wiring I used on the project; nothing seems amiss.

Since this is my first (and only) project on the PC-bus, I'm not sure about the logic I used. I suspect I may be overlooking some glaring design error. When I first tried the circuit, I didn't decode the AEN (address enable) line. The computer failed to boot properly, which showed me the importance of that line. Are there any other important things I need to consider?

Victor H. Klein II
Newton, PA

Debugging logic at long range is always a little tricky, particularly if you don't have a scope to see what's going on. Without going back through the specs again, I bet that old speech generator just can't keep up with the new bus speeds. Probably the best way to get your circuit working is to hitch it to a parallel port where it's isolated from the bus and you can use a voltmeter to check the voltage levels.

The idea is fairly simple: The data inputs come from the printer data outputs, the WR signal is the printer's strobe, and the INTR bit goes back into the printer's BUSY line. In your case, you can use one of the printer port's control outputs to directly select which ROM bank to use. See table 1 for a diagram of the connections.

Table 1: *Port connections for MM54104.*

Printer port pin	Description
1	WR to MM54104 pin 1
2	D0 (least significant bit)
3	D1
4	D2
5	D3
6	D4
7	D5
8	D6
9	D7 (most significant bit)
11	INTR from MM54104 pin 6
17	ROM select to LS139 pin 3
18	Logic ground

Remember to disconnect your existing circuitry from the pins that connect directly to the printer port. You'll also need to come up with a power supply, but a simple wall transformer with a 9- or 12-volt DC output will suffice. Wrap a box around the whole affair and stick the speaker on top.

The next trick is to figure out the printer port address. The fastest and least ambiguous way is to use DEBUG, which is an experience everyone should have at least once. Fire up DEBUG, type D40:8L6, *and press the Enter key. You'll see something like this:*

```
0040:0008 BC 03 78 03 78 02
```

Each pair of hexadecimal numbers after the address corresponds to a printer port address. The above string of pairs shows three printer ports: LPT1 uses 03BCh, LPT2 uses 0378h, and LPT3 uses 0278h. Your system addresses may differ, but the ports are always LPT1, LPT2, and LPT3, in that order. Any ports that aren't installed will be 0—you can't use such ports for output.

Decide which printer port you want to use, and write down its address. Most people use LPT1 for a real printer, so you'll probably want to use LPT2 and LPT3. Buying a printer card just for the speech system might be a good idea if you've got only one now. (I'm pretty sure the Tandy 1000 will take a standard printer card.)

Let's suppose you set up the address and word number like this (I haven't checked this BASIC code out, but it should get you started):

```
MMPORT = &H0278
MMWORD = 0
```

Then, to get the system to say the word, use

```
OUT MMPORT,MMWORD
OUT MMPORT+2,1
OUT MMPORT+2,0
```

The ROM banks are selected by bit 3 in port MMPORT+2, *so to select the other bank, use* MMROM = 8, *and say the word using*

```
OUT MMPORT,MMWORD
OUT MMPORT+2,1+MMROM
OUT MMPORT,MMROM
```

I'll avoid telling you which bank is which, because that bit gets inverted at least once between BASIC and the decoder. The odds are that I'll be wrong no matter what I say.

To check the status bit and loop until it's 0, use

```
1000 IF INP(MMPORT+1) AND &H80
     GOTO 1000
```

There's also a 50-50 chance I've messed up the BUSY *bit, so if that gives bizarre results, try checking for a 0 bit instead of a 1 bit. The same logic applies if you write the code in Pascal, C, or assembly language: Put the word number out to the port, then toggle the strobe bit. All the usual PC languages can handle direct port I/O, so you shouldn't have any trouble.*—Steve

Printing in Reflected Type

Dear Steve,

I am looking for a program that will enable me to print a page of text (eventually with some pictures) in reflected type (using a laser printer or dot-matrix printer). I need reflected type because the output is printed on a particular type of film that is exposed afterward. Currently, my colleagues and I simply print the usual way and reverse the film after encountering the characters.

If the type were reversed, we could place the film right, and since the light would pass through the film before encountering the characters, no distortion would occur.

I've sent inquiries to several CAD firms and have been told that their programs wouldn't be able to handle text, because of problems with "reference points"—whatever that means.

Desktop Publishing packages like PageMaker and Ventura can't help me out, either, at least not here in Belgium. Have you ever heard of a software program that could help me?

Paul Verbinnen
Brussels, Belgium

I have not seen software that will print reflected type in a way you need. I have seen ads for graphics programs that do this in a limited way, but it appears to me that you need two things: a program that will transmit the characters to the printer in reverse order, and a set of reversed fonts for your printer. Since you are worried about the distortion caused by transmitting the image through the film, I assume you won't be satisfied with the relatively low-quality fonts you could make and download to an Epson or compatible printer. Even the 24-pin models only accept characters defined in an 18 by 24 dot, about half the number available in laser printers.

continued

TALLGRASS BACKS YOU ALL THE WAY.



Tallgrass makes internal and external tape backup systems for the IBM PC/XT/AT, PS/2 or compatibles, and an external unit for your Mac Plus, SE or II.

We've got a whole new family of tape backup systems.

Whether you've got an IBM, a compatible, or a Macintosh, you can count on Tallgrass. We back you with all the storage capacity you could ask for, plus all the features, all the support, and all the speed you'll ever need. And we make it easy to protect your valuable data. Since all operations are automatic and unattended, you can just set it, and forget it.

Best of all, we stand behind our products with the industry's only 3-year warranty.

But there's one other reason why so many more people are asking for Tallgrass. It's because the competition is asking so much more for their products.

Let Tallgrass start backing you up. Call 1-800-TAL-GRAS. Or write to:
Tallgrass Technologies, Inc.
11100 West 82nd St.
Overland Park, KS 66214

TALLGRASS TECHNOLOGIES

When it's worth saving, it's worth Tallgrass

© 1988 Tallgrass Technologies, Inc. "IBM" is a registered trademark of International Business Machines, Inc. "Macintosh" and "Mac Plus" are trademarks of Apple Computer, Inc.

Circle 257 on Reader Service Card (DEALERS: 258)

Circle 133 on Reader Service Card

PowerStation

If you have PCs and VAXes, you NEED these products!

For connecting your PC to a VAX, the PowerStation provides the ultimate solution: a VT200 layout keyboard bundled with sophisticated ZSTEM terminal emulation software.

ZSTEM software includes DEC VT240, VT220, VT100, IBM 3101, TEK 4014 and DG D400 terminal emulation.

"Its performance is as perfect as an emulator can get . . ."
DIGITAL NEWS

For *true* terminal emulation call (800) 663-8702.

KEA Systems Ltd.
#412 - 2150 West Broadway
Vancouver, B.C. CANADA, V6K 4L9
Tel: 604-732-7411 Telex: 04-352848 VCR
FAX: 604-732-0715

See us at DEXPO #437

KEA SYSTEMS

What is a Best Western?



The right place at the right price.

Make reservations at any Best Western, see your travel agent, or call toll-free
1-800-528-1234

Best Western
INDEPENDENT WORLDWIDE LODGING

"World's largest chain of *independently owned and operated* hotels, motor inns and resorts"

Printing the characters in reverse order from a straight text file is easy: I'll get to that later. Reversing the characters is the task that will require work. I don't know of any software that can do this. There are some font-editing programs available that might help. Here are some that work with bit-mapped fonts:

SoftCraft Font Editor
SoftCraft
16 North Carrol St., Suite 500
Madison, WI 53703
(800) 351-0500

FontGen IV
VS Software
209 West Second St.
Little Rock, AR 72216
(501) 376-2083

Publishers Type Foundry
ZSoft
1950 Spectrum Cir., Suite A-495
Marietta, GA 30067
(404) 428-0008

An alternative to creating reversed fonts using a font editor is to write a program that reverses an existing font by reversing the order of the bytes. For example, an R *in an 8 by 9 dot-matrix printer download font would be stored as in table 2a. Table 2b also shows the result after swapping bytes so that byte 1 becomes byte 8, 2 becomes 7, and so on.*

Table 2: *Reversing the font definition for an "R."*

	(a)	(b)
byte ->	12345678	12345678
	01111100	00111110
	01000010	01000010
	01000001	10000010
	01000010	01000010
	01111100	00111110
	01000100	00100010
	01000010	01000010
	01000001	10000010
	00000000	00000000

Reversing the order of bytes is simply a matter of reading them into an array and writing them back out to a new file in reversed order. That is, fill the array from 1 to 8, and write the bytes from 8 to 1. I'm not sure that laser printer bit-mapped fonts are stored the same way, but if they're not, the operation of reversing the bits is still possible, but more complicated.—Steve ■

"An exceptional value."

Tom Badgett, *PC Clones*

"I was impressed. It wins the cost-effective award."

John Dvorak, *PC Magazine*

"This program has all the features and capabilities of money management programs costing 10 times as much."

Leonard Hyre, *PCM Magazine*

We appreciated those kind words. They helped make **MONEYCOUNTS® 4.0** one of today's most popular **accounting/money management programs** for home and business. But we couldn't leave well enough alone. So we're introducing new

MONEYCOUNTS® 5.0

...an unbelievable buy at just $29!

MONEYCOUNTS® 5.0 balances your checkbook... prepares your budget... manages your cash, checking, savings, credit cards... prints 5 types of financial statements including net worth...3 types of inquiry reports... general ledger, accountant's trial balance, and graphics. Its fast financial data base handles up to 999 accounts and 100,000 transactions a year.

MONEYCOUNTS® 5.0 is a CPA-designed money management/accounting system you can use for home or business. It's easy to use, requires no accounting knowledge, is menu-driven with on-line help, has a fast financial calculator, works with monochrome or color monitors, comes with a **printed manual** and is **not copy protected.**

SAME DAY SHIPPING. Order today and own **MONEYCOUNTS® 5.0** for only $29! Add $5 shipping/handling (outside North America, add $10). Iowa residents please add 4% sales tax.

Parsons Technology®

375 Collins Road NE
Cedar Rapids, IA 52402

MONEYCOUNTS® 5.0 now also...



- prints any type of pin-feed check and updates your records automatically
- estimates your 1988 income tax
- analyzes financing options, savings programs...computes interest rates, loan payments...prints amortization schedules
- manages mail lists—zip and alpha sorts—and prints labels and index cards
- provides password protection, fiscal year support, and pop-up notepad.

VISA, MASTERCARD & COD ORDERS CALL

1-800-223-6925

(In Canada, call 319/395-7300)

Parsons Technology®

MONEY COUNTS®
VERSION 5.0
$29 + $5 shipping

Dept. B
375 Collins Road NE
Cedar Rapids, IA 52402

NAME _____

ADDRESS _____

CITY _____

STATE/ZIP _____ PHONE _____

CHECK ❑ MONEY ORDER ❑ VISA ❑ MASTERCARD ❑

CARD # _____ EXP. DATE _____

No. of Copies	Product	Price Each	Total
	MONEYCOUNTS® 5.0 (Needs IBM or compatible computer, at least 256k memory, DOS 2.0 or more, two disk drives or hard disk)	$ 29.00	
	Shipping & Handling	$ 5.00	$ 5.00
	TOTAL AMOUNT		$

DAZZLING PERFORMANCE.



'286/SS

COMPLETE 12MHz '286 WITH 32MB HARD DRIVE

ONLY $1295.00

- 80286 CPU, 8/12.5 MHz Dual Speed, Keyboard Selectable.
- *Zero-Wait* State RAM, 512K expandable to 4MB on the motherboard (16MB System Total).
- 32MB Hard Drive, 1.2MB Floppy Drive.
- *Ultra high speed* Hard/Floppy controller. 1:1 interleave, 800 KB/sec transfer rate.
- High Res 12" Amber Display with Tilt and Swivel Base. Compatible graphics controller.
- ZEOS Enhanced Keyboard, Pleasant Tactile/Click Feel.
- Serial and Parallel Printer Ports.
- Clock/Calendar with Battery Backup.
- 6-16 and 2-8 bit expansion slots.
- 80287 support, up to 12 MHz.
- Space Saver Case with Security Lock, LED indicators.

12MHz, 16MHz and 20MHz '286 HARD DRIVE SYSTEMS

As high as *20MHz!* Dazzling performance is yours with one of these high performance full size ZEOS '286 Systems.

Each comes *complete* with our standard features including drives, monitor, high speed controller, etc. Our full size case features room for up to 5 half-high drives, two of which are internal. Incredible values.

- **286/12**—Complete 12.5MHz System with 512K of Zero-Wait RAM, High Speed 32MB, 33ms Hard Drive and all the standard ZEOS goodies. **ONLY $1395.00**
- **286/16**—Complete 16MHz system with *1MB* RAM on board and High Speed 32MB Hard Drive. *Faster than a '386* 16MHz when running 16-bit software! **ONLY $1895.00**
- **286/20**—At 20MHz, it's the fastest. Complete with our 32 MB, 33ms Hard Drive and *1MB* RAM. This is what Dazzling Speed is all about. **ONLY $2095.00**



'286/FS

DAZZLING PERFORMANCE. INCREDIBLE PRICES.

Can you believe it? *Yes, you can!*

We've proven it to thousands and we would like to prove it to you. ZEOS® systems are sold *complete,* ready to plug in and fly right out of the box. And the quality and prices are incredible.

How is it possible? Because your ZEOS computer comes to you *factory direct,* fully assembled, burned-in and tested in our own laboratories. Every system is built to order. Custom built actually, right to your own specifications. And our quality and performance are second to none.

We don't just say it. We guarantee it. That's why your new ZEOS system comes with a Full One Year Limited Warranty and our 30 day Full Refund Satisfaction Guarantee.

So pick out your dream

All prices and specifications are subject to change without notice. Please call for current details. Call for complete warranty details.

INCREDIBLE PRICES.



'386/DT

COMPLETE 16MHz '386 DESKTOP WITH 32MB HARD DRIVE.

ONLY $2495.00

(20MHz add $500)

- Genuine 32-bit Intel 80386, 16 or 20MHz parts.
- *1MB* of RAM Expandable to 16MB.
- 32MB, 33ms Hard Drive, 1.2MB floppy drive.
- *Ultra high speed* Hard/Floppy controller. 1:1 interleave, 800 KB/sec transfer rate!
- High Res 12" Amber Display with Tilt and Swivel Base. Compatible graphics controller.
- 101 Key ZEOS Tactile Click keyboard.
- Serial and Parallel/Printer Ports.
- Clock/Calendar with Battery Backup.
- 2-32, 4-16 and 2-8 bit slots.
- 80287 and 80387 support.

COMPLETE '386 VERTICAL SYSTEM. 64MB DRIVE!

ONLY $2995.00

(20MHz add $500)

Acknowledged worldwide as the highest performance value anywhere. Same great standard ZEOS features found on our other complete systems plus:

- 64KB Zero-Wait CACHE using 64K of SRAM.
- 1MB of 32-bit RAM system expandable up to 16MB.
- *64MB* Seagate Hard Drive.
- 80287 and 80387 optional.
- Heavy Duty Vertical Case.

Ask about our *25MHz* systems too!



'386/V

machine and order it now with confidence. Dazzling performance and incredible prices await you. *Guaranteed.* Order now by calling 800-423-5891.

Other ZEOS Options Include:

- Basic Configurations: Call for prices on systems without drives, etc.
- EGA/VGA Upgrades. 14" EGA color monitor with EGA card, add $495. 14" VGA system, add only $695
- High Capacity Drives. Many other drives and options are available. Call Toll Free for details, 800-423-5891

ORDER NOW TOLL FREE
800-423-5891

FAX Orders Dial: 612-633-2310
In Minnesota Call: 612-633-4591
530 5th Ave. NW, St. Paul, MN 55112
Open days, evenings and weekends.
MasterCard, VISA and C.O.D.
Se habla Español.

ZEOS® INTERNATIONAL, LTD.

ZEOS International, Ltd., 530 5th Avenue, NW, St. Paul, MN 55112. ZEOS is a publicly traded company; MPLS/ST. PAUL Local OTC.

Circle 282 on Reader Service Card


BOOK REVIEWS

The Conquest of the Microchip

by Hans Queisser

Harvard University Press, Cambridge, MA: 1988, 272 pages, $24.95 (hardcover)

Reviewed by Hugh Kenner

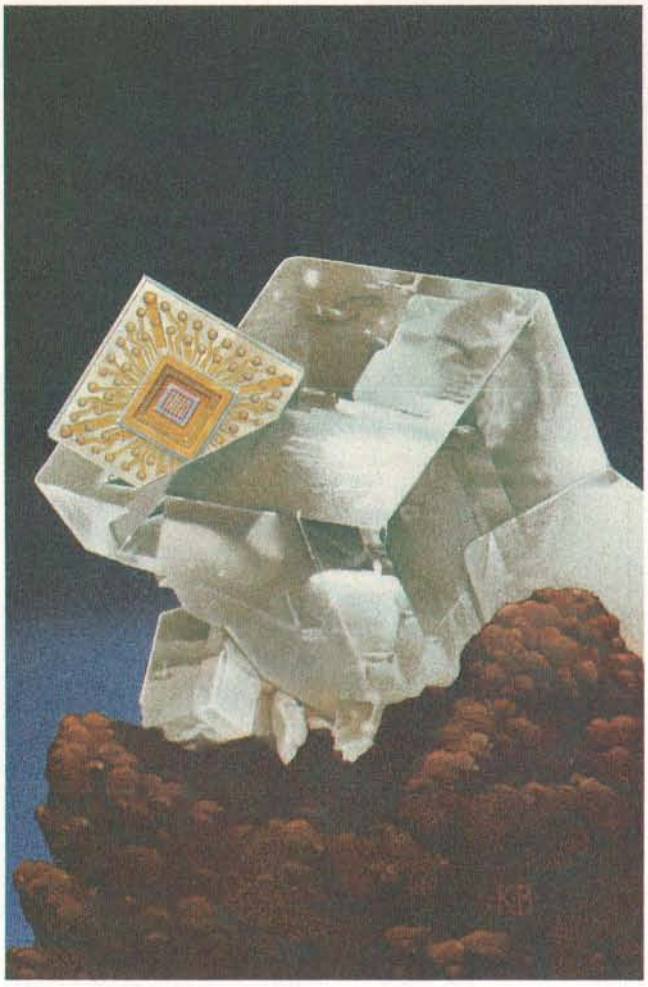

Nature's wonders include rocks you can see through—pieces of clear quartz. But how did they get here? Our forebears guessed that these clear rocks had once been chunks of ice that mysteriously survived in an altered state. So, borrowing Homer's word for clear ice, *krystallos*, our ancestors taught us to speak of crystals. These had something to do with symmetry; that was soon obvious. Look at the orderly shapes salts will assume as they "crystallize" out of water.

By 1723, crystallography was a name for a highly mathematical science. And since order seems a special case in a random universe, what better window onto future happenings than a seer's crystal ball? (No, I'm not being facetious; that was really the crystal ball's theme.)

Crystalline wonders kept multiplying. Around 1630, in Bologna, Italy, a shoemaker/alchemist named Casciarolo chanced to make heavy stones glow with cold light. ("He had reduced barium sulfate to a sulfide, but that would not be understood for centuries," says author Hans Queisser.) What he had discovered we now call phosphorescence and fluorescence. Today, "phosphors" coat an annual 100 million square feet of new television tubes, and glass gets treated with crystallite powder to make a billion fluorescent tubes besides. That's one way to indicate how much seeming magic we subject to routine control.

We can do that because we've merged quantum theory with solid-state physics, and so we've worked ourselves free of an era when tinkerers, in the manner of Casciarolo, kept chancing on curious effects no one could explain. A main site of that crucial merger was Goettingen University, where Queisser got his education. Later, he worked with William Shockley in Silicon Valley. At present, he directs the Max Planck Institute for Solid State Research in Stuttgart, West Germany. Such credentials make his *Conquest of the Microchip* very much an inside story.

The book could not be more engagingly written. Its narrative commences with Guglielmo Marconi, in 1914, disliking the fact that his iron-filing "coherer" (chanced upon in 1890 and not at all understood) was an unreliable foundation indeed for the coming wireless industry. The future, it seemed, lay in a German discovery, the crystal detector, which wasn't understood, either. How did it manage to defy Ohm's law? And why did some crystals work and others not?

In fact, so mysterious was crystal behavior that Marconi's industry would soon be heading off on a long, clumsy vacuum-tube detour. Tubes used brute force; to get any result at all, you had to heat a filament red-hot. If that used up Niagaras of power, at least the tubes were reliable until they burned out—and they always burned out. The men who fired up the ENIAC computer (a base-10 machine, incidentally) could never really guarantee that all 18,000 tubes were functioning at once. The one thing certain was the electric bill, based on a steady flow of 150 kilowatts.

Crystal radios did stay around, cheap toys for attic tinkerers. I remember buying a kit for about a dollar. Today I'm typing these words on a computer, vastly more powerful than ENIAC, that curbs ENIAC's appetite for wattage by a factor of 1000—for the crystal did return.

Its comeback began at post–World War I Goettingen, where Richard Pohl, unable to

continued

ALSO REVIEWED

An Introduction to Solid Modeling


Programs and Data Structures in C

C as a Second Language

Perceptrons

BASIC Mathematical Programs for Engineers and Scientists

ILLUSTRATION: KIM BARNES/SRW, INC. © 1988

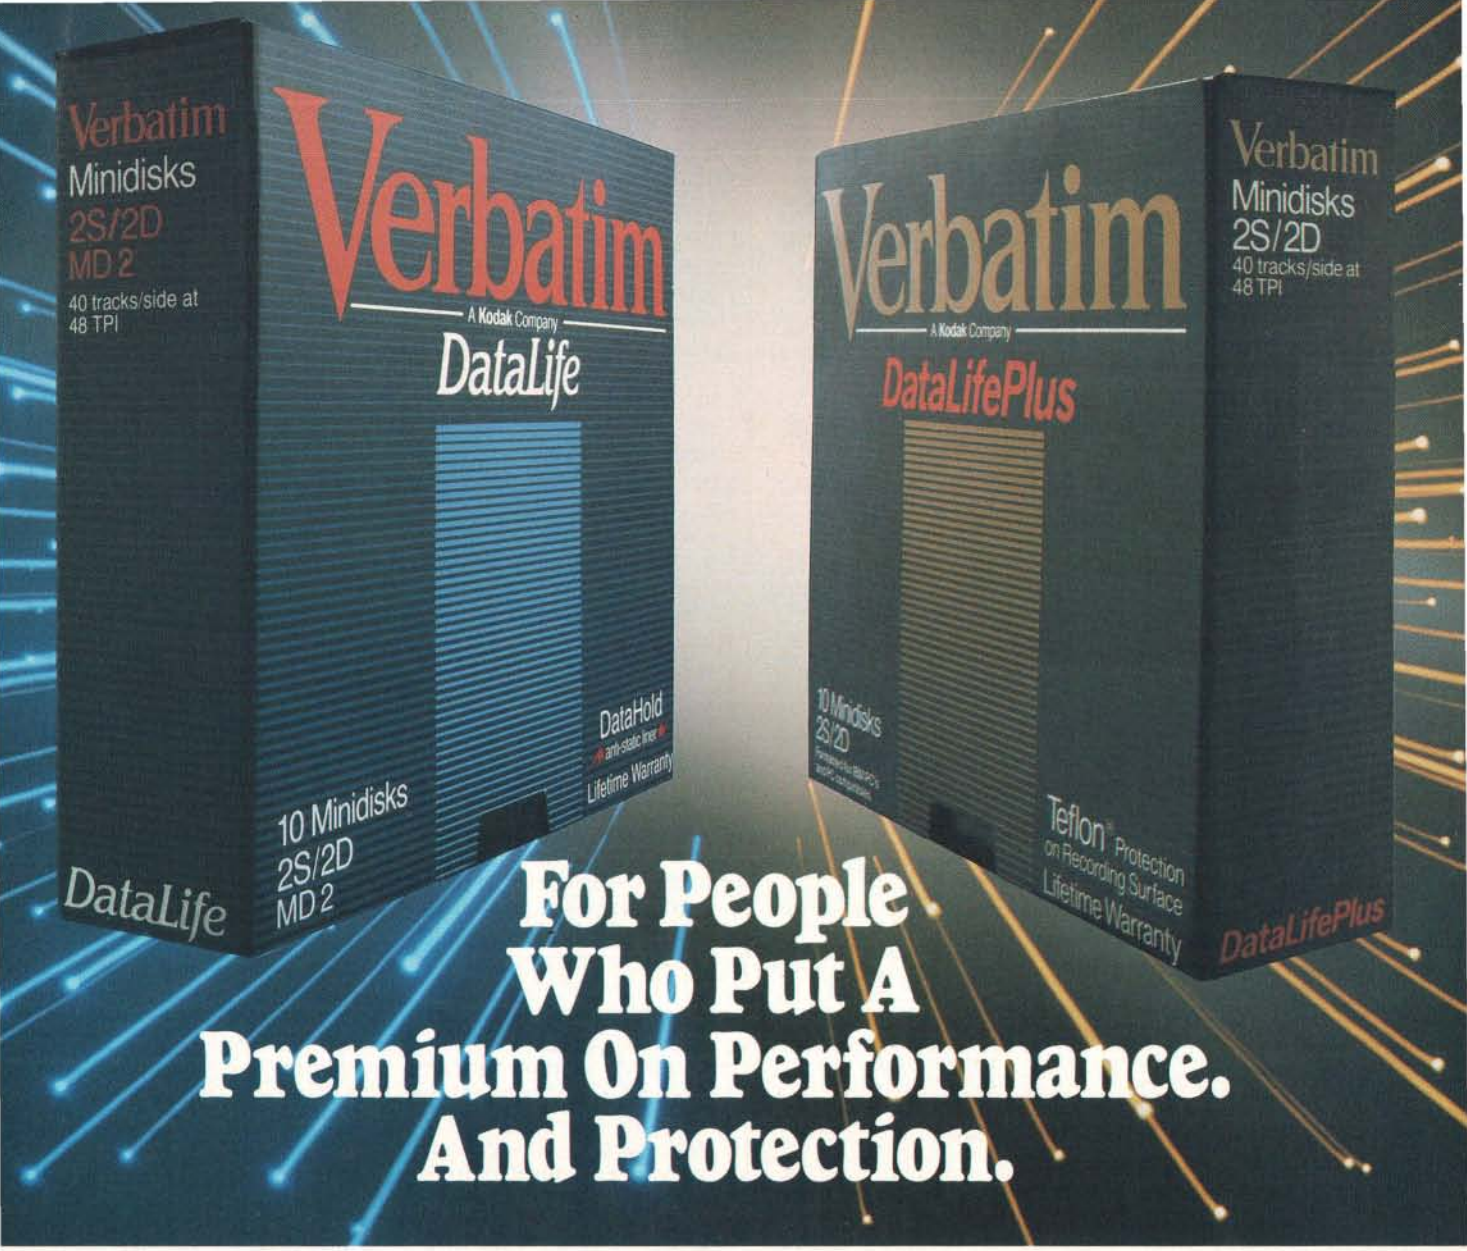

For People Who Put A Premium On Performance. And Protection.

The more invaluable your data is to you, the more you'll value Verbatim® floppy disks. Because when it comes to high performance and data protection, Verbatim has the winning combination no other floppies can copy.

You expect high performance from Verbatim, so it's no wonder that all our DataLife® floppies are engineered to perform an average of 50 million revolutions. That's fifteen times the industry standard.



Setting new standards in data protection is another Verbatim advantage. After all, nearly 50% of all computer users have experienced data loss. Which directly translates into lost time, productivity and money. That's why Verbatim offers advantages like DataHold™and DataHold II anti-static liners. So static charges are dispersed before they ever have a chance to build up.

For the world's ultimate data protection, DataLifePlus™ floppies have an exclusive DuPont Teflon® coating. So fingerprints, coffee, soft drinks, and even greasy foods can be easily wiped from the recording surface. To virtually eliminate data loss.



What's more, Verbatim DataLifePlus and DataLife HD 5¼" floppy disks are preformatted. Another Verbatim advantage. And of course, all Verbatim floppy disks are tested to be 100% error free and are backed by a lifetime warranty.

Verbatim data cassettes and cartridges, 8", 5¼" and 3½" diskettes. The only clear choice for people who put a premium on performance and protection.

For more information on the full line of high quality Verbatim products, call 1-800-538-8589.


® Teflon is a DuPont registered trademark.

Verbatim
A Kodak Company

DOING MORE FOR THE DATA PROCESS™

FULL POWER AT YOUR FINGERTIPS.

Discover two Worlds with the advanced screen generating Facility for "C" Programming Environments, *STAGEHAND*, and its comprehensive demo facility *PLAYWRITE.*

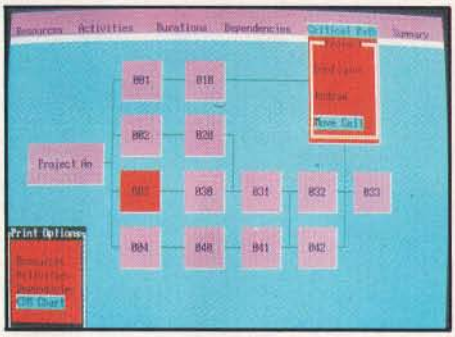

Create your screens with *STAGEHAND:*

- Full screen editor.
- User definable edit function keys.
- Set multiple color text & prompts.
- Define window borders, size and position.
- Create full screen & context sensitive help.
- Extensive printouts for documentation.
- Define valid function keys, pageup/ pagedown.
- Define intemal/extemal help screens.
- Idle and active input sequence.
- Define default prompt values.
- Full input field definitions including:

Protected	Auto Clear	Cursor Type
Must Fill	Keystroke Edit	Cursor Positioning
Transparent	Upper Case	Data Types
No View	Lower Case	Sequencing
Required	Yes/No	Auto Move

Full runtime support with *STAGEMANAGER*:

- Full library support routines w/source code.
- Multiple overlapping windows.
- Scrollable regions.
- Auto scrolling windows.
- User idle time routine support.
- User prompt routine support.
- User keystroke routine support.
- User function key routine support.
- User pageup/pagedown routine support.
- Hot key to user printer handler.
- Auto screen timeout.

Powerful demo generating *PLAYWRITE:*

- Create quick display demos.
- Create quick interface demos.
- Create powerful full featured intensive demos.

Total product support for:

- Microsoft 4.x, 5.x, Quick C, Turbo C.
- No royalties or runtime fees.
- **FREE** updates to registered users.
- **FREE** telephone support.
- **FREE** *STAGEMANAGER* source code.
- Comprehensive manual including library routine definitions and examples.

SPECIAL PACKAGE PRICE $ 199.00!
Call for FREE Demo Disk.

TO ORDER CALL 1 800 - DATACODE OR (516) 331-7848
C.O.D. or AMERICAN EXPRESS.

DEALER INQUIRES WELCOME!

LOOK FOR MS/OS2, UNIX AND VAX VERSIONS THIS SUMMER!

DATACODE INCORPORATED
1085 ROUTE 112, PORT JEFFERSON STATION, N.Y. 11776

get liquid air, had to forgo experiments with the tubes that liquid air could help evacuate, and wryly turned to crystals as second-best. Then a lab mistake that shattered a costly diamond sent him after techniques for growing pure artificial crystals. By 1930, much mystery had been penetrated. Anomalous crystal behavior, wanted and unwanted alike, proved to turn on the presence of minute impurities—local irregularities in the lattice. We now "dope" our lab-grown crystals with the irregularity that gets just the effect we seek.

In World War II Britain, the cat's-whisker crystal detector, long discarded by the radio industry, proved just the thing for ultra-short-wave radar. That brought germanium on-stage, and the point-contact transistor (Shockley et al. at Bell Labs, 1947) was essentially a germanium crystal with *two* cat's whiskers. Finicky cat's whiskers plagued it with reliability problems, and though the junction transistor soon got rid of whiskers, in 1955 the military was still wishing that better than a quarter of the units delivered might fall within spec.

Next, silicon replaced germanium (I'm hurrying through this). Soon, companies that had spun off from Shockley's (who had long since left Bell Labs for California) were into microprocessors, microchip circuitry.... You've probably heard much of this information presented before, but Hans Queisser's version is more vivid and insightful.

By halfway through his book, Queisser is orchestrating so many themes with such dexterity that it's breathtaking. Something that he never forgets is the sociocultural ground bass—the way, for instance, German science, remembering the coercions of two wars, kept aloof from industry and practice. Then there's the invaluable Western tradition of "skepticism, self-awareness, and independent work," which produced the great breakthroughs of the 1940s and 1950s but would later erect barriers, unknown in Japan, "between the universities, the factories, and the research laboratories." Consider, lastly, the Japanese genius for basing mass production on mass experiments, testing "every imaginable combination of manufacturing processes"and investigating "every type of foreign admixtures in the silicon crystal." Western observers at first found that amusingly antlike. Later on, they got nervous, rightly.

For already, by the 1960s in Silicon Valley, says Queisser, "a field in which a few individuals had paved the way was turning into the anonymous work of a number of experts. Every form of technology takes a similar route when it leaves the laboratories for the factories." In Japan, he also notes, "They do not consider basic research and applications as opposites. In their terminology, the opposite of 'basic' is not 'applied,' but simply 'not basic'; the opposite of 'applied' would be something like 'not applicable.' " This last they have learned to shun.

Just such "impurities" as make junction transistors work also create what was noticed far earlier: the colors of gemstones. When nature does anything to catch our attention, it's by generating something we can observe. And the line between "observable" and "applicable" is thin, each being an interruption of the bland. Save for our long pursuit of applicability, we'd still be surviving by smashing clamshells with rocks.

Man's microcosm once, Queisser concludes, was simply Man, a vexed model of universal harmonies. Today, that microcosm is the silicon crystal lattice, which we're probing for "the secrets of creation and destruction, as well as harmony and symmetry." Now it is "the macrocosm of

continued

Circle 74 on Reader Service Card

Circle 99 on Reader Service Card →

COMPUTERS FROM IOWA?

Gateway 2000 is centrally located in order to efficiently serve the entire country. We are honest, hard working, well educated people, committed to succeeding and growing in the highly competitive micro-computer market.

Gateway 2000 is a full-service and support organization that realizes the key to our success lies in a satisfied customer base.

One look at the configurations we have listed below and you will see that we have high quality equipment at incredible prices. We have many different configurations available as well as a complete line of software and peripherals. So call one of our knowledgeable salespeople for more information.


We look forward to doing business with you, and establishing a long term business relationship.



16 Mhz 286 EGA SYSTEM

80286-16 Processor
1 Meg 0 Wait State RAM
1.2 Meg Floppy Drive
1.44 Meg Diskette Drive
40 Meg Seagate ST251
Samsung EGA Monitor w/Card
2-Parallel/2-Serial Ports
101 Key Enhanced Keyboard
DOS 3.3 w/GWBasic
1 Year Warranty
30 Day Money Back Guarantee

$2295.00

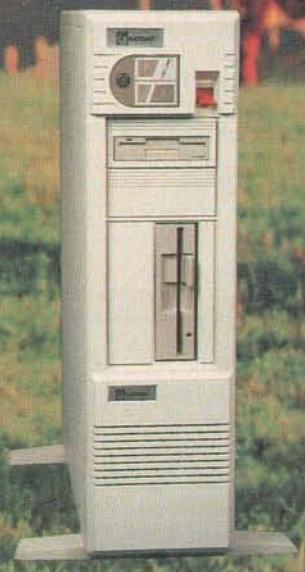

20 Mhz 386 VGA SYSTEM

80386 Processor Running at 20Mhz
1 Meg 60 NS Ram (Expandable to 8 Megs)
1.2 Meg Floppy Drive
1.44 Meg Diskette Drive
80 Meg Seagate ST4096 (28MS)
1 to 1 Interleave Controller
Samsung Multisynch Monitor
EVEREX EVGA Board
2-Parallel/2-Serial Ports
101 Key Enhanced Keyboard
Tower Case w/275 Watt Power Supply
80287 and 80387 Sockets
DOS 3.3 w/GWBasic
1 Year Warranty
30 Day Money Back Guarantee

$3795.00
Call For 25 Mhz Option

GATEWAY 2000

Gateway 2000 • P.O. Box 2414 • Sioux City, IA 51107

800-233-8472/712-255-7899

Due to the volatility in the DRAM market, all prices are subject to change.

IBM PC® COMPATIBLE
SINGLE BOARD COMPUTER

Quark/PC®+
4" x 6"



From $325. quantity one

- Low Power — Less than 3 Watts
- Optional on-board Video LCD Driver
- Ideal for any PC compatible OEM product which is not a personal computer

Includes: 1. Powerful V40® CPU (Faster than a PC) 2. Math Co-Processor Socket 3. 5 Volt Only Operation (3 watts) 4. Speaker Port 5. Keyboard Port 6. Parallel Printer Port 7. PC Bus 8. PC Compatible BIOS ROM 9. 1 Serial Port

On board Options Include: 1. 5 Mode Video Controller Option (Monochrome, Hercules® Graphics, CGA, High Res CGA, LCD Driver) 2. Floppy Disk Controller (3.5"/5.25", 360K/720K/1.2 MB) 3. SCSI Bus Interface (Hard Disk etc.) 4. Up to 768K RAM 5. Battery-Backed-up Real-Time-Clock 6. 2 Additional RS232C Serial Ports

To order or enquire call us today.
Megatel Computer Corporation
(416) 745-7214 FAX (416) 745-8792
174 Turbine Drive, Weston, Ontario M9L 2S2
U.S. Address: 1051 Clinton St., Buffalo, N.Y. 14206

Distributors:
Germany: V&C Computers (06071) 25666 FAX (06071) 5863
Italy and Southern Europe:
NCS Italia (0331) 256-524 FAX (0331) 256-018
U.K.: Densitron (0959) 76331 FAX (0959) 71017
Australia: Asp Microcomputers (02) 500-0628 FAX (02)500-9461

Quark is a registered trademark of F&K Manufacturing Company. Hercules is a registered trademark of Hercules Corporation. V40 is a registered trademark of NEC Corp. IBM PC is a registered trademark of IBM Corporation.

megatel

QSET:
The Simple Approach to Powerful Solutions.

Menu driven
No new language
AT type environment
Rapid prototyping
Multi-user
Data and system integrity

And simple means *fast!* Applications in *use* instead of in development. Applications *completed* when other system developers are still getting started.

QSET is the most productive approach you can take to I/O applications. Easy to learn, fast, and flexible. Combines the power of UNIX, Xenix, C, and any 3GL you choose for powerful, portable applications. Supports relational, hierarchical, and network database structures.

Built-in program logic insures data and system integrity: you can't build a bad application using QSET.

Find out more. Call 800-727-2072. Ask for our product brochure and our very attractive introductory pricing offer.

QSET An Applications Software Solution.

QSET is a trademark of Business Management Data, Inc.. UNIX is a trademark of AT&T. Xenix is a trademark of Microsoft Corporation. AT is a trademark of International Business Machines Corporation.

society" that "seeks the harmony of the microcosm of the atom." And that is nothing less than the present state of our ages-long romance with ordered crystals.

BRIEFLY NOTED

An Introduction to Solid Modeling *by Martti Mäntylä, Computer Science Press, Rockville, MD: 1988, 401 pages, $42.95.* Plenty of books will teach you about computer graphics, particularly about manipulating and displaying images. Textbooks abound describing algorithms for hidden-line and hidden-surface removal. Journal articles will further direct you to esoterica regarding the interaction of light with material objects to produce shadows, reflections, and refractions (ray tracing). And conference proceedings will give you the latest techniques on modeling solid-surface properties, such as color and texture.

On the other hand, learning techniques for describing the shapes of objects is more difficult. Clearly, graphics programmers need good ways to represent shapes. Typically, however, procedures for rendering an image on-screen require a preexisting description of the shape as "input." In short, discussions of representation issues are much harder to come by than discussions of rendering issues.

An Introduction to Solid Modeling remedies this deficiency significantly by focusing on a very important class of representational methods—solid modeling. The book is at once comprehensive and accessible to readers without a strong background in computer graphics.

The first section surveys the current techniques and presents topics such as boundary representations, curved surface patches, and volumetric methods like solid geometry and octrees. The second section describes in detail the author's own solid modeling system, the Geometric WorkBench.

The explication of this technique makes the book far more than just a roundup of existing knowledge. The Geometric WorkBench is capable of modeling polyhedrons. It employs a boundary representation of solids: It describes a solid object by describing each piece of the object's surface. Specifically, the program recognizes a polyhedron as a collection of flat faces. The complete solid model includes a description of each of the faces. Each face is a polygon and so can be specified by the list of straight edges that bound it and the list of vertices at which the edges meet.

Not every collection of polygons constitutes a valid solid model; the polygons must fit together in a way that leaves no holes and no overlaps. The Geometric WorkBench guarantees a model's validity at each step of construction. This guarantee is the program's most important feature.

The system protects a model's integrity in two ways. First, the modeler stores geometrical and topological information separately. Geometry relates to dimension. The geometry of a shape specifies the position of each vertex, the length of each edge, and the size and orientation of each face. Topology relates to connectedness. The topology of a shape lists which edges meet at each vertex and which faces border one another. The topology therefore also tells whether all of a model's parts fit together in a sensible way. The program is able to more efficiently check integrity on one hand and to scale the size of the model on the other, because it deals with topology and geometry separately.

Second, the Geometric WorkBench restricts the users to a small selection of operators that provide them with the means to modify a solid model. Each application of an operator corresponds to one

continued

Mainframe Power for your PC!

If you need or are accustomed to the throughput of a 32-bit mini, including any of DEC's VAX series, MicroWay has great news for you. The combination of our NDP compilers and our mW1167 numeric coprocessor gives VAX speed to your 386 PC! If you don't own a 386 PC, we provide a number of economical PC and AT upgrade paths.

Many of our NDP Fortran-386 users are reporting turnaround times that are two to six times faster than their VAX. The exact times are a function of the VAX processor being used, the speed of the 386, the number of users being served by the VAX, and the coprocessor being used with the 386. There are currently over 400 developers using our NDP tools to port 32-bit applications. To help the 386/1167 engineering standard emerge, MicroWay is co-marketing several mainframe applications that have been ported by our customers. In addition, this ad introduces the first of many utilities that will ease the porting of your favorite in-house programs. These include tools like NDP Plot, which provides CalComp compatible screen and printer graphics, and NDP Windows.

MicroWay has mW1167 boards in stock that run on the Compaq 386/20, IBM PS2/80, Tandy 4000, AT&T 6386, Acer 386/20, Everex Step 386/16(20), H.P. Vectra RS/16(20) and others. We now have a new board for the Compaq 386/20 which combines an 1167 with VGA support that is register compatible with IBM — the "SlotSaver". It features an extended 800x600 high res mode that is ideal for 386 workstations.

Finally, we still offer the 16-bit software and hardware which made us famous. If you own a PC or AT and are looking for the best 8087/80287 support on the market, call (508) 746-7341 and we'll send you our full catalog.

Dr. Robert Atwell, a leading defense scientist, calculates that NDP Fortran-386 is currently saving him $12,000 per month in rentals of VAX hardware and software while doubling his productivity!

Fred Ziegler of AspenTech in Cambridge, Mass. reports, "I ported 900,000 lines of Fortran source in two weeks without a single problem!" AspenTech's Chemical Modeling System is in use on mainframes worldwide and is probably the largest application to ever run on an Intel processor.

Dr. Jerry Ginsberg of Georgia Tech reports, "My problems run a factor of six faster using NDP Fortran-386 on an mW1167 equipped 386/20 than they do on my MicroVAX II."

32-Bit Compilers and Tools

NDP Fortran-386™ and **NDP C-386™** Compilers generate globally optimized mainframe quality code and run in 386 protected mode under Phar Lap extended MS-DOS, UNIX, or XENIX. The memory model employed uses 2 segments, each of which can be up to 4 gigabytes. They generate code for the 80287, 80387, or mW1167. Both include high speed EGA graphics extensions written in C that perform BASIC-like screen operations.

- **NDP Fortran-386™** Full implementation of FORTRAN-77 with Berkeley 4.2, VAX/VMS and Fortran-66 extensions. $595
- **NDP C-386™** Full implementation of AT&T's PCC with MS and ANSI extensions. . . . $595

NDP Package Pricing:

387FastPAK: NDP Compiler, Phar Lap and 80387 Coprocessor — 16 MHz: $1299; 20 MHz: $1499

1167FastPAK: NDP Compiler, Phar Lap and mW1167 Coprocessor — 16 MHz: $1695; 20 MHz: $2295

Phar Lap Development Tools $495

NDP Windows™ — NDP Windows includes 80 functions that let you create, store, and recall menus and windows. It works with NDP C-386 and drives all the popular graphics adapters. Library: $125 — C Source: $250

NDP Plot™ — Calcomp compatible plot package that is callable from NDP Fortran. It includes drivers for the most popular plotters and printers and works with CGA, Hercules, EGA and VGA $325

NDP/FFT™ — Includes 40 fast running, hand coded algorithms for single and double dimensioned FFTs which take advantage of the 32-bit addressing of the 386 or your hard disk. Callable from NDP Fortran or NDP C with mW1167 and 80387 support $250
387FFT for 16-bit compilers $250

387BASIC™ — MicroWay's new 16-bit MS compatible Basic compiler that generates the smallest EXE files and the fastest running numeric code on the market $249

MicroWay® 80386 Support

Parallel Processing

Monoputer™
The world's most popular transputer development product runs all MicroWay transputer software using either a T414 or T800. The T800 processor has built-in numerics and provides performance comparable to an 80386 running at 20 MHz with an mW1167. The new 3L Parallel C and Fortran compilers makes this an especially attractive porting environment. Can be upgraded to 2 megabytes.
Monoputer with T414 (0 MB) $995
Monoputer with T800 (0 MB) $1495

Quadputer™
This board for the XT, AT, or 386 can be purchased with 2, 3 or 4 transputers and 1, 4 or 8 megabytes of memory per transputer. Two or more Quadputers can be linked together to build networks with mainframe power which use up to 36 transputers. One customer's real-time financial application has gone from 8 hours on a mainframe to 16 minutes on a system containing five Quadputers. . . . from $3495

Transputer Compilers and Applications
MicroWay offers Parallel languages for the Monoputer and Quadputer.
MicroWay Parallel C $595
MicroWay Occam2 . . . . . $495
3L Parallel C $895
3L Parallel Fortran $895
µField — A specialty finite element analysis package targeted at transputer networks. Ideally suited to take advantage of the 6 Megaflop speed of the Quadputer. $1600
MicroWay Prolog Interpreter $750

Call (508) 746-7341 for our free catalog!

Numeric Coprocessors

mW1167™ — Built at MicroWay using Weitek components and an 80387 socket.

mW1167-16	$995
mW1167-20	$1595
mW1167/VGA-20 "SlotSaver"	$1995
8087	$99
8087-2	$145
80287-8	$239
80287-10	$279
80387-16	$450
80387-20	$675
80387-25	$795
287Turbo-12 (for AT compatibles)	$450
DRAM	CALL

(All of our Intel coprocessors include 87Test.)

PC and AT Accelerators

MicroWay builds a number of 8086 and 80286-based PC accelerators that are backed up by the best customer support in the industry.

Number Smasher™ (8087-10 & 512K)	$499
FastCACHE-286/9 MHz	$199
FastCACHE-286/12 MHz	$299
SuperCACHE-286/12 MHz	$399

Intelligent Serial Controllers

MicroWay's **AT4™**, **AT8™**, and **AT16™** are the fastest 80186-based intelligent serial controllers on the market. They come with drivers for UNIX, XENIX, and PC MOS.
AT4 ... $795 AT8 ... $995 AT16 ... $1295

32-Bit Applications

COSMOS-M/386 — SRAC's structural and thermal finite element packages for the 80386, when combined with an 80387 or mW1167, achieve mainframe speed and capacity. Turnaround times rival the VAX 8650 and are 6 to 15 times that of an AT . . . . . from $995

PSTAT-386 — This mainframe statistics package has been used by government and industry for 20 years. The full version was ported. Requires 4 to 6 megabytes of memory: $1495

NDP/NAG™ — Features a library of 800 engineering and scientific numerical algorithms. Callable from NDP Fortran $895

MicroWay

The World Leader in PC Numerics

P.O. Box 79, Kingston, MA 02364 USA (508) 746-7341
32 High St., Kingston-Upon-Thames, U.K., 01-541-5466
Australia 02-439-8400 Germany 069-75-1428

When you want to talk computers...

ATARI COMPUTERS

800XL 64K Computer 84.99
130XE 132K Computer 139.00
520ST-FM RGB/Color Syst. . . . 789.00
1040ST Color System . . . . . Call
SF1224 Color Monitor 329.00
XF551 Disk Drive (XL/XE) 189.00



Atari 800XL & XF551 Disk Drive & Software $279

Includes: 800XL, 551 Drive, & Star Raiders, Missile Command, Asterioids, Defender, Qix.

ATARI ST SOFTWARE

Access
Leaderboard Golf 24.99
Accolade
Test Drive 27.99
Avant Garde
PC Ditto (IBM Emulation) 64.99
Michtron
Leatherneck 29.99
Soft Logik Corp.
Publishing Partner 64.99
Timeworks
Desktop Publisher 84.99
VIP
Professional Gem 119.00
Word Perfect Corp.
Word Perfect 189.00

AMIGA SOFTWARE

Absoft
AC Basic 139.00
Aegis Development
Animator/Images 89.99
Draw Plus 149.00
Sonix 49.99
Discovery Software
Marander II 31.99
Electronic Arts
Deluxe Video 1.2 . . . . . 89.99
Gold Disk Software
Pagesetter w/Text ed. 89.99
Micro Illusions
Dynamic Cad 349.00

AMIGA SOFTWARE

Mimetics
Amigen Gen Lock 159.00
New Tek Inc.
Digi-View 2.0 . . . . . 149.00
Digi-Paint 44.99
Sub-Logic Corp.
Flight Simulator II 39.99
Word Perfect Corp.
Word Perfect 199.00

MACINTOSH PRODUCTS



OLYMPIA NP-30 Mac 150 CPS $339

Hard Drives
CMS
MacStack 60 . . . . . 899.00
Everex
40MB SCSI 999.00
60MB Tape Backup 899.00
PCPC
MacBottom HD45 . . . . . 1149.00
Floppy Drives
Central Point
Magnum 800k 209.00
Mirror Technologies
800K Floppy External 199.00
Monitors
Network Specialties
High Top FPD 1199.00
Radius
Full Page Display 995.00
Two Page Display 1595.00
Sigma Designs
Laser View Display for II 1,749.00
Memory Upgrades
Dove Computer
Mac Snap 2SE 359.00
Scanners
AST
Turboscan 1,349.00
Datacopy
730 Flatbed Scanner 1,199.00

MS/DOS SYSTEMS

Ast Premium 286 & 386 . . . . . Call
IBM PS/2 25, 30, 50, 60, 80 . . . . . Call
Leading Edge 899.00

MS/DOS SYSTEMS

NEC APC-IV Powermate 2,399.00
PC-TOO 80286 1.2MB, 512K . . 899.00
Zenith Laptops . . . . . Call



TOSHIBA T-1000 Laptop $799

MULTIFUNCTION CARDS

AST
6-Pak Plus 576 Board 149.00
Hot Shot 286 Accelerator 349.00
Hercules
Color Card 169.00
Graphics Card Plus 199.00
Intel
Inboard 386 Board 899.00
5th Generation
Logical Connection 256K 339.00
Quadram
Quad386XT 80386 PC-Upgr. . . 899.00
Video 7
Vega V.G.A. Adapter 299.00
Zuckerboard
Color Card w/Parallel Port 89.99

MS/DOS SOFTWARE

Ashton-Tate
d-Base III + ... 389.00
Borland
Quattro 169.00
5th Generation
Fastback Plus 89.99
Fox Software
Fox Base & Development 219.00
IMSI
Optimouse w/dr. Halo 89.99
Logitec
Hi-Res Buss Mouse 99.00
Lotus
Lotus 1.2.3 . . . . . 299.00
Software Publishing
First Choice 99.99
Word Perfect Corp.
Word Perfect 5.0 . . . . . 249.00

WE SHIP 90% OF ALL ORDERS WITHIN 24 HOURS

SELECT FROM OVER 3000 PRODUCTS

COMPUTER MAIL ORDER

.....When you want to talk price.

MONITORS

Amdek
Video 210A 12" Amber 89.00
Video 410 12"A/G/W ....(ea.) 139.00
Magnavox
7BM623 12" TTL Amber 99.00
CM8505 14" RGB/Composite .189.00
CM8515 14" RGB/Composite .269.00
9CM053 14" EGA.....379.00
9CM082 14" VGA Display....459.00
NEC
GS-1400 14" Monochr. TTL ..219.00
JC-1402 Multisync-II 599.00
Packard Bell
PB-1418F 14" Flat TTL A/G/W.....
.....(ea.) 119.00
PB-1420CG 14" Mid-Res CGA 269.00
PB-1422EG 14" Hi-Res EGA..369.00
PB-8426-MJ Uniscan Monitor .399.00
Princeton Graphics
Max-12 12" TTL Amber 149.00
Seiko
CM-1430 14"VGA Display 649.00




Magnavox CM 8762 14" RGB/Comp. $269

DRIVES

Atari
AA314 DS/DD ST Disk.....219.00
SHD204 20MB ST Hard Drive .619.00
C.LTD (For Amiga)
C.LTD 20MB (A2000) 769.00
C.LTD 33MB (A2000) 879.00
C.LTD 44MB (A2000) 1099.00
C.LTD 50MB (A2000) 1139.00
C.LTD A500 SCSI Controller ..179.00
Indus
GT Disk Drive Atari XL/XE....199.00
GTS-100 ST Drive 219.00
Racore
Jr. Expansion Chassis 299.00
Seagate Technologies
ST-225 20MB Drive 249.00
Supra
Atari ST 30 Meg Hard Drive ..689.00
Amiga 2000 20MB Hard/Drive .629.00

MODEMS

Anchor
6480 C64/128 1200 Baud 99.99
520 ST520/1040 1200 Baud ..129.00
1200E 1200 Baud External ...129.00
Atari
XMM301 XL/XE 300 Baud 44.99
SX-212 St Modem 89.99
Avatex
1200 Hc External 99.99
2400 External 179.00
Best Products
2400 Baud ½ Card w/software 149.00
Everex
Evercom 2400 Baud External .209.00

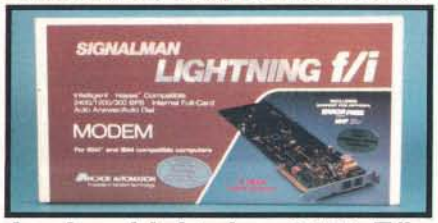

Anchor Lightning 2400 F/I 2400 Baud Internal $189

Hayes
Smartmodem 300 Ext. 159.00
Smartmodem 1200 Int. 279.00
Packard Bell
1200 External 89.99
2400 External 169.00
Practical Peripherals
1200 Baud Internal.....79.99
2400 Baud Stand Alone.....189.00
Supra
2400AT 2400 Baud Atari 169.00
U.S. Robotics
Direct 1200 Baud External....109.00
Direct 2400 Baud External....199.00

DISKETTES

Maxwell
MD1-M SS/DD 5¼" 8.49
MD2-DM DS/DD 5¼" 9.49
MF1-DDM SS/DD 3½" 12.49
MF2-DDM DS/DD 3½" 18.49
MC-6000 DC-600 Tape 23.99
Sony
MD1D SS/DD 5½" 6.99
MD2D DS/DD 5½" 7.99
MFD-1DD SS/DD 3½" 11.99
MFD-2DD DS/DD 3½" 16.99

PRINTERS

Atari
XDM-121 Letter Quality XL-XE 209.00
XM-M801 XL-XE Dot Matrix...199.00
XM-M804 ST Dot Matrix.....199.00
Brother
M-1509 180cps 132col.....389.00
HR-20 22cps Daisywheel.....379.00
Citizen
120D 120cps Dot Matrix.....159.00
Premier-35 35cps Daisywheel .479.00
Epson
LX-800 150cps, 80 col.....179.00
FX-850 240cps, 80 col.....Call
FX-1050 264cps, 132 col .....Call
LQ-500 180 cps, 24-wire .....Call
LQ-850 330 cps, 80 col.....Call
LQ-1050 330 cps, 24-wire .....Call
FX-850, FX-1050.....New
Hewlett-Packard
2225A Thinkjet 369.00
NEC
P2200 Pinwriter 24-wire 379.00
P660 Pinwriter 24-wire 459.00
P760 Pinwriter 132 col 679.00
Okidata
Okimate 20 color printer 129.00
ML-182 180 cps, 80 col 249.00
ML-320 300 cps, 80 col 379.00
ML-390 24 wire, 270 cps 519.00



Brother M-1109 100 cps, Dot Matrix $159

Panasonic
KX-P1080i 144 cps, 80 col....169.00
KX-P1091i 194 cps, 80 col....199.00
KX-P1092i 240 cps, 80 col....339.00
KX-P1595 200 cps, 132 col...479.00
Star Micronics
NX-1000 140 cps, 80 col 179.00
NX-1000C C64/128 Interface ..179.00
NX-15 120 cps, 132 col 329.00
Toshiba
P321-SL 216 cps, 24-wire 499.00
P351-SX 300 cps, 24-wire 999.00

In the U.S.A. and in Canada

Call toll-free: 1-800-233-8950

Outside the U.S.A. call 717-327-9575, Fax 717-327-1217
Educational, Governmental and Corporate Organizations call toll-free 1-800-221-4283
CMO, 101 Reighard Ave., Dept. A1, Williamsport, PA 17701

MEMBER MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.

OVER 350,000 SATISFIED CUSTOMERS • ALL MAJOR CREDIT CARDS ACCEPTED • CREDIT CARDS ARE NOT CHARGED UNTIL WE SHIP

POLICY: Add 3% (minimum $7.00) shipping and handling. Larger shipments may require additional charges. Personal and company checks require 3 weeks to clear. For faster delivery, use your credit card or send cashier's check or bank money order. Credit cards are not charged until we ship. Pennsylvania residents add 6% sales tax. All prices are U.S.A. prices and are subject to change, and all items are subject to availability. Defective software will be replaced with the same item only. Hardware will be replaced or repaired at our discretion within the terms and limits of the manufacturer's warranty. We cannot guarantee compatibility. All sales are final and returned shipments are subject to a restocking fee. We are not responsible for typographic or photographic errors.

A110

```
Quaid Analyzer
Instruction Display

   dx ax      0000 0000
ds:si bx 86c4:003e 085d
es:di cx 86c4:0000 0a9a
ss:sp bp 86c4:0946 00a2
data     09c2:0008
code     09c2:0419
cs:ip    09c2:0419
       ....oditsz.a.p.c
flags  0000001001000110

    d28c 0419 >move dx,ss
    cc8b 041b  move cx,sp
      fa 041d  cli
    c88c 041e  move ax,cs
    d08e 0420  move ss,ax
  0d60bc 0422  move sp,0d60
0200c481 0425  add  sp,0200
      fb 0429  sti
      52 042a  push dx
      51 042b  push cx
      53 042c  push bx
      51 042d  push cx
    30b4 042e  move ah,30
    21cd 0430  int  DOScall
```

Part of a Quaid Analyzer display

Quaid Analyzer is a powerful diagnostic tool that shows what is going on inside your computer. The > at the top is the cursor. You can move it with the arrow keys. When you move the cursor off the screen, the instructions scroll like text in an editor. You can move the cursor into a register and change its value, or see the instructions or data it points to. Of course, you can scroll through the data display as well, and type new values into memory. With **Quaid Analyzer** you never have to type a command.

This example shows the first instructions executed when VDISK.SYS installs itself. You can see that it changes stack pointers, then gets the DOS version number. We got to this point by loading **Quaid Analyzer** before DOS, then watching the DOS call and disk interrupts until the driver was loaded, then putting a breakpoint on its first instruction. Drivers are installed before DOS gives you the first prompt. What other software tool can show you a device driver install?

Quaid Analyzer comes with a manual, and software on a 3 inch and a 5 inch diskette. If you are not satisfied with **Quaid Analyzer**, you can return it within 30 days for a refund. **Quaid Analyzer** is not sold by dealers in the United States or Canada. It is not copy-protected.

To order **Quaid Analyzer**, call us with your credit card, or send us a check for $200 US funds. We ship within a day at our expense.

Quaid Software Limited
Third Floor Dept B633
45 Charles Street East
Toronto Ontario Canada M4Y 1S2

(416) 961-8243

Warning! For advanced programmers only.

step in the incremental construction of a solid model. Each operator changes the number of vertices (V), edges (E), and faces (F) in a way that maintains equality in Euler's formula: $V - E + F = 2$. This equality guarantees the topological validity of the model.

Solid modeling programs like the one described in this book are necessarily large and complex. Software engineers, even those not particularly interested in solid modeling, might enjoy reading this book just to learn more about how to write a large program. The author explains many of his decisions, including his selection of data structures and his design of a user interface.

Many listings of C code illustrate the book. While the syntax of C enables clever programmers to use tricks and shortcuts, Martti Mäntylä avoids those in favor of clear code. An experienced programmer who knows Pascal would have no trouble following the examples.

The exercises in the book offer readers a means of going beyond the text. Many are substantial projects. They constitute a guide for those who are interested in constructing their own solid modeling program, and a jumping-off point for those who are intent on developing their own program of research.

The bibliography lists 137 references, mainly to major journals. That in itself is a major attraction to the book for anyone seriously interested in the subject.

I enjoyed Martti Mäntylä's writing style and presentation. *An Introduction to Solid Modeling* is especially attractive because you can read it quickly or at your leisure, all at once or in bits and pieces. The author has constructed a very effective introduction to solid modeling, which at the same time challenges those who are experienced in the field.

—Leon Tabak

Programs and Data Structures in C *by Leendert Ammeraal, John Wiley & Sons, New York: 1987, 206 pages, $24.95 (softcover).* Leendert Ammeraal's book is a broad but not exhaustive introduction to data structures and algorithms using C.

After briefly defending C as an appropriate *language* for teaching and defending functioning programs as the best *vehicle* for teaching, Ammeraal plunges into a grab bag of tricks and techniques. The initial chapter on programming style discusses search sentinels, global variables, and recursion. Ammeraal's sometimes gruff text goes on to cover basics such as sorting, searching, and list manipulation; more advanced topics, such as doubly linked lists, B-trees, and interpreters/compilers; and esoteric topics like dynamic programming, tries, and graph representations. Example programs are workable for students but are not particularly general or extensible for professionals.

—Darrow Kirkpatrick

C as a Second Language *by Tomasz Muldner and Peter W. Steele, Addison-Wesley, Reading, MA: 1988, 588 pages, $27.95 (softcover).* This is a comprehensive introduction to standard C, with some ANSI extensions included. Written primarily for those who were raised on Pascal, it provides clear discussions of the basics—data types, control structures, file I/O, functions, and strings—with very helpful and concise summaries of the most important points.

The book moves well beyond the basics with probing discussions of C features like pointers, bit fields, structured file I/O, enumerated types, and preprocessor instructions. Muldner and Steele include code to manage abstract data types such as graphs, lists, sets, and stacks. They also include a hearty calculator program featuring variables; a memory-management system with compaction; and a

continued

• Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Call •

Come Visit Our Computer Warehouse Club Outlet Store • Come Visit Our Computer Warehouse Club Outlet Store • Come Visit Our Computer Warehouse Club Outlet Store • Come Visit Our Computer Warehouse Club Outlet Store • Come Visit Our Computer Warehouse Club Outlet Store • Come Visit Our Computer Warehouse Club Outlet Store •

The New PC NETWORK

JOIN THE #1 "COMPUTER WAREHOUSE CLUB" ® FOR BUSINESS

LASER PRINTERS

NEC LC 890 ..... $2,950.00*

- 35 Resident type fonts
- 4 standard interfaces
- 3MB of internal memory
- Includes Apple Talk Connector



LC 890 Toner Cartridge (6Pk.) 62.10*

SOFTWARE

ALDUS PAGEMAKER 3.0

Create your own brochures, newsletters, and reports withpage formatting, layout and design tools.

$479.75*



SYSTEMS

THE® 286/12

•512K of 1MB on the Motherboard • 6-12Mhz • Keyboard/Toggle Switch Selectable • 1.2MB Mitsubishi HDC/FDC • Phoenix Bios • 101 Key Keyboard • Monitor & Video Board Optional



$915.00*

BUY NOW AT ~~DISCOUNT~~ WHOLESALE + 8% PRICES ! *

BUSINESS SOFTWARE

ALDUS PageMaker 3.0	479.75*
ASHTON-TATE Dbase III+	345.32*
ASHTON-TATE Multimate Advan.II	235.35*
BORLAND INT Paradox 2.0	392.89*
BORLAND INT Quattro	129.00*
BORLAND INT Sidekick Plus	112.11*
BORLAND INT Sprint	108.50*
BORLAND INT Turbo C or Basic	56.05*
CENTRAL POINT PC Tools Deluxe	37.50*
DAC SFT DAC Easy Accounting 3.0	53.00*
LOTUS DEVELOPMENT Lotus 1-2-3	279.00*
MERIDIAN TECH Carbon Copy Plus	100.49*
MICROSOFT "C" Compiler	271.69*
MICROSOFT Excel	285.32*
MICROSOFT Basic 4.0 or Windows	60.55*
MICROSOFT Word 4.0	199.00*
PEACHTREE SFT Accting Sys II	146.45*
PETER NORTON Utilities-Advanced	68.25*
QUARTERDECK OFFICE Desqview	69.69*
SYMANTEC Q&A 3.0	186.85*
WORDPERFECT Wordperfect 5.0	205.00*
XEROX CORP Ventura Publisher	445.00*

PLOTTERS/SCANNERS

HOUSTON INSTRUMENTS All Models	CALL
HEWLETT PACKARD Scanjet	984.75*
PRINCETON GRAPHICS LS-300	701.95*
IOLINE PLOTTERS	CALL
SUMMAGRAPHICS(12 x 12)	342.39*
SUMMAGRAPHICS(12 x 18)	564.59*

PRINTERS

PANASONIC

1080i 8.5", 144cps	170.69*
1592 15", 180cps	389.00*
KX-P4450 LASER 11PPM	1,469.00*

CITIZEN

180D 10", 180cps	166.65*
MSP-50 10", 300cps	388.85*
MSP-45 15", 240cps	437.00*
Tribute 224 15", 200cps, 24 Pin	578.90*
Premier 35 15", 25cps	489.00*

EPSON

LX800 80 Col., 180cps	176.00*
LQ500 80 Col., 180cps	CALL
LQ1050 132 Col., 264cps	CALL
FX1050 132 Col., 264cps	CALL
FX850 80 Col., 264cps	CALL

NEC

LC860 + 8PPM Laser	1,839.00*
5200 10", 265cps	503.49*
P9XL 15", 400cps	958.49*
P5300 15", 265cps	639.00*
P2200 Dot Matrix 10", 170cps	317.14*

OKIDATA

390 9.5", 270cps	439.00*
ML 321 16", 300cps	443.12*
ML 320 9.5", 300cps	319.23*

OKIDATA MICROLINE 383 PRINTER

Features 450cps in draft mode, 180cps in near-letter-quality mode, 16" paper width, IBM compatible, top/bottom paper feed, parallel & serial ports.



$879.00*

MONO & COLOR CARDS

HERCULES Graphics Card Plus	170.69*
THE® Color Card or Mono	55.00*
A.T.I. EGA Wonder 800 x 560	162.00*
ORCHID Designer VGA (IBM PC/XT)	287.31*
PARADISE Auto Switch 480	162.00*
PARADISE VGA Plus Card	253.00*
VIDEO 7 Vega Deluxe 640 x 480	185.14*
VIDEO 7 VGA	249.96*

COMPUTER SYSTEMS

AST Premium 286 Model 80	1,542.77*
AST Premium 286 Model 140	2,513.91*
COMPAQ Deskpro 286/40MB	2,295.25*
COMPAQ Deskpro 386/60MB	5,089.00*
COMPAQ Portable III MDL 40	3,850.00*
IBM PS/2 Model 30 CMS 20MB	1,473.59*
IBM PS/2 Model 50	2,499.75*
TOSHIBA T-1000 Laptop w/512K	719.00*
TOSHIBA T-3100/20 Laptop w/640K	2,838.00*
TOSHIBA T-5100 w/2MB RAM, 40MB	4,450.00*
TOSHIBA T-3200 Laptop	3,395.00*
TOSHIBA T-1200 Laptop	2,125.00*

Call For Best Pricing On Other Models

ScanJet Desktop Scanner



- Flat-Bed Design
- Scaling/Resolution
- OCR/IBM Compatibility
- Automatic Document Feeder

$984.75*

ScanJet Interface Card $348.45*

FLOPPIES, DRIVES, TAPES

CMS 360K Ext. PS/2 Floppy	231.29*
10MEGA Bernoulli II 20MB Int	738.00*
IRWIN 64MB Int Tape for IBM PS/2	499.00*
IRWIN 145 40MB Internal Tape	419.65*
MINISCRIBE 3650 40MB Kit	360.57*
MITSUBISHI 360K 1/2 Ht Dr	79.79*
MITSUBISHI 1MB 3.5"FD	79.79*
MITSUBISHI 1.2MB Floppy 1/2 Ht	85.62*
PLUS DEVEL Hardcard 20	489.87*
PLUS DEVELHardcard 40	601.82*
SEAGATE ST-225 20MB Kit	249.00*
MINISCRIBE 3675 60MB HD Kit	389.00*
MINISCRIBE 6128 110MB RLL Full Ht	659.00*
SEAGATE ST-251 42MB/40MS HD	349.00*
SEAGATE ST-4096 80MB Full Ht	529.00*
SYSGEN Bridge File 3.5" Ext. Drive	205.00*

1-800-621-SAVE

Corporate & Export Hotline 1-312-205-1300

MONDAY-FRIDAY 8:30AM-6:00PM

SATURDAY 10:00AM-4:00PM

MasterCard VISA AMERICAN EXPRESS

MMC MICROCOMPUTER MARKETING COUNCIL

TECH SUPPORT 1-312-205-1410
CUSTOMER SERVICE 1-312-205-1510
FAX 1-312-205-1525
Hours: Monday-Friday 9:00-4:00 CST

BY1088

MITSUBISHI DIAMOND SCAN

13" Color Monitor



$455.00*

NEC Multisync II Hi-Res 13" Monitor $544.39*

Call For Best Prices on Magnavox, Amdek, IBM, Princeton, and THE®

MODEMS

HAYES Smartmodem 2400	392.89*
HAYES Smartmodem 1200	261.59*
U.S. ROBOTICS HST 9600	604.99*

MULTIFUNCTION CARDS

AST Advantage Premium	295.00*
INTEL Above Board 286	385.00*
ORCHID Tiny Turbo 286	241.39*
ORCHID Twinturbo 12	342.39*
THE®Multi I/O w/P/S/G/CLK/CAL	50.40*

MATH CO-PROCESSOR

INTEL 80287 10MHZ Co-Processor	284.50*
INTEL 8087-2 Math Co-Processor	147.00*
INTEL 80387-16 Co-Processor	445.00*

MICE & ACCESSORIES

LOGITECH Logimouse +	69.69*
LOGITECH Hi-Res Mouse	85.85*
MICROSOFT Mouse w/Paintbrush	93.50*
MICROSOFT Mouse w/Windows	125.00*
CENTRAL PT Deluxe Option Brd	106.05*
CURTIS Ruby + w/Fax Protector	63.63*
KENSINGTON Masterpiece+	99.99*
THE COMPLETE PC Complete Fax	297.95*
FUJI 3 1/2" DS/HD Box of 10	45.45*
UNISON Unipower 400 UPS	329.00*
640K & 256K CHIPS	CALL
DISKETTES (25) Hi Dens IBM AT	32.82*
DISKETTES (50) 5 1/4" DS/DD	17.50*

FAX MACHINES/COPIERS

SHARP Z-50

$483.00*

Features accurate auto exposure, lightweight and compact for home or office use, 4-color single tone copying, 2-way paper feed plus more.



SHARP Toner Cartridge 60.60*

SHARP Fax FO-300 ..... $1,131.20*

SHARP FO20 Fax Paper (6rolls) 23.23*

REAL BUYING CLOUT- Call now and join over 200,000 members who are too smart to pay more! **MEMBERSHIP BENEFITS:** * Pay just 8% above advertised wholesale price • 3%cash discount (included in wholesale price) • Price Protection • Optional software rental library • FREE Wholesale Buyers Guide • FREE UPDATES • Fully Insured 48 Hour Delivery • 10 day Return Policy • FREE Technical Support • FREE Bulletin Board • Quantity Discounts • All Prices Subject To Change. All Products Subject To Availability. **JOIN TODAY FOR AS LITTLE AS $10.**

*All Prices Shown are Wholesale Prices

• Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Call for FREE Catalog • Ca

Want to save Time, Money, & Headaches?



GET SUPERSOFT's
SERVICE DIAGNOSTICS

All the software, alignment diskettes, parallel/serial wrap-around plugs, ROM POSTs and extensive, professional documentation to provide the most comprehensive testing available for IBM PCs, XTs, ATs and *all compatibles* under DOS or Stand Alone. No other diagnostics offers such in-depth testing on as many different types of equipment by isolating problems to the board and chip level.

NEW: SuperSoft's **ROM POST** performs the most advanced **Power-on-Self-Test** available for system boards that are compatible with the IBM ROM BIOS. It works even in circumstances when the Service Diagnostics diskette cannot be loaded.

NEW: 386 diagnostics for hybrids and **PS/2s!**

For over nine years, major manufacturers have been relying on SuperSoft's diagnostics software to help them and their customers repair microcomputers. End users have been relying on SuperSoft's Diagnostics II for the most thorough hardware error isolation available. Now versions of Service Diagnostics are available to save everyone (including every serious repair technician) time, money, and headaches in fixing their computers, even non-IBM equipment.

All CPUs & Numeric Co-processors
System Expansion & Extended Memory
Floppy, Fixed & Non-standard Disk Drives
Standard & Non-standard Printers
System Board: DMA, Timers, Interrupt, Real-time Clock & CMOS config. RAM
All Color Graphics & Monochrome Monitors
Parallel & Serial Ports
Mono, CGA, Hercules & EGA Adapters
All Keyboards & the 8042 Controller

Join the ranks of XEROX, NCR, CDC, SONY, PRIME, ... who have bundled SuperSoft's diagnostics with their microcomputers at no risk because of our 30 day money back guarantee.

Service Diagnostics for PC, PC/XT, and compatibles only	$169
Alignment Diskette for PC, PC/XT and compatibles (48 tpi drives)	$ 50
Wrap-around Plug for PC, PC/XT and compatibles (parallel and serial)	$ 30
Service Diagnostics for AT and compatibles only	$169
Alignment Diskette for AT and compatibles (96 tpi drives)	$ 50
Wrap-around Plug for AT (serial)	$ 15
ROM POST for PC, PC/XT, and compatibles only	$245
ROM POST for AT and compatibles only	$245
Service Diagnostics: The KIT (includes all of the above—save $502)	**$495**
Service Diagnostics for all other CPUs (386, V20, V30, Harris, etc.)	$195
Diagnostics II is the solution to the service problems of users of all CP/M-80, CP/M-86 and MS-DOS computers	$125
ROM POST for PS/2 and compatibles only	$245
Alignment Diskette for PS/2 and compatibles (3.5 inch)	$ 50

To order, call 800-678-3600 or 217-359-2112,
FAX 217-359-7225, or write SuperSoft.

your microcomputer repair solution

SuperSoft

FIRST IN SOFTWARE TECHNOLOGY P.O.Box 1628 Champaign, IL 61820 (217) 359-2112 Telex 270365

SUPERSOFT is a registered trademark of SuperSoft, Inc.; CDC of Control Data Corp.; IBM PC, AT & XT of International Business Machines Corp.; MS-DOS of MicroSoft Corp.; NEC of NEC Information Systems, Inc., PRIME of PRIME INC.; Sony of Sony Corp.

database using an external binary search tree.

—Darrow Kirkpatrick

Perceptrons *by Marvin L. Minsky and Seymour A. Papert, MIT Press, Cambridge, MA: 1988, 292 pages, $12.50. Perceptrons* has been the classic textbook on connectionist learning machines since its publication in 1969, and the recent surge of interest in artificial neural systems makes the printing of an expanded edition welcome.

Initially, owners of the previous edition of this work may be disappointed by the new book. It turns out to be a reprint of the old edition sandwiched between about 45 pages of a newly written prologue and epilogue.

The short prologue, entitled "A View from 1988," is an overview of the history of artificial neural systems and the authors' commentary on why the state of the art has progressed little since the book was first published.

The epilogue, which accounts for the lion's share of the new text, is an interesting essay entitled "The New Connectionism," which includes discussion of the significant Rummelhart and McClelland work on parallel distributed processing. Minsky and Papert do a good job of tying the theory and application of perceptrons to other paradigms coming into vogue in the science of neural networks.

While billing the new *Perceptrons* as an "expanded edition" may be overdoing things, the authors' additions are important enough to justify putting the book on the shelf next to the older edition. With or without the additions, of course, *Perceptrons* will always remain a classic in its field.—*Eric Bobinsky*

BASIC Mathematical Programs for Engineers and Scientists *by H. Guggenheimer, Petrocelli Books, Princeton, NJ: 1987, 233 pages, $19.95.* This new addition to the large body of literature on numerical computing offers welcome relief from both the code-starved mathematical textbooks on numerical analysis and the simple-minded cookbooks that provide code but little or no useful explanations.

The author, a university mathematics professor, has put together 40 BASIC programs covering such diverse topics as vector geometry, roots of equations, integration and differentiation, ordinary differential equations, linear algebra, Fourier analysis, and gamma and Bessel functions. As important as the code itself, each program is accompanied by a readable and thorough treatment of the theory behind the algorithm.

The book's conversational style and expert presentation make it enjoyable to read, and, although the author states that the text is for "anyone who is not a computer scientist or mathematician," many practicing professionals will nonetheless find it useful.

The only negative aspect of the book is its use of Microsoft GWBASIC. Much more elegant and understandable programs would have followed from the use of any of the new, structured BASIC dialects. Fortunately, Pascal-like pseudocode versions of each routine are presented, and they make the book valuable even to those who write code in something other than BASIC.

At $19.95, this excellent little paperback is a bargain.

—Eric Bobinsky ■

CONTRIBUTORS

Critic and author **Hugh Kenner** lives in Baltimore, MD. **Leon Tabak** is a visiting lecturer in computer science at Worcester (MA) Polytechnic Institute. **Darrow Kirkpatrick** is a freelance writer and computer consultant living in New Paltz, New York. **Eric Bobinsky** is a mathematician at NASA's Lewis Research Center in Cleveland, Ohio.

VGA

Princeton's Very Good Answers.

Without question, Princeton's PSC-28 and PSM-03 monitors will bring you the ultimate in VGA performance. Princeton was the first to offer truly compatible VGA dedicated monitors. Our PSC-28 is a 770 × 570, .28mm dot pitch, high resolution analog color monitor that can display an infinite number of colors. The PSC-28 also features a convenient color button for green, amber or cyan text. The PSM-03, a high resolution analog monochrome monitor gives you outstanding 800 × 630 resolution, and the ability to display infinite shades of gray. Plus sharp crisp graphics and character definition from its dynamic focusing circuitry.

Both monitors are compatible with IBM PC*, XT*, AT*, PS/2, Apple Macintosh SE* and compatible personal computers. Each gives you full compatibility with the leading VGA adapter cards including the QuadVGA and VEGA VGA. So if VGA meets all your needs (and you don't require the additional flexibility of our famous ULTRASYNC and MAX-15 autosynchronous monitors), investigate the cost/performance value of the PSC-28 and PSM-03.




Unsurpassed quality, service and performance make it hard to beat Princeton monitors. We offer better value than our competition. We call it the Visible Edge. For answers to all your questions about VGA compatible monitors, contact us at 601 Ewing Street, Building A, Princeton, New Jersey 08540 (609) 683-1660, x 810.

**Requires proper adapter card*

PRINCETON®
GRAPHIC SYSTEMS
AN INTELLIGENT SYSTEMS COMPANY

THE VISIBLE EDGE

PRICES YOU CAN FIND ONLY IN

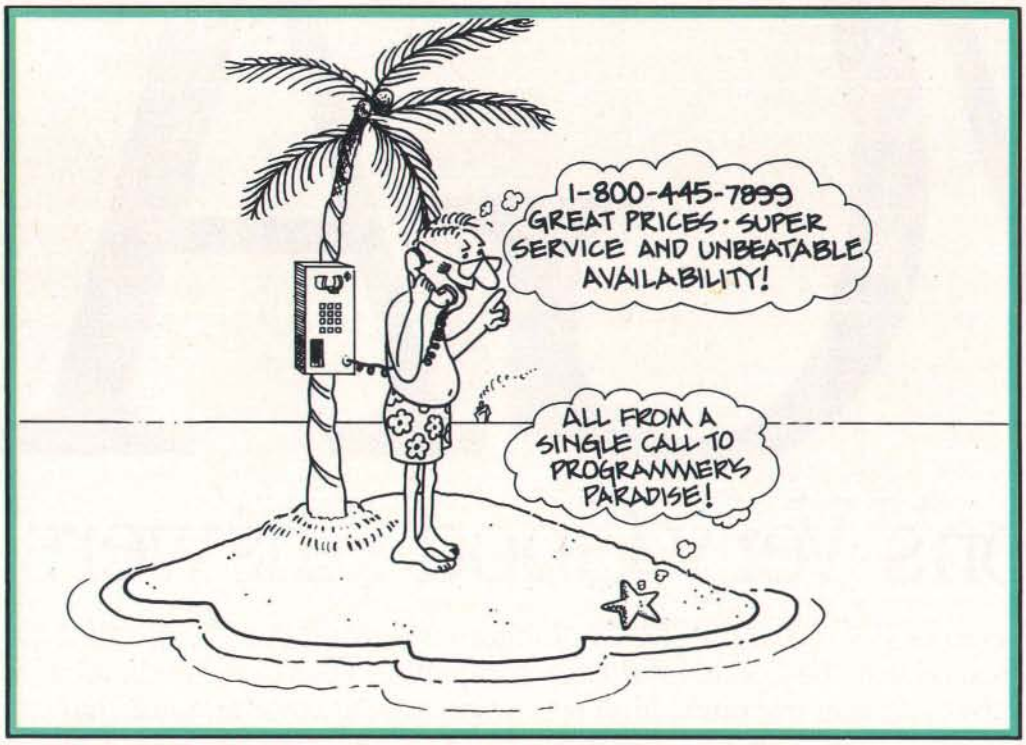

CALL PROGRAMMERS PARADISE TODAY and discover our commitment to bringing you the best software at the best prices. You'll also find software pros to help you select the product that you need plus immediate shipment on our stock of 1000 products and a 30-day money back guarantee. Paradise is ready and waiting for you.

386 SOFTWARE

386-to-the-Max	66
DESQview	115
FoxBASE+/386	CALL
High C-386	799
Microport	
System V/386 (complete)	769
Runtime System	255
MS Windows/386	130
NDP C or Fortran-386	529
PC-MOS 386	CALL
PharLap 386|ASM/Link	409
SCO Xenix	
System V 386 (complete)	1279
Operating System	589
VM/386	182

ASSEMBLERS/LINKERS

Advantage Disassembler	279
MS Macro Assembler	99
OPTASM	109
Plink86plus	279
Visible Computer 80286	90

BASIC

Finally!	90
Flash-Up	80
MS Basic Comp. 6.0	199
MS QuickBASIC	69
QuickPak Professional	105
QuickWindows w/Source	90
Screen Sculptor	96
Turbo Basic	69
Turbo Basic Toolboxes	69

C COMPILERS/INTERPRETERS

C-Terp	220
Lattice C	289
Microsoft C	299
Quick C	69
Run/C Professional	159
Turbo C	69

C LIBRARIES/UTILITIES

C Async Manager	137
C Tools Plus/5.0	101
C Utility Library	125
CxPERT	CALL
Essential Comm Library	125
Greenleaf Bus. Math Lib.	159
Greenleaf Comm Library	169
Greenleaf Functions	155
Greenleaf Super Functions	179
Greenleaf Turbo Functions	109
PforCe	215
PC-Lint	101
Pre-C	159
Resident C w/Source	169
TimeSlicer	279
w/Source	899
Turbo C Tools	101

COBOL

Microsoft COBOL	*NEW*	599
Opt-Tech Sort		105
Realia COBOL		794
RM/COBOL-85		999
SCREENIO		382

DATABASE COMPILERS/ TOOLS

Clear	90

RETURNS ARE A BREEZE

Clipper	439
dBFast	75
FoxBASE+	269
Hi-Screen XL	129
Integrated Development Lib.	135
Quicksilver	369
R & R	129
Say What!	45
Silvercomm Library	139

DEBUGGERS

Periscope I	563
Periscope II	141
Periscope II-X	106
Periscope III 10 MHZ	1143
Pfix 86 Plus	215
T-Debug Plus V. 4.0	39
w/Source	80

DISK/DOS/KEYBOARD UTILITIES

Advanced Norton Utilities	99
Command Plus V. 2.0	70
Disk Optimizer	56
Fastback Plus	142
Mace Utilities	90
Norton Commander	56
Norton Utilities	61
PC Tools Deluxe	70
Vfeature Deluxe	111
X-Tree Pro	111

EDITORS

Brief	CALL
w/dbrief	CALL
EDIX	169
Epsilon	151
KEDIT	120
MKS Vi	66
Multi-Edit	90
Norton Editor	70
PC/EDT+	269
PI Editor	165
SPF/PC	185
Vedit Plus	131

FILE MANAGEMENT

Btrieve	185
Xtrieve	189
Report Option	109
Btrieve/N	455
CBTREE	141
c-tree	318
r-tree	241
d-tree	CALL
dBC III	169
dBC III Plus	599
dB_Vista or dB_Query	CALL
Informix ESQL/C,4GL,SQL	CALL
XQL	599

FORTRAN COMPILERS

Lahey F77 FORTRAN	429
Lahey Personal FORTRAN 77	86
MS FORTRAN	299
RM/FORTRAN	479

GRAPHICS

Advantage Graphics (C)	229
Essential Graphics	229
w/Source	509
GraphiC	322
GSS Graphic Dev. Toolkit	409
HALO '88	229
HALO '88 (5 Microsoft Lang.)	399
MetaWINDOW	162
MetaWINDOW Plus	232

1000 BRAND NAME PRODUCTS IN STOCK

OBJECT-ORIENTED PROGRAMMING

Actor	439
Advantage C++	479
C-Talk	129
PforCe++	215
Smalltalk/V	85
Communication Applic. Pack	45
EGA/VGA Color Ext. Pack	45
Goodies #1, 2 or 3 Applic. Packs	45
Smalltalk/V286	169

OPERATING SYSTEMS

Microport:	
286 DOS Merge	219
System V/AT	549
Runtime Package	209
Software Dev. Package	255
Text Preparation Package	169
Unlimited License Kit	209
SCO:	
Xenix System V (complete)	979
Development System	479
Operating System	479
Text Processing Package	149
Xenix for PS/2 50, 60, 80	CALL
Wendin DOS 2.15 *NEW*	109

TROPICAL TREATS

dBx Translator
New dBx version 4.0 compiles dBASE III Plus programs into portable C source code with full runtime terminal and file support. Execute C fast on PC, or run on UNIX or VAX.
$469

PI Editor
Blazingly fast editor with multi files, full on-line contextual help, compile integration, undo, macro language with integrated source debugger, E/EMS and VGA/EGA support.
$165

Periscope I
Now includes a 512K write protected 16 bit RAM board, along with breakout switch. Store symbol tables, definition files, etc. in addition to the Periscope debugger software, outside DOS memory.
$563

PARADISE 1-800-445-7899

PASCAL COMPILERS

Microsoft Pascal	199
Professional Pascal	549
Turbo Pascal	69
Turbo Pascal Dev. Toolkit	289

TURBO PASCAL ADD-ONS

Flash-Up	80
Flash-Up Toolbox	46
Mach 2	66
Screen Sculptor	96
T-Debug Plus V. 4.0	39
w/Source	80
Turbo Analyst 4.0	69
Turbo Async Plus	101
Turbo Halo	80
Turbo Magic	179
Turbo Power Tools Plus	101
Turbo Power Utilities	79
Turbo Professional 4.0	80
Turbo WINDOW/Pascal	80

SCREENS/WINDOWS

C-Scape	282
Greenleaf DataWindows	219
Makeform *NEW*	99
Panel Plus	395
Panel/QC or /TC	99
POWER SCREEN *NEW*	101
Vitamin C	149
VC Screen	119
Windows for C	149
Windows for Data	259
w/Source	519

ADDITIONAL PRODUCTS

Carbon Copy Plus	142
Dan Bricklin's Demo Prog. II	179
FLOW CHARTING II	205
Logitech MOD II Dev Sys	209
MathCAD	282
MKS Toolkit	145
PC Scheme	86
Pfinish	215
PolyMake	131
PVCS Corporate	359
Source Print	80
Tree Diagrammer	70

BORLAND

Eureka	119
Paradox 1.1	369
Paradox 2.0	529
Quattro	169
Sidekick Plus	125
Turbo Basic Compiler	69
Database Toolbox	69
Editor Toolbox	69
Telecom Toolbox	69
Turbo C Compiler	69
Turbo Pascal	69
Turbo Pascal Dev. Toolkit	289
Turbo Tutor	45
Numerical Methods TB	69
Database Toolbox	69
Editor Toolbox	69
Gameworks Toolbox	69
Graphix Toolbox	69
Turbo Prolog Compiler	105
Turbo Prolog Toolbox	69

MICROSOFT

MS Basic Compiler 6.0	199
MS Basic Compiler (XENIX)	449
MS Basic Interpreter (XENIX)	229
MS C Compiler	299
MS COBOL Compiler	599
for XENIX	649
MS Excel	329
MS FORTRAN	299
for XENIX	449
MS Learning DOS	39
MS Macro Assembler	99
MS Mouse Serial or Bus	99
w/Easy Cad	119
w/MS Windows	139
MS OS/2 Programmer's Toolkit	239
MS Pascal Comp.	199
for XENIX	449
MS QuickBASIC	69
MS QuickC	69
MS Sort	130
MS Windows	69
MS Windows Development Kit	319
MS Windows/386	130
MS Word	285
MS Works	129

PROGRAMMER'S PARADISE:

Microsoft® QUICK C

Microsoft QuickC is a powerful first step into C programming. It compiles at the blazing speed of 10,000 lines per minute. It has a full-featured debugger. And its seamlessly integrated environment means you don't have to switch between tools. So go to C. New QuickC from Microsoft.
SPECIAL! QuickC and Microsoft Serial Mouse Bundle
LIMITED TIME OFFER: $149



WINDOWS FOR DATA

Build a state-of-the-art user interface into your application. Complete, professional C-library for building and managing menus, data-entry forms, user help and text files in a windowing environment. Allows flexibility to create screens "your own way."

Features include: Field entry from lists of choices, scrollable regions for entry of a variable number of line items, nesting and branching of forms and menus. Unique, built-in debugging system.
Ours: $259

Vermont Creative Software

WENDIN-DOS VERSION 2.5

WENDIN-DOS is the new multi-tasking, multi-user MS-DOS replacement operating system for IBM compatible Personal Computers. Version 2.5 allows users to create hard disk partitions greater than 32 MB. WENDIN-DOS uses the MS-DOS file system, and supports MS-DOS commands while providing new ones to enable multi-tasking, file protection, and command language extensions and enables you to access your files with DOS, UNIX, or VAX/VMS style file names — whichever you prefer. WENDIN-DOS supports several users on the same computer. WENDIN-DOS now includes XTC, Wendin's ULTIMATE PROGRAMMER'S EDITOR!
Minimum 512K memory.
Ours: $109

WENDIN

GREENLEAF SUPERFUNCTIONS LIBRARY



The new Greenleaf SuperFunctions Library contains over 350 features including expanded memory access using the LIM 4.0 interface, high level DOS function access like the critical error handler, advanced time and date functions, many menu and window creation options, automatic screen refresh for overlaid windows and device independence plus demo programs and free source. For IBM and compatibles with MS DOS/PC DOS 2.0+.
Ours: $179

HOW WE WORK

PHONE ORDERS

Hours 9 AM–7 PM EST. We accept MasterCard, Visa, American Express. Include $3.95 per item for shipping and handling. All shipments by UPS ground. Rush service available, ask for rates when you order.

MAIL ORDERS

POs by mail or fax are welcome. Please include phone number.

RETURN POLICY

Our "No Hassle" policy means if you're not satisfied with a product from Programmer's, simply return it within 30 days for a refund. Some manufacturer's products cannot be returned once disk seals are broken, so check before you buy.

TECHNICAL SUPPORT FROM SOFTWARE PROS

INTERNATIONAL SERVICE

Take advantage of our International business number for details on export charges and exchange rates. Payments should be made in U.S. dollars.

DEALERS AND CORPORATE ACCOUNTS

Call and ask for our catalog and special volume discounts.

UNBEATABLE PRICES

We'll match lower nationally advertised prices.

In NY: **914-332-4548**
Customer Service:
914-332-0869
International Orders:
914-332-4548
Telex: **510-601-7602**
Fax: **914-332-4021**

Call or Write for Latest Free Catalog!

1-800-445-7899

Programmer's Paradise™

A Division of Magellan Software Corp
55 South Broadway, Tarrytown, NY 10591



Circle 209 on Reader Service Card


Introducing OmniLab 9240. Totally Integrated Scope-Analyzer-Stimulus.

■ Combine a 100 MHz digital oscilloscope with a time-aligned, 200 MS/s 48-channel logic analyzer. Next add synchronized analog **and** digital stimulus generators. Then a remarkable new triggering system. What you have is the 9240 — a whole **new class** of instrumentation. Expressly designed to speed challenging analog and digital analysis. And get you from concept to product faster.

■ The 9240 is based on an innovative new instrument architecture that merges high-speed universal hardware and seamlessly-integrated software to create high-performance capabilities not available in separate instruments. Analog and digital traces are always time-correlated in a unique, single screen display. SELECT™ triggering bridges scope and analyzer techniques. And OmniLab's stimulus generators can playback captured or edited signals.

■ At the heart of the 9240 is SELECT triggering, the most straightforward and complete solution **ever** to triggering dilemmas. It's one system, operating with synchronized analog and digital views of your data. By combining conventional oscilloscope and analyzer triggering with powerful RAM truth tables — plus min/max time qualification as needed — SELECT triggering helps you analyze hardware, debug software, and integrate systems more easily.

■ OmniLab™ is a generation ahead of conventional digital scopes that often hide rarely occurring faults because they only show you a few cycles out of millions. With its continuous monitoring, you can use SELECT triggering to quickly catch every occurrence of rare events like metastable states, bus contentions, missing pulses, and buried noise glitches.

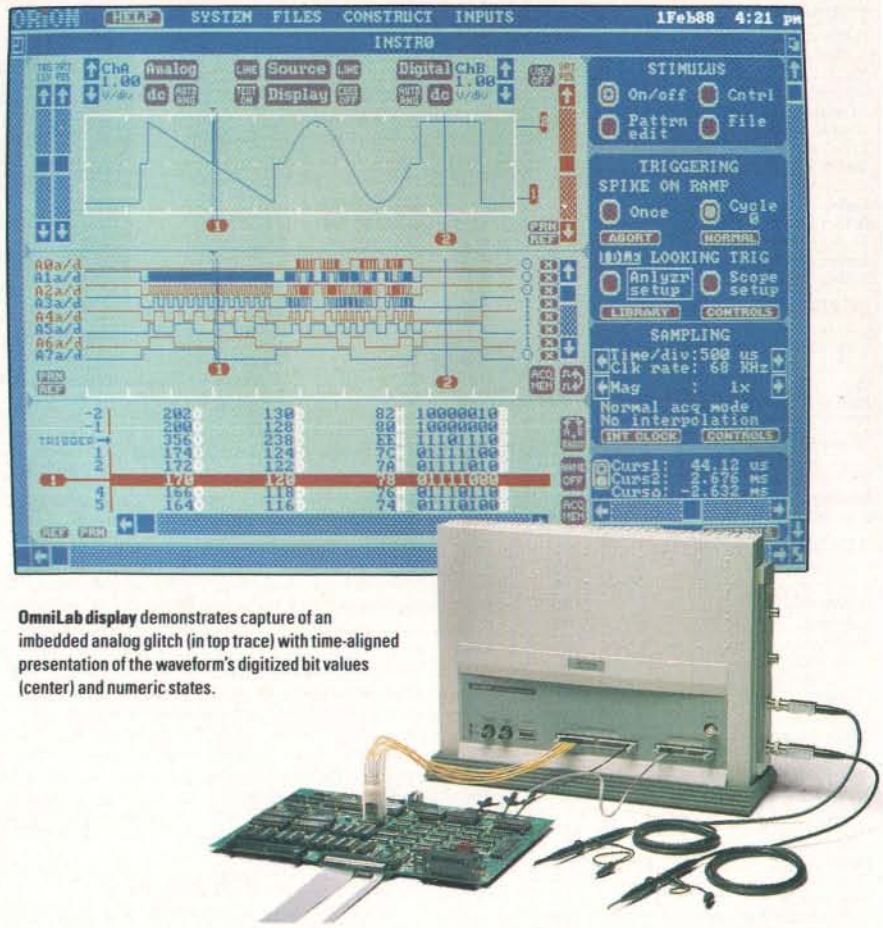

OmniLab display demonstrates capture of an imbedded analog glitch (in top trace) with time-aligned presentation of the waveform's digitized bit values (center) and numeric states.

■ The 9240 is like having a complete benchtop of instruments integrated with your PC/AT or compatible. Which you can easily customize for digital development, analog development, or a combination of both.

■ With OmniLab, your productivity will soar. Because you achieve results with fewer instruments. And in fewer steps than ever before. By no means least, the 9240 delivers the best price/performance you'll find anywhere, costing just $8900 fully outfitted. And most importantly, without compromising a single high-performance spec. Not a one.

NO-COMPROMISE 9240 SPECIFICATIONS

DIGITAL OSCILLOSCOPE		LOGIC ANALYZER	
Digitizers:	Two, 8 bit	Inputs:	48, timing and state
Bandwidth:	100 MHz	Asynchronous Clocking:	34 MS/s on 48 inputs; 204 MS/s on 8 inputs
Single-Shot Digitizing:	34 S/s to 204 MS/s	Repetitive Sampling:	680 MS/s on 48 inputs
Repetitive Sampling:	680 MS/s	Synchronous Clocking:	0 to 34 MS/s
Scale Factor:	5 mV/div to 10V/div in 1-2-5 sequence	Acquisition Memory:	4K samples (16K, 64K optional)
Record Length:	4K (16K, 64K optional)	Disassembly Options:	Over 150 microprocessors
ANALOG STIMULUS		**DIGITAL STIMULUS**	
Output:	8mV to 8 V peak-to-peak, 8 bit	Outputs:	24, 74F tri-state drivers
Cycle Length:	4 to 4K samples (16K optional)	Cycle Length:	4 to 4K samples (16K optional)
Clocking:	34 S/s to 34 MS/s	Timing:	34S/s to 34MS/s
Functions:	Record, edit and playback	Functions:	Record, edit and playback

■ For more information, call **toll free 800/245-8500.** In CA: 415/361-8883. Or write for complete literature.

ORION INSTRUMENTS

702 Marshall Street, Redwood City, CA 94063
TELEX: 530942 FAX: 415/361-8970

Computer Integrated Instrumentation

*OmniLab, and SELECT are trademarks of Orion Instruments, Inc.

Circle 188 on Reader Service Card

PRODUCTS IN PERSPECTIVE

67 **What's New**

89 **Short Takes**
Toshiba 3-in-One P321SLC
Illustrator 88
AppleCD SC
Super PC-Kwik and PolyBoost II
Tickler/2
Zortech Comm Toolkit

Expert Advice:
101 **Computing at Chaos Manor**
by Jerry Pournelle

119 **Applications Plus**
by Ezra Shapiro

129 **Down to Business**
by Wayne Rash Jr.

133 **Macinations**
by Don Crabb

139 **OS/2 Notebook**
by Mark Minasi


144C **COM1:**
by Brock N. Meeks

First Impressions
151 Borland Beefs Up Its Languages
157 Presentation Manager and LAN Manager

Reviews
164 80386s for the Masses
179 Dell's System 310
185 The Amstrad PPC640 and the Epson Equity LT
194 Five low-end scanners for the Mac
201 C_Talk
209 Turbo Prolog 2.0
215 D the Data Language
223 Sprint



IT'S TIME TO DO SOME SERIOUS 386 BUGBUSTING!

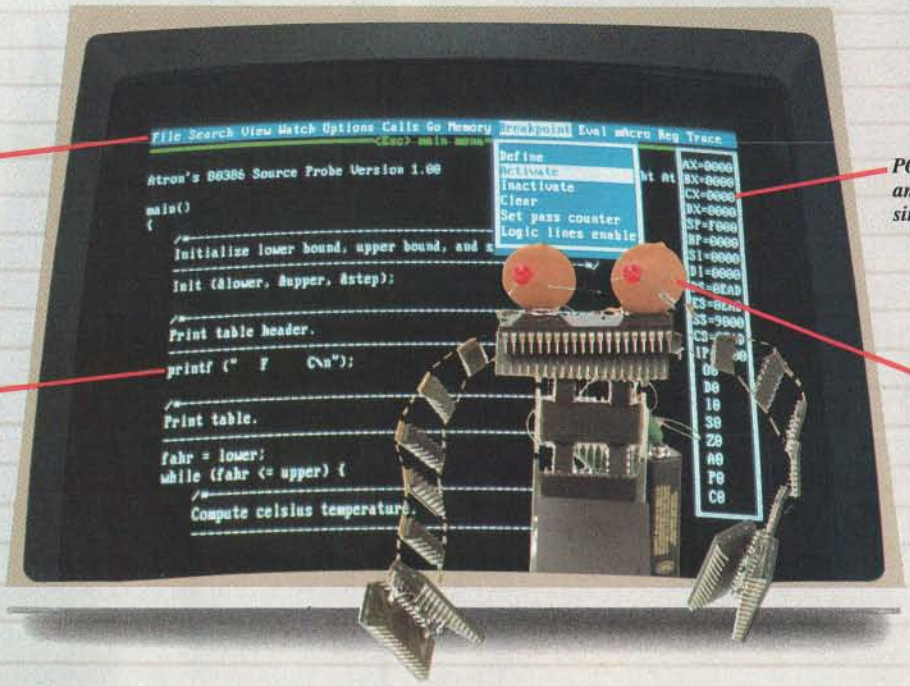

PROBE's menu bar and pull-down menus set a new standard for debugger interfaces.

PROBE has source-level debugging to let you "C" your program.

POP registers up and down with a single key.

This is an out-of-range memory-overwrite bug. Since it is interrupt related, it only appears in real time.

Welcome to your nightmare. Your company has bet the farm on your product. Your demonstration wowed the operating committee, and beta shipments were out on time. Then wham!

All your beta customers seemed to call on the same day. "Your software is doing some really bizarre things," they say. Your credibility is at stake. Your profits are at stake. Your sanity is at stake.

THIS BUG'S FOR YOU

You rack your brain, trying to figure something out. Is it a random memory overwrite? Or worse, an overwrite to a stack-based local variable? Is it sequence dependent? Or worse, randomly caused by interrupts? Overwritten code? Undocumented "features" in the software you're linking to? And to top it off, your program is too big. The software debugger, your program and it's symbol table can't fit into memory at the same time. Opening a bicycle shop suddenly isn't such a bad idea.


THIS DEBUGGER'S FOR YOU

Announcing the 386 PROBE™ Bugbuster,*from Atron. Nine of the top-ten software developers sleep better at night because of Atron hardware-assisted debuggers. Because they can set real-time breakpoints which instantly detect memory reads and writes.

Now, with the 386 PROBE, you have the capability to set a *qualified breakpoint,* so the breakpoint triggers only if the events are coming from the wrong procedures. So you don't have to be halted by breakpoints from legitimate areas. You can even detect obscure, sequence-dependent problems by stopping a breakpoint only after a specific chain of events has occurred in a specific order.

Then, so you can look at the cause of the problem, the 386 PROBE automatically stores the last 2K cycles of program execution. Although other debuggers may *try* to do the same thing, Atron is the only company in the world to dequeue the pipelined trace data so you can easily understand it.


Finally, 386 PROBE's megabyte of hidden, write-protected memory stores your symbol table and debugger. So your bug can't roach the debugger. And so you have room enough to debug a really big program.

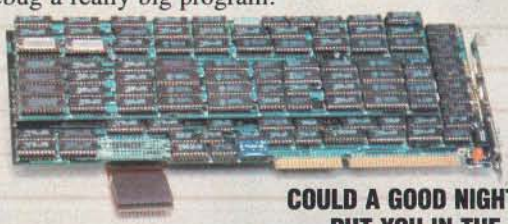

COULD A GOOD NIGHT'S SLEEP PUT YOU IN THE TOP TEN?

Look at it this way. Nine of the top-ten software products in any given category were created by Atron customers. Maybe their *edge* is — a good night's sleep.

Call and get your free, 56-page bugbusting bible today. And if you're in the middle of a nightmare right now, give us a purchase order number. We'll FEDEX you a sweet dream.

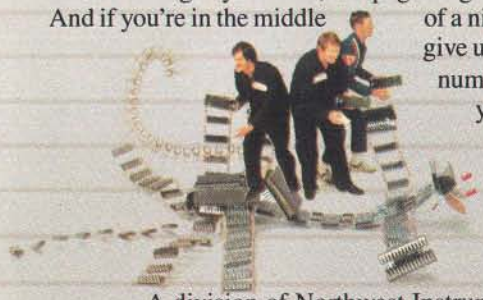

atron

BUGBUSTERS

A division of Northwest Instrument Systems, Inc.
Saratoga Office Center • 12950 Saratoga Avenue
Saratoga, CA 95070 • **Call 408/253-5933 today.**

*Versions for COMPAQ, PS/2-80s and compatibles. Copyright © 1987 by Atron. 386 PROBE is a trademark of Atron. Call 44-2-855-888 in the UK and 49-8-985-8020 in West Germany. TRBA

Circle 25 on Reader Service Card


Switchable CPUs and a Dual Bus, Too

Wells American's CompuStar is actually a "convertible" computer that can switch between an IBM PC AT bus and a Micro Channel bus. In addition, you can set it up to use any of four central processing modules: 8086, 80286, 80386, or 80386SX (which is scheduled to ship in mid-October). The snap-in processor modules, which plug into the motherboard, are interchangeable, the company claims.

All CompuStar models, regardless of the CPU or bus configuration, are equipped with a parallel port, a mouse port, a keyboard and keyboard port, two serial ports, an EGA port, a VGA port, a disk controller, and a 220-watt power supply. The BIOS is by Wells American.

For file-server applications (which increase the possibility of overheated components), each version has two fans—one for pressurizing the hard, floppy, and optical disk drives, and one for creating a vacuum within the printed circuit board areas.

Wells will sell the CompuStar much like a pick-the-component system. Besides an operating system (MS-DOS, OS/2, or Unix), you can choose from a selection of video interfaces, drives (including, later, a Maxtor erasable optical drive), keyboards, and so on.
Price: Basic 8086 machine, $995; 80286 machine, about $20,000; full-featured 80386 machine, up to $25,000.
Contact: Wells American Corp., 3243 Sunset Blvd., West Columbia, SC 29169, (803) 796-7800.
Inquiry 781.

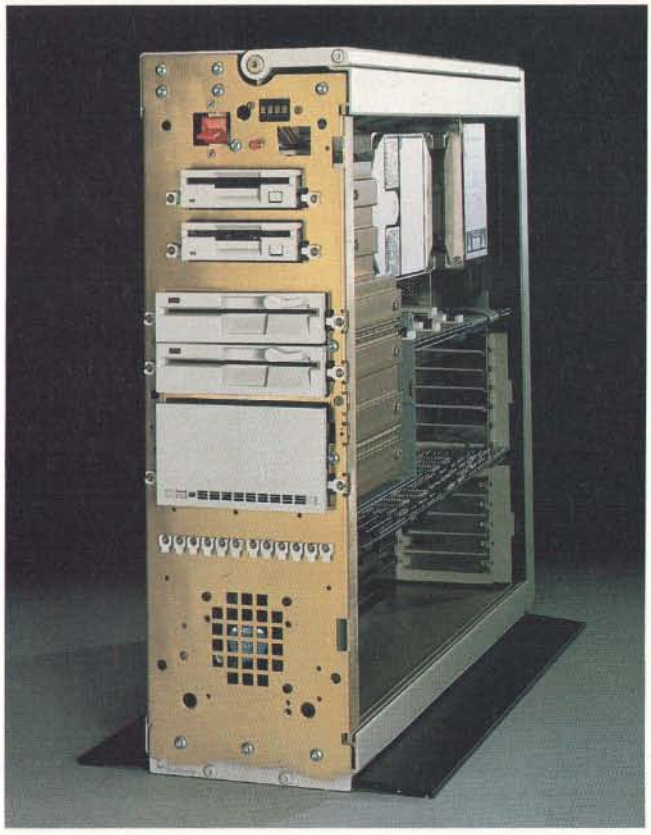

CompuStar includes everything but the kitchen sink.

Apollo Launches First 68030-based System

In its base configuration, Apollo Computer's Series 3500 is a Motorola 68030–based diskless microcomputer that will run at 4 million instructions per second (MIPS).

The 68030 processor makes the 3500 compatible with previous 68000-series machines, resulting in faster and more cost-effective workstations. Clock speed on the 3500 is 25 MHz with no wait states. The standard 4 megabytes of RAM can be expanded to 32. There are 7 16-bit AT slots and three serial ports, and the BIOS is by Phoenix Technologies.

The operating system is Apollo's Domain/OS version of Unix. But "off-the-shelf" MS-DOS applications are supported either by an optional 80286 coprocessor or with a software emulator. The coprocessor, an add-in card, can be purchased and installed on a file server and used by all.
Price: $7990; 80286 coprocessor add-in, $1990; MS-DOS software emulator, $500; 19-inch monochrome monitor, $1000; 15-inch color monitor, $2000; 155-megabyte ESDI hard disk drive and controller, $4500; 348-megabyte drive, $7500.
Contact: Apollo Computer, Inc., 330 Billerica Rd., Chelmsford, MA 01824, (617) 256-6600.
Inquiry 782.

SEND US YOUR NEW PRODUCT RELEASE

We'd like to consider your product for publication. Send us full information, including its price, ship date, and an address and telephone number where readers can get further information. Send to New Products Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458. Information contained in these items is based on manufacturers' written statements and/or telephone interviews with BYTE reporters. BYTE has not formally reviewed each product mentioned. These items, along with additional new product announcements, are posted regularly on BIX in the microbytes.sw and microbytes.hw conferences.

The Desktop and Portable 80386SXes

Intel's new low-cost 80386SX chips have made an appearance in NEC's newest machines—the PowerMate SX and the PowerMate Portable SX. Both machines feature 16-MHz clock speeds and 2 megabytes of RAM, expandable to 16 megabytes.

Additional features of the standard SX machine include a 1.2- or 1.44-megabyte floppy disk drive and a 42-megabyte hard disk drive. The BIOS is by Phoenix Technologies. One RS-232C serial port, one parallel port, and one 8-bit and five 16-bit expansion slots are standard. There's room for two 5¼-inch and one 3½-inch (optional) disk drives. ESDI hard disk controllers are also available.

The Portable SX comes standard with a 360K-byte or 1.2-megabyte floppy disk drive and a 42-megabyte hard disk drive.
Price: $4495 for the PowerMate SX; $6595 for the PowerMate Portable SX.
Contact: NEC Information Systems, Inc., 1414 Massachusetts Ave., Boxborough, MA 01719, (508) 264-8000.
Inquiry 783.

continued

Macro Font Cartridges Do It All

If you need multiple fonts for your HP LaserJet II or Cannon printers and don't want to buy and swap dozens of cartridges, Pacific Data has the solution in five multifont cartridges.


The new "25 Cartridges in One" font cartridge includes all 25 fonts that are available on HP LaserJet cartridges, including the S1, S2, and Z1A, Pacific Data reports.

Four other cartridges offer similar multiple-cartridges-in-one performance for HP and Canon laser printers. The Six-Pack cartridge combines all seven of HP's compatible monospaced fonts and symbol sets and is designed for applications where column alignment is important.

Up to 240 characters per line in both portrait and landscape mode (the Lotus maximum) can be printed with the Spreadsheet cartridge. It includes five different point sizes, including a size for titles and headings. The Z cartridge, containing typographic masters to match the look of PostScript, is designed for such word processing programs as Microsoft Word for typeset-quality documents with proportional spacing.

Also for word processing and desktop publishing, the F cartridge includes a fixed-pitch line-printer font for monospaced word processing applications. And it's compatible with PageMaker and Ventura Publisher.

Price: 25 Cartridges in One, $399; Six-Pack, $99; Spreadsheet, $199; Z cartridge, $99; F cartridge, $99.
Contact: Pacific Data Products, 6404 Nancy Ridge Dr., San Diego, CA 92121, (619) 552-0880.
Inquiry 793.

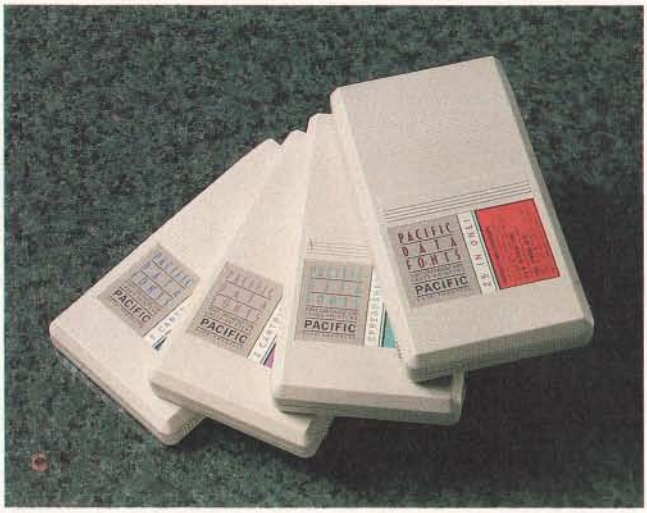

25 Cartridges in One packs five fonts into each cartridge.

Support a Third Floppy with Your AT Controller

Manzana MicroSystems has equipment to add a third floppy disk drive (3½-inch) to your AT without having to add another controller. Your existing controller can now power both 5¼-inch disk drives and a 3½-inch internal disk drive.

Standard equipment includes a multiplexer adapter card to split the controller signal, 3Five Software, and a 3½-inch floppy disk drive in a 5¼-inch frame, plus internal cabling. The software allows XTs, ATs, and compatibles to support the 3½-inch disk drive and includes a device driver and a format program that offers either 720K bytes or 1.44 megabytes of storage (depending on which type of drive you've installed). It is compatible with all desktop systems using DOS (including PS/2s and HP 150 systems) and most laptops such as Toshiba, IBM, Zenith, Tandy, and GRiD.

Price: With 720K bytes of storage, $299; with 1.44 megabytes of storage (works with 720K, 360K, or 180K bytes as well), $340.
Contact: Manzana MicroSystems, Inc., 7334 Hollister Ave., Suite B, P.O. Box 2117, Goleta, CA 93118, (805) 968-1387.
Inquiry 795.

Optical Gigabytes for Your PC

Need ultra-large, high-speed data storage for your IBM PC, XT, AT, or compatible? Two optical disk subsystems, featuring 1.2 and 2.4 gigabytes of capacity in a WORM (write once, read many) format, are available from N/Hance Systems.

TextScan, a document-storage and text-retrieval software package, allows you to access data in under 90 milliseconds, on average. Data transfer rate is 6.5 megabits per second. It also uses multitrack buffering to keep up with even the fastest 80386-based systems.

An internal single-drive system, the Model 5120, includes a drive, controller, installation software, and cabling. An external single-drive version of Model 5120 includes a dedicated power supply, a cooling fan, a controller, cabling, and installation software.

Model 5120/2 provides the 2.4 gigabytes of capacity in a single cabinet. The first 1.2 gigabytes is on one side of the cartridge, and the second 1.2 gigabytes is on the flip side.

Price: Internal Model 5120, $6188; external 5120, $6388; 5120/2, $9688.
Contact: Symphony Systems, Inc., N/Hance Systems Division, 908R Providence Hwy., Dedham, MA 02026, (800) 289-9676; in Massachusetts, (617) 461-1970.
Inquiry 794.

Printer Flexes Paper-Handling Muscles


The IBM QuickWriter 24-wire dot-matrix, bidirectional printer is specifically designed to offer impact printing solutions for your word processing, spreadsheet, graphics, and carbon-copy needs.

The optional bin feeder—which automatically adjusts to paper thickness—lets you print pin-feed paper, single sheets, forms, or envelopes without having to manually change the forms.

Quickness is indeed a virtue with a draft speed of 330 characters per second at 10 characters per inch. Letter-quality speed is 110 cps at 10 cpi. The QuickWriter works in five pitches—10 cpi, 12 cpi, 15 cpi, 17.1 cpi, and proportional.

Price: $1699; pinwheel forms feed, $129; single-bin cut-sheet feed, $349; dual-drawer cut-sheet feet, $849; envelope feed, $299.
Contact: IBM Corp., U.S Marketing and Services Group, 900 King St., Rye Brook, NY 10573, (201) 930-5192.
Inquiry 796.

continued

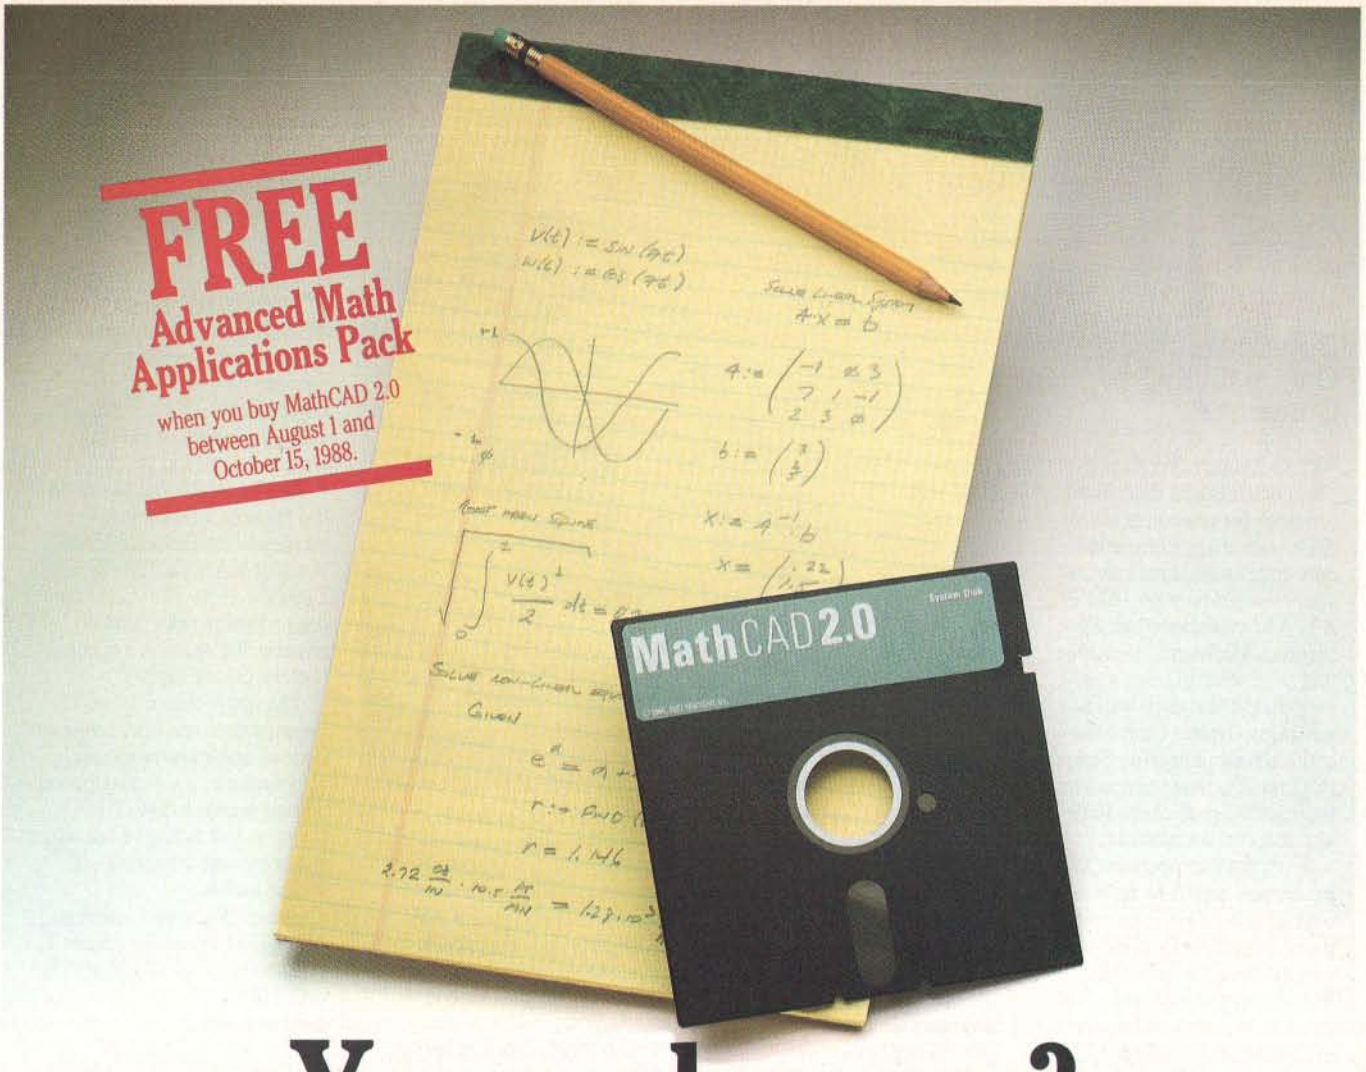


Your pad or ours?

If you perform calculations, the answer is obvious.

MathCAD 2.0.

It's everything you appreciate about working on a scratchpad—simple, free-form math—and more. More speed. More accuracy. More flexibility.

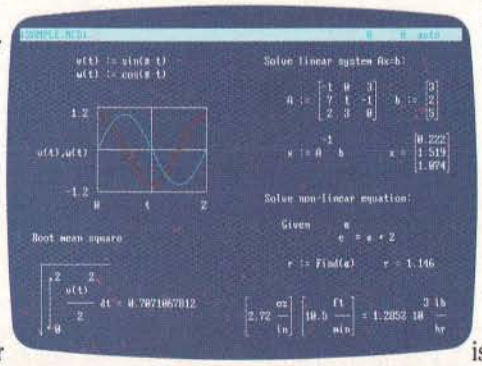

Just define your variables and enter your formulas anywhere on the screen. MathCAD formats your equations as they're typed. Instantly calculates the results. And displays them exactly as you're used to seeing them—in real math notation, as numbers, tables or graphs.

MathCAD is more than an equation solver. Like a scratchpad, it allows you to add text anywhere to support your work, and see and record every step. You can try an unlimited number of what-ifs. And print your entire calculation as an integrated document that anyone can understand.

Plus, MathCAD is loaded with powerful built-in features. In addition to the usual trigonometric and exponential functions, it includes built-in statistical functions, cubic splines, Fourier transforms, and more. It also handles complex numbers and unit conversions in a completely transparent way.

Yet, MathCAD is so easy to learn, you'll be using its full power an hour after you begin.

What more could you ask for? How about the new **Advanced Math Applications Pack**? A $55 value, it's yours *free* when you purchase MathCAD between August 1 and October 15, 1988. The Advanced Math Pack includes a custom binder, software and documentation for 16 advanced applications such as:

- Runge-Kutta Solution of First Order Differential Equation
- Solution of Second-Order Differential Equation
- Eigenvalues and Eigenvectors of a Symmetric Matrix
- Convolution and Correlation of Sequences
- Convolutions using FFT's
- And many more!

If you're tired of doing calculations by hand or writing and debugging programs, come on over to MathCAD.

For more information contact your local dealer or call **1-800-MATHCAD, ext. 2775** (In MA: 617-577-1017, ext. 2775).

Requires IBM PC® or compatible, 512KB RAM, graphics card.
IBM PC® International Business Machines Corporation.
MathCAD® MathSoft, Inc.

MathCAD®

MathSoft, Inc., One Kendall Sq., Cambridge, MA 02139


© 1988 MathSoft, Inc.

Circle 154 on Reader Service Card

Coprocessor Connectivity Convenes

The Connection Coprocessor board from Intel provides for telecommunications within any compatible data-processing application you now run on your IBM PC, XT, AT, or compatible. Symantec, Microsoft, WordPerfect, and several others have announced that they will be writing a Digital Communications Associates/Intel specification into new versions of their software to make their applications compatible.

With the Connection Coprocessor, you'll be able to continue work on your computer immediately after you've commanded the 10-MHz 80188 coprocessor and 256K bytes of memory to handle facsimile, electronic mail, or other telecommunications file-transfer applications. All you need to do is address the information and press a hot key, according to the company. You can then go back to your application while the board takes care of the communications. Intel says this bypasses the hassle of multitasking operating systems (where background applications can slow or halt foreground applications).

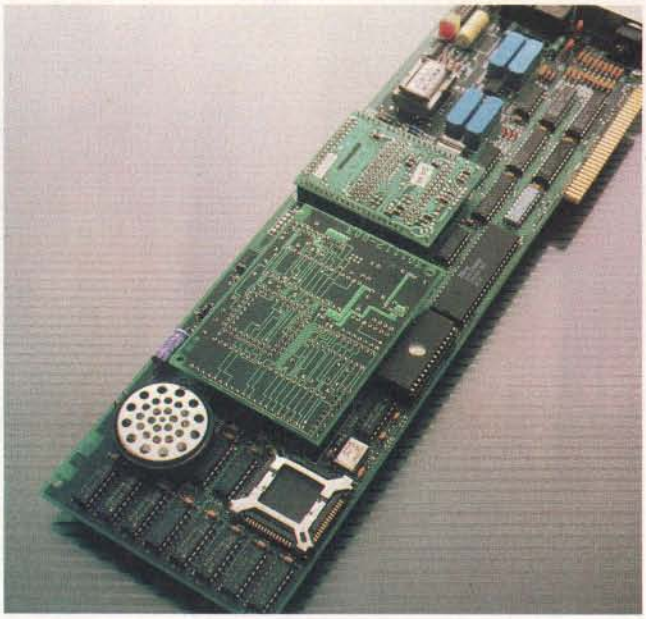

Connection Coprocessor multitasking board from Intel.

Each Connection Coprocessor has an 8K-byte EPROM to grab the downloadable firmware, a direct memory access (DMA) coprocessor interface to talk to the host, and an expansion socket for a modem in addition to its microprocessor and RAM. An option is a piggyback card containing a Hayes-compatible 2400-bit-per-second modem.

Price: $995; modem option, $295.

Contact: Intel Corp., Mail Stop C03-07, 5200 Northeast Elam Young Pkwy., Hillsboro, OR 97124, (503) 629-7354.

Inquiry 784.

Mac II Betters Disk and DAT

Southworth Music Systems announced three cards for the Mac II NuBus. They make use of parallel-processing Motorola 56000 signal-processing chips, which enhance A/D (and D/A) applications on a Mac II by 700 times, according to the company.

The boards support compact-disk sample rates of 44.1 kHz and digital audio tape (DAT) sampling rates of 96 and 192 kHz.

The Max Audio Analog card performs all A/D conversion using a proprietary 20-bit A/D and D/A converter, which provides 104-decibel signal-to-noise ratio on playback. The conversion is performed by a custom circuit that samples the input signal 24 million times per second and integrates the data to 192 kHz. The Analog card includes direct-to-disk recording and playback software and real-time stereo spectral analysis software with 64 to 256 bands.

The Max Audio Quad 56000 DSP (digital signal processing) card has shared memory optionally available, including 3 megabytes for storage and audio samples. The enhanced memory aids in applications such as reverberation and effects processing, frequency-domain audio processing, and sample playing and additive synthesis.

The Digital Audio/SMPTE (Society of Motion Picture and Television Engineers) card can send and receive data in AES/EBU digital audio format for CD and DAT applications.

Price: Analog card, $1400; Quad DSP card, $1400; SMPTE card, $995.

Contact: Southworth Music Systems, Inc., 91 Ann Lee Rd., Harvard, MA 01451, (617) 772-9471.

Inquiry 786.

Proprietary software and the Face Card coprocessor let you perform unattended file transfers between any IBM PC, XT, or AT using a modem or cabling within the office.

The Face Card is based on the Hitachi Z80 8-bit microprocessor. It includes 256K bytes of RAM, a 32K-byte EPROM, 300- to 19,200-bps data transfer rates, and an adapter for AC or a backup battery power supply.

The coprocessor lets you do simultaneous telecommunications and data-processing applications; a separate power-source access allows file transfer and receipt even when the computer is turned off.

Price: $699.

Contact: Face Technologies, Inc., 3711 Plaza Dr., Suite 1, Ann Arbor, MI 48108, (313) 662-8008.

Inquiry 785.

Flipping Four Floppies Further

Omni-Bridge is a half-length board that acts as a floppy disk drive controller to support up to four additional IBM PC, XT, AT, and compatible floppy disk drives.

Data transfer rates are 250K, 300K, or 500K bps, allowing for support of any combination of 720K-byte and 1.44-megabyte 3½-inch floppy disk drives, 360K-byte and 1.2-megabyte 5¼-inch floppy disk drives, and QIC-40 standard streaming-tape drives for backing up your hard disk. With your system's existing controller, this controller allows support for a total of six floppy disk drives.


Price: $95.

Contact: Sysgen, Inc., 556 Gibraltar Dr., Milpitas, CA 95035, (408) 263-4411.

Inquiry 788.

continued

Why Paradox 2.0 makes your network run like clockwork

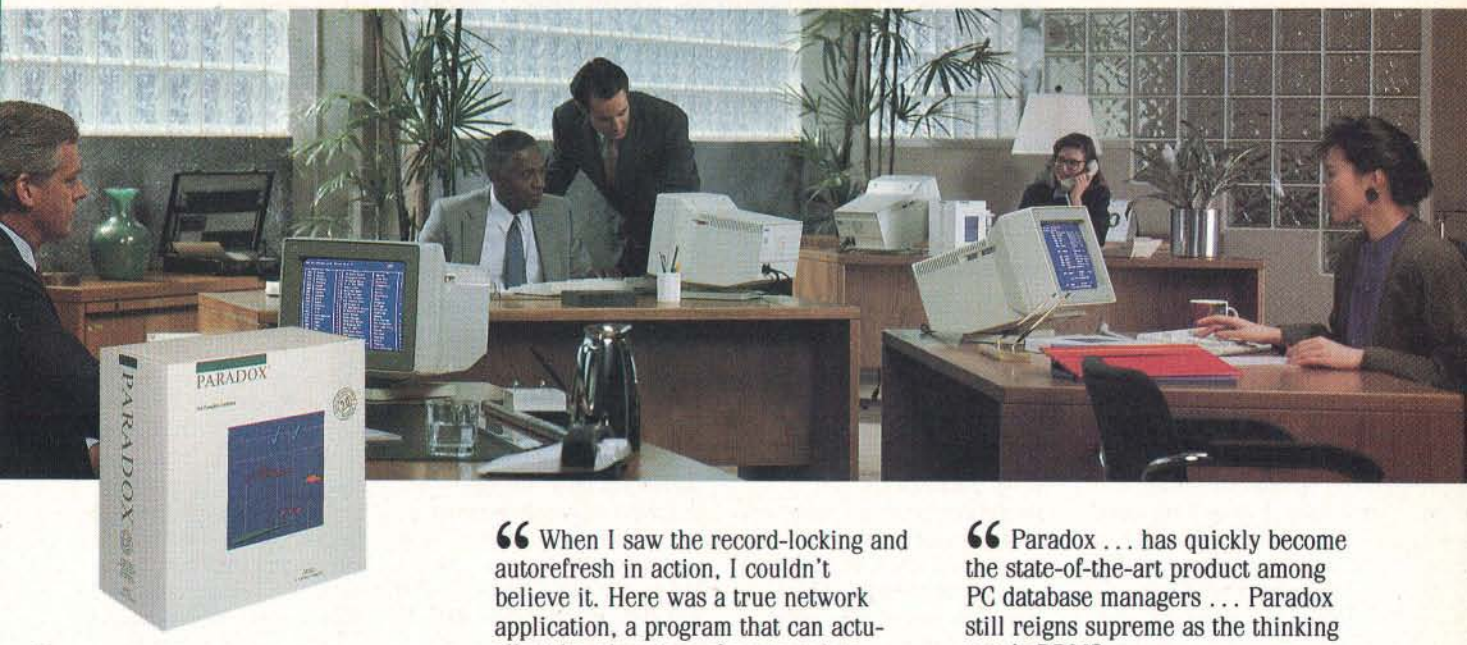

Paradox® runs smoothly, intelligently and so transparently that multiple users can access the same data at the same time—without being aware of each other or getting in each other's way.

With Paradox news travels fast and it's always accurate

Paradox *automatically* updates itself with a screen-refresh that ensures that all the data is up to date and accurate all the time. Record-locking, Paradox-style, safeguards data integrity by preventing for example, two different users from making changes to the same record at the same time.

How to make your multiuser network work

To run Paradox 2.0 or the Paradox Network Pack on a network, you need:

- Novell with Novell Advanced Netware version 2.0A or higher
- 3Com 3Plus with 3Com 3+ operating system version 1.0, 1.1 or higher
- IBM Token Ring or PC Network with IBM PC Local Area Network Program version 1.12 or higher
- Torus Tapestry version 1.45 or higher
- AT&T Starlan version 1.1 or higher
- Banyan VINES version 2.10
- Other network configurations that are 100% compatible with DOS 3.1 and one of the listed networks

System Requirements for the Network Workstation

- DOS 3.1 or higher
- 640K RAM
- Any combination of hard, floppy, or no disk drives
- Compatible monochrome, color, or EGA monitor with adapter

*Customer satisfaction is our main concern; if within 60 days of purchase this product does not perform in accordance with our claims, call our customer service department, and we will arrange a refund.

Paradox is a registered trademark of Ansa Software. Ansa is a Borland International Company. Other brand and product names are registered trademarks or trademarks of their respective holders. Copyright ©1988 Borland International. BI 1243

"When I saw the record-locking and autorefresh in action, I couldn't believe it. Here was a true network application, a program that can actually take advantage of a network to provide more features and functions, things that can't be done with a stand-alone PC.

Aaron Brenner, LAN Magazine

With Version 2.0, Paradox becomes a sophisticated multiuser product that boasts an impressive selection of data-production features and password-security levels.

Rusel DeMaria, PC Week"

Paradox responds instantly to "Query-by-Example"

The method you use to ask questions is called Query-by-Example. Instead of spending time figuring out *how* to do the query, you simply give Paradox an example of the results you're looking for. Paradox picks up the example and automatically seeks the fastest way of getting the answer.

Queries are flexible and interactive. And in Paradox, unlike in other databases, it's just as simple to query more than one table as it is to query one.

"The program elegantly handles all the chores of a multiuser database system with little or no effort by network users.

Mark Cook and Steve King, Data Based Advisor"

"Paradox . . . has quickly become the state-of-the-art product among PC database managers . . . Paradox still reigns supreme as the thinking user's DBMS.

Jim Seymour, PC Magazine"

You don't have to be a genius to use Paradox

Even if you're a beginner, Paradox is the only relational database manager that you can take out of the box and begin using right away.

Because Paradox is driven by the very latest in artificial intelligence technology, it does almost everything for you—except take itself out of the box. (If you've ever used 1-2-3® or dBASE,® you already know how to use Paradox. It has Lotus-like menus, and Paradox documentation includes "A Quick Guide to Paradox for Lotus Users" and "A Quick Guide to Paradox for dBASE users.") Paradox, it makes your network work.

60-Day Money-back Guarantee*

For a brochure or the dealer nearest you
Call (800) 543-7543

BORLAND INTERNATIONAL


Circle 41 on Reader Service Card (DEALERS: 42)

ESDI File Servers Get Powerful

Following an industry trend to bring more file-server capabilities to 80386-based systems, Comterm introduced a system with an ESDI controller that powers an 80386-based series of file servers to minicomputer-like networking versatility.

ESDI with Comterm controllers allows you up to 2.6 gigabytes of hard disk storage with a sustained throughput of 990K bps and an average access time of 19 milliseconds.

Using Novell's NetWare as the operating system and the industry-standard ARCnet, Ethernet, or token-ring protocols, each machine serves as many users as the respective protocols will support. Each of the three models has 1.2-megabyte floppy disk storage capacities and four enclosed LAN software packages: ComShell, E-Mail, LAN Tools, and Notemaker. All the CPUs are 16-MHz 80386s with no wait states.

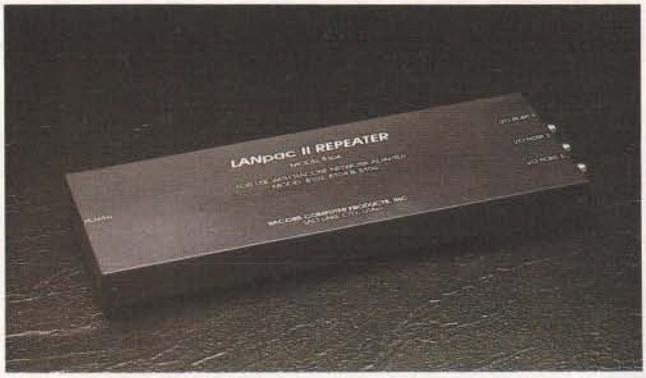

LANpac II repeaters lets you network up to 10,000 feet away.

There's also an AT-standard 101-key keyboard, a 14-inch monochrome monitor, and at least one hard disk drive. Model 4 has 330 megabytes of fault-tolerant disk storage (expandable to 660 megabytes) and 3 megabytes of system and cache RAM. There are two parallel ports, two serial ports, and one ESDI disk controller.

Model 8 has 5 megabytes of system memory plus cache memory, two ESDI disk controllers, one parallel port, and 660 megabytes of formatted capacity.

Model 12 has 7 megabytes of system memory plus cache memory, three ESDI disk controllers, 1.98 gigabytes of formatted capacity, and one parallel port. Model 12 can have an expanded formatted capacity of up to 2.6 gigabytes, and the company is working on expanding that memory to 4 gigabytes with 10 slots.

Price: ARCnet Model 4, $28,495; Model 8, $42,995; Model 12, $76,995. Ethernet models are $29,495, $43,995, and $77,995, respectively. Token-ring models are $29,995, $44,495, and $78,495, respectively.

Contact: Comterm, Inc., 110 Hymus Blvd., Pointe Claire, Quebec, Canada H9R 1E8, (514) 694-4332.

Inquiry 790.

AT&T Enhances Starlan

AT&T's Starlan 10 gives you the choice of networking with the already-installed telephone wiring in your building or with the more traditional coaxial cable. All you need is a full-length PC, XT, AT, or compatible card (or a Micro Channel card for PS/2 connectivity) and a hub.

Adapters, repeaters, and bridges are sold separately, based on your specific networking needs.

Early next year, you'll be able to upgrade all this 10-megabit-per-second Ethernet wiring with optical fiber cabling, increasing the maximum possible distance between your PCs and your hub to 3280 feet. Already available are interhub fiber adapters that increase the distance between hubs to 9800 feet (compared to the 328 feet offered by unshielded twisted-pair).

But regardless of your wiring choice, Starlan 10 will give you 10-megabit-per-second data rates, links to 1-megabit-per-second Starlan networks, links to other Starlan 10 networks, and your choice of operating systems. DOS users will want the DOS Server Program version 3.1.

Software options include a remote PC gateway, an asynchronous gateway, gateways for connection to IBM Standard Network Architecture (SNA) mainframes, network routers for connection to remote networks over X.25 facilities, and certain terminal-emulation programs for connectivity to proprietary terminals.

Price: Network hub unit, $1895; twisted-pair or coaxial PC or PS/2 board, $495; adapter for twisted-pair connection from an Ethernet card, $200; fiber interhub adapter, $500; each 1:10 bridge, $4500; each 10:10 bridge, $7000.

Contact: AT&T Data Systems, One Speedwell Ave., Morristown, NJ 07960, (800) 247-1212.

Inquiry 789.

Coaxial Repeater Goes the Distance

LANpac II repeaters from Racore Computer Products extend the distance between networking nodes up to 10,000 feet. "Electronics, power, and a timing shift" allow for sequential placing of up to 10 repeaters every 1,000 feet, the company claims.

The repeater works with the proprietary network LANpac II, which the company says is the fastest network hardware using the most popular networking operating system, Novell NetWare. LANpac II network architecture is either linear, bus, or star.

Data transfer rate is 16 megabits per second over coaxial cabling with a proprietary "high-speed polling scheme," which eliminates the data collisions and the retransmission of data packets made necessary by such collisions in Ethernet networks, for example. The polling can be set at the repeater for every 10, 20, 30, 40, or 50 microseconds.

You select the setting to compensate for propagation delay in the cable, which is partly dependent on cable length. In addition, the repeater can be configured to poll 32 or 64 nodes at once.

Each LANpac II system allows you to connect up to 254 nodes. The repeaters are either stand-alone versions or full-length adapter cards that plug into standard IBM PC, XT, AT, PS/2 Micro Channel, and compatible interfaces, usually within the file server.

Price: Stand-alone version, $495; PC card version, $395.

Contact: Racore Computer Products, Inc., 170 Knowles Dr., Los Gatos, CA 95030, (408) 374-8290.

Inquiry 791.

continued



Emulate The Best With The Brightest.

There's no denying the availability of some outstanding dedicated terminals to access Digital,® Hewlett-Packard, and Data General® host systems. Which makes the task of precisely emulating the performance of those dedicated terminals on an IBM® PC or compatible a rather significant challenge.

Based on the feedback we've received from SmarTerm® users, our family of terminal emulation software has met the challenge, passed every test, and surpassed, in the opinion of a host of enthusiastic users, the performance of the host system terminals being emulated.

The reasons why we shine are fundamental.

Every SmarTerm emulation is precise. So precise, in fact, that a dedicated terminal's SmarTerm counterpart fully emulates not only advanced performance features but also unique terminal quirks and bugs.


Every SmarTerm emulation is easy to use. It's one thing to make software do what hardware does. It's another challenge to minimize software's human wear. The people designing our products understand the nature of the people using them.

Every SmarTerm emulation is easy to learn. These days, training costs are a hot topic. Software intended to boost overall system efficiency must recognize the value of learning speed. We have.

It's also easy to learn more about how SmarTerm emulations can help you shine. Your software dealer can supply all the details. Or you can contact us at (608) 273-6000 to request complete specifications and a demonstration disk of the SmarTerm emulation that precisely matches your requirements. persoft®

© 1988 Persoft, Inc., 465 Science Drive, Madison, Wisconsin 53711 U.S.A. Persoft and SmarTerm are registered trademarks of Persoft, Inc. All Rights Reserved. IBM is a registered trademark of International Business Machines Corporation. Digital is a registered trademark of Digital Equipment Corporation. Data General is a registered trademark of Data General Corporation.

Get naked

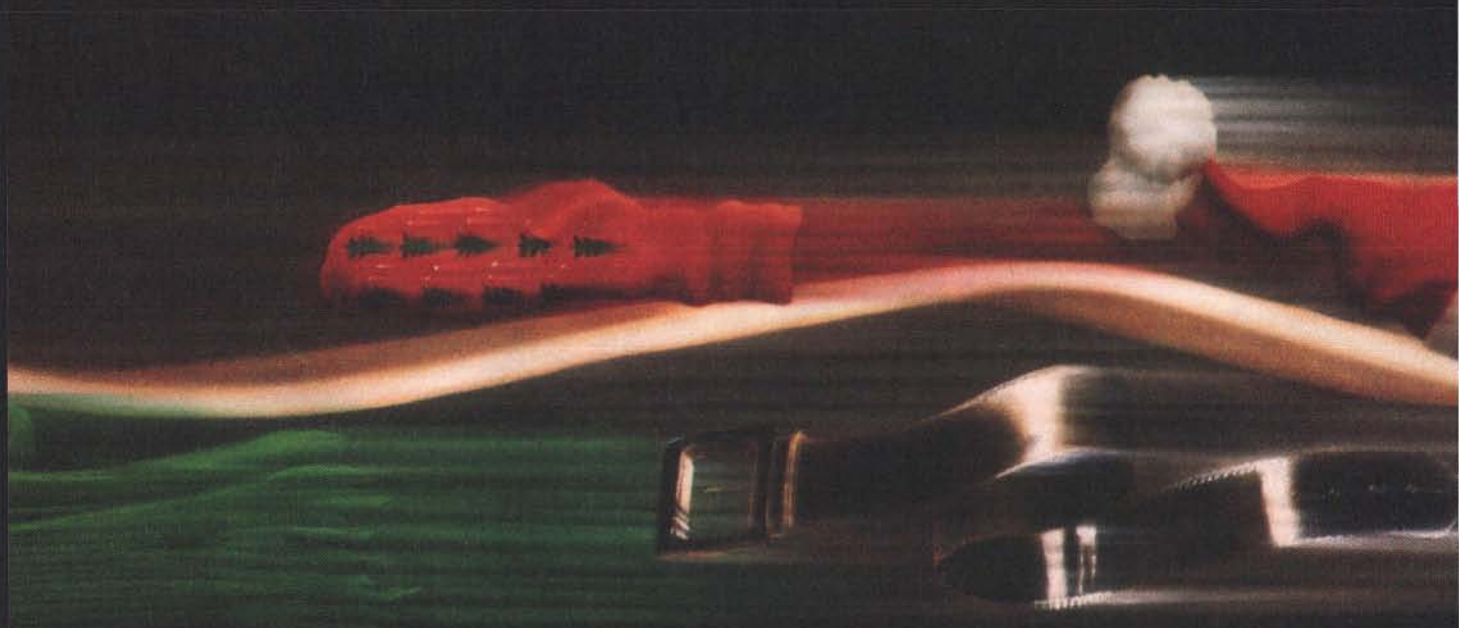


ClearCase™ Mouse—Special Edition From Logitech.

To celebrate the shipment of our two millionth mouse, we took the covers off our winning technology.

But this mouse is a lot more than just a pretty case. It's compatible with virtually all mouse-based programs, plus you can program it to "mousify" any keyboard-based application. And it doesn't need resetting when you switch programs.

High resolution, adjustable cursor control, and a programmable 9,600 baud rate let you move the cursor quickly and accurately, even on detailed graphics—perfect for applications

for Christmas.

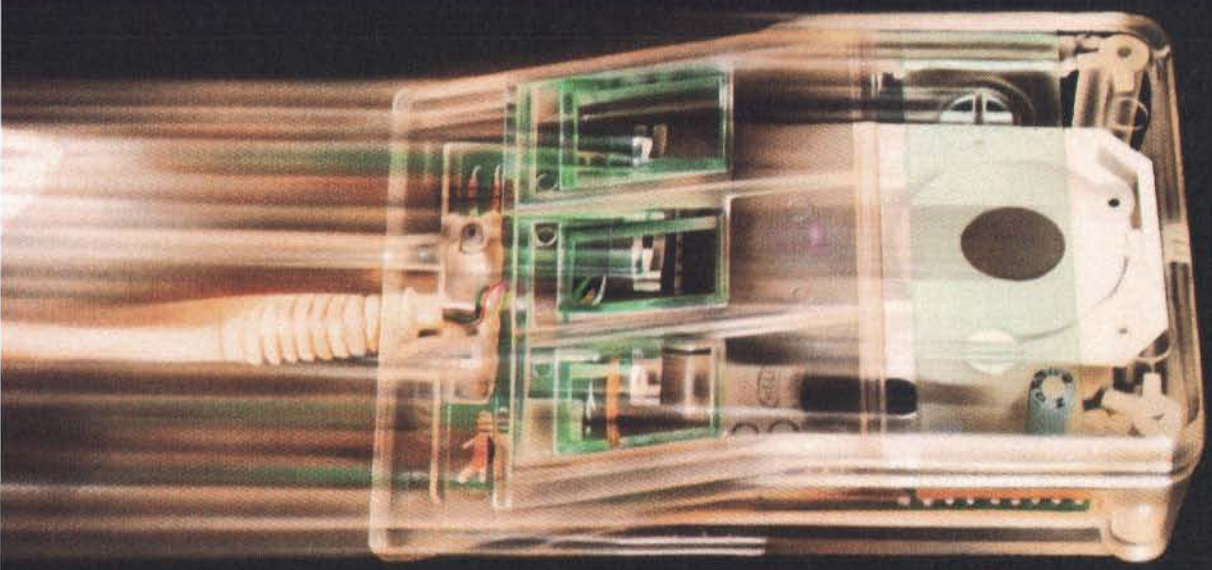

like PaintShow™ which, it so happens, comes with your ClearCase Mouse.

You get everything for $149. The package includes: the Logitech ClearCase Mouse for IBM PC, XT, or AT and PS/2 or 100% compatibles; a 9-25 pin adapter; Plus Package™ software; and Logitech PaintShow™ (which requires a graphics card).

Pick up the ClearCase Mouse at your computer dealer, or call: ***800-231-7717.*** *(In California call* ***800-552-8885.****)*

LOGITECH
Personal Peripherals. Worldwide.

Circle 146 on Reader Service Card (DEALERS: 147)

MFLOPS Help Mac II Process Digital Signals


A floating-point accelerator card for the Mac II allows it to acquire data at up to 125 kHz and can operate on that data using signal-processing functions and display the results in real time. For example, a spectrogram function can display the "bending" frequency components of a slide guitar in real time while you listen to a compact disk recording.

The MacDSP board (with accompanying software) is available in three speeds: 8 MFLOPS, 12.5 MFLOPS, and 25 MFLOPS. It's based on AT&T's DSP32 floating-point digital-signal processor, and it lets you observe the functions as they're applied.

The board supports more than 10 signal-processing functions, including fast Fourier transforms, spectral averaging, and elliptic IIR filters. The functions can be applied to incoming data, data stored in main memory, and data on your disks. Data can be manipulated in both analog and digital formats.

You can display data in several formats, including magnitude, phase, color spectrogram, and waterfall. Log scaling, zoom, and maximum amplitude hold are features that can be performed with standard Macintosh menus. Multiple windows allow you to compare the results of a variety of operations.

AT&T's DSP32 C compiler and simulator provide software suppport, and the board uses firmware for access to processor registers from Macintosh driver functions. Custom signal processing can also be developed and directly downloaded onto the card.

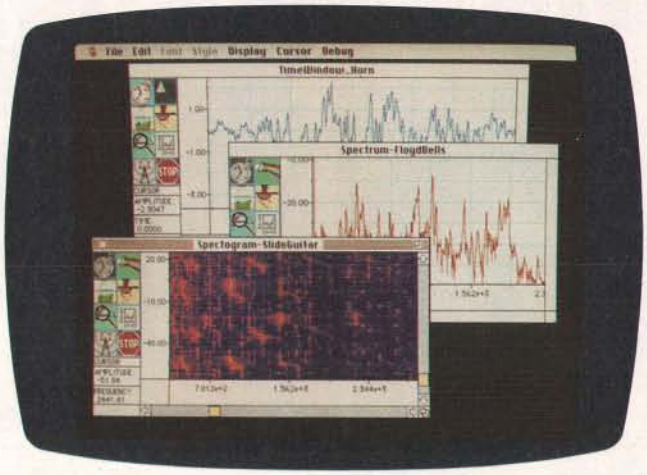

Acquire data at 125 kHz with the MacDSP board.

Price: 8-MFLOPS version with driver software and 64K bytes of RAM, $2249; 12-MFLOPS version, $2745; 25-MFLOPS version, $3241; 125-kHz programmable 16-bit A/D and D/A card, $486; DSP software package, unbundled, $496.

Contact: Spectral Innovations, Inc., 292 Gibraltar Dr., Suite A-4, Sunnyvale, CA 94089, (408) 734-1314.

Inquiry 798.

Digital Waveform Analysis on the PC

Up to 20 million samples per second can be taken with the R2000M, a 128K-byte PC-based oscilloscope. An IBM PC, XT, AT, or compatible needs only 640K bytes of RAM, graphics support of CGA, EGA, or Hercules (with color graphics emulation), and a free expansion slot.

The R2000M is particularly useful, the manufacturer claims, in applications requiring high-speed A/D conversion. It can replace traditional oscilloscopes for transient, vibration, modal, and shock waveform analysis.

Features include an 8-bit A/D converter for each channel with a low front end; 50-ohm input switchable to one million ohms; software-selectable gains from 10 millivolts per division to 50 volts per division; and an optional real-time fast Fourier transform and general-purpose interface bus (GPIB) interface.

Price: $3995.

Contact: Rapid Systems, Inc., 433 North 34th St., Seattle, WA 98103, (206) 547-8311.

Inquiry 811.

continued

Virtual 80386s Run from Host CPU

The UnTerminal, an add-in board from Advanced Micro Research, and PC-MOS/386, a virtual MS-DOS from The Software Link, together allow you to run multiple multitasking workstations from a single 80386-based machine.

Such a distributed concept is based on the fact that the Intel 80386 chip, when combined with specialized software, creates a virtual PC for running multiple DOS applications under the Unix operating system. Unix provides the platform for multiuser applications such as database management, word processing, and communications.

PC-MOS/386 allows the host CPU to run all off-the-shelf DOS applications for any of the virtual PCs. The boards take the multitasking capabilities of the 80386 microprocessor and distribute them via 25-pin copper cabling to as many as 16 virtual PCs in the form of keyboard/monitor units. You can locate each keyboard/monitor unit as far as 500 feet from the 80386 host to obtain 16-megabit-per-second connectivity.


A single full-length board (with as many as three daughterboards) fits an AT or compatible slot and supports four keyboard/monitor units as workstations adjunctly to the main CPU. With a 20-MHz system, four adjunct users and a host user taking full advantage of each workstation will slow down each person's virtual processing to about 4 MHz.

As many as four full-length boards can be placed in a single 80386, supporting a total of 12 daughterboards, with each board supporting one workstation. Supporting this maximum of 16 users would slow down a 16-MHz CPU to virtually 1 MHz at a theoretical maximum load.

Price: Full-length DOS UnTerminal board, $745; DOS daughterboard, $379; full-length Unix UnTerminal board, $895; Unix daughterboard, $425. Boards that fit Unix CPUs are also available, as are the 80386-based systems from which you can network the workstations.

Contact: Advance Micro Research, Inc., One Lagoon Dr., Suite 100, Redwood City, CA 94065, (415) 594-9991.

Inquiry 810.

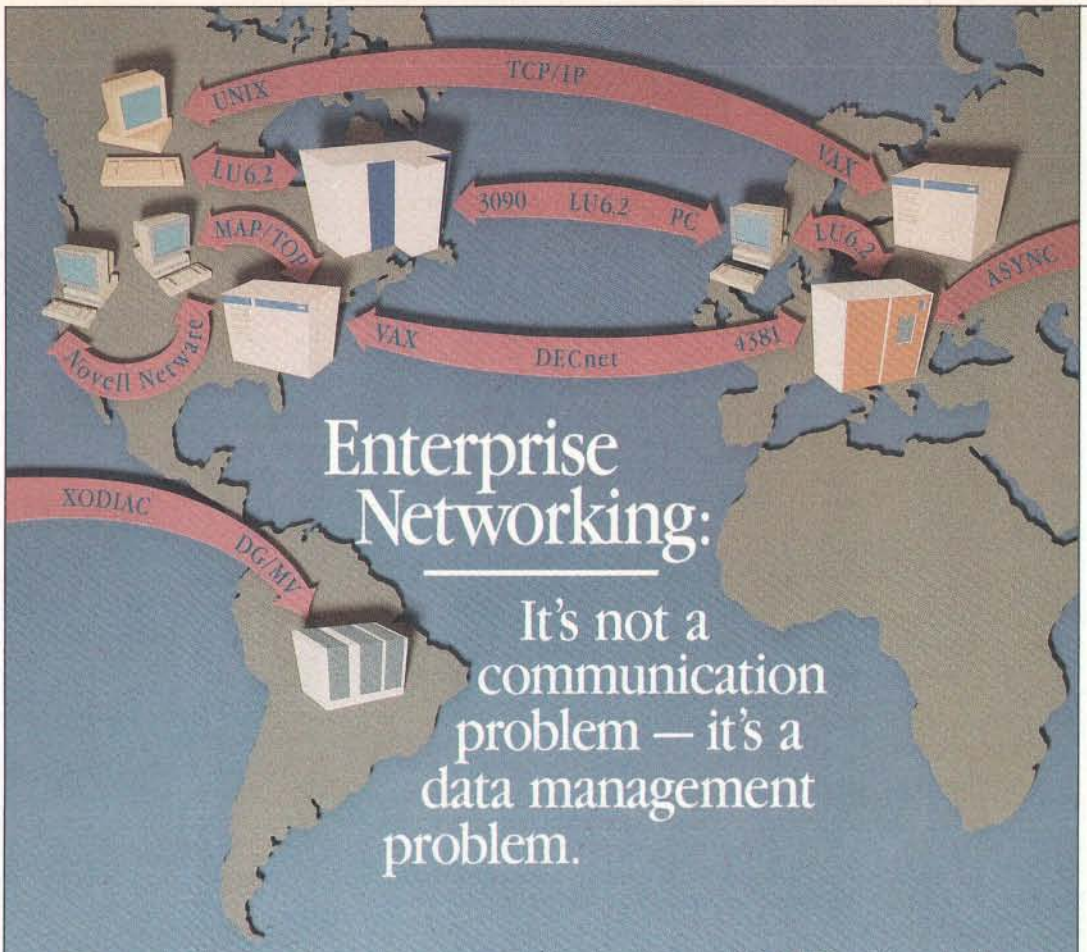

Enterprise Networking:

It's not a communication problem — it's a data management problem.

ORACLE® isn't just the world's best data management system, it's the *only* system that runs on mainframes, minicomputers and PCs—the *only* system that can integrate all your computers and all your data into a single enterprise-wide network.

You've invested a lot of money in communication controllers, satellite links and wire to connect your computers. Yet, to access data located on any computer other than the one to which you are directly connected, you still have to:


- Know which computer has the data you want
- Know how to use a terminal emulator to log onto that computer
- Know how to use a file transfer program to bring your data over

Enterprise networking must provide easy access to data anywhere in the network. Only ORACLE makes this possible, today. Only ORACLE runs on all your computers, today. Only the ORACLE distributed DBMS provides you with transparent access to data on every computer on the network.

If your users know nothing about communications or networks, ORACLE will help keep it that way.

SQL*Star™ is Oracle's open systems architecture for enterprise networking. It allows you to integrate all your computers, operating systems, networks—even different DBMSs—into a single unified computing and information management environment. With SQL*Star, your users can unite information on PCs, minis and mainframes across all your local and wide-area networks. ORACLE's open systems design even allows you to transparently access IBM's SQL/DS and DB2.

If you purchase or write software that interfaces at the wrong level (lower than OSI Level 7), you have a network-dependent application. Applications built using ORACLE are network independent.



ORACLE solves problems at the right level

Are you unsure which or how many networks your company will ultimately settle on? Do you have LU6.2, DECnet, TCP/IP, asynchronous lines, 3270 data stream, MAP/TOP, Novell Netware, Banyan VINES, LAN Manager, 3COM 3+? ORACLE supports them all.

Has your network changed in the past? Might it change in the future? Applications built using ORACLE won't change a bit.

Oracle Corporation is the world's largest supplier of data management software and services, and the only supplier of enterprise-wide networking and data sharing. Oracle's consulting and support services will insure trouble-free operation anywhere in the world.

To register for the next free ORACLE seminar in your area, call or write today.

U.S. SEMINARS

AL	Birmingham	Oct 11
AR	Little Rock	Oct 13
AZ	Phoenix	Sep 13, Oct 13, Nov 8
	Tucson	Oct 25
CA	Costa Mesa	Sep 1, Oct 4, Nov 11
	Los Angeles	Sep 15, Oct 18, Nov 15
	Oakland	Oct 6
	Sacramento	Sep 22, Nov 10
	San Diego	Sep 8, Oct 6, Nov 3
	San Francisco	Sep 14, Oct 11, Nov 9
	San Jose	Sep 20, Oct 26, Nov 17
CO	Denver	Sep 22, Oct 27
	Colorado Springs	Oct 25
CT	Farmington	Oct 4
	New Haven	Sep 8
	Stamford	Nov 15
DC	Washington *(Federal)*	Sep 16, Oct 21, Nov 18
FL	Ft. Lauderdale	Oct 18
	Jacksonville	Oct 19
	Orlando	Sep 14
GA	Atlanta	Sep 7, Oct 5, Nov 9
HI	Honolulu	Sep 13
IA	Des Moines	Sep 13, Nov 10
ID	Boise	Oct 5
IL	Chicago	Sep 15, Oct 11, Nov 16
	Springfield	Sep 14, Nov 9
IN	Indianapolis	Oct 13, Nov 17
KS	Wichita	Sep 13
KY	Lexington	Sep 14
	Louisville	Oct 12
LA	New Orleans	Oct 28
	Shreveport	Oct 13
MA	Boston	Oct 12
	Burlington	Nov 18
	Springfield	Oct 12
MD	Bethesda *(Commercial)*	Sep 21
	Baltimore	Oct 19
ME	Portland	Oct 5
MI	Detroit	Sep 13, Oct 4, Nov 8
	Grand Rapids	Oct 12
MN	Minneapolis	Sep 27, Oct 19, Nov 10
MO	Kansas City	Sep 14, Oct 18
	St. Louis	Sep 6, Oct 6, Nov 7
NC	Charlotte	Oct 20, Nov 17
	Raleigh	Sep 15, Nov 2
	Winston-Salem	Oct 5
NE	Omaha	Oct 4
NH	Concord	Sep 20
NJ	Iselin	Sep 15, Oct 13, Nov 17
	Princeton	Sep 15, Oct 4, Nov 22
NM	Albuquerque	Sep 29
NV	Las Vegas	Sep 22, Nov 10
NY	Albany	Sep 20, Nov 9
	Buffalo	Oct 4
	Long Island	Sep 20, Oct 19, Nov 16
	New York City	Sep 14, Sep 28, Oct 12, Oct 26, Nov 9, Nov 16
	Rochester	Sep 14, Nov 2
OH	Akron	Sep 20
	Cincinnati	Sep 15
	Cleveland	Oct 19
	Columbus	Sep 22
OK	Oklahoma City	Sep 13
	Tulsa	Oct 25
OR	Portland	Sep 8, Nov 15
PA	Harrisburg	Sep 26
	Philadelphia	Sep 19, Oct 26, Nov 18
	Pittsburgh	Oct 26
	Valley Forge	Sep 8, Nov 10
RI	Providence	Sep 22
SC	Charleston	Oct 5
	Columbia	Nov 16
	Greenville	Oct 19
TN	Memphis	Sep 14
	Nashville	Nov 9
TX	Amarillo	Sep 20
	Austin	Oct 20
	Dallas	Sep 7, Oct 4, Nov 2
	Ft. Worth	Nov 9
	Houston	Sep 8, Oct 6, Nov 10
	Midland	Oct 19
	San Antonio	Oct 21
UT	Salt Lake City	Sep 20, Nov 9
VA	Norfolk *(Federal)*	Oct 4
	Richmond	Oct 6, Nov 1
VT	Burlington	Sep 28
WA	Seattle	Sep 14, Oct 20
	Spokane	Nov 3
WI	Madison	Oct 5
	Milwaukee	Oct 12, Nov 29

CANADIAN SEMINARS

To register for Canadian seminars, please call the office nearest you: Calgary 403-265-2622, *Ottawa* 613-238-2381, *Quebec* 514-337-0755, *Toronto* 416-596-7750.

Calgary	Sep 15, Nov 17
Edmonton	Oct 6
Halifax	Oct 13
Kingston	Sep 16
London	Oct 20
Montreal	Sep 28, Oct 26, Nov 23
Ottawa	Sep 1, Oct 6, Nov 3
Quebec	Sep 7, Oct 5, Nov 2
Regina	Sep 22
Saskatoon	Nov 10
Toronto	Sep 13, Oct 11, Nov 8
Vancouver	Sep 8, Nov 10
Victoria	Nov 24
Winnipeg	Oct 20

Attn: National Seminar Coordinator
Oracle Corporation • 20 Davis Drive
Belmont, California 94002

☐ My business card or letterhead is attached. Please enroll me in the *FREE* ORACLE seminar to be held

at: _____

on: _____

BYTE

ORACLE®

COMPATIBILITY · PORTABILITY · CONNECTABILITY

Call 1-800-345-DBMS, ext. 149 today.

Copyright © 1988 by Oracle Corporation. ORACLE is a registered trademark and SQL*Star is a trademark of Oracle Corporation. The other companies mentioned own numerous registered trademarks.

20 Davis Drive, Belmont, CA 94002 • World Headquarters (415) 598-8000 • Calgary (403) 265-2622 • Ottawa (613) 238-2381 • Quebec (514) 337-0755 • Toronto (416) 596-7750 • ORACLE Systems Australia 61-2-959-5080 • ORACLE Europe 44-1-948-6911 • ORACLE Systems Hong Kong 852-5-266846

TRBA

A RAT for A/UX


A new FORTRAN compiler for Apple's A/UX Unix environment uses a technology originally developed for the Motorola 88000 that Absoft has dubbed "RAT" (for RISC Architecture Technology). The company claims that the compiler takes maximum advantage of the Mac II's 68020 register set and executes programs an average of 30 percent faster than other Unix-based FORTRAN compilers.

It's called MacFortran/AUX, and Absoft says it meets full ANSI FORTRAN 77, IEEE P754, and military standard 1753 specifications. It also supports most VAX/VMS FORTRAN extensions, as well as many of the extensions of FORTRAN 8X, Complex*16, and Namelist.

The compiler gives you full access to Unix and the Macintosh Toolbox. It also supports interlanguage calling with C. Although MacFortran/AUX has a standard Unix-style command-line interface, it also comes with a Macintosh-style graphical interface that's written completely in FORTRAN. Absoft even provides the source code, which includes over 150 Toolbox calls.

The company also says it's working on a version of the RAT compiler that will run under Macintosh Programmers' Workshop 3.0 on 68020/68030-based Macs. Absoft claims the current and future versions of the RAT compiler will be 100 percent source-compatible with prior versions of FORTRAN and with each other.

Price: $495.
Contact: Absoft, 2781 Bond St., Auburn Hills, MI 48057, (313) 853-0050.
Inquiry 751.

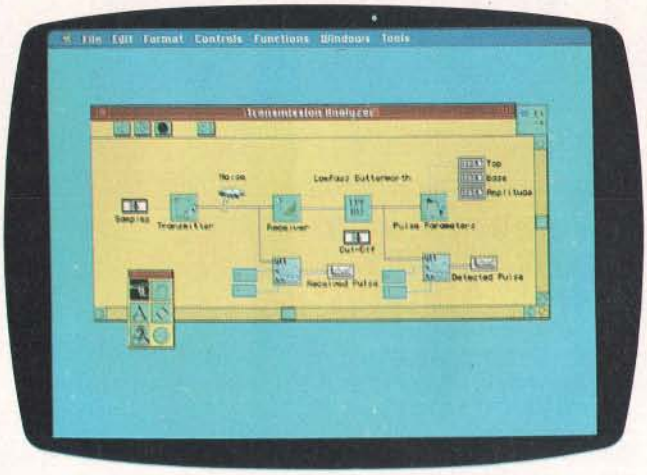

Develop and Debug SQL Databases

If you're an MS-DOS programmer who's working on developing structured query language (SQL)-based database applications, Informix has a "fourth-generation" product that will make your life easier. The Informix-4GL Rapid Development System and Interactive Debugger, as its name implies, lets you do both the development and the debugging.

According to the company, the product reduces your application development time because it eliminates the need for a C compiler. It compiles the 4GL code into a p-code that you can execute with an included p-code runner. You can then use the interactive debugger to find and correct any programming errors. There's also a built-in option that lets you take advantage of up to 16 megabytes of extended memory for creating larger applications.

The development system includes features that let you customize the end-user environment with pop-up windows, selectable colors, and help screens. There's also a flexible report writer. The interactive part of the package lets you set breakpoints, display the contents of variable arrays, and trace functions.

The Informix-4GL Rapid Development System and Interactive Debugger runs on the IBM PC, XT, AT, PS/2s, and 100 percent compatibles.
Price: $1495.
Contact: Informix Software, Inc., 4100 Bohannon Dr., Menlo Park, CA 94025, (415) 322-4100.
Inquiry 752.

A Bumper Crop of C Functions

For those C programmers who don't want to keep reinventing the wheel, Greenleaf Software is offering SuperFunctions, a library of nearly 400 functions for advanced programmers. All functions come with complete source code.

SuperFunctions features routines that give you access to as much as 32 megabytes of Lotus/Intel/Microsoft (LIM) expanded memory version 4.0, and access to high-level DOS functions such as the critical error handler. There's also an advanced set of time-and-date functions that include project-scheduling support, as well as bit-field structures that compress temporal variables into 16- or 32-bit words for saving space when you're doing database development work.

There are also device-independent menu-creation options that include overlaid windows with automatic screen refresh when the windows are removed.

You can use SuperFunctions with any IBM PC, XT, AT, PS/2, or compatible. You'll also need MS-DOS 2.0 or higher.
Price: $265.
Contact: Greenleaf Software, Inc., Bent Tree Tower Two, Suite 570, 16479 Dallas Pkwy., Dallas, TX 75248, (214) 248-2561.
Inquiry 754.

Fast Prolog for Your Mac

Applied Logic Systems has ported its ALS Prolog to the Macintosh environment, retaining its incremental interactive compiler. When you're using ALS Prolog, the compilation step is completely transparent; you interact with the system using text editor windows just as if you were using an interpreter. There's also a built-in debugger.

For Mac aficionados, the company has added a programmer's interface to QuickDraw and a graphics window for making pictures with Prolog.

To run ALS Prolog, you'll need a Mac Plus, SE, or II, Apple's 128K-byte ROM, and a minimum of a megabyte of RAM. A hard disk drive is recommended.
Price: $349.
Contact: Applied Logic Systems, Inc., Box 90, University Station, Syracuse, NY 13210, (315) 471-3900.
Inquiry 753.

continued



Five easy ways to boost your BASIC

PRO BAS™
Professional Basic Programming Library

PRO BAS is a library of 232 routines that kicks BASCOM and QuickBASIC into 5th gear and gives you powers and abilities far beyond those of mortal men. So much for the hype, now down to brass tacks:

- **600 page 3-part manual**
- **Full-featured windowing**
- **Screen snapshots**
- **Virtual screens in memory**
- **Lightning-fast file I/O**
- **Full mouse support**

Plus over 200 essential services from directory and equipment routines to handy string, date, time, and input routines. For all versions of QuickBASIC and BASCOM including BASCOM 6.0 for OS/2. **Just $99.00!**

PRO BAS™ TOOL KIT

The **TOOL KIT** is a collection of assembly and BASIC modules that use the **PRO BAS** library to save you even more hours of grunt work. Why spend hundreds of hours re-inventing the wheel when you can just plug in **TOOL KIT** modules like:

- **Menu Generators**
- **Fast B-tree indexing**
- **Mini-editor with word-wrap**
- **Patch .EXE files**
- **Protected storage areas**
- **Julian date routines**

Plus clock, calendar, BCD math routines, and much more. Complete with BASIC source code and comprehensive manual. The **PRO BAS** adds capabilities and helps conserve your most valuable asset of all, time! Requires **PRO BAS**. **Just $99.00!**

PRO BAS™ TELECOMM TOOL KIT

The **PRO BAS TELECOMM TOOL KIT** is a collection of high-level communications modules that you plug into your code to provide popular file transfer protocols, terminal emulations, login scripts and baud rates up to 57,600 bps. You get:

- **Xmodem/Modem7/Xmodem-1k**
- **Ymodem (single and batch)**
- **CRC-16 and Checksum**
- **VT52, VT100, ANSI BBS etc.**
- **Auto Dialer & data base**
- **Documented BASIC source**

Why use clumsy SHELLs to complex terminal programs when you can plug just the communications routines you need into your code? Implement just the features, and commands you want. Requires **PRO BAS**. **Just $75.00!**

PRO REF™
On-Line Help For PRO BAS

PRO REF is a pop-up help system for the 232 routines in **PRO BAS**, pop-up help for your routines, and an extension of the QuickBASIC programming environment. See the calling syntax and help for any **PRO BAS** routine, or any of your routines, with just a few keystrokes or mouse clicks. Pop-up and ASCII chart, calculator, keyboard scan code module or almost any DOS program via hot-key. **Just $50.00!**

PRO SCREEN™
Professional Screen Management System

PRO SCREEN is a full-featured screen generator/editor that will save you more design and coding time than you ever thought possible. **PRO SCREEN** works with screens like a word processor works with text to provide complete control over screen characters, placement and colors. **PRO SCREEN** comes with subroutine source, extensive on-line help and a 285 page manual with tutorial and reference. **Just $99.00!**

Our thirty day, money-back guarantee assures you the highest quality and our technical support staff is always ready to help. Try our BBS at **(301) 953-7738** or give us a call at:

HAMMERLY
COMPUTER SERVICES, INC.

8008 SANDY SPRING ROAD • LAUREL, MD 20707

(301) 953-2191

Add $3.00 per item ($7.00 Canada) for shipping. Trademarks **PRO BAS, PRO REF, PRO SCREEN**: Hammerly Computer Services, Inc. QuickBASIC, BASCOM: Microsoft Corp.

Circle 108 on Reader Service Card


LabView Forges Ahead

Version 2.0 of National Instruments' LabView system for the Macintosh has added a number of new features. Designed as a general-purpose tool for data acquisition, analysis, and instrument control, LabView is an icon-based graphical programming system.

Among the new features are color support, a run-time system for distributing applications, integer data type support, and MultiFinder background execution. Also added is a compiler, which the company claims makes LabView run up to 10 times faster than the previous version. Unlike version 1.2, which interpreted the graphical program, version 2.0 generates machine code directly from the block diagram. National Instruments claims that I/O-intensive applications execute three times faster, and computation-intensive benchmarks run up to 60 times faster.

LabView 2.0 also has perked up editing capabilities that include diagram rubberbanding, complete Clipboard cut and paste, multiple-object selection, and the ability to drag objects between windows. To increase flexibility in evaluating graphical results, there's an interactive pan and zoom with cursor control. On a Mac II, you can set the color of plot traces, icons, backgrounds, and scroll areas.

LabView 2.0 has added Chebyshev and Butterworth low-pass and high-pass filters and additional numerical methods routines to the existing digital signal processing and statistical analysis routines in the library. The program runs on the Mac Plus, SE, and II. If you already own LabView 1.2, you can upgrade to version 2.0 at no charge.

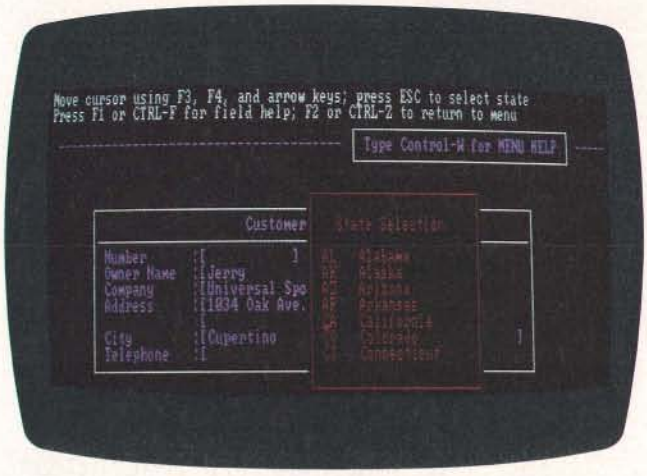

LabView 2.0 has a raft of new features.

Price: $1995.
Contact: National Instruments, 12109 Technology Blvd., Austin, TX 78727, (800) 531-4742; in Texas, (800) 433-3488.
Inquiry 757.

FANSIM Works with Frequency

FANSIM is short for frequency analysis and simulation. It provides frequency analysis of open-loop and closed-loop response, finds transfer functions of real or simulated systems, and also finds poles or zeros.

With FANSIM, you can take real data, simulated data, or internally synthesized functions to find overall frequency response. The program will also accept or output different forms of frequency response functions.

FANSIM runs on the IBM PC and compatibles. It requires a math coprocessor and a Hercules, CGA, or EGA display. You'll also need at least 330K bytes of free RAM, although 512K bytes is recommended.
Price: $395.
Contact: Tutsim Products, 200 California Ave., #212, Palo Alto, CA 94306, (415) 325-4800.
Inquiry 760.

A Solid Diet for AutoCAD

If you've had enough of wire-frame CAD and want something more substantial, Autodesk is now shipping AutoSolid, a solid-model CAD package that uses both constructive solid geometry (CSG) and boundary representation modeling techniques. The package is based on PADL, the University of Rochester's Parts and Assembly Description Language. Autodesk has rewritten PADL in C, making it, the company claims, portable and more efficient.

Autodesk says that because of its intuitive user interface and CSG modeling techniques (analogous to the way mechanical designers work), AutoSolid is easy to use. Pop-up menus guide you through system operations, and you can get on-line help at any point. You can construct a model using solid primitives that you combine using Boolean operations. The finished model is then generated by using sweep techniques.

AutoSolid has DXF and IGES file-transfer capabilities that let AutoCAD and other design packages use its data. The link is bidirectional, letting you transfer solid models to AutoCAD for design detailing and drafting. You can also transfer AutoCAD two-dimensional profiles to AutoSolid, where you can use them to create solid models with the package's revolution and extrusion capabilities.

To use AutoSolid, you'll need an IBM PC AT, Compaq 386, or compatible hardware running Santa Cruz Operations' version 2.2 Xenix. Autodesk says future releases of the product will support other hardware and operating systems, including Sun and Apollo.
Price: $5000.
Contact: Autodesk, Inc., 2320 Marinship Way, Sausalito, CA 94965, (415) 332-2344.
Inquiry 758.

An Algebra Library for C

If you're an engineer or scientist who does extensive programming in C, C-LIN will make your job easier. It's a library of linear algebra subroutines that, according to its maker, have been written specifically to take advantage of the array-manipulation characteristics of C.

The C-LIN library consists of 42 functions, 40 of which come in both single- and double-precision versions. It's available in both compiled and source code versions. The compiled versions are available for Borland Turbo C and Microsoft C.
Price: Compiled version, $69; source code version, $140.
Contact: JAYAR Systems, 253 College St., Suite 263, Toronto, Ontario, Canada M5T 1R5, (416) 751-3284.
Inquiry 761.

continued

You can rely on a file server for LAN communications...



All you need is patience. And faith.

You're getting the drift of this message already. File servers aren't designed to solve the PC user's communications problem. But now there's a system that is.

Now there's COMMIX™ 32.

It's a general purpose local area network for PCs and minicomputer hosts. It connects you with the host, other PCs, and peripherals such as printers, plotters, or modems through simple, pop-up menu commands.

For file transfer and E-mail as a background task. For printer spooling and sharing directly from your applications programs. For terminal emulation that's automatic. COMMIX 32 will let anyone perform common LAN tasks—without the need for expert assistance.

Install it quickly. Expand it easily.

Almost any PC user can install and connect with COMMIX. With each connection, you're saving time and money. Because each COMMIX connection costs as little as $150.

Then take advantage of expansion possibilities. With our optional Ethernet® Link Module, you can create larger LANs with thousands of users. And through our optional Wide Area Network Module, distant COMMIX LANs can appear as one network.

If you're lost at sea.

And looking for solid LAN. The COMMIX 32 is available now. Send us a message: ITRON, a Division of Infotron Systems Corporation, 130 Gaither Drive, Suite 116, Mount Laurel, NJ 08054.
TEL: (609) 722-5575 FAX: (609) 234-0451
In the United Kingdom: (01) 735-0731
In Europe: (2) 725-0770

1-800-423-8044

ITRON
An Infotron Division



COMMIX is a trademark of Infotron Corporation. Ethernet is a registered trademark of Xerox Corporation.

Circle 124 on Reader Service Card

The Ultimate Business Machines

In just three years, CLUB American Technologies has grown into a multi-million dollar computer manufacturer. What's the secret to our success? The answer is simple, CLUB delivers solidly designed systems which are famous for high performance and superior quality. That's why so many fortune 500 companies depend on us. Additionally, CLUB's on-line engineers are available to support you every business day with optional on-site service available.

CLUB Model 200 Series

The Model 200 Series are **OS/2 compatible,** 80286 based systems. They are available in either 8 or 10 MHz versions to fit your specific needs. These economical, yet full featured AT compatibles are perfect for any applications such as spreadsheets and word processing.



Model 200 Series Features & Pricing

Intel 80286 CPU -208/208S-6/8MHz, 210/210S-8/10MHz, 211-8/10MHz '0' wait state, 512K DRAM, 1.2MB Floppy Disk Drive, 80287 Math Coprocessor Socket, HD/FL Controller (controller is built-on motherboard for 'S' Models) Keyboard Speed Switchability ('S' Models), 2 Serial/1Parallel Ports (211), 192 Watt Power Supply, 101 Key Enhanced Keyboard, Documentation and more.

200 Series	*with Monitor and Adapter*		
Model with Hard Disk	Mono	EGA	VGA
208 or 208S with 20MB	$1275	$1625	$1875
208 or 208S with 40MB	$1420	$1770	$2020
210 or 210S with 20MB	$1705	$2065	$2305
210 or 210S with 40MB	$1850	$2210	$2450
211 with 20MB	$1805	$2165	$2405
211 with 40MB	$1950	$2310	$2550

CLUB Model 212 Series

With an **effective throughput of 16 MHz,** the Model 212 Series is as fast as many 386 machines at a fraction of the price. Compatibility with the existing AT standard ensures that the Model 212 will run your large databases, and complicated financial software today, as well as **OS/2** applications tomorrow.



Model 212 Series Features & Pricing

Intel 80286-8/12, 1MB of DRAM, 1.2MB Floppy Disk Drive, 1:1 Interleave HD/FL Controller, 80287 Math Coprocessor Socket, Clock/Calendar/ Configuration with Battery Backup, Reduced Chassis (212D), 192 Watt Power Supply, 101 Key Enhanced Keyboard, Complete Documentation, and more

212 Series	*with Monitor and Adapter*		
Model with Hard Disk	Mono	EGA	VGA
212 with 40MB	$2250	$2615	$2850
212 with 70MB	$2505	$2870	$3105
212D with 40MB	$2190	$2550	$2790
212D with 70MB	$2445	$2805	$3045



CLUB Model 300 Series

The Model 300 Series 80386 microprocessor's state of the art design brings mainframe capability to the desktop at a vastly lower cost per seat. Complete compatibility with OS/2 and Unix give the Model 300 Series the ability to meet the most demanding multi-user and multi-tasking applications. Let CLUB give you the key to increased productivity in todays complex office and engineering environments.

Model 300 Series Features & Pricing

Intel 80386 CPU - 8/20 (320), 8/16 (316S), 1MB 32-bit DRAM (320), 1MB DRAM (316), 1.2 MB Disk Drive, 1:1 interleave HD/FL Controller (320), HD/FL Controller (316S), 80387 Math Coprocessor Socket (320), Weitek Support (320), 80287 Math Coprocessor Socket (316), 8 expansion slots, Clock/Calendar/ Configuration w/battery backup, 192 Watt Power Supply, 101 Key Keyboard, Dcocumentation, and more.

300 Series	*with Monitor and Adapter*		
Model with Hard Disk	Mono	EGA	VGA
316S with 40MB	$2690	$3050	$3420
316S with 130MB	$4060	$4420	$4790
320 with 70MB	$4005	$4330	$4675
320 with 130MB	$5120	$5445	$5790

CLUB Model 110

The Model 110 is an affordable entry level computer. It's perfect for general business applications and for low cost network nodes.



Model 110 Features & Pricing

Intel 8088 CPU-4.77/10 MHz, 256K RAM Maximum 640K, Floppy Disk Drive and Controller, 8 Expansion Slots, 150 Watt Power Supply, 101 Key Keyboard, Documentation and more

100 Series	*with Monitor and Adapter*		
System & Hard Disk	Mono	EGA	VGA
110 with 20MB	$895	$1255	$1495
110 with 40MB	$1080	$1440	$1680

Circle 51 on Reader Service Card

Peripherals

For your convenience, we offer the latest peripherals to enhance your systems. Our manufacturing facilities are geared to build systems the way you want them. Call and tell us what you need. Here's a list of just some of the products we carry.

Storage.

Floppy Drives: 5.25" - 1.2MB	$95
5.25" - 360K	$85
3.5" - 1.44MB	$120
3.5" - 720K	$105
Tape Backups: Internal: 40MB	$580
60MB	$650
125MB	$995
External: 40MB	$620
60MB	$690

Multifunction & Memory
(all prices with 0K)

384K memory card for XT	$99
576K memory card for XT	$42
2MB multifunction card for AT	$110
3MB extended memory card for AT	$110
10MB EMS card for AT	$150
2MB EMS card for AT	$110
Mini I/O for XT and AT	$75
Mini I/O w/ floppy controller for XT	$85
80286 accelerator card for XT	$299

Modems

1200/300 Baud rate internal	$99
2400/1200/300 Baud rate internal	$175
2400/1200/300 Baud rate external	$210
1200/300 Baud pocket Mini Modem	$139

* All modems come with Bitcom software

Printers

Star Micronix NX 1000 9 pin	$199
Star Micronix NB-24-10 24 pin	$493
Epson FX 1050	$595
HP Laser Jet	$1815

Products for PS/2

RAM 4000 (EMS) card OK	$399
60MB Tape backup internal	$1095
60MB Tape backup external	$1285
120MB Tape backup external	$1595
PS/2 modem 2400 baud internal	$299

Others

80287-8	$230
80287-10	$279
80387	Call
Ram chips	Call
Logitech Mechanical mouse	$79
Optical mouse	$75
DOS 3.3	$95

To Order:
Continental USA, Hawaii, Alaska:
Call (415) 490-2201
In Canada Call PC Centre,
Call (416) 470-0560
International
Call (415) 683-6623
Customer Support &
Technical Hotline
Call (415) 683-6580

Corporate, University and Government P.O.'s Welcome

All prices are subject to change and quantities may be limited. We reserve the right to substitute equivalent items.

OS/2, MS DOS Unix, IBM PS/2, PC, XT, AT, Bitcom, Star Micronix NX-1000, NL24-10, Epson FX-1050, HP Laser Jet, Logitech Mechanical Mouse, Intel, VGA, EGA are the trademarks or registered trademarks of their respective companies

CLUB V v.1 8/23/88

CLUB
American Technologies, Inc.
3401 W. Warren Ave., Fremont CA 94539


Good Golly, It's Molly

Do you need historical stock market information? Do you not want to bother with the time and expense of tracking it down through an on-line database? Molly can help. Molly is a historical financial database that contains about 100,000 prices—about 3 megabytes of information.

Molly consists of disks with data in Lotus WK1 format for the IBM PC, or Microsoft Excel format for the Macintosh.

It includes the Dow Jones Industrial Average daily close since 1920; the S&P 500 Composite Index daily close since 1928; the S&P price/earnings ratio and yield on a daily basis since 1940; the Dow Jones transportation and utility averages since 1970; short-term interest rates on a weekly basis since 1970; and intermediate, long-term, and Eurodollar weekly interest rates since 1977. There's also the Nikkei Index, the Value Line Index, the S&P 100 Composite Index, advancing and declining issues on the New York Stock Exchange, and the NYSE advancing and declining volume.

Molly runs on the IBM PC and compatibles with 384K bytes of RAM or on the Macintosh. You'll also need Lotus 1-2-3 for the IBM PC and Excel for the Mac. You can order monthly or quarterly updates for an annual fee.
Price: $199.95; monthly updates, $79.95; quarterly update, $49.95.
Contact: MarketBase, Inc., 250 West 90th St., Suite 12K, New York, NY 10024, (800) 627-5385.
Inquiry 764.

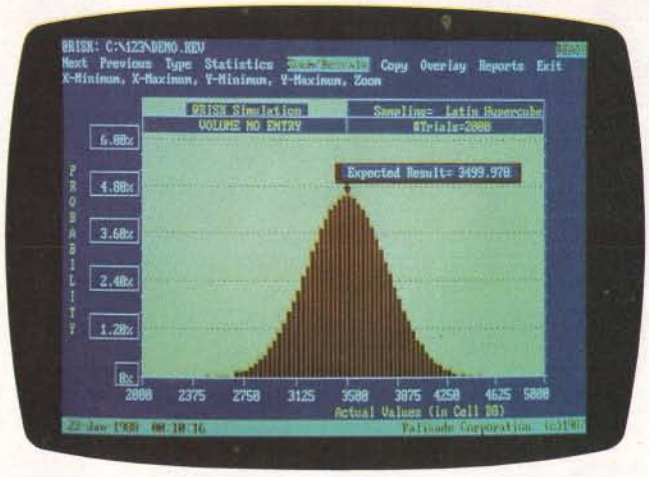

@RISK does risk analysis and simulation.

@Risk Reduces Risk

Question: Which program (along with Lotus 1-2-3 and WordPerfect) is required for all incoming students at the Harvard Business School? Answer: @Risk (pronounced "at risk"), a Lotus 1-2-3 add-in designed for risk analysis and simulation modeling.

@Risk is designed for situations where there is uncertainty in the values you enter in your spreadsheet. The program handles uncertainty by letting you enter a range of values. It then uses probability distributions and simulation techniques to evaluate the situation. @Risk uses Monte Carlo–type simulations, where uncertain cell values are varied across the probability distribution. Each simulation calculates hundreds or thousands of what-if scenarios, and then the program tells you the probability of each outcome occurring.

The output from @Risk's calculations is displayed graphically as probability distributions by @RiskGraph's high-resolution graphics routines. You can display the output in a variety of formats, including histograms, cumulative curves, summaries over ranges of cells, or overlays. All graphics outputs are in a standard .PIC format. @Risk supports VGA, EGA, CGA, and Hercules graphics. It comes with a 30-day money-back guarantee.
Price: $395.
Contact: Palisade Corp., 2189 Elmira Rd., Newfield, NY 14867, (607) 564-9993.
Inquiry 763.

PackRat Mobilizes Personal Information

Polaris calls PackRat a personal information manager and says it's a direct competitor to Lotus' recently shipped Agenda. PackRat is described as a text and graphics database that lets you enter free-form data.

PackRat runs under Microsoft Windows, and the company says Windows' interface and mouse support make PackRat particularly easy to use. For example, you can simply point to a date on a Windows calendar instead of having to type in something like "the day after tomorrow."

PackRat consists of several facilities, including a phone book, phone log, expense log, calendar, agenda, task list, index cards, and disk log file. Each of the facilities has its own local database, but depending on how you store it, the same information can be displayed on more than one list.

The package also has a tickler function that lets you enter reminders. PackRat can give you a full range of reports that you can select and sort in a variety of ways. The program runs on any system that runs Microsoft Windows.
Price: $395.
Contact: Polaris Software, 613 West Valley Pkwy., Suite 323, Escondido, CA 92025, (619) 743-7800.
Inquiry 765.

TaxCalc Plans Your Taxes

Worried about the implications of tax reform on your personal or business nest egg? TaxCalc can help. TaxCalc Multi-Year Tax Planner is the latest incarnation of the company's popular spreadsheet template. Now it's also available as a stand-alone run-time version.

The program gives you 3-year tax analysis through 1990, multiple alternative analysis of the same year, the ability to put up to 12 calculations on-screen at one time, and separate schedules for detail input. TaxCalc also calculates a special report that follows IRS Form 8582, which allocates unused passive losses and activities.

The template version of the program works with all popular spreadsheets, including Lotus 1-2-3, SuperCalc, and PC-Excel. It's also available for Excel on the Macintosh. If you have a previous version of TaxCalc, you can update to the new version for $150.
Price: $395.
Contact: TaxCalc Software, Inc., 4210 West Vickery Blvd., Fort Worth, TX 76107, (800) 527-2669; in Texas, (817) 738-3122.
Inquiry 767.

continued

"TOPSPEED EARNS A STANDING OVATION."

—Kent Porter, Dr. Dobbs Journal



See us at COMDEX
Cashman A348

"...TopSpeed is surely one of the finest new products introduced to date in the PC arena...DDJ doesn't give unqualified raves very often, but there's no question about it in this case; JPI's TopSpeed Modula-2 is first-rate."

Kent Porter
Dr. Dobbs Journal

"JPI Modula-2 looks like another classic in the making. It generates code as good as or better than leading C compilers and the programming environment is a genuine pleasure to use."

Dick Pountain
BYTE Magazine

"I liked all of the hard-disk space that was recovered after I deleted my BORLAND, MICROSOFT, and LOGITECH compilers, because with TopSpeed Modula-2 all the rest are obsolete."

Robert D. Randall
Donnelley Marketing

In England and Europe contact:
Jensen & Partners UK Ltd., 63 Clerkenwell Road, London EC1M 5NP. Phone: (01)253-4333. Compiler Kit: £59.95, TechKit £34.95, VID £34.95, 3-Pack £109.95.
Handling charges:
In UK, add £2 for each product ordered. VAT will be added on software. In Europe, add £4 for up to 3 products, £2 for each add'l product.

The successor of Pascal: JPI TopSpeed™ Modula-2 produces better code than Microsoft C, Turbo C, Logitech Modula-2 and Turbo Pascal 4.0.

Introducing VID: The easy-to-use, source-level debugger. Single-step and trace through source in multiple modules. Examine and modify all variables in symbolic form, including arrays, records, enumerated types and pointers. Point and shoot breakpoints including "One-shot," "Sticky," "Delayed," and "Monitor." Watch both variables and Modula-2 expressions during execution. Automatic variable trace of all variables accessed, and assembler, registers and procedure call-stack trace windows. Package includes symbolic disassembler and execution profiler. 72-page manual.

The Compiler Kit includes: High-speed optimizing compiler (3,000-5,000 lines/min. on a PC AT 8MHz), integrated menu-driven environment with multi-window/multi-file editor, automatic *make*, fast smart linker. All Modula-2 sources to libraries included. BONUS: Complete high-speed window management module included with source. 258-page User's Manual and 190-page Language Tutorial.

The TechKit™ includes: Assembler source for start-up code and run-time library, JPI TopSpeed Assembler (30,000 lines/min.), TSR module, communications driver, PROM locator, dynamic overlays, and technical information. 72-page manual.

System Requirements: IBM PC or compatible, 384K available RAM, two floppy drives (hard disk recommended).


Circle 130 on Reader Service Card



Seamlessly integrated OS/2 version coming soon.



VID (Visual Interactive Debugger): power without complexity.



Sieve benchmark measured by the British Standards Institution (BSI)—25 iterations on an 8MHz AT.

Compiler Kit $99.95
TechKit $59.95
VID $59.95

3-Pack $179.95
(Compiler, TechKit & VID)

To Order:
In the US, call:
1-800-543-5202
In Canada, call:
1-800-543-8452
Or mail us your order with a check, money order, or VISA/MC information. 30-day unconditional money-back guarantee.

Shipping & handling charges:
In North America: add $5, plus $2 for each add'l product. CA residents please add applicable sales tax. Overseas: add $20, plus $8 for each add'l product.

Jensen & Partners International

1101 San Antonio Rd.
Suite 301
Mountain View, CA 94043
Phone: (415)967-3200

TopSpeed and TechKit are trademarks of Jensen & Partners International. Other brand and product names are trademarks or registered trademarks of their respective holders.


A Communications Program for All Systems

If you have different computers running under different operating systems and want a consistent user interface for communications, a program called Term could be just the ticket. The program runs identically under Unix, Xenix, MS-DOS, VMS, and BTOS. Term's developer, Century Software, claims it is keystroke-for-keystroke-compatible with more than 50 computer systems, ranging from micros to superminis.

Term emulates the VT-100, VT-102, VT-52, TeleVideo 925 and 912, WY-50, ANSI 3.64, and Teletypewriter for every terminal attached to a system. It also has a proprietary file-transfer protocol called TermCRC (Term cyclical redundancy check) that lets you do file transfers at up to 115.2K bits per second. It supports XMODEM, Kermit, Modem7, ASCII, Binary, XON/XOFF, ETX/ACK, and line-by-line protocols.

The program uses Lempel-Ziv Welch data compression, which the company claims results in an average 45 percent to 50 percent speed improvement in file-transfer times. Term automatically converts text-file formats when you're transferring files between different operating systems.

Term includes a full-featured script language that you can use to build full-screen data-entry forms, mail gateways, and completely automated remote communications sessions. It's shipped with 35 prebuilt script applications.
Price: Single-user version, $195; multiuser version, $350.
Contact: Century Software, 5284 South 320 W, Suite C294, Salt Lake City, UT 84107, (801) 268-3088.
Inquiry 769.

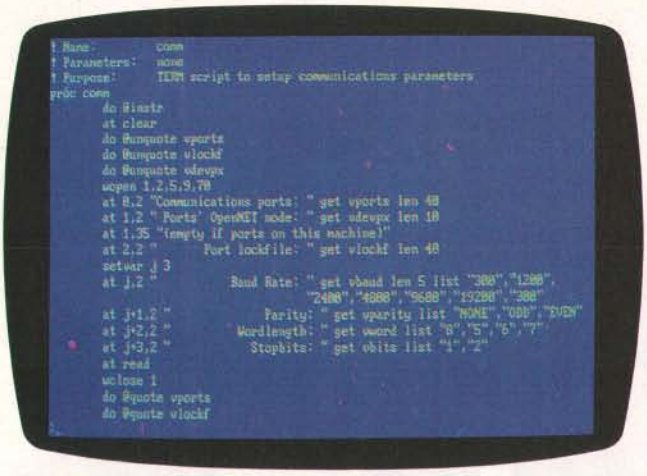

```
! Name:        conn
! Parameters:  none
! Purpose:     TERM script to setup communications parameters
proc conn
        do @inatr
        at clear
        do @unquote vports
        do @unquote vlockf
        do @unquote vdevpx
        wopen 1,2,5,9,78
        at 0,2 "Communications ports: " get vports len 40
        at 1,2 " Ports' OpenNET mode: " get vdevpx len 10
        at 1,35 "(empty if ports on this machine)"
        at 2,2 "       Port lockfile: " get vlockf len 40
        setvar j 3
        at j,2 "           Baud Rate: " get vbaud len 5 list "300","1200",
                                        "2400","4800","9600","19200","300"
        at j+1,2 "              Parity: " get vparity list "NONE","ODD","EVEN"
        at j+2,2 "          Wordlength: " get vword list "8","5","6","7"
        at j+3,2 "            Stopbits: " get vbits list "1","2"
        at read
        wclose 1
        do @quote vports
        do @quote vlockf
```

TERM has a powerful script language.

Manage Files with the Bridge

White Crane Systems' newest version of its Brooklyn Bridge system-to-system file-transfer package has a number of new features, including a dual-directory display, a file manager, and special DOS utilities. It runs on all MS-DOS-compatible systems and transfers data at up to 115,200 bps.

Using installable device drivers, Brooklyn Bridge 2.0 lets you quickly transfer individual files or groups of files with direct commands. But like its competitors—such as LapLink—the new version also has a dual-directory display that lets you see the directories of both machines at once. You use the dual directory along with a 1-2-3-like menu to choose your transfer options.

The new version also has several DOS utilities, such as `BACKUP`, that copy only files that have been created or changed since the last time you used Brooklyn Bridge. There's also `MOVE`, which deletes the original file once it's transferred; `COPY`, which lets you work with multiple files using a single command; and `REMOVE`, which has a security option that ensures that deleted files are unrecoverable.

Brooklyn Bridge 2.0 lets you share hard disks and peripherals between two systems. It has a `RUN` command that gives you multiprocessing by letting you run programs on a slave system at the same time you're doing something else with the master. The program comes with both 3½-inch and 5¼-inch disks, along with an 8-foot universal serial cable. A 50-foot cable is also available.
Price: $139.95; upgrade from previous version, $35.
Contact: White Crane Systems, Inc., 6889 Peachtree Industrial Blvd., Suite 151, Norcross, GA 30092, (404) 394-3119.
Inquiry 772.

NetWare Lands the Mac

Along with MS-DOS and OS/2, Novell's NetWare local area network (LAN) software now supports the Apple Macintosh. If you're using your Mac in an AppleShare network, NetWare's newest version lets you be fully compatible. Because each system continues to use its native operating system, Macintosh, IBM PC, and PS/2 users can continue to see and use the environment they're most comfortable with, while sharing files and data across the network without the need for conversion.

Designed for use with NetWare version 2.15 or higher, NetWare for the Macintosh gives you the fault tolerance, security, and high performance of Novell's network and lets you use a lower-cost IBM-compatible file server. Macs use the standard AppleShare client software to access the NetWare file server. NetWare provides full support of AppleTalk protocols within the server.
Price: $200.
Contact: Novell, Inc., 122 East 1700 S, Provo, UT 84601, (800) 526-5463; in Utah, (801) 379-5900.
Inquiry 770.

Carbon Copy Now Handles Graphics

Carbon Copy Plus, a remote-control communications package for the IBM PC and compatibles, is now available in version 5.0. This newest version adds background file transfer and a universal graphics translator.

The background file-transfer feature lets you transmit a file to another Carbon Copy–equipped computer without interrupting the application you're working on. With the universal graphics translator, the program supports EGA, VGA, Hercules, CGA, and extended CGA cards. All of these are interchangeable, which lets you and the Carbon Copy user on the other end see and interact with the same graphical screen image.
Price: $195; upgrade from previous version, $50.
Contact: Meridian Technology, Inc., 1140 Hammond Dr., Suite A-1125, Atlanta, GA 30328, (404) 390-9152.
Inquiry 771.

continued

ONCE IN A BLUE MOON...COMES A STROKE OF GENIUS.

SCANMAN.™ HANDHELD SCANNING FOR $299.

Pop any image up to 4" x 11" straight into your PC. Clip it, crop it, color it. Resize and rotate it. Merge, save, and store it.

Choose between high contrast or high detail. Import images into any best selling publishing application—PageMaker,™ Ventura™ and many more. All you need is $299, an IBM PC, XT, AT or PS/2 (or compatible) with a spare slot, and five minutes to set up.

Choice of editing colors.









Scan directly into graphics editor for a full range of paint utilities.









Ideal 4" scanning window



TO ORDER—or for the name of your nearest dealer—CALL: 800-231-7717, IN CALIFORNIA CALL: 800-552-8885.

Or fill in the coupon: BY

*Name*_____

*Address*_____

*City/State/Zip*_____

*Phone*_____

Send to: LOGITECH, 6505 Kaiser Drive, Fremont, CA 94555

© 1988 Logitech. PageMaker and Ventura are trademarks of Aldus and Ventura Software, respectively.

ScanMan™
The Hand-Held Scanner.

LOGITECH
Personal Peripherals. Worldwide.

Circle 148 on Reader Service Card (DEALERS: 149)

Microsoft Takes You for a Ride

Four years in the making, Microsoft's long-awaited update to its popular Flight Simulator is ready for takeoff. Version 3.0 has many new features, including the ability to run on high-speed AT clones and support full 640- by 350-pixel, 16-color EGA and VGA displays.

Besides the old familiar Cessna 182 and Sopwith Camel, you can now add more than a little spice to the experience with a Gates Lear Jet and a Crop Duster. Flight Simulator 3.0 now uses pull-down windows to control navigation and communications, flight analysis, environmental conditions, and flight scenarios.

There's also a new learning mode that gives you basic and advanced flight training, aerobatics, and navigation instruction. These are prerecorded flight sessions designed for pilots from beginner's rank all the way to advanced. A flight analysis package tells you how well you've done.

If you're the adventurous sort, you can try a night landing on an aircraft carrier, the ultimate test of flying skill. You can also fly together with other Flight Simulator 3.0 users through a null modem cable or through telephone lines.

Flight Simulator 3.0 runs on the IBM PC, XT, AT, PS/2s, and 100 percent compatibles. You'll need at least 256K bytes of RAM, DOS 2.0 or higher, and a CGA, EGA, VGA, or Hercules adapter.
Price: $49.95.
Contact: Microsoft Corp., 16011 Northeast 36th Way, P.O. Box 97017, Redmond, WA 98073, (206) 882-8080.
Inquiry 775.



Flight Simulator 3.0 steps closer to reality.

Forge a Few Fantastic Fonts

Version 1.1 of Z-Soft's Publisher's Type Foundry includes numerous new features that make electronic publishing packages faster and easier to use. The package, which runs under Microsoft Windows, lets you design and modify type fonts for laser printers.

The biggest new feature is a Windows screen font translator. This lets you see the final version of the font you've designed on-screen, as well as use it in other applications. Other new features include a virtual memory manager for handling large and complex images without performance degradation; data compression; and an editor that lets you set character height and width guidelines. This makes it easier to create uniform-looking fonts.

Version 1.1 now includes full support for the Hewlett-Packard LaserJet II, including both portrait and landscape modes. A DOS utility is included that lets you download your fonts to HP printers without having to use Windows.

Finally, the new version of Publisher's Type Foundry includes several new bit-map and outline fonts. Best of all, if you're a registered owner of the current version, you can get the new version gratis.
Price: $495.
Contact: Z-Soft Corp., 450 Franklin Rd., Suite 100, Marietta, GA 30067, (404) 428-0008.
Inquiry 776.

Describe Files with Words

Ever run into situations where those eight-character-plus-extension DOS filenames become incomprehensible gibberish in a few weeks? Would you remember what you meant by SAPM4755.TXT or APP-2REV.WK1? Extend-A-Name can help. It lets you use filenames or descriptions that are up to 60 characters long.

Extend-A-Name is RAM-resident and uses from 39K bytes to 65K bytes of memory. If you have LIM version 4.0 expanded memory, the program takes only 3K bytes in your base RAM. The program continually scans the screen for your application program's load prompt. It then pops up with a library screen where you can choose a previously created file or make a new one.

The program lets you create libraries, which are logical divisions of subdirectories. They let you further organize your files. Extend-A-Name also has a number of additional features, including copy, delete, assign, rename, tag, and untag. You can perform all these functions without having to leave your application.
Price: $79.95.
Contact: World Software Corp., 124 Prospect St., Ridgewood, NJ 07450, (800) 962-6360; in New Jersey, (201) 444-3228.
Inquiry 778.

On Cue Fights Window Buildup

If you're one of those Macintosh users who keeps switching from application to application, having to return to the Finder (or MultiFinder) every time can be a pain. It can also result in "window build-up" of numerous stacked windows on your Mac desktop. A new program called On Cue claims to solve all these problems.

On Cue gives you a pull-down menu that shows your most frequently used applications. You can move among them simply by clicking on the application you want to use. You won't have to move between overlapping windows on the desktop or wait for folders to open and close.

The program works with all Macs from the 512KE on up. It's easy to configure to your specific needs, and installation is a simple matter of dragging On Cue's icon to your system folder.
Price: $59.95.
Contact: ICOM Simulations, Inc., 648 South Wheeling Rd., Wheeling, IL 60090, (312) 520-4440.
Inquiry 777.

INTERNATIONAL


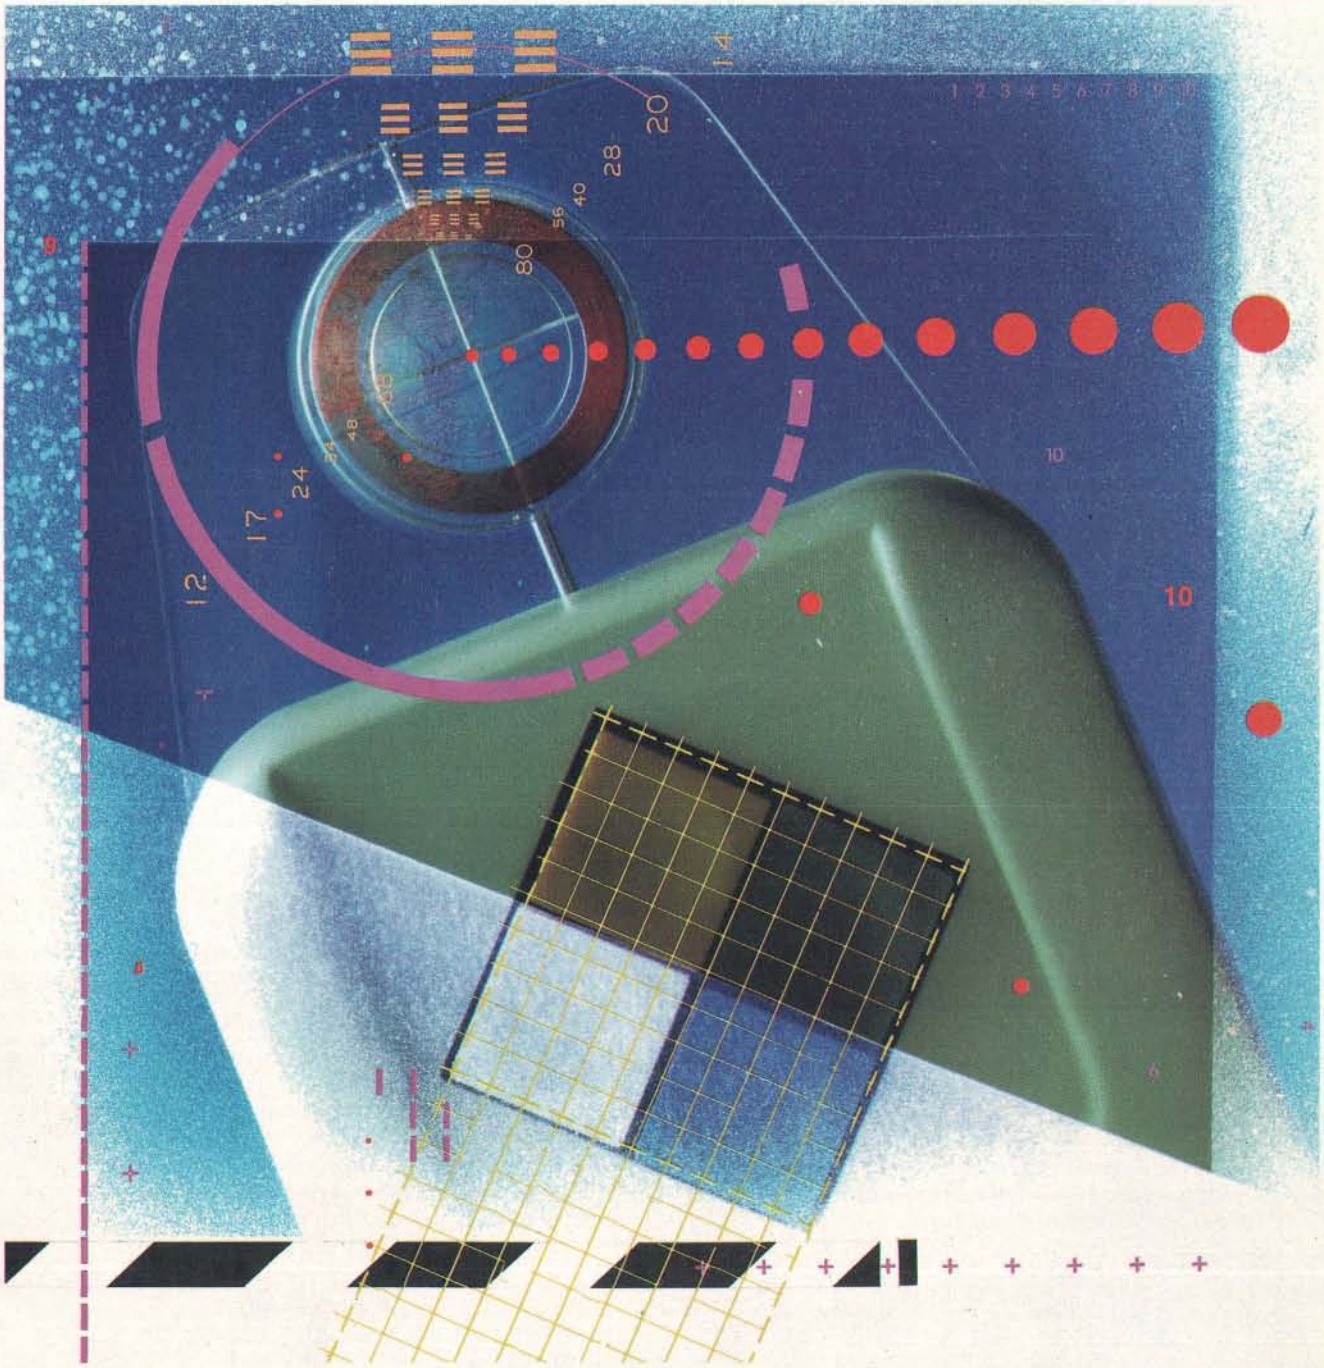


ILLUSTRATION: FRANK MILLER © 1988

CADcontroller™

The Affordable Resolution

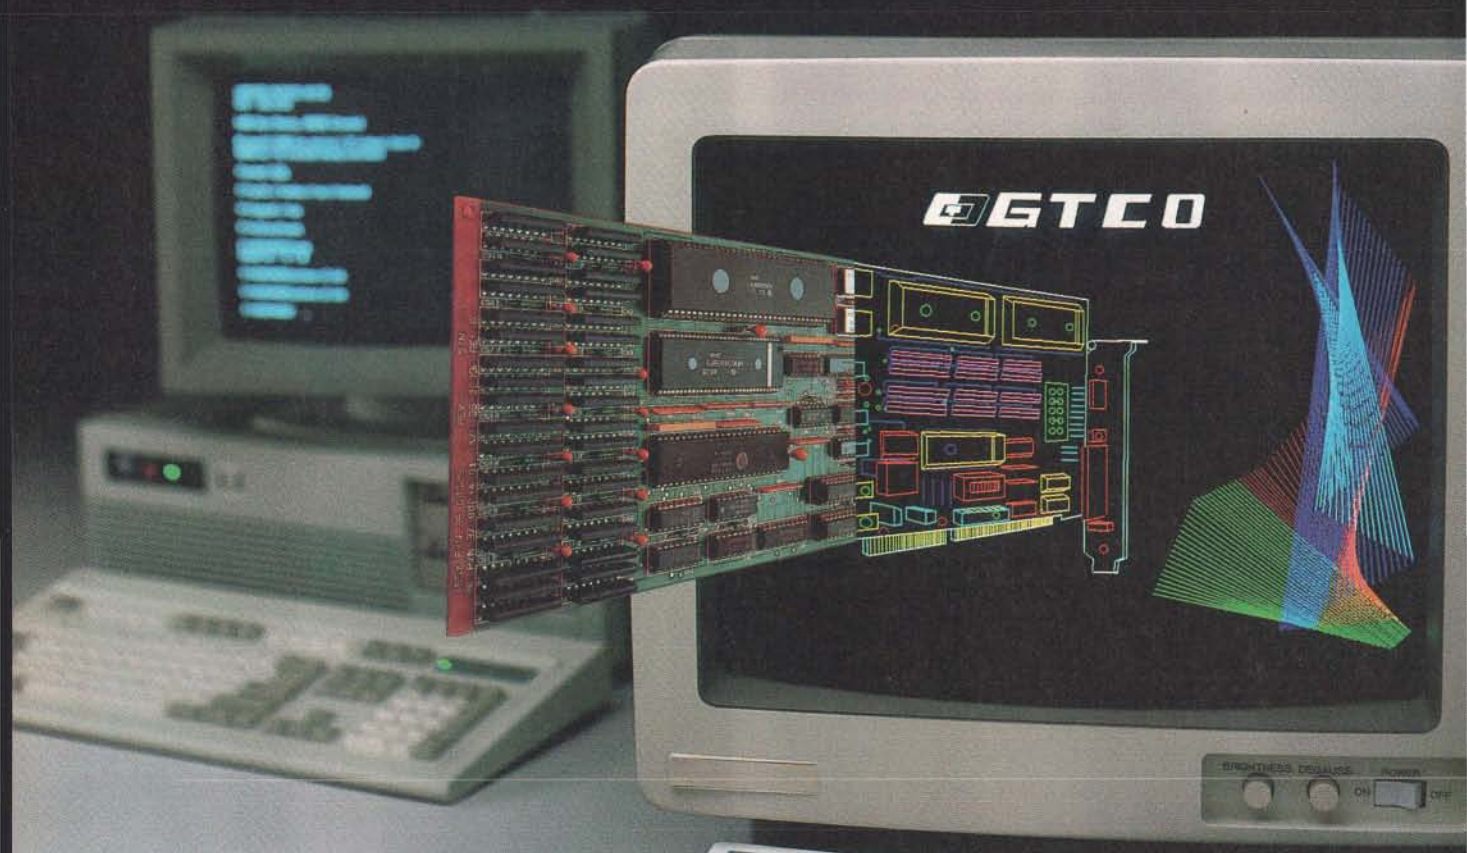

This Multi-Function Graphics Card Combines The Features Your CAD System Requires.

Increase Your Productivity. *CADcontroller* generates color graphics of up to 1024×768 non-interlaced resolution, producing sharp, flicker free images that are easy to see. Its advanced CRT controller will speed up your work by drawing lines at a rate of 1 million pixels/second.

Expand Your System. A built-in COM port is convenient for connecting peripherals. As an added feature, *CADcontroller*'s serial port can power our Micro DIGI-PAD digitizer directly, eliminating the external power supply.

Improve Your Performance. Most CAD programs work best with extra memory, allowing quick access to programs and drawing files. For this purpose, *CADcontroller* can have an optional 1 megabyte of extended RAM on board.

Choose Your Monitor. *CADcontroller* is compatible with both high resolution monitors and popular, low cost, medium resolution monitors such as the NEC MultiSync®. We designed it to be versatile so that you can choose the resolution, bandwidth and output mode your monitor requires.

The Price? So good there's no need to look elsewhere.

Call GTCO For A Brochure On *CADcontroller* And All Of Our Graphic Products.

GTCO Corporation, 7125 Riverwood Drive, Columbia, MD 21046 Phone: (301) 381-6688 Telex: 898471 Fax: (301) 290-9065

Circle 334 on Reader Service Card

BYTE editors offer hands-on views of new products

A Personal Time- and Address-Management Program

Portex SE Integrated Management Software, a personal time- and address-management program from Showerings Business Systems, lets you print out data on Filofax-compatible paper for carrying in a personal organizer binder. The program provides three main functions: an address book, a perpetual diary, and a simple word processor with a built-in spelling checker.

Though Showerings claims you can run Portex on a single floppy disk drive system, the number and size of the files are such that I'd suggest a hard disk drive.

There's no installation routine to go through; Portex attempts to find out what display adapter you are using for itself. Very sensibly, switches are provided to override it if it guesses incorrectly, as it did with my Hercules Incolor card. You can't change the color settings, so if you don't like the ones supplied, monochrome is your only option.

Portex SE gives you the option of choosing from a number of printer drivers, which are supplied on the Help and Utilities disk, including most of the popular dot-matrix printers and the Hewlett-Packard LaserJet printer.

You access the three main application modules from a menu. Portex is not a memory-resident pop-up program, and despite the claim that it is an integrated program, there is no communication between the applications, so you have to close down one before you can enter another.

The Portex Directory, or address book, is a simple database manager. It uses a built-in record format that includes 36 fields, of which 14 are lines of word-wrapped text for comments and notes. You don't have to fill in all the fields.

The actual display of the directory shows only one or two lines from each record, typically a person's name and phone number. To view the whole record, you move the bar cursor onto the selection and press Return. The database automatically stays sorted, and you can choose one of eight ordering schemes (e.g., by surname, title, or history).

The search facility matches partial strings and lets you use the "*" wild card. A supplied utility program converts address files from other programs if they employ comma delimited, newline separated, or fixed-length record formats. I had no trouble converting an address book that I exported from SideKick Plus by printing it to disk.

The print formatting function of the directory is very sophisticated but specialized. Two built-in formats let you print on Filofax forms or on Portex's own smaller pocket-size paper, which you can purchase in die-cut fanfold form for printing on dot-matrix printers. The software lays out the address list so that you can print on both sides of the paper with each new letter starting on a fresh right-hand page. After you tear off the perforated edging, the pages slip straight into a binder.

The Portex Diary shows the days of the week. When you press Return over one of them, a form pops up that is similar to that used in the directory. You can put the details of an appointment or reminder into this form.

Despite its plain visuals, the diary function is very well designed and, in some respects, is the best I have used. It gives you very flexible control over repeating appointments and has a nag feature that I found absolutely invaluable. This nagging reminder, if you do not acknowledge it, reschedules itself automatically for the following day and continues to do so until you stop it by pressing the NAG DONE command. With many computer diaries, if you ignore this type of reminder, you never see it again.

The word processor is basic but adequate for writing short letters. One nice feature is that it can sort blocks of text according to their level of indentation, so that it acts as a simple outliner without the need for special commands.

The spelling checker is based on an engine from Proximity Linguistic Technology; it uses the Collins dictionary and works well. You don't have to learn any complicated modes; you just select SPELL, and it hops from one misspelled word to another, offering you a pop-up window of alternative spellings.

With the word processor and the diary, you can use the special Filofax print format, in addition to any format you may wish to define for yourself.

The version of Portex that I reviewed has an international option that lets you print in one of 11 European languages, including Flemish and Greek. This facility applies only to data items such as the days of the week, times, and dates; the control menus of Portex itself remain firmly in English. Continental users may be so accustomed to U.S. software by now that they will welcome this as better than nothing.

Portex is an unglamorous program with a user interface that looks distinctly old-fashioned, but it's straightforward and easy to use and install. Because printing from a computer remains a black art for some people, the ease with which Portex formats data for a pocketbook will sell a lot of copies.

The fact that Portex is not a memory-resident program detracts from its appeal to more advanced users, but as multitasking environments like DESQview and OS/2 take hold, this may cease to matter quite so much.

—Dick Pountain

THE FACTS

Portex SE Integrated Management Software
£129, including leather Filofax-size binder and special fanfold printer paper

Requirements:
IBM PC, XT, AT, PS/2, or compatible with DOS 2.0 or higher, a minimum of 256K bytes of memory (320K bytes of memory to use the spelling checker), one floppy disk drive, and a dot-matrix, daisy-wheel, or laser printer.

Showerings Business Systems
South Bank Technopark
90 London Rd.
London SE1 6LN, U.K.
(01) 922-8821
Inquiry 440.

A Modula-2 Program Development Aid

Writing a user interface to today's commercially acceptable standards can consume the vast majority of the programming time in a project, but **Amadeus** could reduce that time at least tenfold.

Amadeus, a Swiss program development aid for Modula-2 programmers, is more than a module library but not quite an environment, because it doesn't integrate with the compiler or include a source code editor. It features an extensive set of library modules, which you can use in your own programs, and an interactive resource editor, which you can use to create windows, forms, menus, and other user interface components.

A code generator lets you create source code modules for the interface you design; you can then compile and import the modules into your main program. Amadeus can reduce the interface part of your programming to painting on the screen. The implementation of screen painting in Amadeus is the slickest I have yet encountered; designed for programmers with limited patience, it lets you accomplish just about every operation in one or two keystrokes.

Four 360K-byte 5¼-inch floppy disks contain the demo programs, the editor (with source code for the demos), and the libraries. To run Amadeus, you just copy the editor and the libraries onto your hard disk.

The editor presents a rather Spartan first screen, largely blank with a menu of commands along the bottom. The commands let you show, edit, and delete masks and variables. A mask is a screen window with fields that are associated with named variables, as in most database and 4GL programs.

To define an input form, you choose `Edit Mask...` `Create New`, and then you give the mask a name when the program prompts you. To define a window, you point to its top left and bottom right corners, choose a border style and title bar, and pick the border, text, and entry-field colors from a full-screen palette display. At this point, it displays the window exactly as you have defined it, and you can type field titles and comments straight onto it, with full-screen editing. It takes more time to describe than it does to do. The draw function lets you draw single or double lines with the cursor keys, and it automatically fills in all the corners. Masks you are currently working on are stored in RAM; you can have several masks on-screen simultaneously and switch from editing one to another with a keystroke.

The `Edit Vars` command lets you create new field variables and give them names and types. Many Modula-2 types are supported, such as `CARDINAL`, `INTEGER`, and `LONGINT`, as well as `String`, `Money`, and `Date` and `Records` of all these. You can assign minimum and maximum field sizes and default values to field variables. In addition, there are some fancy types like `List`. A `List` variable lets you define a list of option values (e.g., strings), and when the application is running, the first option appears in the field; you can press the space bar to step through the other options in cyclic fashion. When you have some variables defined, you can go back to `Edit Mask` and add fields to a mask by simply pressing the Insert key and entering the appropriate variable name. You can remove the fields again using the Delete key.

The masks for your application are saved in a binary file called `xxxx.APP`, which you can edit only with the Amadeus editor. You can also choose to save a text version (called `xxxx.TXT`), which contains the specification for each window and variable in a readable ASCII form that you can edit with a standard text editor. And you can generate the two files (`xxxxAPP.DEF` and `xxxxAPP.MOD`) that contain the definition and implementation modules for your new resources; the definition module exports all the field variables and mask names, as well as a procedure called `InitxxxxAPP` that initializes them all. To actually use a mask from your application code, you initiate a single call to the library procedure `Edit Mask` with the name of one of your masks as a parameter. This call triggers a whole interactive session in which you can fill in a form with full line-editing facilities. When `Edit Mask` returns, the results are already in your named variables.

A set of library functions provides the menus, which take as an input parameter a list of strings that specify menu position, color, option names, and format (e.g., pull-down or Lotus style) and return a code for the option you have selected. A library function called `InstallHelp` lets you assign procedures to shifted keys, which are polled while `ReadKbd` is waiting for user input, so you can add pop-up accessories to your application very easily. An HP41-style calculator is supplied as a demonstration.

An important Amadeus data structure is the Message Table, which lets you keep your application's text, including menu options and mask prompts, in a separate ASCII text file rather than embedded in the code. By using this feature, you can write applications that are easy to translate into other languages and update them without recompilation.

The libraries contain hundreds of routines in 28 modules that cover keyboard input, formatted I/O, windowing, a simple text editor, a database package modeled on the Borland Turbo Pascal Toolbox, and a module that interfaces to SoftCraft's Btrieve database engine. They are documented in a thick paperback user's manual, the utility of which is somewhat compromised by the absence of proper page numbers.

Amadeus could significantly reduce a project's programming time. Tools of this quality are needed if Modula-2 is to compete with C as a production language.

—Dick Pountain

THE FACTS

Amadeus Modula-2 Program Development Tools
495 Swiss francs; 10 Swiss francs for a demo disk

ID Nouvelles SA
av. des Figuiers 20
1007 Lausanne, Switzerland
(21) 27-2630
Inquiry 441.

Requirements:
IBM PC, XT, AT, PS/2, or compatible with at least 256K bytes of memory, a hard disk drive, and a Logitech, SDS, or Taylor Modula-2 compiler. Also available for the Logitech VAX/VMS compiler. Versions of Amadeus for the Stony Brook and JPI Modula-2 compilers are currently in preparation.

NEW M380 LINE: NOW MORE THAN EVER THE SPEED AND POWER TO GROW WITH YOU.



To keep you abreast of advances in the important 80386 sector, Olivetti has up-dated its powerful 386-based M380 line.

The new line is the fastest on the market today and more powerful XP (extra performance) models are introduced at the top end. At the top of the new line is the M380/XP5 floor-standing PC. It has a clock speed of 20 MHz. Hard disk options range up to 300 MB. The XP5 also offers the new graphic subsystem OVC (VGA-compatible). The new M380/XP3 has 2 MB RAM and a clock speed of 20 MHz, plus a 135 MB hard disk unit. It too has the OVC graphic subsystem as part of the standard configuration.

The new M380/XP1 compact desktop PC has an 80 MB HDU. With a clock speed of 20 MHz, it offers 1 MB RAM and OVC graphic subsystem as standard. The new M380/C has an improved HDU capacity of 63 MB, OVC graphic subsystem and a clock speed of 16 MHz. All



M380 models operate in MS-DOS, XENIX/V and MS OS/2 environments. And all include the WINDOWS 386 package to meet all current and future applications.

The new M380 line. Yet another way in which Olivetti is honouring its commitment to bring you the choice of freedom.

MS-DOS, XENIX/V, OS/2 and MS-Windows are registered trademarks of Microsoft Corporation.

OLIVETTI PERSONAL COMPUTERS.

CHOICE OF FREEDOM.

Circle 347 on Reader Service Card

A Dual-Control Mouse for MS-DOS Compatibles

Mitsi Mouse has a two-button control system and features teflon feet and a silicon-coated rotary ball that Mitsubishi claims give you ease of movement over most surfaces. It is compatible with Microsoft Mouse and MS-DOS-based CAD, desktop publishing, and graphics-environment programs, such as GEM and Microsoft Windows.

A D-9 serial connector lets you connect Mitsi Mouse to your IBM PC AT or compatible computer. If you have an IBM PC, XT, or compatible computer, an adapter is available for D-9–to–D-25/RS-232C serial ports.


You can purchase Mitsi Mouse as a stand-alone system or in a bundled utility software package with a keyboard emulator program, a pop-up menu, a mouse driver, and TelePaint drawing software.

The keyboard emulator program gives Mitsi Mouse the ability to govern screen cursor movements in desktop publishing, spreadsheet, and word processing applications. The pop-up menu lets you select up to 40 user-programmable macro commands, with three sets of preprogrammed macros (for Lotus 1-2-3, WordStar, and WordPerfect) supplied on the floppy disk. You can use the mouse driver program whenever a graphics application lacks a built-in Microsoft Mouse–compatible driver. With the TelePaint drawing software, you can generate full-color presentations, including maps, charts, and graphs, as well as freehand drawings and slides.

Price: $79.50 U.S. alone; $94.50 U.S. for the bundled package.

Contact: NEOS International Computer Products, GmbH, Fliederbogen 1, D-2399 Tarp, West Germany, (04638) 7499.

Inquiry 865.

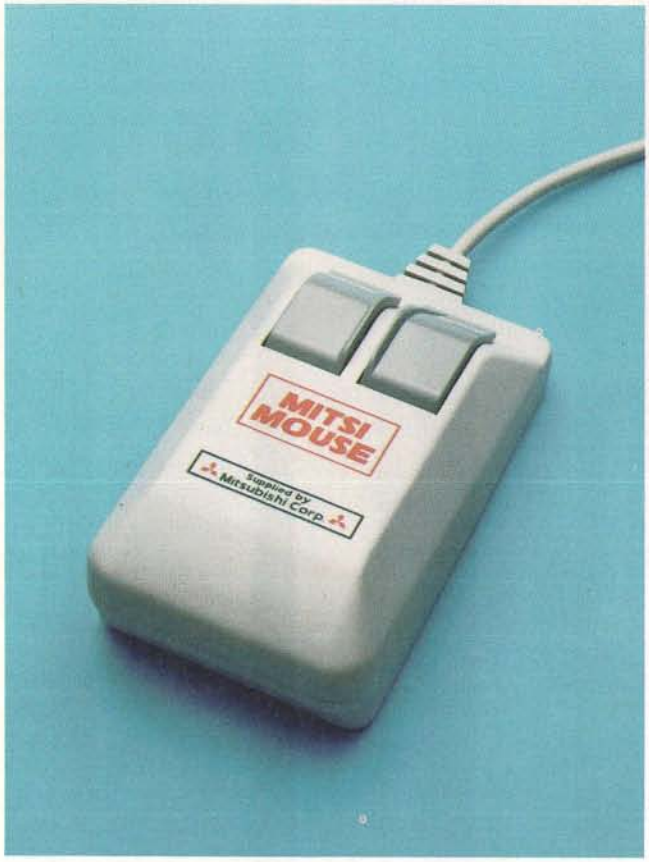

Mitsi Mouse has a two-button control system.

An IBM PC AT–Compatible Portable

The Golf from Goupil is an IBM PC AT–compatible computer designed to serve as a light, transportable, desktop computer or as a mains-powered portable; it has no provision for batteries. The computer comes with an 80286 CPU running at 10 MHz, 640K bytes of memory, one 3½-inch floppy disk drive, and two internal expansion slots, which can be the 8-bit IBM PC or 16-bit IBM AT type. Also included is one RS-232C serial port, one Centronics parallel port, and a Microsoft mouse port. The Golf comes in a flat case, measuring 335 by 370 by 67 mm, with a separate keyboard. The operating system is MS-DOS 3.21 or Xenix.

The video system consists of an on-board VGA chip set. The flat screen display uses the newest "super-supertwist" technology, which produces a 640- by 480-pixel black-on-white image with fluorescent backlighting; the 20-to-1 contrast ratio approaches that of print on paper. For desktop use, you can connect the Golf to a standard VGA color or monochrome monitor.

An optional portability kit consists of a flat-screen display and a compact 102-key enhanced keyboard. The screen and keyboard fold flat onto the console unit so you can carry it in a shoulder bag. Storage options include a 40- or 100-megabyte hard disk drive, an external 5¼-inch floppy disk drive, and a 40-megabyte tape streamer.

Price: 20,000 French francs and up with a desktop monitor; 6950 FF for the LCD screen; 1000 FF for the carrying bag.

Contact: SMT Goupil, 3 Rue des Archives, 94000 Creteil, France, (1) 43-99-1515.

Inquiry 988.

If you would like your new product considered for publication in the international section of BYTE, send press releases to BYTE, Attention: Martha Hicks, One Phoenix Mill Lane, Peterborough, NH 03458, U.S.A.; or Dick Pountain, BYTE, McGraw-Hill Publishing Co., 34 Dover St., London W1X 3RA, U.K.; or Shouzou Watanabe, Editor in Chief, Nikkei BYTE, 1-1, Kanda-Ogawamachi, Chiyoda-ku, Tokyo 101, Japan. All press releases must contain price information, address, and telephone number.

Multiple Programs on Your Atari ST at One Time

You can have more than one program in your Atari ST at one time with Twist, a switcher program from HiSoft. It lets you treat whole programs as if they were a desk accessory, sharing the machine with another program.

Twist works with most Atari ST applications and with GEM programs. It understands programs running with different screen resolutions—up to 14 programs at once, memory permitting. A shared RAM disk is included. You can invoke Twist by pressing a key or through the Twist control program.

Price: £39.95.

Contact: HiSoft, The Old School, Greenfield, Bedford MK45 5DE, U.K., (0525) 718181.

Inquiry 877.

continued

USA SOFTWARE IN EUROPE!
NO COSTLY PHONE AND FREIGHT CHARGES!
QUICK DELIVERY! LOW PRICES!

Come pay us a visit at our new address. We carry over 1,200 products! Call today for Price List.

386 PRODUCTS: Price

PharLap 386\ASM/Link (Intel 80386 Development System) $ 699
ADVANTAGE 386 C (Protected mode C Compiler) ..... $ 1079
High C/386 (Use full 32 bit power of 80386) ..... $ 1437
Concurrent DOS 386 Prgmr's Toolkit (By Digital Research) .. $ 209
ADVANTAGE 386 Pascal (Protected mode Pascal/386) ..... $ 1079
FoxBASE+/386 (Run any dBASE III Plus program without modification) . $ 565
Microsoft Windows /386 (Multiple applications environment) ..... $ 231
Microport Sys. V/386 Complete (Runtime, Development System) $ 1191
NDP C-386 (Globally optimizing C Compiler. Mainframe quality code) .... $ 805
NDP Fortran-386 (Protected mode; recompiled 286 code-3-8 times faster) $ 805
OS/386 Software Dvlpr's Kit (Port exist. appls. to protec. mode) .. $ 649
Paradox 386 (Powerful, easy to use database) ..... $ 990
Professional Pascal 386 (Handles large systems of modules) $ 1409
SCO XENIX Sys. V Comp. 386 (Op. Sys, Dvlpt. Pak & Text Prep.) $ 1919
Microport System V/386 Complete (Runtime, dvlpt. sys.) ..... $ 1191
VM/386 (Control Program. Turns 1 386 machine into many!) ..... $ 299

ARTIFICIAL INTELLIGENCE:

Arity Combo Pak (File interchange, compiler/interpreter) .... $ 1319
Golden Common Lisp (Training and Development System) $ 1005
MuLISP-87 Development System (Formerly Microsoft Lisp) ... $ 549
Turbo PROLOG (Complete A.I. environment) ..... $ 169
Turbo PROLOG Toolbox (Over 8,000 lines of Turbo Prolog source) .. $ 115
Vp Expert (Complete Expert System Development Tool) ..... $ 125

ASSEMBLERS LINKERS & TOOLS:

ADVANTAGE Disassembler (Disassemble .EXE & .COM files) .. $ 315
Microsoft Macro Assembler (Fastest assembler dvlpt. sys.) $ 179
Plink 86Plus (Overlay linkage editor) ..... $ 453
Sourcer (Create commented source code listings) ..... $ 155

BASIC LANGUAGE & TOOLS:

FINALLY! (BASIC Graphic subroutine library) ..... $ 135
Microsoft Quick BASIC (With editor & debugger) ..... $ 121
ProBas (232 BASIC routines) ..... $ 163
Turbo BASIC (Editor, compiler & debugger) ..... $ 115

BUSINESS GRAPHICS:

Boeing Graph (3-D presentation graphics) ..... $ 359
Dan Bricklin's Demo II (produce prog. prototypes, Demos & tutor.) $ 265
Gem Collection (Produce documents w/ integrated text & graphics) .... $ 105
Pizazz Plus (Full EGA support, 200 colours) ..... $ 214

C LANGUAGE:

High C (Protected mode, compiles across machines & op. sys.) . $ 945
Instant C/16M (Protected mode. Up to 16MB) ..... $ 1205
Microsoft C Compiler (Includes QuickC & CodeView) ..... $ 527
Microsoft Quick C Compiler (Very fast C compiler) ... $ 121
Turbo C (Pull down menus with windows) ..... $ 117

C LIBRARIES AND TOOLS:

dBASE C Tools Prgmr's Lib. (Built in C func. for dBASE III Plus) . $ 101
C-scape (functions library for screen design & code generation) $ 395
C ASYNCH MANAGER (Interpreter driven polling control) $ 157
C TOOLS PLUS (Full spectrum of general utility functions) .. $ 157
C Utility Library (Over 400 functions) ..... $ 213
Greenleaf Communications Library (Asynch. comm. library) . $ 247
Greenleaf Functions Library (300 functions with all DOS & BIOS) $ 227
Multi-C (Library for mult-tasking programs) ..... $ 199
Turbo C TOOLS (Compiled C functions for Turbo C) $ 159

COMPUTER AIDED DESIGN:

AutoCAD Release 9 (Most popular CAD package) ..... $ 3995
AutoSketch Enhanced (Full-functions CAD for line art) ..... $ 118
Design Cad 3-D (Export 3D drawing to 2D packages) ..... $ 297
Generic Cadd (Mechanical drafting & design. 200 colors/line types) ..... $ 105

COBOL LANGUAGE AND TOOLS:

COBOL spII (Powerful screen management tool) ..... $ 519
Level II COBOL (Combines best of mainframe & PC capabilities) ..... $ 459
Microsoft COBOL Compiler (Move appl. from mainframes to PC) $ 817
Realia COBOL (Compile larg. prog. than mainframe or micro Compiler) $ 1398
RM/COBOL 85 Development System (Fastest devel. system) $ 1555
Screenplay (Screen management) ..... $ 249

CROSS DEVELOPMENT:

Aztec C Cross Devel. System (DOS to many different targets) ..... $ 1055
Lattice 68000 C Cross Compiler (PC host to 68K target) ... $ 605
Lattice Z-80 C Cross Compiler (PC host to Z-80 target) .... $ 605
QUELO 68000 Cross Asm/Link (PC host to 6K target) ..... $ 779

DATABASE AND FILE MANAGEMENT:

Btrieve (Keyed indexed file management system) ..... $ 299
Xtrieve Report Option (Report writer) ..... $ 193
Xtrieve (Menu driven Query system) ..... $ 323
C-ISAM (C functions for indexed file system) ..... $ 343
c-tree with r-tree (Btree file handler with report generator) .... $ 785
CLIPPER (Compiles dBASE into .EXE files) ..... $ 723
d-tree (Comprehensive application generation modules) ..... $ 599
dB/RA (Arrays/windows program) ..... $ 285
dB_QUERY (Query for dB_Vista) ..... $ 297
dB_VISTA (Build, maintain & access database files) ... $ 297
dBC III Plus (ISAM package & C interface to dBASE III Plus) $ 845
dBFast (Turbo compiler for dBASE III Plus) ..... $ 115
DBXL Diamond (Extended lang. features for dBASE III Plus) $ 209
Eagle-Emerald Bay (Advanced database progmg. language) . $ 511
FoxBASE + (Run dBASE programs without modification) ..... $ 373
Informix-4GL (4th generation application language) ..... $ 1497
Informix-ESQL (Imbed SQL statements & incorporate into C Programs) . $ 897
Informix-SQL (Relational DBMS) ..... $ 1197
Knowledgeman/2 (Integrated system with menus & on-line help) ..... $ 613
Magic PC (Eliminate coding, cut months of development time) ..... $ 283
ORACLE 1-2-3 (Database add in for Lotus 1-2-3) ..... $ 245
Paradox 2.1 (Powerful, easy to use database) ..... $ 763
QUICKSILVER (dBASE III PLUS compiler) ..... $ 620
R&R Clipper/Foxbase+ Module (Report writer) ..... $ 65
R&R Relational Report Writer (Report writer for dBASE) $ 185
R:BASE for DOS (DBMS with high level programming language) ..... $ 803
Tom Rettig's Adv. Prgmr's Library (175+ dBASE III +(mtns.) .. $ 145
XQL (Relational DBMS for programmers) ..... $ 959
Xtrieve (Menu driven Query system) ..... $ 323

DEBUGGERS:

Advanced Trace-86 (Symbolic debug. & Asm. Interpreter) .... $ 233
Periscope I (With breakout switch & submarine board) ..... $ 839
Periscope III 10MHz (w/ 512K write protec. RAM & Breakout switch) $ 1679

DESKTOP PUBLISHING:

Byline (Use with dBASE III Plus or Lotus 1-2-3) ..... $ 346
PageMaker (Integrate text and graphics) ..... $ 1025
PagePerfect (European fonts, WP, Graphics and File mgmt.) .. $ 505
Ventura Desk Top Publisher (Professional page layout system) .. $ 905

DISK, DOS, BACKUP & KEYBOARD

Disk Optimizer (Logically organizes data on hard disk) ..... $ 75
Fansi-Console (Fast, powerful screen & keyboard utilities) .... $ 110
FastBack Plus (Backup utility for 5.25" & PS/2 3.5") ..... $ 175
FastTrax (Disk optimizer) ..... $ 57
Norton Advanced Utilities (Data recov./security, disk mgmt., etc.) $ 149
On-Call (Memory resident. Load up to 40 programs) $ 82
PC/Tools Deluxe (Memory resident disk & file utility) ..... $ 75
Q-DOS II (Hard disk file management) ..... $ 89
SpeedStor 286 (Integ. hard disks to PC/XT/AT or compat.) .. $ 143
Vfeature (Turn one or two hard disks into many) ..... $ 117
Vopt (Make your hard disk last longer) ..... $ 75
Window DOS (Memory resident disk manager) ..... $ 57

EDITORS:

Brief (Most popular customizable text editor) ..... $ 303
MKS VI (Complete implementation of UNIX VI full screen editor) ..... $ 109
SPF/PC (PC version of mainframe ISPF) ..... $ 299
VEDIT PLUS (Windows, menus, word processing) .... $ 191

FORTRAN LANGUAGE & TOOLS:

Grafmatic & Plotmatic (75 graphics routines and plotter drivers) ..... $ 293
Lahey FORTRAN F77L-EM/32 (Mainframe power, extend. mem.) $ 1254
Microsoft FORTRAN Compiler (Mainframe speed, por. code) .. $ 527
No Limit Fortran Library (129 func; graphics, screen cont., comm.) $ 135
RM/Fortran Development Sys. (Incl. Hollerith & Hex constants) $ 739

GRAPHICS LIBRARIES:

ADVANTAGE Graphics (Low-level graphics/window mgr.) ..... $ 265
Essential Graphics (Easy to use. No royalties) ..... $ 285
GraphiC (Scientific & engineering graphics) ..... $ 479
GSS Graphic Dvlpt. Toolkit (Complete dvlpt. environ.) ... $ 579
HALO'88 (190 functions. Supports many languages) .. $ 349
MetaWINDOW/PLUS (Graphics primitives & window manager) .... $ 339

LOCAL AREA NETWORKING:

Btrieve/N(Supports most networks) ..... $ 719
dB_QUERY Multi User (Relational view of LAN database) . $ 747
dB_VISTA Multi User (Supports simultaneous users) $ 747
FoxBASE+ Multi User (Ultra fast dBASE compiler) .... $ 475
Knowledge Network (Easy to install without training) $ 199
LifeNet 6 Users for 286 or 386 (Powerful & economical LAN) ..... $ 626
Novell Advanced NetWare 286 (Industry standard LAN) . $ 3119
SFT NetWare 286 W/Keycard or DCB (W/Sys. Fault Tol.) . $ 5639
Paradox For Network (Easy to use DBMS. Up to 6 users) $1085

MACINTOSH PRODUCTS:

Copy II Mac (Archival backup for copy protected software) ..... $ 45
FastBack (Backup utility) ..... $ 95
FoxBASE+ for Mac. (Powerful, easy to use DBMS) ..... $ 376
FullWrite Professional (Word processing, PostScript support) ..... $ 452
Guide (Hypertext. Store & retrieve information intuitively) ..... $ 245
LapLink Mac (Connect PC to MAC. Transfer files rapidly) .... $ 149
MacBrain (Best Neural net system available) ..... $ 305
Microsoft FORTRAN Compiler (Mainframe speed, port. code) . $ 338
Microsoft BASIC Compiler for Mac (Long awaited for Mac.) . $ 225
Pixel Paint (Full repertoire of minicomputer paint programs) .. $ 471
Turbo Pascal (Compiles 27,000 lines per minute!) ..... $ 117

MODULA-2 LANGUAGE & TOOLS:

LOGITECH Modula-2 Dvlpt. Sys. (Compiler pack plus toolkit) $ 303
Repertoire/Btrieve Toolkit (Integrate Repertoire w/Btrieve) $ 155

OBJECT ORIENTED PROGRAMMING:

ACTOR (Supports MS Windows. Royalty free) ..... $ 599
ADVANTAGE C++ (Implementation of AT&T's C++) ..... $ 717
Smalltalk/V (Pure object oriented programming. Fast graphics interface) . $ 143
Smalltalk/V 286 (Contains DOS extender. Adress 16MB) ..... $ 285
Smalltalk/V Communications (Communications) ..... $ 75
Smalltalk/V EGA/VGA Colour Pack (Integrate EGA/VGA) .. $ 75
Smalltalk/V Goodies (Extend Smalltalk/V environment) ... $ 75
Zortech C++ Compiler (True C++ compiler) ..... $ 155

OPERATING SYSTEMS & TOOLS:

A.I. Dvlpr's Kit Operating Sys. (Protect. mode command shell) . $ 649
Microport DOS Merge 386 (DOS/UNIX environment) ..... $ 531
MKS Toolkit (Optimize DOS environment with over 110 UNIX tools) ..... $ 239
QNX Dvlp. Sys. (Multiuser, multitasking realtimeLAN OpSys) ..... $ 851
SCO VP/IX FOR XENIX 386 (Multi-user, -task. DOS under XENIX) $ 599
SCO XENIX System V Complete 286 (OpSys, dvlpt. pack) .... $ 1559
System V Complete PS/2 Mod. 50/60 (Opsys, dvlpt. pack) .. $ 1679
Microport Sys. V/AT Comp. (Runtime, Dvlpt. Sys., & Text prep.) . $ 861
Microport System V/AT Runtime (Op. Sys., 180+ utilities) ..... $ 333
Wendin-DOS (Multitasking, multiuser Op. Sys.) ..... $ 125

OTHER LANGUAGES, TOOLS & MISCELLANEOUS:

Ada Vantage Compiler (Fast, efficient Ada) ..... $ 1197
Baby/36 Automated Conv. Sys. (Run Sys/36 RPG II on PC) ..... $ 830
Boeing Calc. (3D larger-than-memory spreadsheet) .... $ 359
Carbon Copy Plus (Communications. Remote PC access) .... $ 239
CC EXPRESS (Automated, unattended communications) ..... $ 419
DESQview (Multitasking, windowing, over 640K) ..... $ 149
Framework II (Spreadsheet, Database, WordProc. & Comm.) . $ 715
MathCad (Statistical and Mathematical) ..... $ 415
Microsoft Excel (Spreadsheet) ..... $ 581
Microsoft Project (Project Management) ..... $ 575
Microsoft Word (Word Processing) ..... $ 527
Mirror II (Asynch file transfer & data manager) ..... $ 83
PC/FORTH+ (Forth Development System) ..... $ 315
Personal REXX (Rexx language interpreter) ..... $ 159
PVCS Personal (Version & source code control) ..... $ 185
Remote 2 (Powerful remote PC to PC communications) ..... $ 185
RPG II Compiler (IBM System/36 compatibility) ..... $ 1055
RUNOFF (Text formatter) ..... $ 73
SideKick Plus (Desktop management tools) ..... $ 231
Sideways (Print text that's too wide for your printer) ..... $ 76
SmarTerm 220 (Terminal emulation) ..... $ 217
SSP/PC Scientific Subroutine Library (Over 140 subroutines) $ 389
TimeLine (Project management with mainframe power!) ..... $ 613
WordPerfect–French (French Word Processing) ..... $ 501

PASCAL LANGUAGE:

Microsoft Pascal Compiler (For large programs up to memory limit) $ 353
Pascal-2 (Fully integrated development system) ..... $ 417
Professional Pascal (Squeeze large programs into unbedded spaces) ... $ 945
Turbo Pascal (Compiles 27,000 lines per minute!) ..... $ 117

PASCAL LIBRARIES AND TOOLS:

Pascal TOOLS (Extend power of IBM & Microsoft Pascal) ..... $ 173
T-Debug Plus (Powerful debugging for Turbo Pascal) ..... $ 59
Turbo Analyst (Turbo Pascal Utilities) ..... $ 95
Turbo ASYNCH PLUS (Communications Library) ..... $ 157
Turbo Pascal Database Toolbox (Database building kit) ..... $ 115
Turbo Pascal Editor Toolbox (Build text editor or w.p.) ..... $ 115
Turbo Pascal Graphix Toolbox (High-res graphics) .... $ 115
Turbo Pascal Num. Methods Toolbox (Sci./Eng./Math) ..... $ 115
Turbo POWER TOOLS PLUS (For Turbo Pascal 4.0) .. $ 179
Turbo Professional (Fast general purpose library) ..... $ 125

SCREEN DESIGN AND WINDOWING:

Greenleaf DataWindows W/Src. (Virt. wind. Many data types) $ 305
Microsoft Windows (Multiple applications environment) ..... $ 121
Development Kit (Develop graphical multitasking windows) ..... $ 585
Multi-Windows (Multitasking, simultaneous window display) ..... $ 389
PANEL Plus (Screen mgmt. library with source, graphics mode) ..... $ 505
PC/Forms (Forms management for C & Pascal) ..... $ 215
VCScreen (Screen painter/code generator) ..... $ 215
Vitamin C (Windows, data entry) ..... $ 275
Windows for Data (Windowing, data entry) ..... $ 359

TRANSLATORS:

BAS_C Commercial (Basic to C) ..... $ 305
BAS_C Economy (Basic to C) ..... $ 164
BAS_PAS Commercial (Basic to Pascal) ..... $ 229
BAS_PAS Economy (Basic to Pascal) ..... $ 124
dBX dBASE to C Translator (Run dBASE III Plus in C environm.) . $ 721

UNIX/XENIX PRODUCTS:

BASIC Compiler for Sys. V/286 (Comp. W.BASICA & Q.BASIC) $ 719
Btrieve (Keyed, indexed file management) ..... $ 719
SCO FoxBASE + for XENIX 286 (Run dBASE prog. W/O mod.) . $ 959
Terminal Control for XENIX (Windowing & data entry) ... $ 1199

USA SOFTWARE
LIMMATQUAI 116 • 8001 ZURICH, SWITZERLAND
PHONE: (01) 252-6710 FAX: (01) 2527795 TELEX: 814460
(Attn: USA SOFTWARE)

Terms: EUROCHEQUE, AMERICAN EXPRESS, VISA, MASTERCARD, EUROCARD, C.O.D.
30 day billing for qualified companies in Switzerland.
Special discounts for large or corporate buyers. All prices in US dollars.
Add shipping charge from Zurich at prevailing rates.
Prices subject to change without notice.
Hours: 8:30 AM - 5:30 PM.

B1088

Enhance Imaging and Graphics on Your Mac

Torch Computers offers the RSVP (Raster Scan Video Processor) board, the first of a new range of products developed to enhance the imaging and graphics capabilities of the Apple Macintosh II. It provides an 8-bit video input and frame store with software-programmable resolutions, including the picture requirements of European and U.S. broadcast TV standards.

The board uses a TMS320C25 digital signal processor (DSP), which lets you create and manipulate display lists that control operations such as frame grabbing, buffer switching, palette manipulating, zooming, and panning. The DSP also controls overlays and keying, as well as providing programmable frame interrupts for synchronization purposes. In addition, you can program the DSP for dedicated image processing and other graphics functions.

Output look-up tables provide 256-level gray scale or 256 colors from a palette of 16.7 million. If you install three cards, the system can output 24-bit true color. Input look-up tables let you perform thresholding and contrast enhancing at full-frame rate, as well as mix live video and graphics with the overlay and keying functions.

The supplied software includes an interface with slot configuration and a dedicated card driver; a C library and associated declaration header files, which let you access extra driver functions; and a demonstration program that illustrates the use of the library, QuickDraw, and downloadable DSP functions.
Price: £1400.
Contact: Torch Computers Ltd., Abberley House, Granhams Rd., Great Shelford, Cambridge CB2 5LQ, U.K., (0223) 841000.
Inquiry 869.



The Raster Scan Video Processor board for the Mac II.

Add a Resource Editor to Your Atari ST

WERCS (WIMP Environment Resource Construction Set) is a resource editor that lets you create dialog boxes, menus, icons, and alert boxes on your Atari ST with a GEM user interface.

You can run WERCS in any resolution, which lets you use all 16 colors, if required. It also has a `Find` command for navigating around your files, and it gives you the option of automatically naming objects. You can cut and paste objects and whole trees.

WERCS accepts resource files from other resource editors and is capable of producing header files for languages such as assembly, C, BASIC, Pascal, FORTRAN-77, and Modula-2. Header files can generate identifiers of up to 16 characters with flexibility over uppercase and lowercase. Example programs and libraries are included, for you to use with these languages.
Price: £29.95.
Contact: HiSoft, The Old School, Greenfield, Bedford MK45 5DE, U.K., (0525) 718181.
Inquiry 878.

Fuzzy Relational Inference Language

FRIL (Fuzzy Relational Inference Language) is a Prolog-based logic programming language developed at the University of Bristol and now available in a commercial implementation from Equipu A.I.R. Ltd.

The language includes Prolog as a subset, with the addition of Support Logic Programming, which is the ability to reason with uncertain data. Support Logic works by mustering support for and against particular facts and by quantifying this support so that predicates in a logic program can deal with it.

You can use FRIL to program heuristic or rule-of-thumb solutions to problems where the data is uncertain. The Prolog subset of FRIL uses the Lisp-like prefix syntax of MicroProlog, and an external language interface lets you link in routines written in C, Pascal, and FORTRAN.

The IBM PC version of FRIL 4.0 uses virtual memory, either based on expanded memory specification or on a RAM or hard disk drive. Versions are also available for VAX, Sun, and Apollo workstations.
Price: £495.
Contact: Equipu A.I.R. Ltd., 184 Hotwell Rd., Bristol BS8 4SG, U.K., (0272) 213427.
Inquiry 980.

Retrieve and Display Pictures with Text Files

Pixie View lets you take a video picture from your disk and display it with associated text files on your computer screen. You can display the picture and text files in any size window and place it anywhere on the screen, claims the company. The program lets you rescale the picture to fit a window and scroll the text up, down, and sideways.

You can create, process, edit, and write pictures to a disk with Pixie's Electronic Darkroom (see What's New International, page 96A18, in the December 1987 BYTE), and then let the Pixie View program convert the picture to the format required by your graphics screen.

Pixie View runs under DOS 2.0 or higher on the IBM PC XT, AT, and compatibles with sufficient memory to run the database and Pixie View together (Pixie View requires no more than 128K bytes of memory to hold the program and a large picture). It requires an EGA or Viking screen.
Price: £49.50.
Contact: Pixie Computer Vision Systems Ltd., 3rd Floor, Rosemount House, Rosemount Ave., West Byfleet, Surrey KT14 6LB, U.K., (09323) 52776.
Inquiry 993.

continued



Phone 0800 678222

If Oracle said that you could develop SQL applications on your PC today, for £399, how would you respond?

Oracle's fourth generation products for the DP market have established it as the acknowledged leader in relational software.

Now the company is offering you the opportunity of experiencing all the power and flexibility of Oracle on the PC.

And although the implications for your organisation are huge, the cost of implementation is anything but.

For just £399 plus VAT, we'll send you the Oracle Professional Developer's Copy – a software package that'll enable you to examine and apply *all* the options.

It includes Oracle's SQL relational database management system, together with four development tools: a screen based application generator, a report writer, a spreadsheet and a pre-compiler for C.

With full documentation and support, the package is complete. The response is up to you.

For immediate attention call 0800 678222 (the call is free.) Alternatively, send in the coupon below.



To: Telemarketing, Oracle Park, Bittams Lane, Guildford Road, Chertsey, Surrey KT16 9RG.

Please send me ..... copy(s) of the Oracle Professional Developer's Copy at £399 plus VAT each. I enclose a cheque for ..... made payable to Oracle Corporation UK Ltd.

Name_____ Position_____

Company_____

Address_____

Postcode_____

Telephone_____

ORACLE

Please note the requirements for running Oracle Professional Developer's copy – 80286/80386 PC running Dos 3.0+ and 640 KB of RAM plus 1 ½ MB of extended memory and 5 ¼" disc drive.

C/BY10

Fill in the coupon

Circle 348 on Reader Service Card

Give your software maximum protection but eliminate customers complaints



HASP II™
Hardware for Software Protection

HASP-II is a hardware device that connects externally into the printer port of the IBM-PC/XT/AT and PS/2 family.

Special electronic circuits form a unique code allowing only your customers to operate the protected software.

HASP-II is "transparent" to the user. It does not interfere with the operation of other programs nor does it require actual connection of the printer to the computer.

Your customer can create backup copies of his programs but these copies cannot be used on another "HASPless" computer.

Implementation is easy. You won't need the source program in order to protect your software, and yet if you have the source, we offer you the option to check for the HASP-II from within the program at any time. Software drivers are supplied.

No Automatic copying program or device will be able to crack the HASP-II, since no such tools can duplicate the plug. The HASP-II software is sophisticated and encrypted. The code returned from the HASP-II is algorithm depended.

Can be used for sophisticated data encryption systems.

(c) 1987/88 by Aladdin Knowledge Systems Ltd. Israel.

We have sold tens of thousands of plugs to dozens of satisfied customers worldwide.

For further information contact us at
ALADDIN KNOWLEDGE SYSTEMS LTD.
P.O.B. 11141 Tel-Aviv, 61110, Israel
Tlx. 35770/1 COIN IL Ext. JBL
Tel. 972-3-231707; Fax. 972-3-243540

An evaluation package is available

WE ARE LOOKING FOR DISTRIBUTORS ABROAD.

Estimate the Cost of Your Project

NPC-CALC from Norwegian Petroleum Consultants is a software package developed in DataFlex for preparing detailed cost estimates. The package was originally developed for large offshore-industry projects; however, you can use the system for preparing estimates at any stage or phase in any project, according to the company.

The package makes full use of the relational database in DataFlex and can handle a large number of records. You define each record uniquely within a Work Breakdown Structure, a Project Breakdown Structure, and a Code of Accounts.

You can store and control information such as equipment specifications, bulk weights, and estimating data, including man hours, labor, and material costs, and make global estimating rate adjustments, global weight adjustments, global equipment cost adjustments, adjustments per discipline, and recordwide edits and changes. Cost estimating is based on weight input per discipline and area, for both bulk items and individual items of equipment.

You can generate reports that reflect the manner by which a project contractually may be developed and organized, and sort them according to criteria, such as tag number, system, area, or discipline.

NPC-mini CALC is a subsystem to NPC-CALC, which comes on one high-density floppy disk and is designed as a portable toolkit for estimators. The toolkit helps you estimate offshore-related projects using the work breakdown structure, the code of accounts, and other estimating principles.

NPC-CALC runs under DOS 2.10 or higher on the IBM PC AT and compatibles with a hard disk drive and an A3 printer. The program is menu-driven and window-controlled. It can handle one project or case at a time but lets you switch between projects or cases by using floppy disks and menu options.
Price: 40,000 Norwegian krones.
Contact: Norwegian Petroleum Consultants A.S., Project Control Dept., P.O. Box 23, N-1371 Asker, Norway, (02) 793000.
Inquiry 880.

Convert ASCII to DIF on Your Atari ST

K-DIF is a converter program that reads ASCII files and turns them into data-interchange format (DIF) files. It is designed for use with programs that read standard DIF files, such as K-Spread 2, K-Data, and K-Graph 2.

The program reads the standard Atari end-of-line sequence CR/LF as just CR, and it takes a record separator or an end-of-file marker as the end of a record. When you choose a file, the program reads it and shows you its first record, on-screen one field per line, followed by the number of fields per record and records generated. Fields can be up to 255 characters long.

"Filter Out NonPrintables" (a radio button option) automatically removes characters not in the ASCII range 32 (space character) to 127 (delete character). "Strip leading/trailing spaces" (another radio button option) removes spaces within a field until it finds a nonspace character. A creep bar shows the progress of the generation of the DIF file. After generation, the program loops back to the field

continued



Model	CPU	Speed (MHz)	Main Memory	Hard Disk Drive	Floppy Disk Drive	Serial/ Parallel Ports	Expansion Slots/ (free)	Mono System	EGA System	VGA System
PC-88C Compact	V20 (8088)	4.77/10	640K	20MB (65mS)	360K	1/1	4/(2)	£775	£1075	£1275
PC-88S	V20 (8088)	4.77/10	640K	20MB (65mS)	360K	1/1	8/(4)	£875	£1175	£1375
PC-286C Compact	80286	8/10	640K	40MB (40mS)	1.2MB	2/1	6/(4)	£1375	£1675	£1875
PC-286S	80286	8/12	1MB	40MB (40mS)	1.2MB	2/1	8/(5)	£1495	£1795	£1995
PC-386S	80386	20	2MB	44MB (28mS)	1.2MB	2/1	8/(5)	£2795	£3095	£3295

Each system includes a keyboard, monitor, mouse, MS-DOS 3.3, BASIC, GEM (1st Word Plus, Paint), and full set of manuals, and is backed up by our Technical Hotline Support and 12 month warranty. On-site maintenance is also available.

DISK UPGRADE: 40MB to 44MB (28mS) = £150, 44MB to 72MB (28mS) = £100, 44MB to 135MB (18mS) = £900.

OPTIONS: OS/2 for PC-286 and PC-386 ranges. Maths co-processors, 720K/1.44MB FDDs, tape-streamers, printers, plotters, and networking cards.

Authorised supplier of XENIX and NOVELL.

Please feel free to visit our showrooms.

Elonex (UK) Ltd., Rays House, North Circular Road, London NW10 7XB.
Telex 946240 CWEASY-G/REF: 19020170, Fax 01-965 3248
Tel 01-965 3225

Elonex (UK) Ltd., 7-9 Campus Road, Bradford Science Park, Bradford, West Yorkshire BD7 1HR. Fax (0274) 307294.
Tel (0274) 307226

All prices are exclusive of carriage and VAT. Prices and specifications are subject to change without notice.
MS-DOS, XENIX, OS/2 and NOVELL are registered trade marks.


Circle 326 on Reader Service Card

NO BULL

ELONEX

How Facit B-line m more attractive

One of the easiest ways to breathe new life into your office is to add a powerful Facit B- line matrix printer to your computer. Not only will it cover all your printout requirements, but the printers are so easy to use that you will really enjoy exploring your new potential.

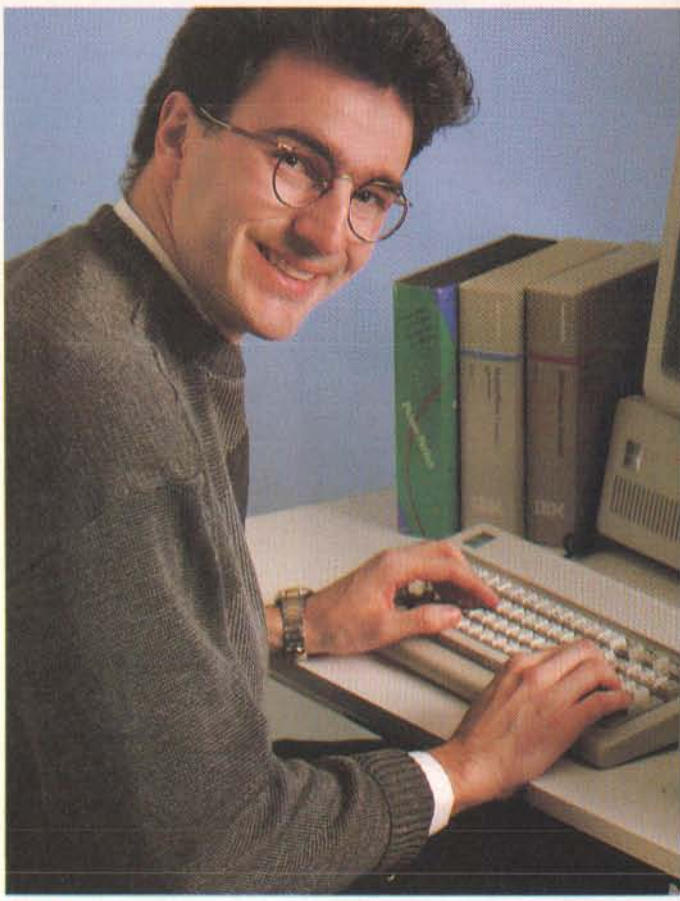

EASY SWITCHING FROM HIGH PRINT QUALITY TO FAST DRAFT PRINTING

If you still associate matrix printers with dull "computer-style" text, it's time to change your view. The Facit B-line printers feature professional Near Letter Quality printing that will really flatter your word-processing. The B3450 even offers Letter Quality which makes printouts virtually indistinguishable from those of daisy-wheel and laser printers. You can also easily customize your texts for special applications by selecting from a wide range of versatile fonts in several pitches.




The B-line control panel offers instant selection of print quality, font pitch, low-noise printing, etc. Set-up parameters are also controlled from the panel, thereby making the printers very easy to install.

By flicking a switch on the front panel of the B-line printers, you can quickly change from high quality print to draft quality for lists and other applications when you're in a hurry. And because the Facit B-line printers are designed for high throughput, they maintain their high printspeed even during long printouts.

FLEXIBLE PAPER HANDLING FOR YOUR ADMINISTRATION

The B-line printers permit you to load the paper in several different ways to suit various applications. This facilitates:

- Immediate paper tear-off without losing a single form – great when you use expensive paper
- Parking a continuous form while printing cut-sheets – a real time-saver if you frequently switch paper types
- Accurate feed of thick paper, such as forms and labels

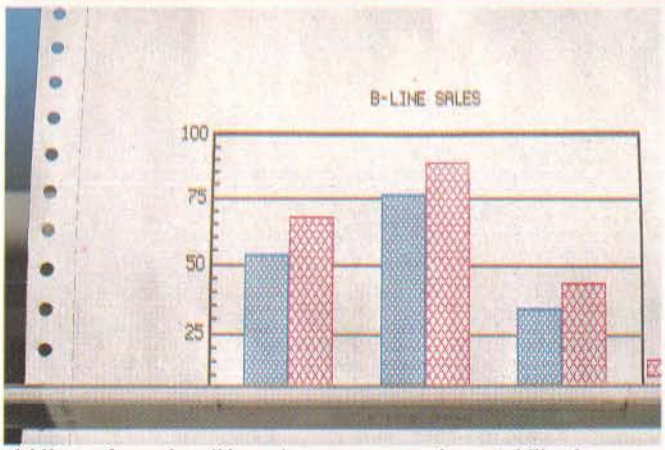

Adding a four-color ribbon gives you seven-color capability for highlighting, labels, business graphics, etc.

You can also equip the printers with an optional single- or double-bin cut-sheet feeder. The double-bin capability is very convenient as it gives you immediate access to two types of paper, such as cut-sheets and envelopes.

akes your printouts efficient and fun.



The B-line printers can be used with a wide range of computers ranging from IBM PCs (and compatibles) to large DEC systems.




You can easily customize your printouts with Facit's unique font cards.

9-, 18- AND 24-PIN PERFORMANCE

The Facit B-line includes as many as five printers, each tailored for slightly different applications. The 80-column B3100 and its 136-column counterpart, the B3150, are excellent 9-pin, all-round printers. And the 18-pin B3350 and 24-pin B3450 are especially suitable for wordprocessing. All these printers can be used with a wide range of computers and softwares as they offer parallel and serial interfaces plus several command set emulations as standard.

The Facit B-line also includes the compact B1100, which does not have all the advanced features of its big brothers but is a highly economical alternative for small PC systems and video terminals.

So, if you really want to take advantage of the printout potential of your computer and software, contact your nearest Facit representative for more information and a demonstration of all printers in the Facit B-line.

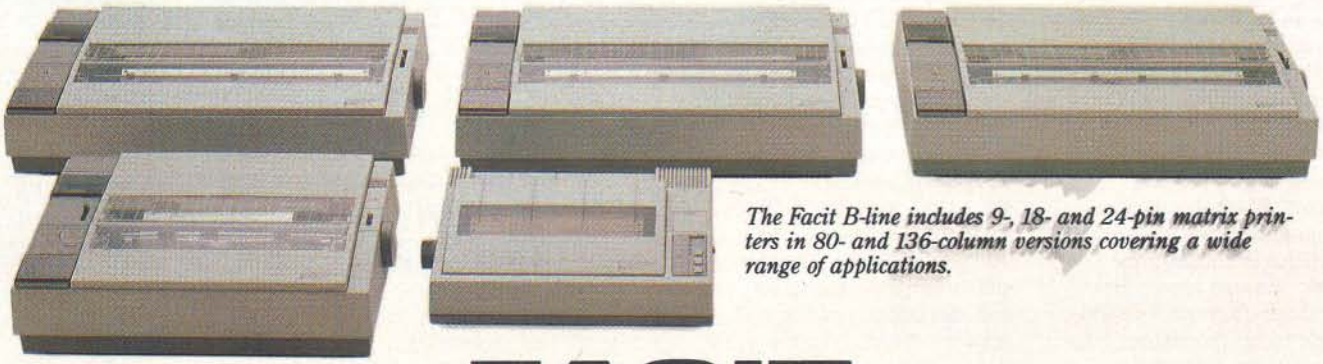

The Facit B-line includes 9-, 18- and 24-pin matrix printers in 80- and 136-column versions covering a wide range of applications.

FACIT

Facit AB, S-172 91 SUNDBYBERG, Sweden. Phone: +46 8 764 30 00

AUSTRALIA: Elmeasco Instruments Pty. Ltd., 2-736 28 88. *AUSTRIA:* Facit GmbH, 0222-613 641. *BELGIUM:* Facit Office Products N.V./S.A., 02-725 20 20. *CANADA:* Facit Canada Inc., 416-825-2712. *CYPRUS:* LBM (Lillytos) Ltd 051-646 34. *DENMARK:* Facit A/S, 02-92 24 00. *FINLAND:* OY Facit Ab, 90-420 61. *FRANCE:* Facit S.A., 1-4780 3535. *GREAT BRITAIN:* Facit Ltd., 0634-83 00 08. *GREECE:* American Computers & Engineers Hellas S.A., 01-671 97 22. *HONGKONG:* Gilman Office Machines, 5-893 00 22. *ICELAND:* Gisli J. Johnsen HF, 1-64 12 22. *INDIA:* Forbes Forbes Campbell & Co. Ltd., 22-20 48 081. *ITALY:* Facit S.p.A., 039-63 63 31. *JAPAN:* Electrolux (Japan) Ltd., 03-479-7570. *KOREA:* True Trading Co. Ltd., 2-783-3855-7. *MALAYSIA:* Facit Sdn Bhd, 3-24 24 438. *THE NETHERLANDS:* Facit B.V., 3480-21784. *NEW CALEDONIA:* Maison Barrau, 27 37 74. *NEW ZEALAND:* Northrop Instruments & Systems Ltd., 04-856-658. *NORWAY:* Facit A/S, 02-38 65 00. *PORTUGAL:* Regisconta Sarl, 1-56 00 91. *SINGAPORE:* Far East Office Eqpts Pte Ltd., 66-745 82 88. *SPAIN:* Facit S.A., 1-733 76 96. *SWEDEN:* Facit AB, 08-764 30 00. *SWITZERLAND:* Facit AG, 01-836 75 76. *TAIWAN R.O.C.:* Dimension, Computer Technology Co., 2-501 55 68. *TURKEY:* Teknodata Ltd., 1-150 87 47. *USA:* Facit Inc., (603) 424-8000. *WEST GERMANY:* Facit GmbH, 0211-528 60.

Circle 328 on Reader Service Card


and record separators for you to exit or process another file.
Price: £10.
Contact: Kuma Computers Ltd., 12 Horseshoe Park, Pangbourne, Berkshire RG8 7JW, U.K., (07357) 4335.
Inquiry 882.

A Workstation for Presentation Graphics

You can create animated or single-frame presentation graphics on the Silver Video Graphics Workstation from DeGrafe. You can show the finished product "live" on a standard National Television System Committee (NTSC) monitor or transfer it to videotape.

The workstation lets you grab full-color images from still photographs or moving videotapes, as well as documents and drawings. Special effects include mosaics, mirrors, colorizing, and wipes; graphics include graphs, airbrush, and freehand drawing; technical animation includes movement of objects and fluids; and you can add titles and logos, with relief and shadows. Real-time processing and the digital-image storage capability lets you revise and update productions without loss of quality.

The Silver Video Graphics Workstation gives you a resolution of 768 pixels per line and a choice of 65,000 colors from a palette of 16 million shades. Seven independent, simultaneous windows are available in single-frame mode. Editing capabilities for single-frame or video include image processing, miniaturization, enlargement, zoom effects, stop-motion framing, special effects, copying, subtitling, and mixing. The system is available in PAL, SECAM, and NTSC video systems, and you can interface it with an IBM PC or compatible running under MS-DOS 2.0 or higher for greater storage and speed. Optional software can give you full-screen real-time animation and three-dimensional titling.

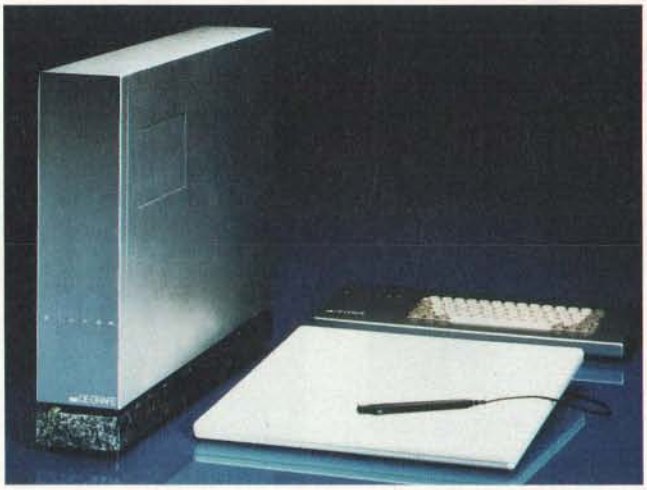

DeGrafe's Silver Video Workstation.

Price: $24,450 U.S.
Contact: DeGrafe, 10 Rue des Presles, 75015 Paris, France, (01) 47-83-88-37.
Inquiry 974.

Science and Engineering for Lotus 1-2-3

The Scientific and Engineering Tool from K.I.T.A.L. Software is a menu-driven template program for Lotus 1-2-3 users who deal with number crunching.

The program operates with Lotus 1-2-3–style commands, menus, and formulas, and it includes a programmable calculator and a solver. The program lets you perform simple arithmetic, define and convert physical units, integrate and differentiate functions and data tables, and edit and calculate statistic functions. It also allows for frequency and normal distribution, curve fitting (polynomial, exponential, powers, and linear), root finding (nonlinear equations), matrix operations, and simultaneous linear equations.

A number of commonly used units and functions are included, which you can edit or add as much as you like. You can save graphs and data tables to a disk for later use.

The Scientific and Engineering Tool requires DOS 2.0 or higher, Lotus 1-2-3 version 2.0 or 2.01, and an IBM PC, XT, AT, PS/2, or compatible. A hard disk drive is recommended. The documentation is included on the program disk.
Price: $120 U.S. plus $5 U.S. for shipping and handling.
Contact: K.I.T.A.L. Software, 17/1 Arbel St., Karmiel 20100, Israel, (972) 987255.
Inquiry 875.

Networking TopCopy Plus

You can now purchase a networking version of TopCopy Plus, the add-in word processor from Innova Software (see What's New International, page 88A-30 in the May BYTE). Networking features include document locking, read-only access to locked documents, document encryption, password protection, and the ability to configure each computer separately. Since TopCopy Plus is RAM-resident, you can download it once to the workstations and then call it up at any time by pressing a hot key.

TopCopy Plus runs under DOS 2.0 or higher on the IBM PC, XT, AT, and compatibles with a minimum of 256K bytes of memory.
Price: £250 for three users; £70 for each additional user.
Contact: Innova Software Ltd., Stag House, Inchbrook Trading Estate, Bath Rd., Woodchester, Stroud, Gloucestershire GL5 5EY, U.K., (0453) 835379.
Inquiry 862.

An IBM PC AT Clone with VGA

The PARAGON 286V from Mitac Japan is an IBM AT clone that offers a display adapter with BIOS-level compatibility with the IBM PS/2 VGA. The adapter emulates EGA, CGA, monochrome, and Hercules display adapters and supports 800 by 600 pixels (16 colors) and 132-column displays.

The CPU is a 12-MHz 80286, and the system comes with 1 megabyte of main memory (maximum configuration 8 megabytes); you can use the expansion memory as expanded memory specification memory. The BIOS is from Phoenix Technologies.

Storage includes a 1.2-megabyte 5¼-inch floppy disk drive and a 1.44-megabyte 3½-inch floppy disk drive, both mounted internally. You can have a 20- or 40-megabyte hard disk drive mounted internally as an option.
Price: 366,000 yen and up for the system, depending on the configuration; 48,000 yen for the display adapter.
Contact: Mitac Japan Corp., Akasaka Office Heights, 4-135 Akasaka, Minato-ku, Tokyo 107, Japan, (03) 586-1631.
Inquiry 996.

continued





For more information call
1-800-227-4139 or (702) 883-7611

Unix is a Registered trademark of AT&T

If you can't easily tell 386 systems apart, how can your customers?

That's why we designed QB2 386 with a striking new look!

QB2 386 is a fully integrated business computer, designed with Unix in mind, to provide multiuser power for the least amount of money.

HIGH PERFORMANCE UNIX 5.3 — Achieved by using an 80386 with a busless design to optimize on-board data transfers and using DMA transfers to all peripherals, including serial output.

BUILT-IN UPS — On-line battery-backup keeps the system fully operational even during prolonged power loss.

ISO/OSI NETWORKING — Supports RFS Streams CubixNET, an Ethernet network that transparently runs DOS and Unix in the same environment.

DYNAMIC PACKAGING — Small enough to fit on a bookshelf, large enough to support an entire office staff.

ALL THIS IN AN 11" CUBE:

■ **80386** ■ **8 user ports** ■ **2 MB RAM memory (expandable to 8 MB)**
■ **80+ MB formatted Winchester (larger capacities are available)**
■ **60 MB tape drive** ■ **5-1/4" floppy drive** ■ **Ethernet (optional)**
■ **80387 (optional)** ■ **Built-in online UPS** ■ **Priced like a 386 PC!!!**

This diminutive 11" cube can take on systems twice its size and thrice its price.

The QB2 386's unique combination of attention-getting looks and "keep 'em happy" multiuser power will help you acquire new customers and keep them for years to come.

Prospective customers will remember QB2 386. They will remember you!

CUBIX

Corporate Offices • 2800 Lockheed Way, Carson City, Nevada 89706 • Tel (702) 883-7611 • TWX (910) 395-6051 • Fax (702) 882-2407

Circle 323 on Reader Service Card

Graphics and Memory Expansion Board for STEbus

Arcom's SPCCGA graphics board combines IBM PC-compatible CGA, Monochrome Display Adapter (MDA), and Hercules graphics with four memory sockets for housing RAM or EPROM. The board works in conjunction with the SCPC88 8088 microprocessor board to provide low-cost two-board emulation of the IBM PC architecture for industrial control applications. The SPCCGA board complements Arcom's EGA-compatible STEbus board.

The SPCCGA offers a maximum graphics resolution of 640 by 200 pixels in its CGA mode, or lower-resolution black-and-white text or graphics using the MDA or Hercules function modes. The board also offers four memory sockets that accept 32K-byte by 8-byte RAM devices or 64K-byte by 8-byte EPROMs, so you can develop and debug the system with the power of a disk-based system and RAM, and then use the Arcom diskPROM transfer package to download the code into EPROM. This gives you an IBM-compatible target computer with a silicon disk that you can use in industrial environments.

The SPCCGA graphics board is a single-Eurocard (half-size) STEbus board that lets you run IBM PC software on the system without modification.
Price: £195.

Contact: Arcom Control Systems Ltd., Unit 8, Clifton Rd., Cambridge CB1 4WH, U.K., (0223) 411200.
Inquiry 972.

A Chip Set for 20-MHz 80386 Microprocessors

Tomcat Computer and Kawasaki Steel's Electronic Equipment Department have developed a chip set that gives a personal computer compatibility with the NEC PC-9801, the IBM PC AT, and the Toshiba J-3100.


The chip set offers Tomcat's proprietary Virtual System Logic in six LSI chips designed to work with the 20-MHz 80386 microprocessor.
Price: 50,000 yen.

Contact: Tomcat Computer Inc., Hashimoto Building, 1-10-3 Minami-Aoyama, Minato-ku, Tokyo 107, Japan, (03) 405-6311; Kawasaki Steel Corp., New Business Division, Electronic Equipment Dept., Hibiya Kawasaki Building, 2-2-3 Uchisaiwai-cho, Chiyoda-ku, Tokyo 100, Japan, (03) 597-4614.
Inquiry 997.

IBM PS/55 Software to Extract Alphanumerics

IBM Japan offers a recognition data conversion program that lets you extract alphanumerics from scanned images and generate character code files; you store the

continued

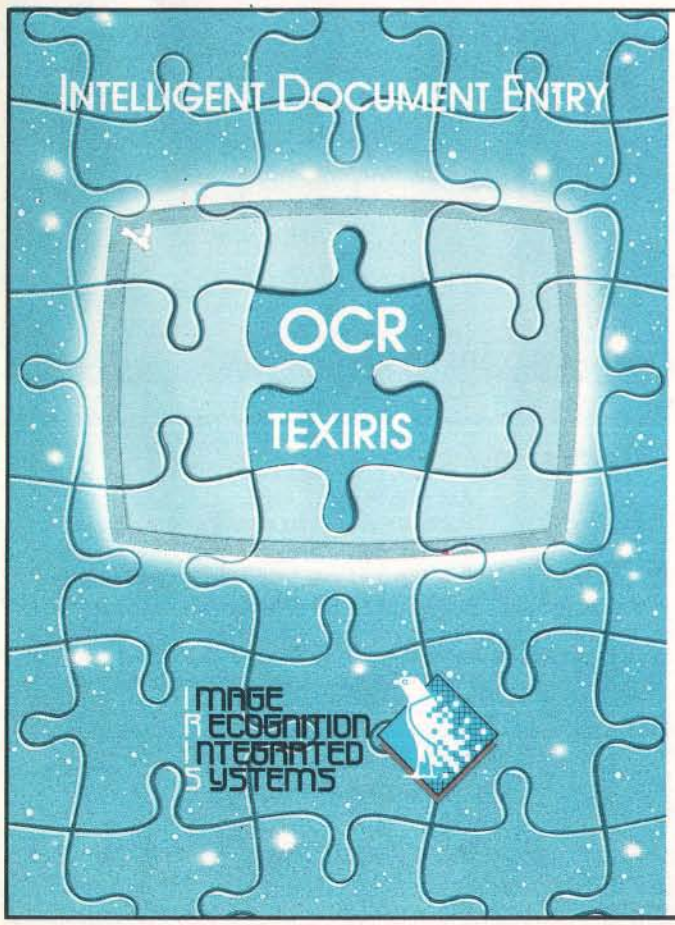

TEXIRIS
APPLICATIONS

- Archiving
- Publishing
- Dedicated OCR
- Databases
- Electronic Mail


TEXIRIS
FEATURES

- Pre-trained omnifont OCR
- One-pass scanning of text and graphics
- Automatic high performance recognition
- Learning mode
- Multilanguage lexicons and character set
- Graphical preview of document
- Multicolumn detection and coding
- Adaptability for VAR/OEM applications

Image Recognition Integrated Systems S.A. (I.R.I.S.)
Place de l'Université 4 B -1348 LOUVAIN-LA-NEUVE, BELGIUM
TEL : 32-10-45 13 64 - FAX : 32-10-45 34 43

Circle 337 on Reader Service Card

WAVE MATE, THE AMERICAN MOTHERBOARD MANUFACTURER, CONTINUES TO DELIVER UNBEATABLE VALUE.

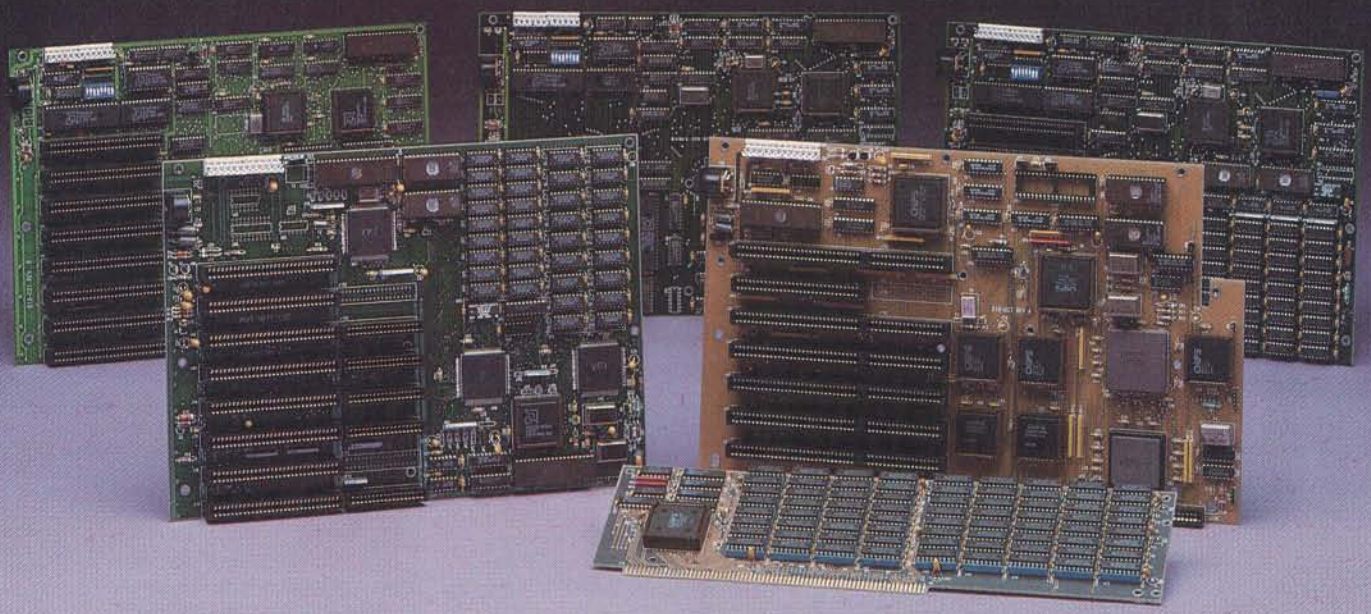

A family of made-in-the-U.S.A. PC / XT / AT motherboards offering the highest performance, exceptional compatibility, unmatched reliability, all at no more cost than dubious imported products. All combine our own superior design and state-of-the-art VLSI gate arrays, zero wait-state memory, PC / XT (Baby AT) Form Factor, WAVE MATE Proprietary Bios — plus Automatic Disk Caching. And of course, quality components throughout.

NEW BULLET-386 AT offers 20 or 25 MHz speed, 32-bit external 16MB interleaved DRAM card, optional 2MB static RAM card for ultimate performance, optional 80387 or 80287 and LIM 4.0 support. NEW BULLET-286 AT provides 10, 12.5 and 16 MHz operation, flexible DRAM configurations, EMS memory support, and more performance than most 386 products.

Then there are the "old reliables": BULLET-286ii is PC / XT compatible, provides maximum performance and compatibility at 8, 10, 12.5 and 16 MHz speed, optional 80287 with external clock, available in 5 slot PC and 8 slot XT versions and much more. The BULLET-286 E is ideal for low-cost diskless workstations with 7.2 MHz operation, PC / XT compatibility and either 640KB or 1MB of DRAM.

To add to the unbeatable value, every WAVE MATE motherboard comes with a two-year warranty, generous quantity discounts, and a no-risk performance/compatibility money-back guarantee.

Try one today. Join the tens of thousands of "more than just satisfied" WAVE MATE customers. Find out how to put The American Motherboard's unbeatable value to work for you!

WAVE MATE INC.

2341 205th Street, Suite 110, Torrance, CA 90501 - Tel: (213)533-8190 - Fax: (213) 533-5940
159 Chee de Vleurgat, 1050 Brussels, Belgium - Tel: (322) 649-1070 - Fax: (322) 649-2727

Circle 358 on Reader Service Card

"We have just finished our first Multi-Lingual Scholar™ produced job — a service manual in Russian for SAAB Marine Electronics. The result was quite good and the customer is satisfied. It seems we cut his costs some 30%."
— TEKNISK SPRÅKSERVICE
Västra Frölunda, Sweden

SOFTWARE THAT SPEAKS YOUR LANGUAGE

Multi-Lingual Scholar,™ a single software program for wordprocessing and high quality printing with multiple languages in the same document. Supports on-screen foreign characters — with accents and vowel points — with no hardware modifications. Arabic, Farsi and Hebrew edit right to left, and a font editor lets you design your own characters and customize keyboard layouts.

☐ **Standard package** includes 5 alphabets: Roman (for English, European and Scandinavian languages), Arabic/Farsi, Cyrillic, Hebrew and Greek. Supports 9-pin and 24-pin dot matrix printers. $350 + $20 s/h
☐ Also available with Hindi (Devanagari) replacing Hebrew. **Laser Printer** option. $150 additional.
☐ **Optional languages** available: Armenian, Amharic, Sanskrit, Indian dialects, Syriac and most ancient Biblical languages; please inquire.
☐ **Demo program** — same as standard package except file size and printing have been limited. Comes with tutorial. $15 (applies toward purchase) + $7 s/h.

VISA/MC/AMEX, or bank draft in US dollars accepted. **Or write for a list of dealers world-wide.**

Multi-Lingual Scholar

A product of
Gamma Productions, Inc.
710 Wilshire Boulevard, Suite 609
Santa Monica, CA 90401 USA
Tel. 213-394-8622
Tlx: 510 600 8273 Gamma Pro SNM

Requires: IBM PC/XT/AT or compatible, 640K, graphics (Hercules. CGA, or EGA), 1 disk drive, 1 parallel port. Works with most dot matrix (9- and 24-pin) printers and Hewlett Packard Laserjet+/Series II or compatible laser printers.

generated character codes in the image with their coordinates. The company envisions using the program for applications such as generating CD-ROM databases from printed catalogs.

The character extraction algorithm can handle a wide range of font sizes and embellishments, as well as new fonts that you register in the recognition dictionary. The program is available for IBM's Japan PS/55 Models 5540 through 5570, operating under Japanese DOS K3.3.
Price: 150,000 yen.
Contact: IBM Japan Ltd., 3-2-12 Roppongi, Minato-ku, Tokyo 106, Japan, (03) 586-1111.
Inquiry 987.

A Synthesizer in a Kit for the NEC PC-9801

Roland offers its MT-32 synthesizer in a kit with a musical instrument digital interface (MIDI) board for connection to the NEC PC-9801 and music composition software.

The MT-32 synthesizer can generate, in stereo, 128 instruments including keyboards, strings, and woodwinds, as well as the tambourine and 29 other rhythm sounds. You can create music by combining up to 4 of the synthesizer's 32 sound sources.

The software divides scores into 10 parts, 8 of which are for music. Using a mouse, you can assign any one of the 128 instruments to each part and change the instrument in the middle of any part. The ninth part is for rhythm, using the 30 rhythm sounds, and the final part is for MIDI instruments other than the MT-32.

You can display the image of a 10-track stereo mixer for playing, using the mouse to control the volume and switches. Each track corresponds to one of the parts. Track 1 is for the other MIDI instrument, tracks 2 through 9 for music, and track 10 for rhythm. You can set volume, acoustics, and origin position (either left or right) for each track.

Roland plans to release three score libraries in the future, each with 10 scores—Oldies and Group Sounds, Jazz and Fusion, and Animation and New Music. Dynaware offers Ballad, which gives you real-time recording and sound-editing functions, and a file converter for Prelude, its software for MIDI instruments, which has a different score data-file format than that used with the MT-32 kit.
Price: 99,800 yen for the MT-32 kit; 69,000 yen for the MT-32 synthesizer alone; about 50,000 yen for Ballad.
Contact: Roland Corp., 3-7-13 Shin-Kitajima, Suminoe-ku, Osaka 559, Japan, (06) 681-5431.
Inquiry 983.

A Gadget and Requester Editor for the Amiga

K-Gadget from Kuma Computers is a gadget and requester editor that lets you generate C source code on your Commodore Amiga. You can witness the changes you make during design and editing stages and generate Boolean, Proportional, and String gadgets.

The program features drop-down menus and lets you use the mouse for sizing and positioning gadgets and requesters. Gadgets can have text and borders, and you can define Sourcenames, GadgetID, MutualExclude, and UserData fields for all gadgets. You can also define source names for text, bor-

continued

Above & beyond the call.

Software

Word Processing/ Desktop Publishing

Byline	$ 199
Microsoft Word	$ 229
Multimate Advantage-II	$ 279
Lotus Manuscript	$ 339
Office Writer/Speller	$ 249
Pagemaker 3.0	$ 569
PFS: Prof Write	$ 119
Publisher's Type Foundry	$ 259
Ventura Publisher	$ 519
Word Perfect 5.0	$ 195
Wordstar Pro 5.0	$ 199
Wordstar 2000 + 3.0	$ 229
Xywrite III +	$ 229

Database Systems

Clipper	$ 389
DBase III Plus	$ 389
Data Perfect	$ 269
DBase IV	$Call
Foxbase +	$ 199
Paradox 2	$ 429
PFS: Prof File	$ 149
Q&A	$ 209
R Base for DOS	$ 479
RapidFile	$ 199
Reflex	$ 99
Omnis Quartz	$ 469

Spreadsheets/ Integrated Packages

Javelin +	$ 169
Lotus 1-2-3	$ 309
Lotus Hal	$ 49
Microsoft Excell	$ 319
Microsoft Works	$ 139
Plan Perfect	$ 179
Quattro	$ 129
Smart System	$ 449
SuperCalc 4	$ 289
Symphony	$ 495

Communications

Carbon Copy +	$ 119
Crosstalk XVI	$ 99
Crosstalk MK 4	$ 125
Relay Gold	$ 149
Smarterm (Persoft)	$Call
Smartcom III	$ 149

Statistics

SPSS/PC +	$ 699
Statgraphics 2.6	$ 479
Systat 4.0/ W/Graphics	$ 499 $649

Desktop Environments

MS Windows	$ 69
Sidekick Plus	$ 129

Graphics

Boeing Graph	$ 219
Chartmaster	$ 219
Design CAD	$ 159
Diagraph	$ 259
Diagram Master	$ 199
Freelance Plus	$ 329
Harvard Graphics	$ 279
MS Chart	$ 269
PC Paintbrush Plus	$ 89
Picture Perfect	$ 199
Presentation Pak	$ 349
Publishers Paintbrush	$ 159
Signmaster	$ 139

Project Management

Harvard Total Project Manager II	$ 369
Microsoft Project 4.0	$ 329
Superproject Plus	$ 289
Timeline 3.0	$ 349

Languages/Utilities

Fastback +	$ 99
Lattice C	$ 229
Norton Advanced	$ 79
Microsoft C	$ 299
Mace Utilities	$ 65
MS Fortran 4.0	$ 299
Quick Basic/Quick C	$ 69
Turbo Basic/Turbo C	$ 65
Turbo Pascal	$ 65

Accounting

AccPac BPI	$ 279
Great Plains	$ 499
Peachtree Comp II	$ 159

Hardware*

Computers

AST Premium 286	$ Call
Samsung	$ Call
Sharp PC4502-A	$1175
Toshiba 3100/20 +	$ Call

Multifunction Boards

AST Advantage Premium (512K)	$ 309
AST 6 Pak Plus (64K)	$ 129
AST Premium (256K)	$ 219
AST Rampage 286	$ 419
Everex RAM 4000	$ 299
Inboard 386AT	$1050
Inboard 386 PC	$ 750
Intel AboveBoard	$ Call

Display Boards

ATI EGA Wonder +	$ 199
Hercules Network Card Plus W/Tops	$ 349
Paradise VGA Plus	$ 259

Modems

Hayes 1200/1200B	$ 299
Hayes 2400/2400B	$ 449
US Robotics 1200B	$ 109
US Robotics 2400B	$ 189
Ventel 2400/2400B	$ 389
Ventel 2400/2-PS2	$ 299

Networking

Arcnet Board	$ 149
Novell Adv.Netware 286	$1499
Novell ELS	$ 399

Emulation Boards

AST 5251-11 +	$ 629
Irma/2 PCA/MCA	$ 725
Quadram Mainlink IV W/ Software	$ 399

Monitors

Amdek 210A	$ 99
NEC MultiSync II	$ 649
Princeton HX-12 +	$ 439
Princeton MAX-12E	$ 149
Samsung Color	$ 229

Printers/Plotters

Epson FX-286E	$ 499
Epson LQ1050	$ 779
HP 7475A	$1499
HP Laserjet II	$1750
LQ-500	$ Call
NEC 3550	$ 789
NEC P2200	$ 369
Okidata 320	$ 375
Okidata 321	$ 519
Okidata 393	$1050
Okidata 293E	$ 675
Panasonic	$ Call
The Complete Hand Scanner	$ 169
Toshiba P321SL	$ 549
Toshiba P341SL	$ 749
Toshiba P351M2	$ 999

Mass Storage/Backup

Bernoulli II Dual	$1799
Irwin Tape Drives	$ Call
Mountain 40MB Int Tape	$ 389
Plus HardCard 20MB	$ 519
Plus HardCard 40MB	$ 719
Seagate ST251-1	$ 529
Seagate ST 225 W/int	$ 289
Seagate ST238 W/int	$ 319
Sysgen Bridge	$ 299

Input Devices

Keytronics KB 101	$ 109
Logitech Hi-res Mouse	$ 99
Logitech M8 Mouse W/ Paintshow	$ 69
Microsoft Mouse	$ 109
PC Mouse w/Paint	$ 99

Accessories

Curtis Ruby	$ 59
DataShield S-100	$ 69
Logical Connection	$ 329
Masterpiece Plus	$ 125
256K Ram Set	$Call
8087 Math Chip	$ 119
80287-8/80287-10	$289/$339
80387-16/80387-20	$529/$775

***CALL FOR SHIPPING COST**

ATTENTION CORPORATE BUYERS!!

Join over 1000 major corporations and institutions who have selected **SOFTLINE** as their primary vendor. Here's why:

- **Wide Selection**—We carry over 1000 "corporate" titles. We will assist you to source those difficult requests.
- **Low Price** Our motto has always been "Sample our Service. Price shall never be an issue."
- **Fast Delivery** For those last minute rush orders, we offer convenient overnight delivery.
- **P.O.'s, of Course!!** We accept purchase orders from qualified organizations. Ask about our customized purchasing programs for volume buyers.

ATTENTION INTERNATIONAL BUYERS!!

We process export orders to thousands of companies worldwide. Convenient TELEX and FAX facilities available.

Contact: **Fay Chayne,** Intl. Sales Manager.

Celebrating 5 Years of Excellence

1-718-438-6057

Customer Service Hours: 9 AM—5 PM, Mon.—Fri.

Contact: Fay Chayne -Intl. Sales Mngr.

MasterCard VISA

Softline

1333 60th Street
Brooklyn, NY 11219
TELEX: 627-30170 or 910-240-3918
FAX: (718) 438-2315

Our Policy: • All returns require prior authorization • 20% Restocking fee on returns • POs accepted from qualified organizations • Visa or Mastercharge—add 3% • COD, Cash M.O. or bank check only—add $5.00 per order • Prepaid personal or company check—allow two weeks to clear • Shipping via UPS surface—add $5.00 per item, UPS Blue—add $10.00 per item • Prices subject to change; call for latest prices.

ST-TEX
and
ST-METAFONT

The Implementation of
TEX and METAFONT
for the
ATARI ST

Your hardware configuration should be:
Computer: ATARI 520 ST, 1040 STF, MEGA ST ...
Main memory: 1 MB.
Monitor: monochrome, colour.
Peripherals: double sided disk drive.
Printer: EPSON, NEC, OKI, ATARI SLM 804, HP-Laserjet

The **ST-TEX package consists of:** Knuth TEX 2.1, INITEX, plain TEX and German plain TEX. TFM files, DVI driver for screen and various printers including the full font set for screen and for one printer at one resolution. English or German documentation.
The **ST-METAFONT package consists of:** Knuth METAFONT 1.0, plain METAFONT, INIMF, utilities and METAFONT source files for the fonts of the TEX and LATEX system. English or German documentation.

○ ST-TEX	198.00 DM
○ LATEX	70.00 DM
○ ST-METAFONT	298.00 DM
○ BiBTEX	17.50 DM
Shipping and handling:	
Europe	15.00 DM
Elsewhere	20.00 DM
E.C. residents add 14% VAT	DM

Please indicate the type of printer you use:
○ EPSON FX, ○ EPSON MX,
○ NEC P6, ○ NEC P2,
○ EPSON LQ/SQ,
○ HP Laserjet+, ○ ATARI SLM 804.

Please indicate the payment method you choose:
○ Check, ○ Money Order, ○ VISA, ○ MC.

Distributor Inquiries Invited

General correspondence should be addressed to:

Tools GmbH, Kessenicher Straße 108
D–5300 Bonn 1 (FRG)

TEX is a trademark of the American Mathematical Society, METAFONT is a trademark of Addison Wesley Publishing Company, ATARI ST is a trademark of the ATARI Corp.

ders, images, and requesters.
Price: £29.95.
Contact: Kuma Computers Ltd., 12 Horseshoe Park, Pangbourne, Berkshire RG8 7JW, U.K., (07357) 4335.
Inquiry 872.

Computer-Assisted Maintenance Management

You can maintain the equipment found in your building or facility with Lynx, a system that provides computer-assisted maintenance management, centralized technical management, and systems for management and communication of technical information.

The system also encompasses a range of services, such as technical and organizational consultation, training for senior staff and technicians, assistance with data formulation, and technical analysis services.

Lynx is based on the Oracle relational DBMS and the C language, with multiwindow menu and submenu displays, coherent data-input displays, and help messages and tables.

The basic software package, Lynx-Speed, helps you manage parts lists; multilocation inventories, including inputs, outputs, loans, transfers, physical location, allocation number, quantity in stock, and weighted average value; equipment records with serial numbers, geographic locations, priorities, work records, and documentation; maintenance and repair records; and maintenance staff by trade, qualification, experience, and availability.

The optional Lynx-Plus software provides modules for order management and tracking and for repair tracking, as well as customized modules based on specific customer requirements. You can also interrogate and link to other systems or software packages.

Versions of Lynx are available for the IBM PC AT and compatibles, the DEC VAX, the MicroVAX, the IBM 43XX, the HP 9000, and the Bull DP57. The AT version runs under Unix.
Price: 400,000 French francs.
Contact: Sodeteg-T.A.I., 283 rue de la Minière, 78530 Buc, France, (01) 39-56-80-60.
Inquiry 863.

SAA-Compatible Midrange Computers

IBM Japan's midsize IBM AS/400 computer is compatible with its SAA (System Application Architecture). Up until now the only SAA-compatible machines have been the PS/55 PC and the System/370 mainframe, but the AS/400 fills the gap between them.

The operating system is the newly developed OS/400, supporting the AS/400 native mode as well as modes for System/36 and System/38 application execution. It includes a relational database manager using Structured Query Language as standard equipment, and it supports links to the System/370 and PS/55, as well as Token Ring local-area networks. Maximum main memory is 96 megabytes, maximum disk capacity is 27.2 gigabytes, and it manages all addressing from a single-address volume.

Six models range from the AS/400-B10 to the B60. The B60 has about 10 times the performance of the B10.
Price: 9,400,000 yen for the B10 system; 176,000,000 yen for the B60 system.
Contact: IBM Japan Ltd., 3-2-12 Roppongi, Minato-ku, Tokyo 106, Japan, (03) 586-1111.
Inquiry 970.


continued

Infosys

Exclusive Swiss Representative

Are your telephones being used ...or abused?

keep TABS on them and find out!

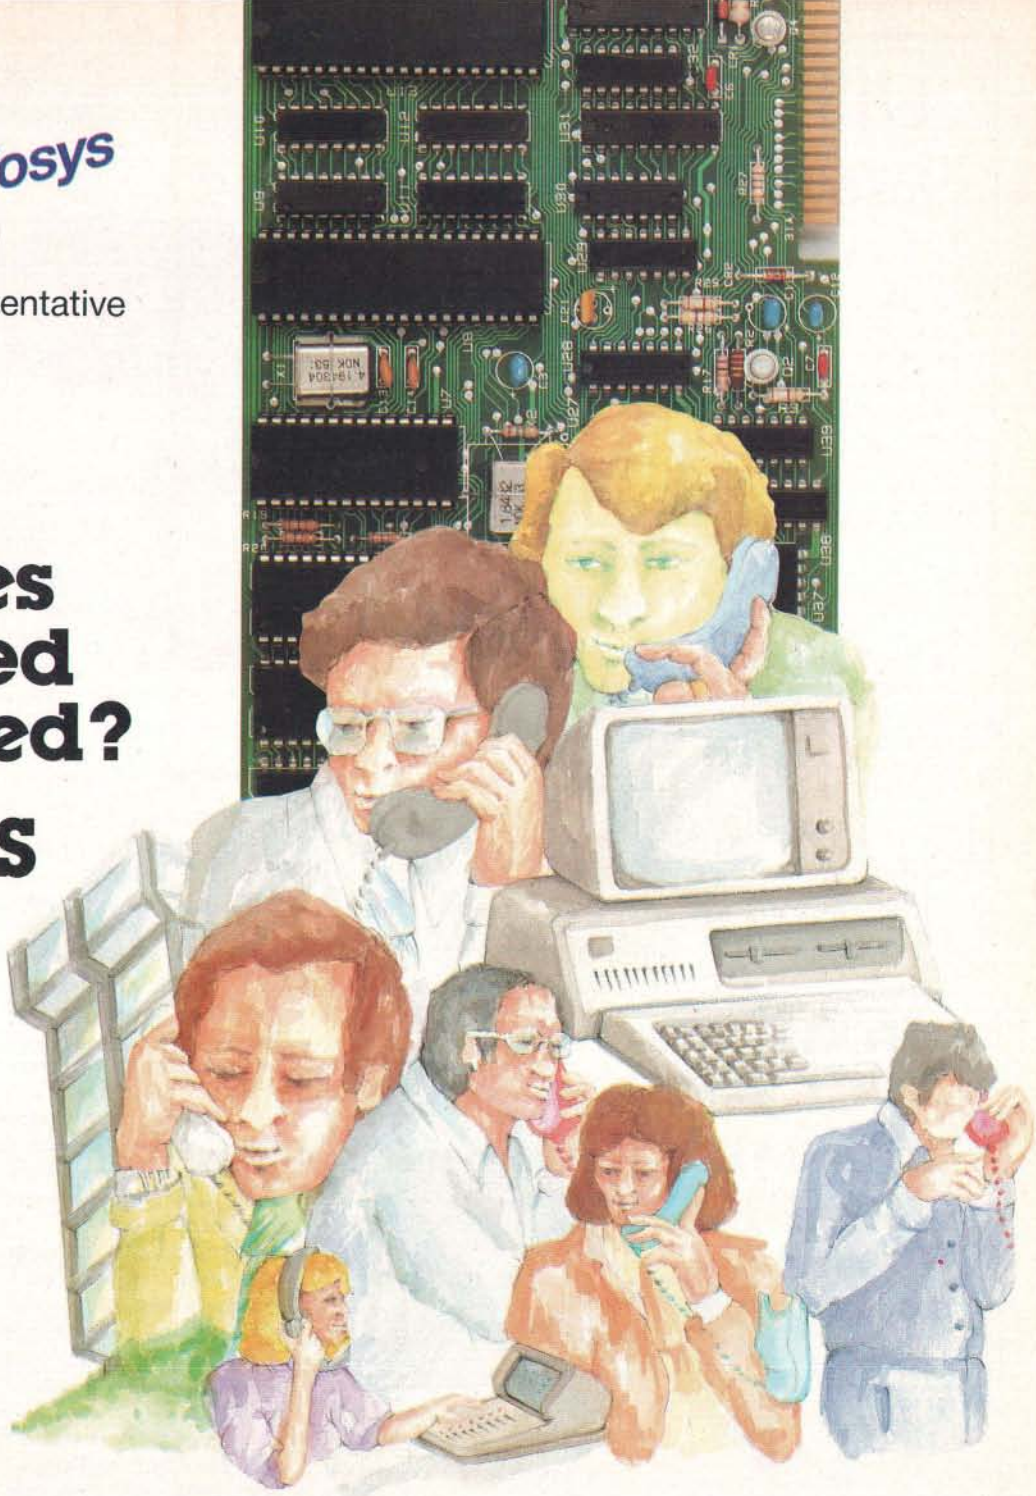

TABS

Telephone Accounting & Billing System

MER & CO.
COMMUNICATION SYSTEMS

Computer Elektronik Infosys AG, Im Rötel 10a, CH-6301 Zug, Telefon 042/21 78 57
Lager und Vertrieb Schweiz: Oberdorfstrasse 11, CH-8953 Dietikon, Telefon 01/741 30 41

Circle 341 on Reader Service Card

DISTRIBUTORS

POSTSCRIPT Software Emulation
GoScript
- works with XT – AT – 386
- prints on HP/Canon Laser or Inkjet–Printer
- prints on any FX or Proprinter
- includes 13 Bitstream–Outline Fonts
- Low Cost – High Quality

WANTED

FORMS–Generator
LaserForm
- create forms with PC – XT – AT – 386
- print on HP or Canon Laser–Printer
- print data and form in one single step
- includes 6 Softfonts in Roman 8 Character Set
- Low Cost – High Quality

laser team

laser team gmbh
PO–box 1540
D–6070 Langen
Tel. 49 6103 22037–39
Fax 49 6103 22099
Telex 415073

MAXIMUM RANGE WITH MAXIMUM RELIABILITY



Like a camel can overcome hardship to complete a desert journey
Our camel will pull you through power failure so you can get the job done.

For a reliable and dependable Uninterruptible Stand by Power Supply
The Camel features include
- Power rating range from 300 VA–1KV
- Both Sine and Quasi Square output wave form
- Protection against voltage sags, spikes, surges, brownouts and electrical noise
- High speed response
- Isolation from power lines
- Quiet operation
- Audible and visual alarm indicators.

Please contact NEOLEC for more information.

neolec
International Inc.
7F, No.102 Hsin–Sheng S. Rd.
Section 1, Taipei, Taiwan Republic of China
Mail Address
P.O.Box 24-91, Taipei Taiwan Republic of China
TEL: 886-2-3930896
FAX:886-2-3925348
TLX: 11656 PRODUCTO



The PM8 Peripheral Manager from Adder Technology.

Connect up to 16 Peripheral Devices

You can connect 2 to 16 devices using Adder Technology's new eight-port, user-configurable peripheral manager. The PM8 Peripheral Manager lets several users share printers and plotters. You can control a range of functions from its keypad, or you can operate the PM8 entirely under software control from a host computer connected to a port.

By buffering up to 4 megabytes of data, the PM8 lets computers continue to work while printing and plotting is in progress. The buffer memory automatically allocates memory to each user as it is needed and is available in sizes from 256K bytes to 4 megabytes. Data transfer rates are 75, 110, 150, 300, 600, 1200, 2400, 4800, 9600, and 19,200 bits per second.

You can make multiple copies of printouts and reprint ruined printouts independently of a host computer. The Pause function stops data coming in from a device or going out to a device. Nonvolatile operating parameters and connection information, such as data transfer rates and types of handshaking, are stored within the PM8 so you only have to set them once. You can cascade PM8 devices to let more than eight devices share the same resources.

The PM8 is available with RS-232C serial and Centronics parallel interfaces. Two devices can share each RS-232C serial port when you use it in split mode. The unit can accept data on all ports simultaneously with automatic protocol conversion.

You can network Peripheral Managers together to let any number of computers share resources. Additional buffer-memory modules are available, and you can use two modules in each PM8.
Price: £345 plus £32.50 per port; £100 for a 256K-byte buffer-memory module; £190 for a 512K-byte module; £395 for a 1-megabyte module; £795 for a 2-megabyte module.
Contact: Adder Technology, Cambridge Science Park, Milton Rd., Cambridge CB4 4GF, U.K., (0223) 861912.
Inquiry 976.

New 16-bit CPU to Complete H Series

The first product in Hitachi's H8 single-chip computer family, the H8/532, completes three H-series families, together with the 32-bit H32 and the 16-bit H16 chips.

continued

FRIL

THE NEW ARTIFICIAL INTELLIGENCE PROGRAMMING LANGUAGE FOR MODELLING UNCERTAINTY

FRIL is the first AI programming language to be based on Support Logic, a formal calculus for uncertainty reasoning. The unique features of **FRIL** put it ahead of conventional Prologs for complex applications involving uncertainty.

Evidential Reasoning with Support Pairs
Fuzzy Sets and Semantic Unification
Open Worlds and True Logic Negation
Prolog as a subset of **FRIL**

Written in C, **FRIL** is highly portable and available across a wide range of computers.

EQUIPU AIR LTD

184 Hotwell Road Bristol BS8 4SG. Tel: (0272) 213427/277551

If you are interested in knowing about **FRIL** please complete and return this coupon to: Equipu AIR Ltd., 184 Hotwell Road, Clifton, Bristol BS8 4SG. Or ring us on (0272) 213427/277551.

NAME: _____ TITLE: _____
COMPANY: _____ TELEPHONE: _____
ADDRESS: _____
_____ POSTCODE: _____

BM

MOUSE MEET HARRISON



HARRISON MOUSES ARE AVAILABLE IN MICROSOFT, MOUSE SYSTEM, AND OUR HARRISON II WHICH IS SOLELY DESIGNED FOR THOSE WHO'VE CHOSEN THE PERSONAL SYSTEM/2™



COMFORTABLE AND EASY TO HANDLE WITH FEATURES NOT FOUND IN MANY OTHERS. INCLUDES ASIC CHIP USING CMOS TECHNOLOGY, HARRISON MOUSE DRIVER SUPPORT, TWO YEAR WARRANTY.

HARRISON PRECISION INDUSTRIES CO., LTD.
7/F, NO. 102 HSIN SHENG S. ROAD SECTION 1, TAIPEI, TAIWAN REPUBLIC OF CHINA
TEL:886-02-3930896 FAX: 886-02-3925348 TLX: 11656 PRODUCTO
MAILING ADDRESS: P.O.BOX. 24-91 TAIPEI, TAIWAN, REPUBLIC OF CHINA

Zukunftsorientiert!

LAPTOP

ISE TS16



Ein kompatibler PC der Extraklasse!

Die Leistungen überzeugen:

CPU:	Intel 80286 (10 MHz), 80287 (Option)
Speicher:	640 KB RAM, 2 MB (Option)
Diskettenlaufwerk:	1 x 3,5" 1.2 MB
Festplattenlaufwerk:	1 x 3,5" 20 MB (40 MB optional)
Bildschirm:	hochauflösendes Gas-Plasma-Display 640 x 400 Punkte, 192 x 144 mm EGA und CGA Graphik-Mode
Tastatur:	82 Tasten – deutsch
Schnittstellen:	1 x Centronics (Parallel) 2 x RS-232C (seriell) 1 x Port für externes 5,25"-Laufwerk
Betriebssystem:	MS-DOS 3.3
Abmessungen:	320 (B) x 320 (T) x 94 (H) mm
Gewicht:	6,4 kg


Der Preis stimmt: DM 8.436,– — frei Haus

Fordern Sie nähere Informationen an:

ISE DATA GMBH · Herrnrainweg 5 · 6050 Offenbach/Main
Tel.: 069/80 05 30 · Fax: 069/80 05 332 · Tx: 4 185 164 ised

The H8 family consists of two types—the H8/500 series, based on a 16-bit CPU core, and the H8/300 series, based on an 8-bit CPU. The H8/532 is the first in the H8/500 series, including a 16-bit CPU (eight 16-bit general-purpose registers), a 32K-byte EPROM (or ROM), a 1K-byte RAM, a 1-channel serial I/O, a parallel I/O, an A/D converter, and a timer in a single chip. You can execute inter-register 16-bit addition and subtraction in 100 nanoseconds, and it can run programs developed in C.
Price: 7000 yen for the 32K-byte PROM version; 17,000 yen for the EPROM window version.
Contact: Hitachi Ltd., New Marunouchi Building, 1-5-1 Marunouchi, Chiyoda-ku, Tokyo 100, Japan, (03) 212-1111.
Inquiry 971.

A Transputer Module for Image Processing

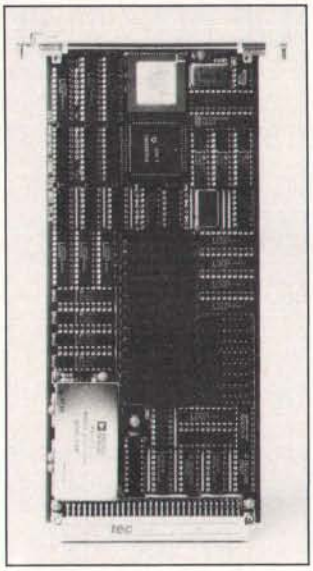

Transputer Frame Grabber module from Parsytec.

Parsytec's new TFG module (Transputer Frame Grabber) uses Transputers for parallel processing in image-processing applications. The single Eurocard module contains a frame grabber for standard video signals, a Transputer processor with expansion facilities via communication channels, and a display unit with a color lookup table.


The video interface supports CCIR or RS170A input signals at resolutions up to 768 by 512 pixels with 256 levels of gray scale.

The processor section contains a T414 or a T800 Transputer with 1 megabyte of memory. The T800 Transputer has processing speeds of 10 million instructions per second and 1.5 million floating-point operations per second, also accessing 0.5 megabytes of video RAM without additional wait states. When you use a color lookup table, the display unit can support 256 colors from a palette of 262,144.

You can use the bus-free TFG module within a megaframe system unit, where it can communicate with other processing modules in the megaframe series via its four 20-megabits-per-second communication channels. When you combine it with an adapter, you can plug it into an IBM PC and it can operate as a stand-alone or in cooperation with other processors.

Compilers support programming for Occam, C, FORTRAN, Pascal, Parallel PROLOG, and the Transputer operating system, HELIOS. Development systems are available for, personal computers, OS-9, Unix, and the Mac II.
Price: 7800 Deutsch marks.
Contact: Parsytec, GmbH, Juelicher Strasse 338, D-5100 Aachen, West Germany, (241) 166000.
Inquiry 871.

continued

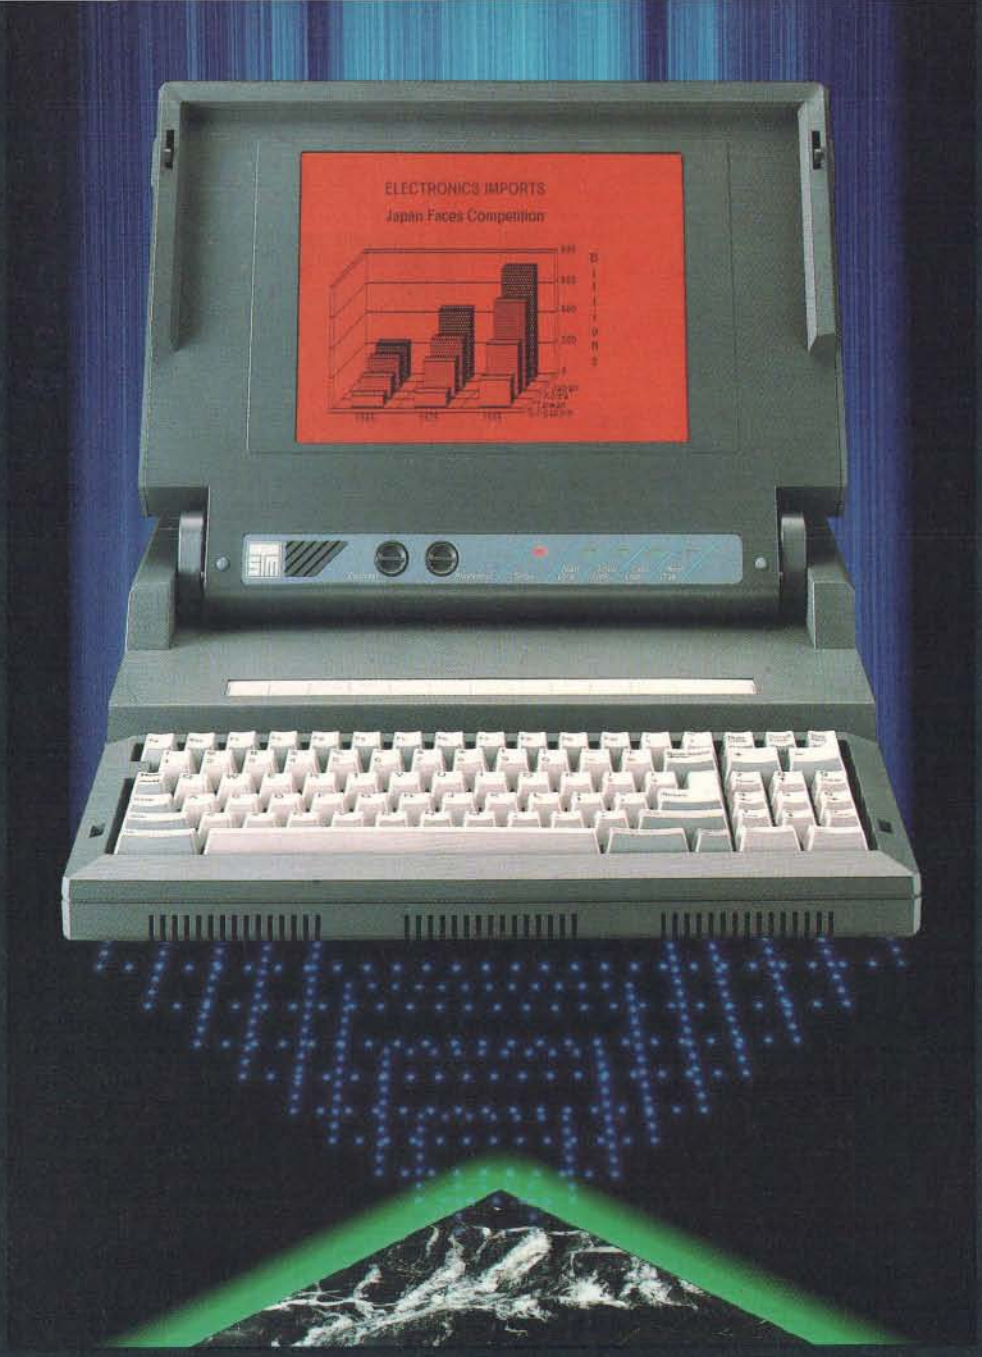

STM · 5500

PORTABLE PERSONAL COMPUTER

- 80286 running at 12 MHz/6MHz
- 1 Mb RAM: Expandable internally to 3 or 5 Mb RAM
- Internal 40 Mb hard disk drive
- Internal 3.5" 1.44 Mb microfloppy disk drive
- 640 x 400 pixel gas plasma display with four grey scales
- IBM (EGA) and IBM (CGA) compatible
- Also MDA and Hercules compatible (on external monitor)

Interfaces:

RGB connector/external keyboard port/parallel port/RS 232C/ RJ-11

Size/Weight:

36 W x 8.6 H x 36 D cm — 6.8 kg

Options:

- Internal/2400 bps Hayes compatible modem (CCITT)
- Internal 2 Mb (4 Mb) Extended Memory card
- Expansion chassis for IBM PC/AT type card

IBM and PC/AT are registered trademarks of International Business Machines Corporation. Hercules is a trademark of Hercules Computer Technology Inc.

For distribution please contact:

SEMI-TECH MICROELECTRONICS CORPORATION
P.O. Box 3009, Markham Industrial Park
Markham, Ontario, Canada L3R 6G4
Fax: (416) 475-1552 Telex 06-986749

A Message To Our Subscribers


FROM TIME TO TIME WE make the BYTE subscriber list available to other companies who wish to send our subscribers material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services, or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to the following address.

BYTE MAGAZINE
ATTN: SUBSCRIBER SERVICE
P.O. Box 7643
TEANECK, NJ 07666-9866

INTERNATIONAL

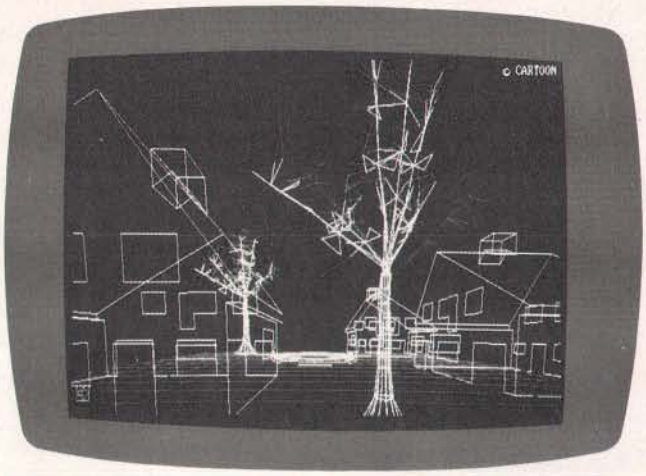

Design three-dimensional objects with PC-Cartoon.

A Family of Three-Dimensional Design Software

PC-Cartoon is a family of three-dimensional designing, modeling, and drafting software that features mouse-based operation. You can view objects in wire, hidden view, and solid modes, and store the three-dimensional objects you design in files that include the *x*, *y*, and *z* coordinates of its points.

The original PC-Cartoon (see What's New International, page 64A-4 in the September 1987 BYTE) helps beginners construct three-dimensional objects based on the revolution of a curve around a vertical axis. You can merge, zoom, manipulate, sculpt, distort, cut, and paint within the EGA 16-color palette. A script module lets you place 12 objects in a space and tell the computer to build, frame by frame, all the slides of a real animation film.

PC-Cartoon I adds three-dimensional business graphics with 72 graph types and more than 40,000 presentation possibilities. A spreadsheet editor lets you construct three-dimensional business graphics that you can view from any points in space or manipulate as three-dimensional structures. You can print your graphics in black and white or color on a choice of 130 printers.

You can construct an image through revolution; merge several images; rotate images 360 degrees around an *x*, *y*, or *z* axis; display picture sequences; view frames step by step; and construct and edit an image facet by facet.

With PC-Cartoon II, you get four more ways to construct a three-dimensional structure, which gives you a total of six methods to build objects such as geographical maps in relief, architectural buildings, mechanical tools, in-depth forms, fractals, and character fonts.

You can construct multilingual three-dimensional fonts, a symbols database, three-dimensional space geometry through coordinates, and three-dimensional texts; edit three-dimensional space coordinates of any point of a PC-Cartoon object; design three-dimensional fractals; explode and implode objects; show the metamorphosis of two bodies; and convert molecular software files in PC-Cartoon files.

The packages include a memory-resident utility that lets you convert PC-Cartoon files for use in desktop publishing. The PC-Cartoon packages run under DOS 2.11

continued

International Edition S-100™ "THE PC PEOPLE"

SINCE 1977

P C COMPATIBLE SYSTEMS



ARC

ARC Model 10 XT - 8088-10 MHz, 640K RAM, 360K floppy, MS-DOS 3.3..... CALL

ARC Turbo 12 - 80286-12.5 MHz 1 wait, 1Mb RAM, 1.2 Mb floppy, MS-DOS 3.3 ..... CALL

ARC Options

AT-Style Keytronics keyboard ..... $ 59
RT-Style 101 Keytronics enhanced keyboard $ 59
Add-In Boards..... *See Modems & Boards*
Monitors..... *See Monitors*
Drives..... *See Drives*



AST Premium Workstation ™

Model 205 - 80286/10 MHz, 0 wait, 1 Mb RAM, 1 parallel, 2 serial, 101 keyboard, 2 horizontal 8/16 exp. slots, built in EGA, hard & flpy disk ctrl, 5.25" 1.2 Mb flpy drive..... ~~$2,695~~

AST Premium/286 - Model 80 - 80286/10 MHz - 0 Wait, 512K RAM, serial/ parallel ports, clock/ calendar, 101 keyboard, 1.2 Mb floppy drive, MS-DOS 3.3, GW-Basic, runs 11.5 Norton. ~~$2,295~~

DRIVES - HARD, FLOPPY & TAPE

WESTERN DIGITAL

File Card 20 - 21Mb PC/XT/AT card drive.....$ 369
File Card 30 - 32Mb PC/XT/AT card drive.....$ 395
File Card PS/30 -30Mb microchannel card dr .$ 395

EVEREX

Everex 60i - 60Mb internal tape with software.$ 729
Everex 125Mb Internal Tape .....$ 988
Everex PS/2 - Stream 60 .....$1,249

CDC 300Mb SCSI -for NetWare 2.11 & DCB CALL

Maxtor XT-1140 140Mb.....$1,425

MICROPOLIS 85Mb 28mSEC.....$ 649

Seagate

Seagate PC 20 Mb with WD Ctrl ....$ 269
Seagate PC/XT 30Mb ST-238, ctrl, cable.....$ 289
Seagate ST251-1 - 40Mb AT 28mSEC.....$ 498

Floppy Drives

Fujitsu 360K flpy drive $ 75 / 1.2 Mb .....$ 95
Mitsubishi 3.5" 720K ...$ 115 / 1.44 Mb .....$ 129
Mitsubishi MF501 .....$ 90 / MF504 1.2Mb $ 125
Teac FD-55-BR 48tpi ..$ 85 / GFR570 1.2...$ 99

POWER ACCESSORIES

American Power Conversion

450AT.....$ 425
520 ES.....$ 495
800RT 575W w/UPS Monitor Board I/F.$ 795
1200VX.....$ 925
Interface Cable.....$ 25

Novell U.P.S. Monitor Board Compatible!
** 220 Volt Models Available **

NETWORKING

4-User NOVELL Network System

Server/Work Station:

- **American Research (ARC)** - 12.5MHz, 1 wait, 80286, PC/AT 210W power supply, 1 serial, 2 parallel ports, monitor, 1.2Mb floppy, 2Mb RAM, 71Mb hard drive, 60Mb tape drive.
- **American Power Conversion** 520 Watt U.P.S.
- **NOVELL ELS NetWare 286 Level I** (4-users) Network set-up is Menu Driven with "Hot Print" Utilities!
- **4 ArcNet cards**, 200' cable, 4-port passive hub
- **3 ARC™ M10 XT's** - Each includes: 640K, 4.77/ 10 MHz, 8088-1 CPU, MS-DOS 3.21, RT-style keyboard, amber tilt 'n' swivel monitor.

List Price $13,995- Your Cost $7,895
Lease from $199. per month.

MONITORS & TERMINALS

AST RESEARCH INC.

14" Flat White Tilt 'n' Swivel.. $139
14" EGA Tilt 'n' Swivel $499

SAMSUNG

Samsung EGA tilt 'n' swivel, 14" monitor $359
Samsung 14" tilt 'n' swivel color hi-res..... $239
Samsung 12" TTL tilt 'n' swivel amber ..... $ 79
Samsung Soft White flat screen..... $ 85

TATUNG

CM-1495 OmniScan 14"PGA,EGA,HGC,CGA,VGA with OmniCard 900 controller, auto-sensing. $729
MM-1422 dual freq, t 'n' s 14" green $129
CM-1496 - VGA analog monitor, VGA card, auto vertical mode for 100% IBM compat $639
MM-1295W 12" white OmniScan Monitor with VGA card $395

MDS "The Genius" FULL PAGE for PC/XT/AT.....CALL

WYSE WYSE 50 $389 / WYSE 60 $425
WYSE WY700 1280 x 800 ... $699

MODEMS & BOARDS

ANCHOR

1200/PS2.....$159 / 2400/PS2..... $195
1200 External .....$ 98 / 1200 Internal $ 69
2400 External .....$135 / 2400 Internal $115

EVEREX

Everex EverCom II Internal 1200.....$ 69
Everex EverCom 2400 Internal 2400 (MNP) ..$ 139
Everex EverCom 2400E External 2400 .....$ 189

MultiTech Systems *Multi-Modems*.....CALL

US Robotics

US Robotics Courier HST up to 19,200 bps CALL
2400 Ext.....$175 / 2400 PC Int ...$ 139

AST RESEARCH INC.

Advantage-Prem-512K, S, P ...$ 308
Advantage PS/2 - 512K 24Mb .$ 365
Hot Shot 286-10XT Accel. Bd .$ 349
I/O PAK/2 for PS/2 - S & P .....$ 195
RAMPAGE 286 - 512K.....$ 375
RAMPAGE2 for XT 0K .....$ 175
XFORMER AT replace ment, 8 slot M.B.....$ 599

EVEREX

Deluxe Hi-Res EGA ....$139 / VGA.....$ 259
Magic I/O AT1-3 S,P,G $ 59 / Deluxe PGA..$ 888
Floppy I/O Serial ,Parallel, Game, Clock.....$ 89
Intel Above Board/286 -PCMB4020 512K..$ 388

LASER PRINTERS



Brother HL-8 40 fonts 8PPM 2nd Gen. Canon Engine Emulates Epson, IBM, Diablo 1Mb RAM=Full Pg graphics HP LaserJet II compatible
~~$ 2,895~~ CALL

AST TurboLaser/PS postscript, ricoh, 3 Mb, 35 fonts, 8ppm, AppleMac/PC.....$3,695
H.P. LaserJet Series II..... CALL
NEC LC890 Silentwriter P,S, Appletalk Ports $ 3695
Xerox 4045 Laser A-50 512K, Serial, Parallel Interface, 10ppm $2,888
HP ScanJet Scanner with Starter Kit.....$1,675

PRINTERS, PLOTTERS & FAX

brother *M-1709* .....CALL
brother *HR-40*.....CALL
brother *M-1724*.....CALL
brother *FAX 100* .....CALL

houston instrument PLOTTERS DIGITIZERS

Panasonic
1080i.....$ 169
1091 Model 2.....$ 195
1092 I.....$ 325

XEROX

Xerox 7007 9600 BPS, 18 second / page, + phone with 99 number auto dial, 10 pg feed, up to 7 day delayed send, 200x400 resolution..... $1,375

PC COMPATIBLE SOFTWARE*

Data Base Management

Ashton-Tate dBase III Plus.....$368
PFS: Professional File $129
WordTech DBXL (dBASE 3) "Diamond".....$115

Communications

Carbon Copy Plus (Meridian) $109
Crosstalk XVI (Microstuf).....$ 98

Word Processors

NewWord (WordStar 4.0 clone).....$ 98
WordStar 4.0.....$228
MicroSoft Word.....$235
MultiMate Advantage II.....$278
PFS: Professional Write.....$105
Word Perfect.....$239

Integrated / Spreadsheets

Enable 2.0 (software group) $369
Framework III (Ashton-Tate).....$459
Lotus 1-2-3.....$295
Multiplan 3.0 .....$115
PFS: First Choice.....$ 85
PFS: Professional Plan.....$ 55
Borland Quattro $155
Symphony (Lotus).....$438

Desktop Publishing

PFS: First Publisher.....$ 69
PFS: Art Gallery.....$ 69
Xerox Ventura 1.1.....$489
Aldus PageMaker/PC 3.0 .....$549

Graphics & Mice

Harvard Graphics (for Lotus 1-2-3).....$248
IMSI OptiMouse Serial.....$ 88
IMSI Genius Mouse Serial.....$ 59
Microsoft Mouse .....$ 98
SummaMouse-Optical.....$ 85
SummaSketch 12x12.....$379

Project Management

Harvard Total Project Manager.....$339

* Compatibility with PC/XT/AT Clones not guaranteed.
* Order Carefully-opened software not returnable!


MEMBER MMC MICROCOMPUTER MARKETING COUNCIL

TELEX 9103806778 SNSCORP For Orders

S-100 Div./696 Corp. ◆ 14151 N. 76th St. ◆ Scottsdale, AZ 85260
FAX 602-483-0920 ◆ Customer Service 602-991-7870

Ad Code BI-J

Advertised prices are cash (U.S. Dollars), prepaid, VISA or M/C Only! Customers using American Express, calculate additional charges by dividing the above prices by .95. Special order items require prepayment with other than credit card and they are not cancellable/returnable. All returns subject to a restocking fee or full credit towards a future purchase. All prices subject to change without notice. Credit card charged after shipment. Opened Software packages are not returnable!. Contact our International Department for shipping, handling, and insurance charges.

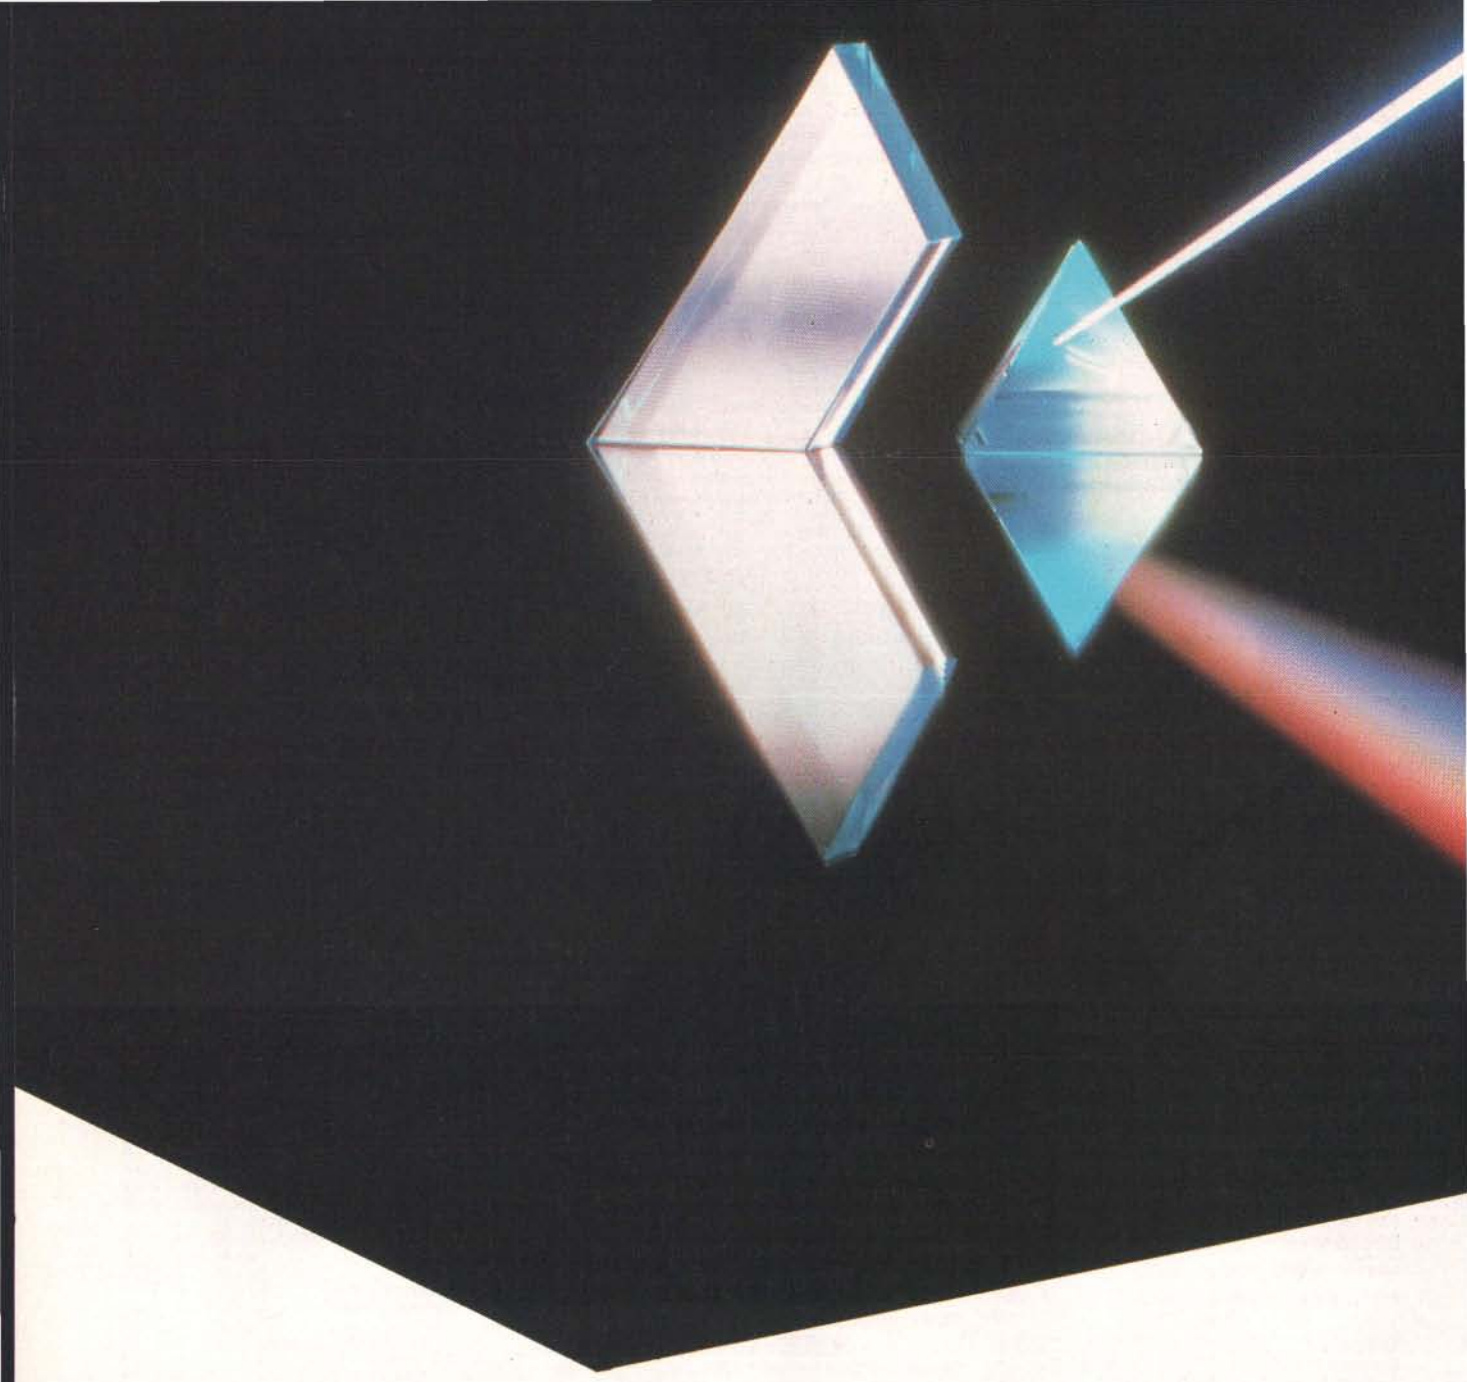

A

Building a better standard in computing.

Acer has transformed its corporate values of quality, innovation, and customer satisfaction into an exciting new spectrum of computer systems.

Acer's worldwide R&D efforts generate the most advanced personal computers to meet your rigorous demands. From high performance entry-level systems to state-of-the-art 386-based and PS/2 compatible personal computers, Acer creates computers to satisfy all your needs. And by building feature-packed products compatible with the industry standards, Acer has become the value leader in the field.

But Acer provides much more than superior personal computers. Acer is your total computing solution. Meeting the connectivity challenge with its local area network, the LAN 30, Acer optimizes your business potential. The LAN 30 gives you an excellent way to share resources between personal computers and make maximal use of peripherals such as the Acer LP-76 laser printer. One of the few companies to provide a one-stop connectivity solution, Acer supplies all the equipment, software, and support you need. In one place. No worries, no sweat.

Acer.
The Spectrum of Value.



Painstaking attention to detail is another Acer value. Thinking small has made us big. Our 500+, 1030, and 910 are not only famous for their high performance, but also for their compact footprint. They fit well on your crowded desktop. They fit well in any workspace.

And each Acer computer reflects Acer's consideration for the little things. Little things that make computers more pleasant to use. Little things like keyboards earning universal praise for their nice touch. Little things like easily accessible front panel on/off switches, and front panel reset buttons.

All these features and Acer's commitment to quality, innovation, and customer satisfaction combine to create systems of unparalleled value. Acer backs up this quality with over 12 years of experience, and a distributorship providing service in more than 70 countries, with over 10,000 dealers worldwide.

Acer Computer systems.
Based on the right values.

Acer 1100 20MHz or 16MHz 386-based supermicro	**LP-76** Laser printer offering true HP LaserJet Series II compatibility
Acer 1030 Enhanced Model 30 compatible with higher speed	**LAN 30** One-stop business connectivity solution
Acer 910 Second generation 286-based machine offering total diskette support	**Acer Station 5280** High performance 286-based diskless LAN workstation
Acer 500+ 8088-based entry-level personal computer running at 8MHz	**Acer Server 5200** Powerful 20MHz 386-based LAN fileserver

HP LaserJet Series II is a registered trademark of Hewlett-Packard Corp.
PS/2, Model 30 are registered trademarks of International Business Machines Corp.


Acer
The Word for Value

Circle 312 on Reader Service Card


Regional Offices: U.S.A., San Jose, Tel: (408)922-0333 ■ U.K., London, Tel: (01)569-2978 ■ W. Germany, Düsseldorf, Tel: (0211)6508-0 ■ Japan, Tokyo, Tel: (03)463-3222 ■ R.O.C., Taipei, Tel: (02)713-2252.

BACKCHART 2000

IBM PC based memory-resident presentation graphics
for nearly all MS-DOS applications
(IBM PC/XT-AT 512K RAM and Harddisc required)

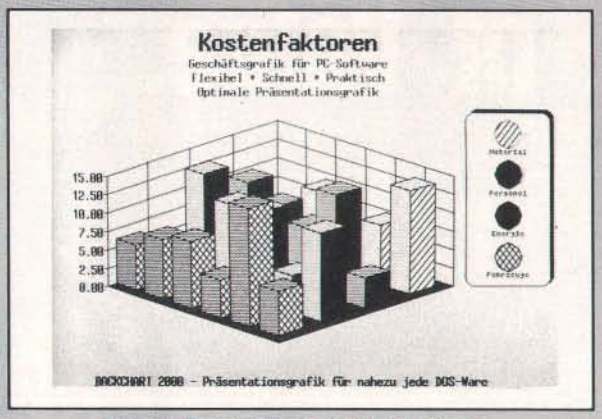

Original BACKCHART 2000 EGA-Screen

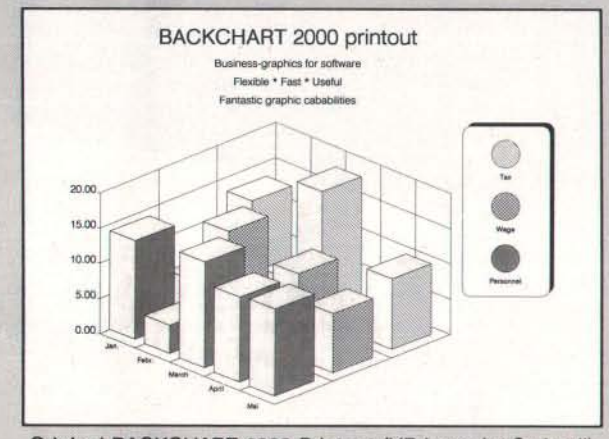

Original BACKCHART 2000 Printout (HP LaserJet Series II)

At a Glance

* Presentation graphics system for IBM PC/XT-AT BACKCHART 2000 adds fantastic presentation graphics capabilities to virtually every MS-DOS software
* Memory resident
* Also usable as a stand-alone system
* BACKCHART 2000 offers you 10 different types of charts
* Fast graphics display
* 37 Filling patterns
* 12 Different typefaces for diagram annotation
* Supports EGA, CGA and Hercules standards
* Excellent printout on dot-matrix-, color- and laserprinters
* Data input is possible from nearly any application using the screen capture function
* Very easy to use
* and many, many other features ... (FREE EGA-DEMO)

BACKCHART 2000 complete only $149

Distributor and dealer inquiries welcome - Local language versions possible - call today our international sales department

INTERLOG - Software GmbH
P.O.Box: 2210 - West Germany (Europe) - 8240 Schoenau
Phone: 08652/3545 Fax: 08652/63805 Contact Mr. Peter Herzog

or higher on the IBM XT, AT, and compatibles with a minimum of 640K bytes of memory, a CGA or EGA, and a hard disk drive.
Price: $249 U.S. for PC-Cartoon; $495 U.S. for PC-Cartoon I; $795 U.S. for PC-Cartoon II.
Contact: Areli, 105 bte 14, Blvd. East Machtens, 1080 Brussels, Belgium, 32-2-520-08-62.
Inquiry 873.

Interface Converters for Data Communications

The Databox ICP range of interface converters allow most popular data communications interfaces to communicate with each other. Each unit has two interface connectors with the appropriate receptacle for each interface type. You can strap the interfaces internally for Data Terminal Equipment or Data Communications Equipment.


The ICP-24/35 model is available for V.24/V.35 interfaces, the ICP-24/11 model for V.24/V.11 interfaces, the ICP-24/21 for V.24/X.21 interfaces, and the ICP-21/35 for X.21/V.35 interfaces. You can plug the ICP units into regular electric outlets; they are housed in an all-metal chassis.
Price: 705 Swiss francs each for the ICP-24/35 and the ICP 21/35; 585 Swiss francs for the ICP 24/21; 465 Swiss francs for the ICP 24/11.
Contact: Databox S.A., 48, Route des Acacias, CH-1227 Geneva, Switzerland, (41) 22-42-21-30.
Inquiry 966.

A System That Reads Japanese Document Layout

Fujitsu offers the FACOM 6365 Document Reading System for its G-100 series of engineering workstations.


The scanner handles up to B4-size documents, automatically extracts the layout, and then executes character recognition at about 20 characters per second for specified regions. To improve the hit rate, the results are verified with a word dictionary located in the workstation. While the system is verifying one word, it is reading the next character. You can read about 3500 characters, including all of JIS level 1 and portions of JIS level 2, and texts with mixed normal and bold typefaces. While pitch can vary from 7- to 28-point, you can use only a single size in any single line. The company reports that the program will be available toward the middle of December.
Price: 5 million yen, with the workstation included.
Contact: Fujitsu Ltd., Marunouchi Center Building, 1-6-1 Marunouchi, Chiyoda-ku, Tokyo 100, Japan, (03) 213-4160.
Inquiry 984.

continued

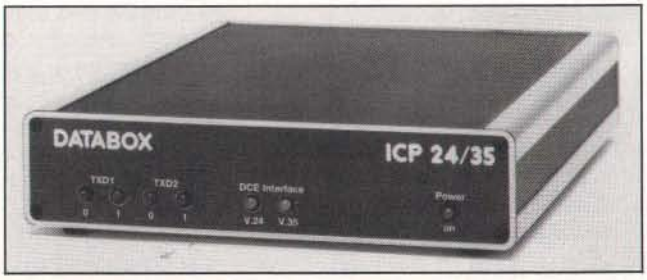

The ICP-24/35 interface converter from Databox S.A.

EUROPEAN VIDEOTEX

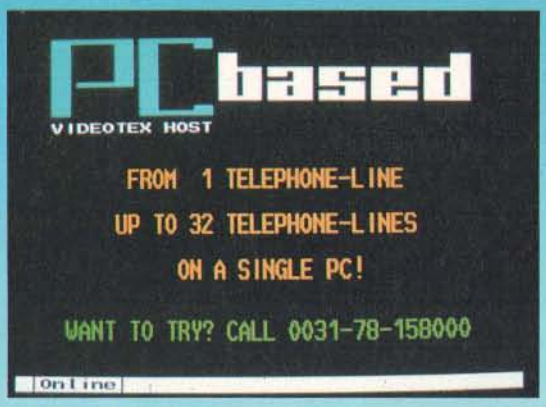



MT-TEL
a private videotex databank system

Up to 32 users simultaneously

MT-TEL is a high performance, low-priced private Videotex system. Due to its self-contained multi-tasking, multi-user operating system, the MT-TEL Videotex database system has a performance only found in mini's or mainframes. With commercially available I/O cards and modems, a standard PC AT can serve up to 32 users simultaneously, using your MS-DOS 3.2!

Quickly up and running

The MT-TEL software comes with a comprehensive manual and is easy to operate. Due to a starter database, which contains a number of sample videotex pages and all available editors (for pages, users, Information Providers, etc.), a new setup is easy and does not take much time.

Fully-blown software

The MT-TEL package contains everthing a grown-up Videotex database system should have: Closed User Groups, Information Providers, Data-collection pages, Electronic Mail (Individual-, Group- and Registered E-Mail, Store-Mail, etc), Dynamic pages, Log-files, Password-Protection (3 levels), Sub-Databases and a number of additions to the Prestel Videotex normalisations.

X25 Gateway

You don't want to use the Public Switched Network? MT-TEL can be interfaced to the X25 datanetwork as well through the 2.1 and 2.2 type Gateway protocol. Almost any European country now has the V.A.P. (Videotex Acces Point) structure connected to its X25 data network. The MT-TEL system connects to that network by an X25 Gateway interface. It enables you to be reached all over the country or all over Europe.

A heavily tested software package

The MT-TEL private Videotex databank software has been tested thoroughly in field-installations during several years. In use in Holland by a.o. the largest private, public Videotex databank ComNet with over 10.000 users and 120 telephone lines, and also by Wehkamp, the major mailorder warehouse in the Netherlands to enable tele-shopping or Merck, Sharp & Dohme pharmaceutical industry, using an IBM System 38 front-end connection. In Belgium by Elma, the countries largest wholesaler of electrical goods. In Italy at the Borsa, the Milanese Stock Exchange. And added to that we can mention a number of smaller systems, varying from 2 telephone-lines to over a 100. Proving that the MT-TEL private Videotex system is unbeatable in performance!

Try it right now? That's possible!

If you have a Prestel Videotex terminal (or program on your PC), try-out the MT-TEL system right now! Call the Dutch ComNet system, a large public databank and see for yourself how the MT-TEL software performs. Sorry, you can only acces a few of the 40.000 pages without being a member of the system. Of course you can subscribe to it (without any charge). But if you use the guest number, which is displayed on the wellcome page you can try the system yourself.

There are three phone-numbers (in Holland) which you can use and which will connect you to one of the front-ends each having 32 telephone lines. Dial: (Holland's country code is 31) 78 158000 or 78 156100 or 78 159900. (Use standard Prestel settings 1200/75 baud.)

Easily expandable

MT-TEL was actually developped to serve up to 32 users simultaneously. It took a number of man-years to develop the software and test it in a real environment. So we decided that the price should be over $20,000.-- for the package, since it performs like Videotex software costing 5 to 10 times that amount on mini's and mainframes. But we are interested in selling a high number of packages and also to position the software in the low-end market for the smaller system. So now, we sell this 20.000 dollar software with a protection device to setup smaller systems for a low price. Starting with a 2 telephone line system (plus the keyboard and the monitor of the system, so actually a 3-user system) for only $1095.--.

A demo package is available

We have the same fully-blown Videotex Host software for you in a demo package. This demo-package has the same complete databank store- and retrieval structure as the real package (actually, it is the real package), but we restricted the software to use only the keyboard and the monitor of the computer itself to acces the system. You can use the demo package (and the official manual) to test it, even to setup a complete database and, if you are fully satisfied, buy the original package, allowing you to handle telecommunications completely. The demo and the original package are fully file- and function compatible. We'll even pay you back the cost of the demo package when you buy the original software!
The demo package will only cost you $245,-- (including shipping in Europe). And remember, we'll send you the $20.000 software for that price!

How to order or to obtain information

You can order a demo or obtain a brochure by phone, by fax, by telex and (of course) by Videotex! Use your Eurocard, Mastercard, Visa or American Expresscard to have your order shipped today.

Micro Technology b.v.
Weteringsingel 6
3353 GZ PAPENDRECHT
NETHERLANDS
Phone xx31-78-410977
Fax xx31-78-150849
Videotex Orderline:
xx31-78-158000
Telex 62425 mtsft nl

We are looking for dealers and distributors

Circle 342 on Reader Service Card



Make
Precision Data Products
Your Source
For Computer Supplies



Save on quality magnetic media and ribbons from world leaders in the computer industry...
Even supplies not available in your area.

Hassle free from Precision Data Products to your Airport...
Or even your door (within 4 days).
We will take care of all documentation & insurance, if you so desire.

Contact Precision Data Products today for current export prices and terms. You will be glad you did!

Precision Data Products™
P.O. Box 8367, Grand Rapids, MI 49518 **USA**
Tel: 616-452-3457 **FAX: 616-452-4914**

Advertise your Computer Products through

BYTE BITS

2″ x 3″ ad size
(5.1 cm x 7.6 cm ad size)

in BYTE's International Advertising Section

For more information
Call Karen Lennie
at 01-493 1451

McGraw-Hill Publications
34 Dover St.
London W1X 3RA

Circle 344 on Reader Service Card



MicroEye IC card enhances IBM's Storyboard Plus.

Enhanced Image Capture for Storyboard Plus

You can now enhance IBM's Storyboard Plus with a new software driver for Digithurst's MicroEye IC full-color image-capture card (see What's New International, page 88A-3, in the March BYTE). The card lets you process and modify captured images for use in Storyboard Plus and incorporate the images of personnel, products, or company logos into the Picture-Maker module of Storyboard Plus to personalize presentations.

According to Digithurst, you can capture color images in under 6 seconds when you invoke the digitize option in Storyboard Plus. You can display images at EGA or VGA resolutions of up to 640 by 480 pixels by 4 bits in 16 colors, or 320 by 200 pixels by 8 bits in 256 colors.

Digithurst also offers the MicroScale IC full-color image-analysis package that utilizes the MicroEye IC card for image input. The software offers facilities for color selection and quantitative analysis of field and object measurement, with pull-down menus, threshold setting, and macro functions.

The software quantifies colors in terms of their RGB content and treats each color as a gray scale with 256 levels. You can select particular colors for analysis from the menus, including yellow, magenta, cyan, red, green, and blue. Black-and-white operation is also available.

You can use the MicroScale IC package on an IBM PC AT, PS/2 Model 30, or compatible computer running under DOS 3.1 or higher.
Price: £495; £990 for the software and the image-capture card.
Contact: Digithurst Ltd., 7 Church Lane, Royston, Hertfordshire SG8 9LG, U.K., (0763) 42955.
Inquiry 990.

C and BASIC Support for STEbus Color Graphics

Arcom Control Systems offers C and BASIC high-level language support for its SG84 color graphics controller board for the STEbus (see What's New International, page 88IS-6 in the July BYTE). The software provides 17 commands that help you develop advanced graphics; generate displays such as MIMIC diagrams, bar charts, trends, or graphics; and add animation-style effects.

continued

PS/2 and PCL - a powerful pair. . .

Benchmark	Turbo Pascal 4	Turbo C 1.5	Quick C 5.1	MS C 5.1	PCL 3.0
BYTE Magazine FLOAT benchmark	6.65	5.15	10.22	9.78	4.60
With 80387:	0.39	0.49	0.49	.049	0.38
Convert 10000 decimals to character strings	2.48	11.87	14.66	13.78	3.35
With 80387:	2.69	2.47	7.52	7.31	1.43
Convert 10000 char. strings to decimals	7.14	9.51	14.17	13.29	2.41
With 80387:	3.13	4.50	6.53	6.49	1.37
Sort array of 20000 random integers with built-in SORT.	–	4.61	4.84	4.83	0.61
Sort array of 5000 random decimals with built-in SORT.	–	13.90	22.62	15.43	0.66
With 80387:		1.87	2.75	2.09	0.66
Sort array of 5000 random 8 byte strings with built-in SORT	–	2.14	2.25	2.25	0.94
Sequential write, 100000 x90 byte records	31.4	31.0	31.5	31.0	10.2
Sequential read, 10000 x90 byte records	31.3	30.9	31.4	31.3	9.2

Manufacturers: Turbo Pascal, Turbo C = Borland. Quick C, C 5.1 = Microsoft. PCL = Calend. All timings are in seconds. They were all taken under identical conditions on a 16MHz IBM PS/2 80 and PC DOS 3.3, without a diskcache and BUFFERS=20 in CONFIG.SYS. Turbo Pascal has no built-in Sort.

But execution speed tells only half the story. . .
PCL's text string handling, window management, communications are superb. You can design elegant and professional screens with ease, make any PCL application RAM-resident or even write self-modifying programs.

If you looked at C and couldn't see the emperor's new clothes then PCL is for you. PCL is much easier to learn, use and maintain. You'll find that it has more useful functions than C for real-life commercial or scientific programming.

And of course PCL will also run on AT/XT/PC's and most clones (just a bit slower). We are beta testing the OS/2 PCL implementation now.

PCL 3.0 costs just £195 + VAT.
To order call **CALEND**, London 894 7409 FAX-7550670
or write to

CALEND P.O. Box 94, Twickenham TW2 6DD, ENGLAND

MIX

SPECIAL OFFERS

POWER C

POWER C Compiler (+673 pg. manual)	£24.95
POWER C Library Source (+Assembler)	£10.00
POWER Ctrace Debugger	£19.95
POWER C Business Math Library	£10.00
MIX Split Screen Editor	£19.95
Btree & ISAM Database Kit	£22.00
Windows Library*	£19.95
UXDOS Unix™ Bourne Shell & Utilities	£22.00

"Send for your FREE demonstration disk"

See the MIX SOFTWARE ad on page 297.

Analytical Engines Ltd

P.O. Box 35 Eastleigh Hampshire
England SO5 5WU Tel: 0703 262099

Circle 315 on Reader Service Card

FORECASTING is EASY

PRO*CAST is the easiest to use forecasting program for the IBM-PC.

AUTOMATIC. Artificial intelligence gives you EXPERT results – even if you're a novice. Just enter your past history for sales, inventories, revenues, etc. and hit one key. You'll have a forecast in less than 30 seconds on most computers.

POWERFUL. Take full manual control, and choose from over a dozen methods – from linear trend to Box Jenkins. You can even draw your forecast on the screen. Full screen editor. Reads WKS/ASCII. GREAT GRAPHICS!

IBM-PC or 100% compatible with 512K & graphics. US $295 + s/h. 99% functional demo $10 + s/h. VISA/MC. WE SHIP AIR MAIL OR COURIER. CALL OR WRITE FOR QUOTE.

by FLEMING SOFTWARE
distributed outside the U.S. by

OVERSEAS TECHNOLOGY, INC.
PO Box 5195, Arlington, VA 22205 USA
703-538-4261
FAX: 703-525-8115
TELEX: 650 155 7424 MCI UW

DEALER INQUIRIES WELCOME

Circle 329 on Reader Service Card

★ Computer Repair/Service & Spare Centre.
We repair IBM Compatible, Amstrad range of Computers, Atari range of Computers.

★ Computer Disk Drive, Monitor etc.

★ We sell Hard Disks, Peripherals Card for IBM & IBM Compatible, Amstrad 1512, 1640 Peripheral

★ Ram Chips 4164, 41256, 41464

★ Full range of Semiconductors

BCL Computers Ltd.
227 Tottenham Court Road
London W1, UK
Tel: 01-631 0139
01 436 4237

Circle 316 on Reader Service Card

Two versions of the software are offered: a new BASIC compiler called AB88, and source-code libraries of Aztec or Microware C routines. Depending on the route chosen, you can run the software on Arcom's IBM PC–compatible 8088 microprocessor, one of its 80188 CPUs under MS-DOS or Concurrent DOS, or a 68008 CPU under the OS-9 operating system.

Both forms of the software implement the same commands with functions that let you build displays; set up text size, slant, and direction; copy blocks from one screen area to another; and generate windows. Additional commands set up the modes of operation for the host graphics processor.

Price: About £100.
Contact: Arcom Control Systems Ltd., Unit 8, Clifton Rd., Cambridge CB1 4WH, U.K., (0223) 411200.
Inquiry 870.

A Printer Sharer Built for Two

The Databox Parallel Printer Sharer is a two-input to one-output Centronics parallel interface switch that lets two personal computers access one printer. An LED indicator on each input channel shows data activity, and the unit can be powered from the printer interface or an external power supply.

The device operates on a first-come first-served basis. It scans both input interfaces for data activity and opens a path for interface signals to and from the printer when it detects incoming data. The second input receives a "printer not ready" signal, which stops data activity. When the first input is finished, the interface is ready for the next output.


Price: 250 Swiss francs.
Contact: Databox S.A., 48 Route des Acacias, CH-1227 Geneva, Switzerland, (41) 22-422130.
Inquiry 994.

Lotus 1-2-3 and 4word for Hitachi B16 Series

You can now purchase versions of Lotus 1-2-3 R2.1J and Lotus 4word, which adds Japanese word processing capabilities to Lotus 1-2-3, for your Hitachi B16LX, LX, EX-II, or MX-II personal computer.

Price: 98,000 yen for Lotus 1-2-3 R2.1J; 25,000 yen for Lotus 4word.
Contact: Lotus Development Japan Corp., Toranomon MF Building No.10, 3-10-11 Toranomon, Minato-ku, Tokyo 105, Japan, (03) 436-4105.
Inquiry 986.

continued

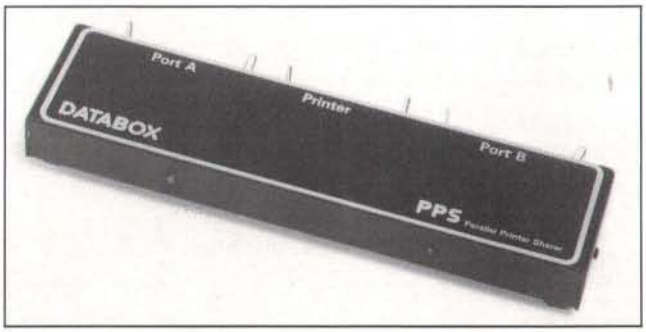

Databox's two-input to one-output printer sharer.

THE C LANGUAGE

The new Watcom compiler produces very fast code with excellent debugging facilities. MSC v5.1 for OS/2 and the OS/2 programmers toolkit are here.

C COMPILERS

Aztec C Personal 1.06D	CP/M-80	£110
Aztec Commercial 1.06D	CP/M-80	£180
BDS C 1.60	Z80 + CP/M-80	£ 65
Eco-C v3.5.0	Z80 + CP/M-80	£ 45
Hi-Tech C	Z80 + CP/M-80	£ 99
Mix C	Z80 + CP/M-80	£ 35
Toolworks C/80 v3.1	CP/M-80	£ 40
Advantage C++	MS-DOS	£375
Aztec C86 Professional	MS-DOS	£110
Aztec C86 Developer	MS-DOS	£165
Aztec C86 Commercial	MS-DOS	£250
CI C86 Plus	MS-DOS	£290
CI Optimizing C86	MS-DOS	£210
De Smet C Programmer	MS-DOS	£ 95
De Smet C Professional	MS-DOS	£165
ECO-C88 V4.0	MS-DOS	£ 70
HIGH C (Metaware) v1.4	MS-DOS	£380
HIGH C 386 v1.4	MS-DOS	£545
Hi-Tech C	MS-DOS	£115
Lattice C v3.22	MS-DOS	£230
Mark Williams LETS C v4	MS-DOS	£ 60
Microsoft C v5.1	OS/2&PC-DOS	£260
Microsoft Quick C v1.0	PC-DOS	£ 60
MIX C	MS-DOS	£ 20
MIX Power C & lib s'ce	PC-DOS	£ 29
Turbo C v1.5	PC-DOS	£ 50
Toolworks C v3.2	MS-DOS	£ 40
Watcom Express C	PC-DOS	£ 95
Watcom v6 Opt comp	PC-DOS	£220
Zortech C v2	PC-DOS	£ 29
Zortech C Power Pack v2	PC-DOS	£ 59
Aztec C86 Developer	CP/M-86	£230
Aztec C86 Personal	CP/M-86	£130
CI Optimizing C86	CP/M-86	£210
De Smet C Starter	CP/M-86	£ 85
De Smet C Programmer	CP/M-86	£125
De Smet C Enhanced	CP/M-86	£165
Hi-Tech C	CP/M-86	£115
HIGH C (Metaware)	Flex OS 286	£380
Aztec C65 V1.05	Apple DOS	£180
Aztec C65 V3.20	Apple PRO-DOS	£230
Aztec C68 Commercial	MACINTOSH	£250
Aztec C68 Developer	MACINTOSH	£165
Aztec C68 Commercial	AMIGA	£250
Aztec C68 Developer	AMIGA	£165
Hi-Tech C	ATARI	£ 99
Lattice C	ATARI	£ 85
Mark Williams C v2	ATARI	£110
Laser C	ATARI	£150

C CROSS COMPILERS

We supply 2500AD, Aztec, Lattice, IAR and Hi-Tech Cross Compilers hosted on MS-DOS and targeted on Z80, 8085, 6502, 6801, 68HC11, 6301, 6809, 8051, 68000 & 68020. Please call for information or advice.

C INTERPRETERS

Latest v3.00 of C-terp has improved debugging facilities.

C-terp V3.0X	PC-DOS	£155
Interactive C	PC-DOS	£195
Introducing C	PC-DOS	£ 85
Living C Plus	PC-DOS	£135
Instant-C v2.2	MS-DOS	£380
RUN/C	MS-DOS	£ 60
RUN/C Professional	MS-DOS	£110

PROLOG LANGUAGE

Arity Standard	PC-DOS	£ 79
Arity Prolog Int. v5	PC-DOS	£225
Arity Int. & Comp. v5	PC-DOS	£495
LPA PROLOG Prof V2.0	PC-DOS	£755
LPA Micro-PROLOG v3.1	MS-DOS	£ 75
Prolog-86 plus v1.0	MS-DOS	£195
Prolog-2 Personal	PC-DOS	£145
Prolog-2 Programmer	PC-DOS	£495
Prolog-2 Professional	PC-DOS	£995
Turbo-Prolog v1.1	PC-DOS	£ 59
ADA Educ.Prolog	MS-DOS	£ 26
ADA FS Prolog	MS-DOS	£ 45
ADA VMI Prolog	MS-DOS	£ 70
ADA VML Prolog	MS-DOS	£150
Prolog-1 v2.2	CP/M-86	£299
LPA Micro-Prolog v3.1	CP/M-86	£ 75
LPA Micro-prolog v3.1	CP/M-80	£ 60
Prolog-1 v2.2	CP/M-80	£225

C LIBRARIES

Microsoft OS/2 programmers toolkits are now in stock. SQL libraries are emerging regularly.

DATABASE

Btrieve	OS/2	£370
Btrieve v4.11	MS-DOS	£160
Btrieve/Multi-tasking	MS-DOS	£370
Btrieve/Network	MS-DOS	£370
XQL	PC-DOS	£510
CBTREE	(source any C)	£100
C-Index/Plus	(source any C)	£175
C-ISAM (L,MS)	MS-DOS	£210
C-to-dBase (source CI)	MS-DOS	£120
C-tree	(source any C)	£210
R-tree	MS-DOS	£155
db-VISTA III s'gle user	PC-DOS	£420
db-VISTA v2.x (most C's)	MS-DOS	£145
db-VISTA v2.x (with sce)	MS-DOS	£350
db-VISTA v2.x multi-us.	MS-DOS	£350
db-QUERY v1.x single-us.	MS-DOS	£145
db-QUERY v1.x sngl.(sce)	MS-DOS	£350
Lattice dBCII	(L) MS-DOS	£160
Lattice dBCIII	(L,MS) MS-DOS	£160
SftFcus Btree&Isam (sce any C)		£ 80
Virtual Memory File Man.	PC-DOS	£150

GRAPHICS

Enhanced Graphics Tlkt	PC-DOS	£185
Essential Graphics v2	PC-DOS	£150
GFX Graphics	PC-DOS	£ 65
GraphiC v4.1(CI,L,DS,MS)	PC-DOS	£270
GSS Kernel system	PC-DOS	£305
GSS Lattice Binding	PC-DOS	£110
GSS Graph Dev Toolkit	PC-DOS	£305
GEM Prog.Toolkit (L)	PC-DOS	£405
GSX Prog.Toolkit (DR)	PC-DOS	£270
HALO '88 (MSC5,LAT,TC)	PC-DOS	£175
MetaWINDOWS (CI,L,MS,T)	PC-DOS	£105
MetaWINDOWS Plus	PC-DOS	£150
Turbo WINDOWS/C (Turbo)	PC-DOS	£ 55

SCREEN & WINDOWS

Blaise View Mngr.(s'ce)	PC-DOS	£245
Curses Screen Mngr. (L)	PC-DOS	£120
Entelekon Windows(s'ce)	PC-DOS	£ 99
Multi-windows (MS,L)	PC-DOS	£220
Panel Plus (source)	PC-DOS	£270
Vitamin C (source)	PC-DOS	£130
Windows for Data (most)	PC-DOS	£200
Windows for C (most C)	PC-DOS	£135
Greenleaf Datawindows	MS-DOS	£135
C-Scape (MS,L,TC)	MS-DOS	£205

GENERAL FUNCTIONS

CQL (CTREE&BTRIEVE)s'ce	PC-DOS	£250
C-Worthy Int.Lib (L,MS)	MS-DOS	£165
Greenleaf (source)	PC-DOS	£ 85
G'leaf C Sampler(TC,QC)	PC-DOS	£ 55
Smorgasbord (source)	PC-DOS	£130
Blaise Tools Plus (sce)	PC-DOS	£ 80
Blaise Tools Plus/5.0	PC-DOS	£ 80
Blaise Turbo C Tools	PC-DOS	£ 80
Blaise Light Tools (ZOR)	PC-DOS	£ 65
ESI Utility Lib(source)	PC-DOS	£105
Entelekon Funct(source)	PC-DOS	£ 95
Phoenix Pforce (source)	PC-DOS	£205
Phoenix Pforce C++ (sce)	PC-DOS	£220
Pro-C (most C)	PC-DOS	£720
Security Library object	MS-DOS	£ 95

COMMS LIBRARIES

Blaise Asynch (source)	PC-DOS	£ 95
Essential Comms(L,MS,T)	PC-DOS	£110
Greenleaf Comms(source)	PC-DOS	£ 95
Multi Comms (L,MS)	PC-DOS	£105

SCIENTIFIC LIBRARIES

Wiley Scientif.Lib.v2	ANY C	£145
Mathpak 87 (L,MS)	MS-DOS	£ 80

PROGRAMMERS UTILITIES

PC-Lint	OS/2&MS-DOS	£ 75
Pre-C (Phoenix Lint)	MS-DOS	£175
C-Documentor	PC-DOS	£195
C-Scan	PC-DOS	£195
C Toolset	MS-DOS	£ 90
Lattice Cross Ref.	MS-DOS	£ 40
Lattice Text Utilities	MS-DOS	£ 85

REAL TIME & MULTI-TASKING TOOLS

Csharp (CI,L,MS) s'ce	MS-DOS	£445
Concurrent C (PC/MPX)sce	MS-DOS	£ 60
Multi C (L,MS,CI)	PC-DOS	£105
Op.Sys.T'box (MS) s'ce	PC-DOS	£ 65
Timeslicer v3.01 (L)	PC-DOS	£160
Timeslicer v4.01M (MS)	PC-DOS	£160
Over-C (L,MS)	PC-DOS	£225

DISK COPYING SERVICE

We can copy files to and from 600 disk formats including CP/M, CP/M-86, MS- DOS, PC-DOS, ISIS, APPLE, SIRIUS, BBC, TORCH, APRICOT, HP-150, TRSDOS, DEC RT- 11, IBM BEF, ATARI ST, AMSTRAD, MACINTOSH.

Our charge is £10.00 + disk + VAT with discounts on small quantities and disks are normally despatched within 24hrs of receipt.

For more information call us.

MODULA -2 COMPILERS

JPI shows good promise and we now have the JPI Technical kit.

Pecan P-Sys. w.Mod-2	PC-DOS	£ 80
Farbware Modula-2	MS-DOS	£ 70
FTL Modula-2 (sml.mem)	MS-DOS	£ 45
FTL Modula-2 (lge.mem)	MS-DOS	£ 55
FTL Modula-2 Developer	MS-DOS	£ 85
Interface M2-SDS	PC-DOS	£ 75
Interface M2-SDS-XP	PC-DOS	£185
JPI Modula-2 v1.10	PC-DOS	£ 59
Mod-2/86 Compiler v3	PC-DOS	£ 58
Mod-2/86 Dev.system	PC-DOS	£145
Modula Corp.PC Mod.2	PC-DOS	£150
FTL Modula-2	Z80/CP/M-80	£ 45
Hochstrasser Mod.2	Z80/CP/M-80	£100
Turbo Modula-2	Z80/CP/M-80	£ 50
Modula-2 (Mod S/W)	ATARI 520ST	£ 75
MacModula-2 v4.1	MACINTOSH	£100

Library source is available with some compilers. Please enquire about other utilities available.

PRICES & DELIVERY

Prices do not include VAT or other local taxes but do include delivery in UK and Europe.
Please check prices at time of order, ads are prepared some weeks before publication.
This page lists some of our products. Call us for a complete pricelist.
Order by phone with your credit card.

CROSS ASSEMBLERS

We supply cross-assemblers by Avocet, 2500AD,IAR Systems and Pecan hosted on MS-DOS, CP/M-86 and CP/M-80 with over 30 target processors.
In total over 200 products with no space to list them here.
We hold some stock but you should allow 10-14 days for delivery.
Please call for information or advice.

PROGRAMMING TOOLS

Ada Compilers	Algol Compilers
Assemblers & Libs	AWK
Basic Compilers	Basic Interpreters
Basic Utilities	Basic Libraries
BCPL Compilers	C Compilers
C Interpreters	C Libraries
C Utilities	Cobol Compilers
Comms.Libraries	Cross Assemblers
Database Libs.	Debuggers
Dis-assemblers	Editors
Engineers Libs.	Expert Systems
Forth	Fortran Compilers
Fortran Libraries	Graphics Libraries
Icon	Linkers/Locaters
Lisp	Modula-2
Nial Interpreters	OPS 5
Pascal Compilers	Pascal Libraries
Prolog	Rexx
Risc	Screen Libraries
Smalltalk	Snobol

We stock many items for which there is no space in these advertisements.

GREY MATTER
4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
TEL. (0364) 53499

GREY MATTER
4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
TEL. (0364) 53499

GREY MATTER
4 Prigg Meadow, Ashburton, Devon TQ13 7DF.
TEL. (0364) 53499

PL/M Users:

Replace your Intel MDS!

With Experts-PL/M™ you can now develop and maintain PL/M-85 software on a PC - using the most advanced, Intel-compatible PL/M compiler in the world.

Experts-PL/M™

- the **80/PC™ PL/M** compiler
- the **80/AS™** assembler
- the **80/RL™** link/locate tool-set

£799 Sterling

Warren Point International Ltd
Babbage Road, Stevenage
Herts SG1 2EQ England
Tel: 0438-316311
Fax: 0438-313485
Tx: 826255 DBDS G

Circle 357 on Reader Service Card

PROGRAMMING NETBIOS

Communication on networks

- ★ *A complete unit for Turbo Pascal.*
- ★ *Includes all procedures and functions necessary to communicate between programs and devices on network.*
- ★ *Uses netbios protocol directly.*
- ★ *A complete demo program included.*
- ★ *Source code available.*

Price: Compiled unit $59.95.
Source code $99.95.

Traffic Software Ltd.
P.O. Box 4123, 124 Reykjavik, Iceland
Tel. int-354-1-687150 TELEX 3101 ISTEL IS
Telefax int-354-1-687447

Circle 355 on Reader Service Card

IEEE488

Technology that hits the mark


- For **IBM-PC/XT/AT/IC/RT6150** and all other compatible computers
- For PHILIPS PC **:YES**
- **HP commands** (enter, clear etc.) implemented
- **SRQ/ASYST** compatible
- **64 kByte** memory capacity
- **DMA** and **INTERRUPT** can be activated by **simple commands**
- **HELP functions, SYNTAX** monitoring in **clear text**
- BASIC, BASIC(compiled), TURBO-BASIC, (TURBO-) PASCAL, MODULA-2, FORTRAN, C, ASSEMBLER

DEALER + OEM WELCOME

ines
Messtechnik Datenverarbeitung

Ines GmbH
Neuenhöfer Allee 45
5000 Köln 41
West-Germany
Phone: -49-221-438659
Teletex: -2627-221-4237 gizkln
FAX: -49-221-491871

Circle 336 on Reader Service Card

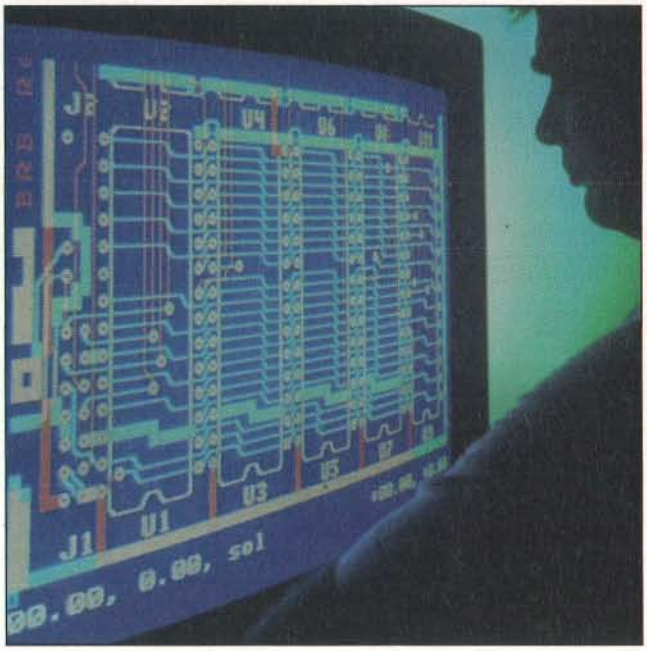

Riva's printed circuit board layout design program.

An Enhanced Schematic Design Program

The new auto-routing feature of the smARTWORK 1.4 printed circuit board (PCB) layout design program is controlled by the netlist output from schematic design programs and significantly reduces layout design time, according to Riva Ltd.

The program is a low-cost software tool for creating circuit-board artwork on an IBM PC or compatible. Once you complete a schematic design, you place pads and name pins in smARTWORK. A check program then looks for errors or discrepancies between the smARTWORK layout and the imported netlist. Once these have been reconciled, smARTWORK loads the netlist from the schematic design program and auto-routes PCB tracks onto one or both sides of the boards using a vertical or horizontal routing priority.

You can view the circuit board or a routing-status page during the routing process. Also, the auto-route facility routes only until it fails to complete a route or until it has tried all possible routes. With smARTWORK, you can fix failed routes and restart the auto-router from the failed route, the next route, or the beginning route.

Version 1.4 of smARTWORK runs under DOS 2.1 or higher on the IBM PC, XT, AT, PS/2s, and compatibles with a minimum of 512K bytes of RAM. You can import netlists from schematic design packages such as HiWire, SCHEMA, FutureNet Dash 1/2/3, Tango-Schematic, and OrCAD. You can output camera-ready artwork to Hewlett-Packard, Houston Instrument, and Gerber plotters or to most dot-matrix printers.

Price: £695; £75 for an upgrade.

Contact: Riva Ltd., 3 Bentley Industrial Centre, Bentley, Farnham GU10 5NJ, U.K., (0420) 22666.

Inquiry 879.

continued

Agentur Kreis, München


The Ada® world just changed. Again.

Meridian Europe continues its tradition of Ada "firsts" by introducing a powerful new set of integrated software development tools.



AdaVantage Optimizing Ada Compiler

Available for the APPLE Macintosh and the IBM PC and compatibles. An exceptionally fast validated Ada compiler that for the first time brings a true world-class production quality Ada compiler to your desktop personal workstation.



AdaVantage Debugger

An interactive source-level debugger for use with programs written using the Meridian AdaVantage compiler. The debugger allows the programmer complete control over the execution of an Ada program in high-level Ada terms – no knowledge of the underlying machine architecture is required. The debugger supports break points, subprogram traces, single-stepping, call backtraces, and full Ada reference syntax.




Ada Developer Interface

A powerful interactive screen-orientated interface to the Ada library dependancy information. Includes built-in operations to edit, "pretty print", compile, and link any Ada library unit. Configuration file allows user customisation of all operations and displays.




Ada Run-Time Customization Library

For preparation of Ada application programs for execution on embedded systems based on 80X86 or other operating systems. The Library is a collection of Ada source files, batch files, and documentation that define the customizable, system-dependant components of the AdaVantage Run-Time System.



Ada Designer

A collection of tools supporting the design, programming, and the documentation phases of the software life cycle. Tools include a structured editor/synthesizer coupled to a text editor/incremental syntax analyzer for Ada, an incremental editor for design languages, a program deviation processor that guarantees your design is always in sync with your implementation, and a structured documentation generator.



Ada Configuration

The compilers all run in a standard PC configuration (min. 640 K of memory and hard disk) or the Macintosh Plus, SE, II, and hard disk.

For more information call Meridian Europe or one of the distributors listed below.

> "AdaVantage... is an Ada software milestone."
> *PC Week*

MERIDIAN
EUROPE
A STEP AHEAD OF THE COMPETITION

Pixisstr. 2 · D-8000 Munich 80 · W-Germany · +49-89-9 21 00 80
France: European Advanced Technologies · 35, rue Brunel · F-75017 Paris · Tel.: 45 74 70 94 — **Germany:** GSE Software Engineering · Postfach 86 03 49 · D-8000 München 80 · Tel.: 0 89-92 10 08 27 — **Sweden:** Sypro i Arboga AB · Paradisgränd 6 · S-73200 Arboga · Tel.: 05 89-12 81 0 — **United Kingdom:** High Integrity Systems · Astra Centre · Edinburgh Way · Harlow, Essex CM 20 2BE · Tel.: 02 79-45 00 00

The information contained herein is subject to change without notice. Ada is a registered trademark of the U.S. Government (AJPO), AdaVantage and AdaDesigner are trademarks of Meridian Software Systems, Inc. References to other computer systems use trademarks owned by the respective manufacturers. Meridian Europe is a trademark of Meridian Software Systems, Inc. licensed to GSE

Circle 333 on Reader Service Card

C_GRAPH V.2.1

interactive, device-independent graphics programming in C

- 300+ functions to generate and manipulate pictures and control device
- implements LEVEL 2b of GKS + many additional features not covered by the standard (e.g. current position, shielding)
- supports MICROSOFT, LATTICE and TURBO C, UNIX/XENIX
- most hardware supported
- optional device-driver-construction-kit to use even the most specialized hardware

Prices: Professional System (MS/PC-DOS) **DM 798,—** (Options and other Systems: call!)

Kessler-Software • Mitteldorfstr. 17 • 3400 Göttingen
Tel. 0049-551-792488 • West Germany

Circle 340 on Reader Service Card

IBM-PC BUS
Input/Output Cards

DIP-24	Opto-isolated digital input
DOP-24	Opto-isolated Darlington output
PIO-48	TTL level digital input/output
DPC-10	Pulse counter/timer/generator
DCM-16	8 Inputs, 8 Outputs, CTC
AIP-24	12 Bit ADC input
AOP-8	12 Bit DAC output
AIS-16	12 Bit isolated ADC input
TIP-8	Thermocouple input
SIO-2	RS232/422/485/20mA I/O
ST-24	Screw terminal adaptors
BXT	Backplane extenders
BP-5/11	5/11 Slot backplanes

BLUE CHIP TECHNOLOGY

Blue Chip Technology Limited, Main Avenue, Hawarden Industrial Park, Manor Lane, Deeside CH5 3PP. Telephone: (0244) 520222.

Circle 318 on Reader Service Card

DISK CONVERSIONS
DISK/DISK • DISK/TAPE • TAPE/TAPE

We can transfer your data between over 1,000 different Micros, Minis and Mainframes, giving more than 1,000,000 permutations

Tape
1/4" - QIC-11, QIC-24, (QIC-02)
1/2" - 800, 1600, 3200, 6250 BPI
ANSI, CPIO, DEC 'DOS', IBM Labelled / Unlabelled / ASCII / EBCDIC / Binary, ICL 6 bit, TAR, VAX Backup / Copy, VME
DEC - TK50, TS11, TU58; RL02 removable disk pack

Floppy
8", 5¼", 3½", 3"
Acorn, Amiga, Amstrad, Apple, Archimedes, Atari, CP/M, CP/M86, FLEX, IBM, Idris, ISIS, Macintosh, MDOS, MS-Dos, OS/9, PC-Dos, RT11, Torch, Unix, Victor-Sirius, Xenix and more

WP / Typesetter
Many formats, including Displaywriter, Olivetti, Wordplex, Linotype...

Disk to Page
Typesetting / Laser printing, full design and print production services

Overnight - Most formats returned by next day's post

Kermit Distribution Centre

Ring or write for a full format list
Prices from £10 + VAT per disk

Usual terms C.W.O

A.L. DOWNLOADING SERVICES
VOYSEY HOUSE
BARLEY MOW PASSAGE
LONDON W4 4PT
Fax: 01-994 4959
Tel: 01-994 5471

Circle 313 on Reader Service Card

Dynaware Ports VJE-Beta to the Macintosh

Dynaware has ported the VACS-developed Japanese-language front-end processor VJE-Beta to the Macintosh Japanese-language processing system KanjiTalk 2.0. You can transfer dictionary files used on NEC PC-9801 machines to the Mac. While the kana-kanji conversion function is the same as that used on the NEC, the user interface (including input-mode change and dictionary registration) has been rewritten to the Mac style.

The company has also ported its in-house Dynapers see-through architectural software package to the Mac II.

Price: 20,000 to 35,000 yen.
Contact: Dynaware Corp., 1-9-13 Ishibashi, Ikeda, Osaka 563, Japan, (0727) 62-8201.
Inquiry 967.

Improved Pascal for the Amiga

The upgraded version of Metacomco's Pascal Compiler for the Commodore Amiga has a number of optional extensions to the ANSI standard. Version 2.0 lets you separately compile modules using Export, Import, and Module, dynamic strings, and random-access files. You can have dynamic strings up to 32,766 characters long and use the new routines Concat, Copy, Delete, Length, POS, and STR, which are similar to those in Turbo Pascal, to handle them. Other enhancements include bit-wise operators; binary, octal, and hexadecimal constants; a Step addition to the FOR statement; an Otherwise clause for the CASE statement; and run-time I/O error handling via IORESULT and IOMESSAGE. The interface has been improved and updated to be compatible with AmigaDOS 1.2.

Price: £89.95; £38.50 as an upgrade.
Contact: Metacomco plc., 26 Portland Sq., Bristol BS2 8RZ, U.K., (0272) 428781.
Inquiry 989.

Prolog Processing System

CRI-Prolog is a DEC-10-type Prolog processing system equipped with an incremental compiler function. You can sequentially interpret compiled description with the system's floating-point and dispersion operations. Object-oriented programming is available as an option. Also available from CSK is Tiny-Prolog, a program set excluding the compiler and object-oriented and C-linking functions; it comes with a textbook.

Price: 68,000 yen, 8000 yen for Tiny-Prolog.
Contact: CSK Corp., Shinjuku Sumitomo Building 16F, 2-6-1 Nishi-Shinjuku, Shinjuku-ku, Tokyo 163, Japan, (03) 505-550.
Inquiry 995.

Enhanced SCSI Processors

Manhattan Skyline offers four new enhanced SCSI processors for applications including disk drives, tape drives, printers, voice/mail, page scanners, communication gateways, instrumentation, workstations, subsystems, host adapters, and intelligent terminals.

The NCR 53C90A processor features an enhanced direct-memory-access interface, SCSI-2 support, FIFO

continued

INTRODUCING

LANsmart™

Network Operating System

D-Link®
Bright New Solution to your multi-user needs !

LANsmart is an advanced multi-user network operating system, which allows you to share the resources of any personal computers within a D-Link Local Area Network, and to communicate with one another over the network. LANsmart runs on IBM PCs, XTs, ATs, PS/2s and their compatibles.


Fully DOS 3.1 file/record locking and NETBIOS compatible LANsmart will allow you to run most multi-user software without modification

Versatile, powerful and simple to use, D-Link LAN products offer a complete solution to your networking needs....at a price you can afford.

Ethernet or Twisted-pair hardware, and a vast array of optional network software are available to the D-Link user, you can even network your PS/2s. With D-Link, the possibilities are endless....

OEM and distributors are welcome.

Contact us now for further information.

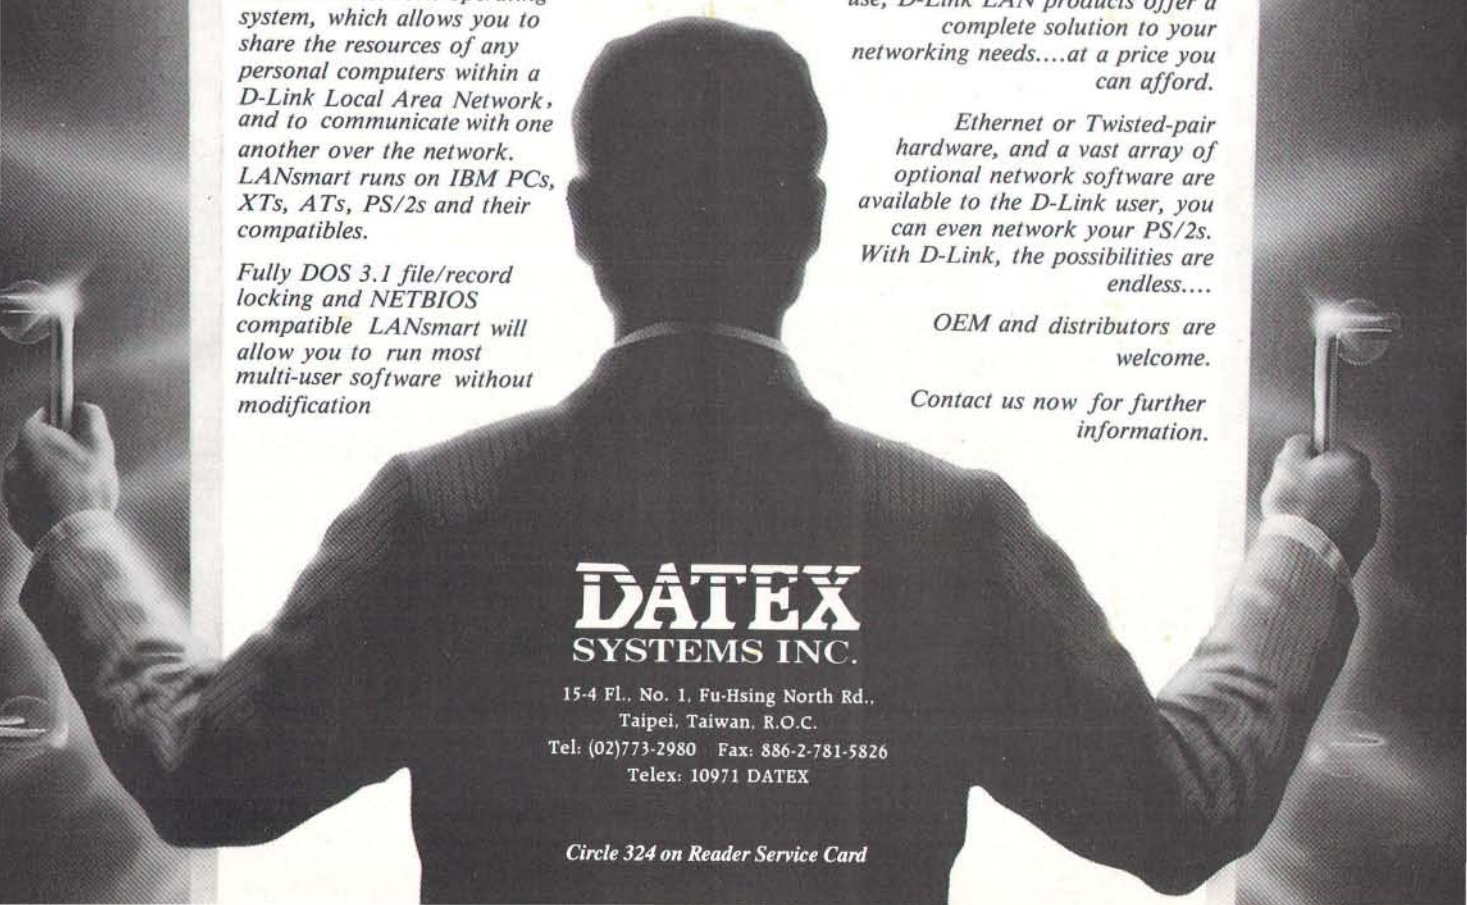

DATEX
SYSTEMS INC.

15-4 Fl., No. 1, Fu-Hsing North Rd.,
Taipei, Taiwan, R.O.C.
Tel: (02)773-2980 Fax: 886-2-781-5826
Telex: 10971 DATEX

Circle 324 on Reader Service Card

data zeroed on chip reset, more flexible register I/O timing, and new target features, including Target Stop DMA.

The NCR 53C90B processor adds the ability to pass parity through on the FIFO data to the features of the 53C90A. Other features of the 53C90B include parity bit for each FIFO stage and parity enable bits for DMA, I/O, and SCSI.

The NCR 53C94 and the NCR 53C95 processors are 84-pin plastic leadless chip carrier devices that have the pass-parity option, in addition to an 8-bit processor bus and a 16-bit split data bus that you can use for data and processor I/O.

According to the company, the devices maximize protocol efficiency by minimizing host intervention with combination commands. You can implement combination commands with sequential logic, and dual-ranked registers allow for command pipelining. The processors also offer sustained asynchronous data transfers of over 3 megabytes per second and sustained synchronous data transfers of up to 5 megabytes per second. Programmable bus offset up to 15 improves speed matching, and a dual-ranked transfer counter helps to eliminate intersector transfer delays.

Price: £12.33 for the C90A; £13.21 for the C90B; £15.42 for the 53C94; £16.52 for the 53C95.

Contact: Manhattan Skyline Ltd., Manhattan House, Bridge Rd., Maidenhead, Berkshire SL6 8DB, U.K., (0628) 75851.

Inquiry 991.

Compact Unix Machine

The extremely compact NCR Tower 32/200 Unix machine from NCR measures 320 by 123 by 432 millimeters, or about the same size as the NEC PC-9801UX. A 16.7-MHz 68020 CPU, 1 to 8 megabytes of main memory, and up to a 100-megabyte hard disk drive can be internally mounted. The maximum hard disk drive capacity, including external drives, is 440 megabytes. The operating system is Tower 32/200 O/SV, which is based on Unix System V version 3, and it supports up to four users.

At the same time, NCR announced the floor-standing Tower 32/450 and Tower 32/650, new versions of the existing 32/400 and 32/600 machines that are higher-speed and can handle more users.

Price: 1.74 million yen for the 51-megabyte hard disk drive configuration.

Contact: NCR Japan Ltd., 1-2-2 Akasaka, Minato-ku, Tokyo 107, Japan, (03) 582-6111.

Inquiry 969.

Three Portables with Flat-Panel Displays

Fujitsu's FM R-30HX portable computer is designed to compete with Japan IBM's PS/55 Model 5535. It features an 80286 CPU running at 8 MHz; 1 megabyte of

continued

NOW YOU HAVE A CHOICE


in Software Protection

The Electronical Key

The Electronical Key is designed for software packages which are reproduced identically.

Both the Electronical Key AND The Memory KEY :

- ❑ are transparent to end user
- ❑ will not interfere with peripheral operations
- ❑ allow unlimited backup copies
- ❑ are easily installed
- ❑ are very small in size

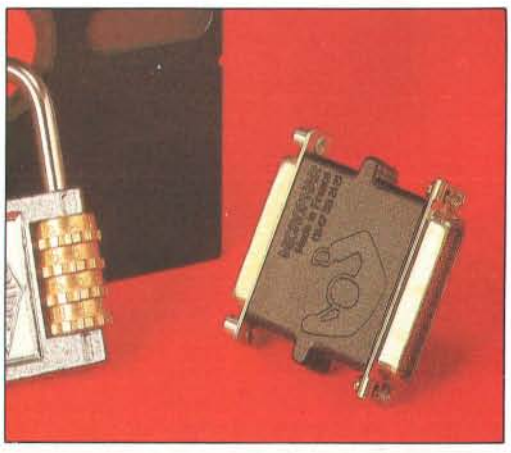

The Memory Key

The Memory Key comes with unique software which permits the use of its available read/write memory. Each byte of memory can be addressed individually or in groups for specific identification. Also, numerical information can be transferred between the Memory Key and your software and acted upon. The Memory Key comes with special error checking abilities. Example applications are :

- ❑ modular package control
- ❑ serialization
- ❑ software customization
- ❑ sophisticated protection
- ❑ demo control
- ❑ auditable and easy software leasing
- ❑ any "counter" operation

The ease of use, cost effectiveness and functionality of the Memory Key allows for previously unavailable controls and applications.

MICROPHAR

42, Av. Sainte-Foy
92200 Neuilly-sur-Seine
FRANCE
Tél. (33) 1 47 38 21 21
FAX : (33) 1 46 24 76 91


Please contact us to obtain our Distributors addresses :

BELGIUM
FRANCE
GERMANY
ITALY
SPAIN
PORTUGAL
SWITZERLAND
UNITED-KINGDOM
U.S.A.

Circle 343 on Reader Service Card

Great News for Volume Buyers

1987 PC Magazine Editor's Choice 1988

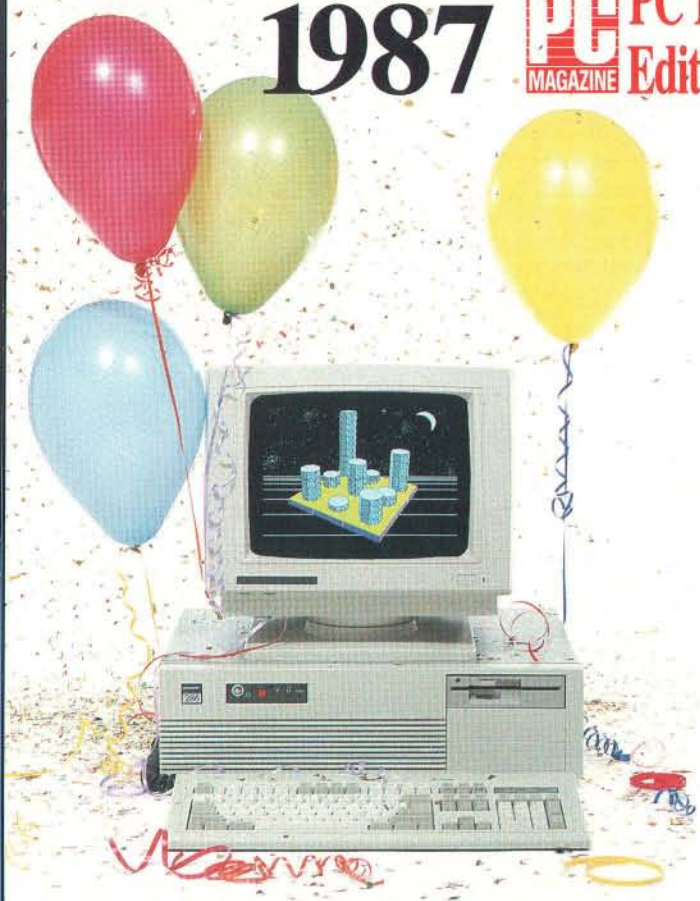



Standard-286/8

". . . its performance, features, and price are enough to make me want to take it home."

— **Vincent Puglia**
PC Magazine
Feb. 10, 1987

Standard-286/10

"Overall, the Standard-286/10 appears to be one of the most attractive values. . . It comes with a good complement of manuals and software and performs precisely as you would expect. You should be happy with this one."

— **Alfred Poor**
PC Magazine
Feb. 16, 1988

Circle 321 on Reader Service Card

We are looking for dealers outside of the United States to resell the award-winning Standard Brand line of personal computers and peripherals, as well as other name brand products, including MiniScribe® hard drives, Samsung® and NEC® monitors, Zenith® and Epson® computers and peripherals, Hayes® modems, Panasonic® and Okidata® printers, and much more.

CompuAdd

12303-G Technology Blvd.
Austin, Texas 78727 U.S.A.
Telephone: 512-258-5575
Ask for International Department
Telex: 763543 COMPUADD AUS
TeleFax: 512-250-5760

MiniScribe · Zenith data systems · OKIDATA · Panasonic Office Automation · EPSON · NEC · Hayes · SAMSUNG

Performance • Value • Compatibility
Quality • Dependability • Price • Support

Why Our Products?

Because we're one of the largest direct-mail computer and computer product companies in the United States.

And with over six years in business, we have proven that our IBM® compatible computers and products consistently maintain the high quality and great personal support that you expect.

Performance, features, and prices are what make us stand alone against our competition.

CompuAdd
"Personal Computer Products"

Circle 359 on Reader Service Card

SOFTWARE SECURITY MODULE

An easy to use hardware/software combination for securing data/programs.



Our security modules can be used simply as 'Dongles' through to advanced encryption – decryption systems.

- ★ For IBM PC family (and compatibles)
- ★ Variants for other systems
- ★ Advanced construction – rugged and compact
- ★ Proven throughout the world
- ★ Transparent operation – user friendly
- ★ Driver software supplied for variety of applications

CTL

Control Telemetry of London
11 Canfield Place, London NW6 3BT
Tel: 01- 328 1155 Telex 265871 ATTN: CJJ181

Subscription Problems?



We want to help!

If you have a problem with your BYTE subscription, write us with the details. We'll do our best to set it right. But we **must** *have the name, address, and* **zip** *of the subscription (new and old address, if it's a change of address). If the problem involves a payment, be sure to include copies of the credit card statement, or front and back of cancelled checks. Include a "business hours" phone number if possible.*

BYTE
Subscriber Service
P.O. Box 7643
Teaneck, NJ 07666-9866

main memory, expandable to 2 megabytes; one 3½-inch internal floppy disk drive; a 20-megabyte internal hard disk drive; one RS-232C serial port; one Centronics parallel port; an interface for a second floppy disk drive; and two general-purpose expansion slots.

The 12-inch backlit flat-panel display is a black-and-white LCD with a resolution of 640 by 400 pixels. The FM R-30HX measures 360 by 170 by 305 mm and weighs 9 kilograms, including the keyboard. The operating system is MS-DOS 3.1, which is available as an option.

Applications available for the FM R-30HX include Ichitaro 3, Hanako, Lotus 1-2-3, and Multiplan. It is an upwardly compatible successor to 8086 floppy-disk-based FM R-30BX.

The FM R-10LT portable computer is part of the FM R series but is not compatible with them. It features an 80L186 CPU running at 10 MHz; 448K bytes of main memory, expandable to 640K bytes; one or two internal 3½-inch floppy disk drives; one RS-232C serial port; one Centronics parallel port; and one expansion port for a second floppy disk drive (limited to a model with one floppy disk drive). Expansion slots include one for general purpose, one for memory, and one for an operating-system ROM card.

The display is a 12-inch, reflective, backlit LCD with a resolution of 640 by 400 pixels. External dimensions are 310 by 335 by 80 mm, and it weighs about 5 kilograms.

The FM R-10LT's software is supplied on ROM cards. The operating system is MS-DOS 3.1, which Fujitsu will supply on a ROM card along with its OASYS Japanese word processing application. Additional applications will also be available on ROM cards. You can use a nickel-cadmium battery pack to power the computer. The company claims that shipment of the FM R-10LT will begin in November.

The FACOM 9450LT mkII is the first laptop in the 9450 family; it is designed to replace the existing desktops. It uses the MN1617 CPU running at 20 MHz and the APCS III alpha operating system, the same as the rest of the 9450 family.

Other features include 1 megabyte of main memory, expandable to 1.5 megabytes; one internal 3½-inch floppy disk drive; a 20- or 40-megabyte internal hard disk drive; one RS-232C serial port; one Centronics parallel port; one expansion board, which connects a 10-key pad, a bar-code reader, or a magnetic card reader; and room for a second floppy disk drive. Expansion slots include two general-purpose slots and one for memory.

The display is a 12-inch plasma (4-tone) LCD with a resolution of 640 by 480 pixels. External dimensions are 310 by 367 by 96 mm, and the computer weighs about 8 kg. The operating system is APCS IIIalpha, which is available as an option.

Price: 498,000 yen for the FM R-30HX; 198,000 yen for the FM R-10LT with a reflective LCD and one floppy disk drive; 228,000 yen with two floppy disk drives; 248,000 yen for the FM R-10LT with a backlit LCD and two floppy disk drives; 538,000 yen for the FACOM 9450LT mkII with a 20-megabyte hard disk drive; 688,000 yen with a 40-megabyte hard disk drive.

Contact: Fujitsu Ltd., Marunouchi Center Building, 1-6-1 Marunouchi, Chiyoda-ku, Tokyo 100, Japan, (03) 213-4160.

Inquiry 982.

continued

InfoWorld: Clarion's Professional Developer™ Rated #1.

"When it comes down to the bottom line, Clarion gets our vote." – InfoWorld

INFOWORLD PRODUCT COMPARISON—REPORT CARD

PRODUCTS	RELATIONAL DATA ENTRY	RELATIONAL REPORTING	PROGRAMMING LANGUAGE	PROGRAM SPEED	DOCUMENTATION	EASE OF USE	TECHNICAL SUPPORT	VALUE	FINAL SCORE
CLARION PROFESSIONAL DEVELOPER 2.0	EXCELLENT	EXCELLENT	EXCELLENT	GOOD	VERY GOOD	EXCELLENT	EXCELLENT	EXCELLENT	8.2
Rbase FOR DOS 2.0	EXCELLENT	EXCELLENT	VERY GOOD	SATISFACTORY	EXCELLENT	EXCELLENT	GOOD	EXCELLENT	8.2
PARADOX 2.0	EXCELLENT	EXCELLENT	VERY GOOD	SATISFACTORY	VERY GOOD	EXCELLENT	GOOD	EXCELLENT	8.0
DATA EASE 2.5r3	EXCELLENT	EXCELLENT	GOOD	SATISFACTORY	VERY GOOD	EXCELLENT	GOOD	EXCELLENT	7.8
DATAFLEX 2.3	EXCELLENT	EXCELLENT	VERY GOOD	GOOD	VERY GOOD	SATISFACTORY	UNACCEPTABLE	GOOD	6.6
ADVANCED REVELATION 1.0	EXCELLENT	EXCELLENT	VERY GOOD	GOOD	VERY GOOD	VERY GOOD	UNACCEPTABLE	GOOD	6.2
Dbase III PLUS 1.1	POOR	POOR	GOOD	SATISFACTORY	EXCELLENT	SATISFACTORY	GOOD	POOR	5.2
PROFESSIONAL ORACLE	EXCELLENT	POOR	EXCELLENT	GOOD	POOR	UNACCEPTABLE	SATISFACTORY	POOR	4.9

After hundreds of hours testing the industry's foremost relational databases – scoring them on fourteen criteria – and comparing them head to head, the editors of InfoWorld emerged with an undisputed winner.

Clarion's Professional Developer.

The first programming environment to integrate the simplicity of a database product with the robust characteristics of a true programming language in one affordable package.

A programming environment so powerful it caused the InfoWorld editors to comment: "No other product's language comes close to Clarion's degree of functionality."

A product so efficiently constructed, it prompted them to add: "...with all its superb utilities, (Clarion) is ideally suited for the most complex and challenging of database programming tasks; it earns an indisputable excellent in ease of use."

And an applications developer so highly evolved it will: "...cut your development time to a fraction of what most other development systems would require. A must-have for professional applications programmers." And finally, "Serious applications development is a disease. Clarion is the cure."

In all, a somewhat favorable evaluation of our product. But then we'd prefer you think of it as a prescription. To fill it, return the coupon below. Or call Clarion today and ask for the Clarion dealer nearest you.

- Slash development time and effort from prototyping to completion
- Automatically generate source code for entire applications
- Generate dazzling customized screens and reports
- High-speed bullet proof data management with built-in LAN support
- Interfaces with C or Assembler routines for open-ended solutions
- Produce DOS executable programs that don't need run-time systems

Clarion Professional Developer and Clarion Software are trademarks of Clarion Software. Copyright 1988 Clarion Software.

1-800-354-5444 • FAX 305-946-1650

CLARION
PROFESSIONAL DEVELOPER™



All New Version 2.0

The Clarion Professional Developer Is A Total Programming Environment That Runs On Any IBM PC, PS/2, Or True Compatible With 384K Of Memory And A Hard Disk. The Retail Price Is Just $695.

For A Free Copy Of Our Tutorial Diskette And Introductory Material Simply Return This Coupon

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone (_____) _____


Mail This Coupon To:

Clarion Software
150 East Sample Road, Pompano Beach, FL 33064

Circle 320 on Reader Service Card

BYTE & Europe



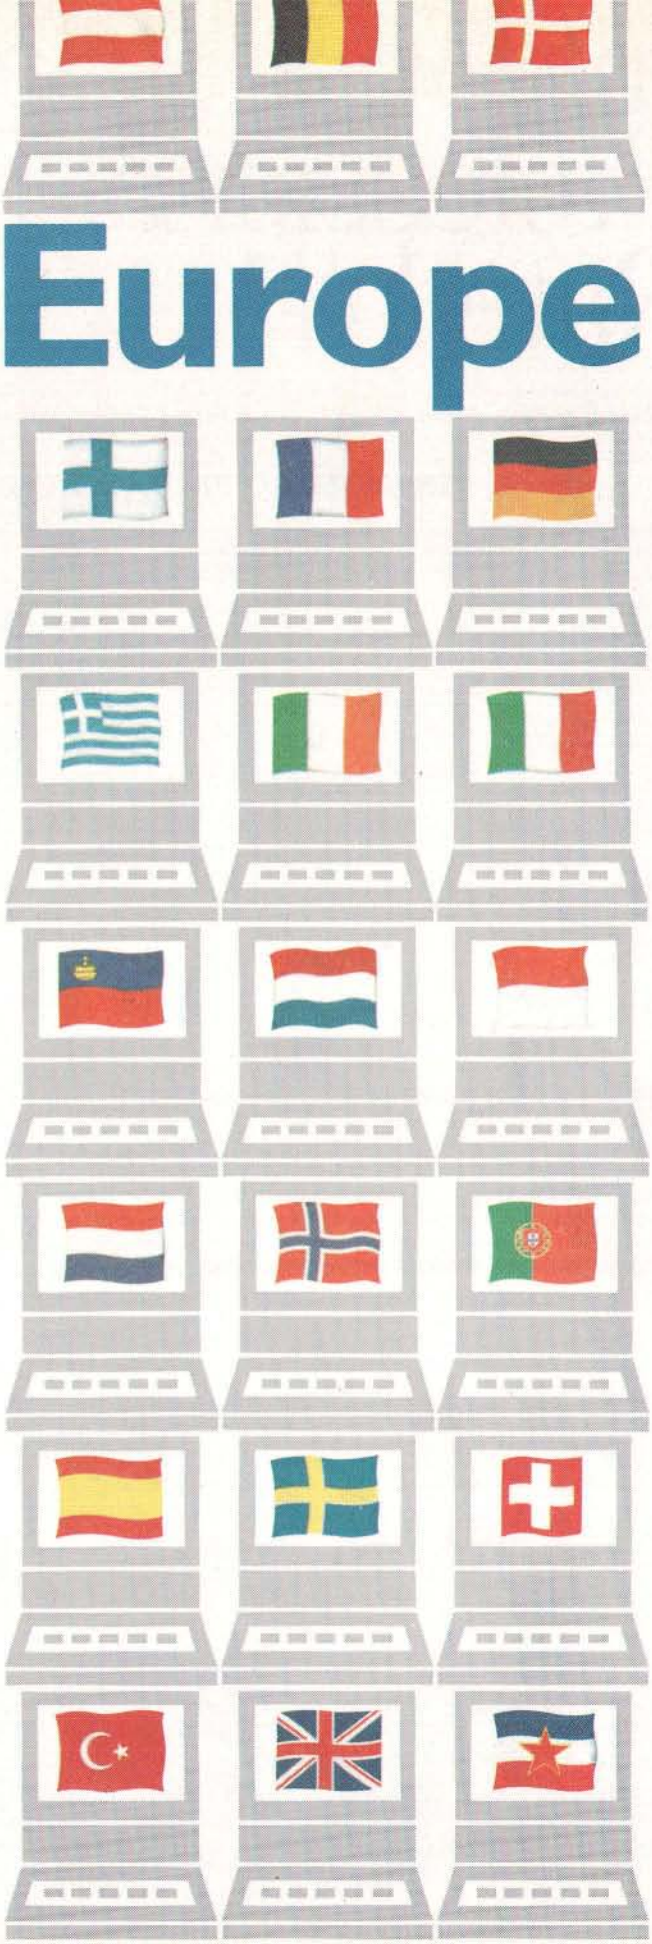


This winning combination reflects a decade of unparalleled circulation growth and reader acceptance resulting in an ideal marketing environment for European advertisers.

■ BYTE's paid circulation outside North America has grown from 7,300 in 1977 to over 89,000 in 1987. And just as the international microcomputer marketplace has doubled its growth in the last 4 years, so has BYTE's paid circulation. More importantly, 69% of these international subscribers are located in Europe, where each copy of BYTE is read and passed along to *3 additional readers,* achieving a total European readership of 248,000.

■ BYTE attributes its international growth to the continued excellence of its editorial content, as well as to the unique opportunity it provides for advertisers wishing to reach non-U.S. countries. This unique opportunity is BYTE's *International Section,* a combination of monthly editorial pages and advertisements appearing only in copies distributed outside of North America. The Section contains customized editorial for BYTE's non-U.S. readers that focuses on the latest international products available.

■ BYTE's International Section allows both U.S. and non-U.S. manufacturers to reach BYTE's exclusive international audience at significantly-reduced advertising rates resulting in a low cost per thousand. With BYTE's current international circulation at 89,800, the one-time black-and-white rate of $3,380 means that advertisers can reach these BYTE readers at the low cost per thousand of $37.63, or, *less than four pennies per contact.*

For further information, contact your local BYTE representative listed opposite the *Alphabetical Index to Advertisers* located in the back of this issue.

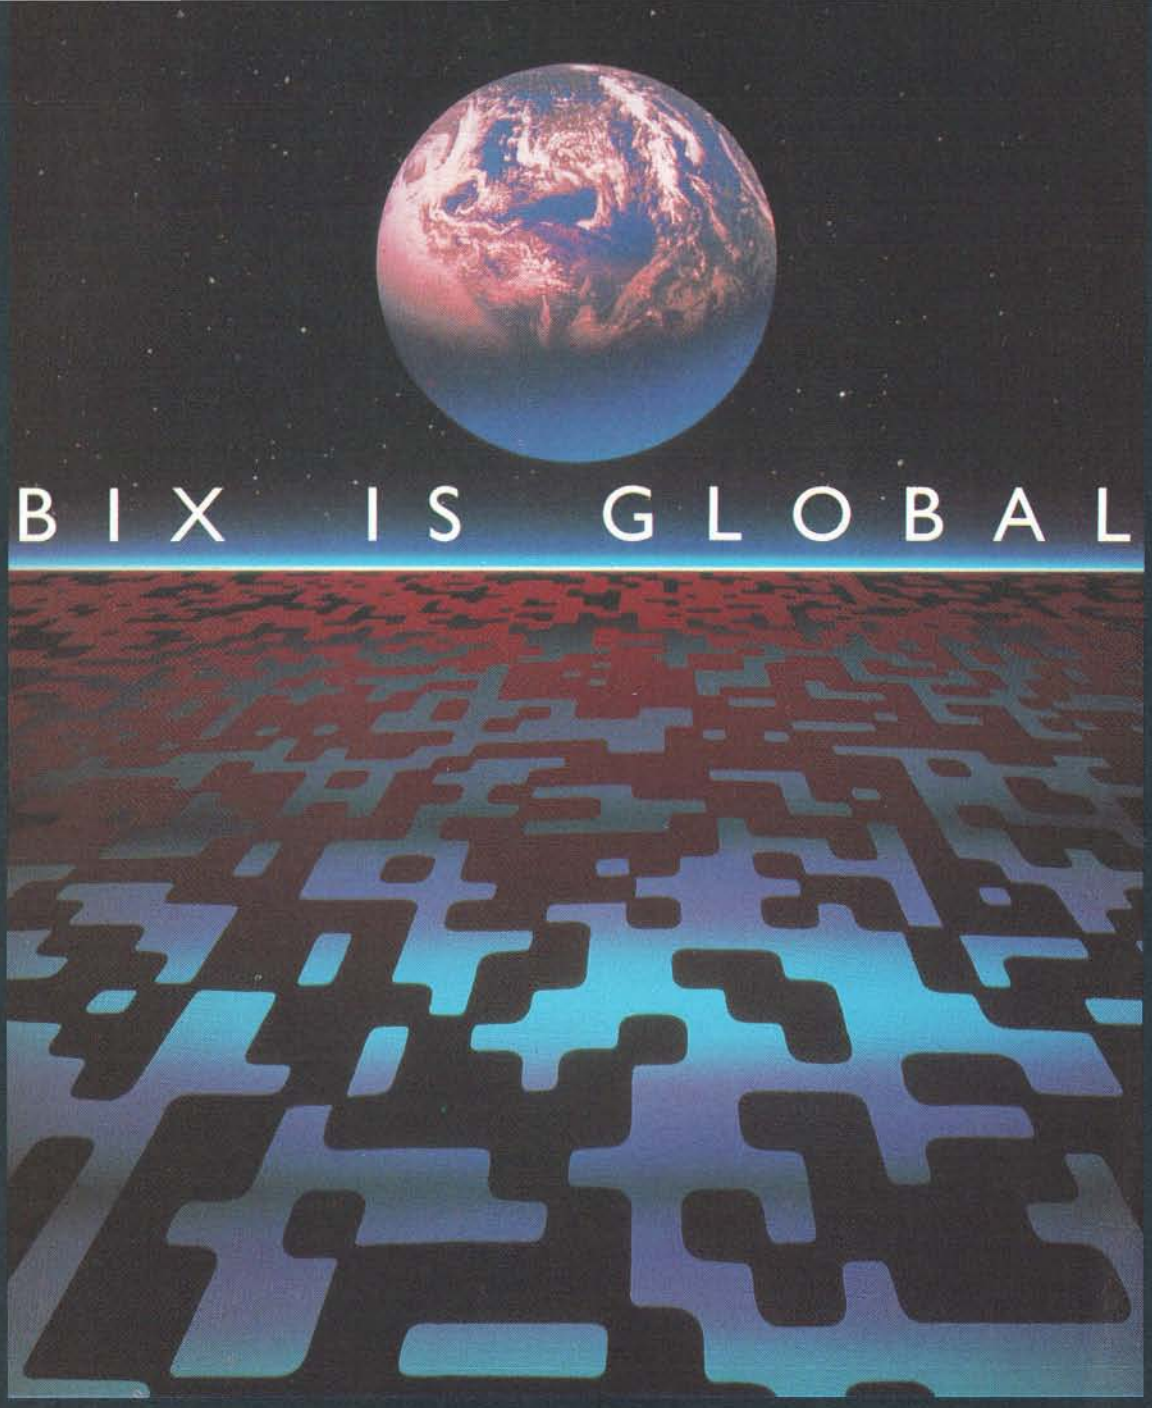

BIX IS GLOBAL

BIX is BYTE's Information Exchange, a worldwide computer conferencing system devoted to the exchange of microcomputer information.

When you use BIX, you leap borders of geography and time to exchange information, opinions and ideas with a "living database" of the world's most knowledgeable microcomputer users.

BIX covers the world.
Our *Microbytes* news service, backed by BYTE and McGraw-Hill, provides worldwide daily news coverage of major events in the microcomputer industry plus listings of thousands of new products from vendors around the globe. Scores of companies now use BIX to provide technical support for their hardware and software products worldwide.

BIX saves you time.
BIX resources help you get the micro-related information you need right away, regardless of your location. BIX electronic mail lets you send private messages to other BIX users worldwide. For more information on how to join and use BIX from your country, read the BIX message in this issue (see Advertiser Index for page number), or contact us today.

BIX *Circle 317 on Reader Service Card*

BYTE INFORMATION EXCHANGE

One Phoenix Mill Lane
Peterborough, NH 03458 USA
(603) 924-7681 (Our overseas helpline number)
8:30 AM–11:00 PM
Eastern Time
(–5 GMT) Weekdays

McGraw-Hill

Workstations with G64 or STEbus Expansions

The Omega range of workstations features integral G64- or STEbus expansion facilities; ten bus positions are available. You can set the backplanes at the normal depth, or you can set the back so that the cards are hidden behind a hinged panel.

You can use standard Omega I/O cards in conjunction with the bus expansion facilities. The cards include a CGA that provides a resolution of 768 by 576 by 4 bits per pixel and lets you display up to 16 colors from a palette of 4096. The adapter incorporates 512K bytes of dedicated memory and the Hitachi HD63484 Advanced CRT controller. Also available are a nine-port RS-232C serial-port expansion card and a 3-megabyte ROM expansion card.

The top-of-the-line Omega workstation incorporates a 16-MHz MC68020 microprocessor and an MC68881 math coprocessor; 2 megabytes of zero-wait-state, nonvolatile static RAM, expandable up to 8 megabytes; a 1-megabyte 3½-inch floppy disk drive; a 40-megabyte hard disk drive (access time 30 ms); and a 150-megabyte ¼-inch tape streamer. Also included are five RS-232C serial ports, a Centronics parallel printer port, a clock calendar, and OS-9/68000 professional operating systems. Optional displays are available.

Price: £1595 to £4950, depending on the configuration; £495 for the G64 or STE expansion facilities.

Contact: Windrush Micro Systems Ltd., Worstead Laboratories, North Walsham, Norfolk NR28 9SA, U.K., (0692) 404086.

Inquiry 864.



Windrush Micro Systems' Omega workstation.

Use Your Computer As a Tape Recorder

Your computer can act like a small-reel tape recorder with digital-quality sound and editing facilities with the SWELL Soundfile Editor. The editor also establishes a file format for speech-related signals, which you can use with an expanding range of speech analysis programs. SWELL runs under Microsoft Windows, so you can use it to form a computer-based speech lab that you can integrate with other Windows programs, such as spreadsheets, text editors, graphics programs, databases, and project managers.

You can record and play back audio-frequency signals in up to 16 channels, depending on your analog hardware; display the signals on the screen; mix and rescale signals, with linear or logarithmic ramps; and edit them with cut-and-paste operations using the mouse and the keyboard.

By running several instances of SWELL, you can edit two or more files at the same time and transfer signals between them; you can also scroll their displays in a linked fashion. Axis markings are optionally in metric units or in sample values, and the vertical axis can annotate linear transforms of the sampled data. You can read time and amplitude values from a cursor and save graphics to the Windows Clipboard for further use with other Windows programs. The file header lets you store text information about the contents of the file.

Analysis and synthesis programs are available: SIG is a time-domain signal-processing utility that lets you implement digital filters, gates, and other devices that operate in the time domain. HIST is a Windows program that eavesdrops on the SWELL editor and lets you produce histograms with basic statistics from curves that you select in the editor. You can use the SETH program to manipulate SWELL file headers from the DOS-command line. FO, a fundamental frequency extraction program, reads a SWELL file and produces an FO file with optional decibel and voice tracks with built-in high- and low-pass filters.

The SWELL Soundfile Editor runs under MS-DOS 2.1 or higher and Microsoft Windows 1.02 or higher on IBM ATs and compatibles with at least 640K bytes of memory and a 20-megabyte hard disk drive. A mouse or other pointing device is recommended. Required analog hardware is an Ariel DSP-16 board or a Data Translation DT2801, DT2801A, DT2805, or DT2181 board.

Price: 2500 Swedish krona for the Soundfile Editor; 1000 krona for HIST; 1500 krona for SIG; 2000 krona for Ariel DSP-16 analog device library; 2000 krona for Data Translation DT2801 analog device library; 900 krona for FO.

Contact: Soundswell Music Acoustics HB, Kyrkbacken 21, 1 tr, S-171 50 Solna, Sweden, (08) 735-6202.

Inquiry 977.

continued

FORMOSA MICROSYSTEMS



PæLIT VGA CARD


Paint Your PC Will Love

1024×768 Display

Formosa Microsystems would like you to imagine a company a lot like your own. Strong and well-established yet dynamic and growing, Formosa Microsystems is composed of people who inspire confidence. And like your company, we also believe cooperation is the key to any successful business partnership.

Formosa Microsystems has recently completed the development of a new PæLIT VGA/1024 card. Palit VGA/1024 offers resolution up to 1024×768 with 16 colors out of a palette of 256K to support IBM 8514 type monitors. Palit VGA/1024 is totally compatible with MS Window 2.0 and MS Window/386 in virtual mode and is OS/2 compatible. This unbeatable combination of superior quality and state-of-the-art features is at an unmatched price.Besides using registered levels compatible to VGA, EGA, CGA, MDA and HERCULES, our VGA card also has fully automatic mode switching and is compatible with a wide variety of monitors with auto detect. Even more special, our analog display supports more different displays than many models costing significantly more.

For a complete set of specs on our VGA card or our other products as well as information on becoming a distributor, please contact us directly.

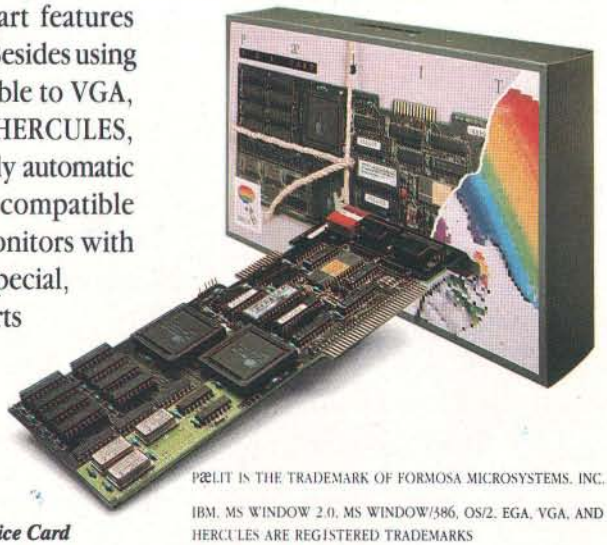

PæLIT IS THE TRADEMARK OF FORMOSA MICROSYSTEMS. INC.

IBM. MS WINDOW 2.0. MS WINDOW/386, OS/2. EGA. VGA. AND HERCULES ARE REGISTERED TRADEMARKS

Circle 330 on Reader Service Card

FORMOSA MICROSYSTEMS, INC.

3F, 1015 Ming Shen E. Rd. Taipei Taiwan, R.O.C. TEL: 886-2-7631211 • FAX: 886-2-7659739 • TLX: 17118 FORMICRO

A FORTRAN Checker

Polyhedron Software offers Forcheck 8.05, a programmer's tool (originally developed at the University of Leiden in Holland) that helps you validate and maintain FORTRAN programs.

Forcheck is a status code analyzer that validates programs by checking their conformance to the ANSI X3.9 standard; you can customize it to check dialects such as VAX or Microsoft FORTRAN.

It performs global checks for consistency between modules; optimizes and maintains programs by identifying unused variables, common blocks, include files, and dead code fragments; and constructs cross-reference charts of constants, variables, commons, subprograms, include files, and I/O instructions.

You can generate a call tree, which shows the calling structure of the program as a tree diagram. A library facility lets you store global subprogram information, and you can check new or changed modules without reanalyzing the entire program.

Forcheck 8.05 runs under MS-DOS or PC-DOS 2.1 or higher on the IBM PC, XT, AT, and compatibles. Versions are also available for a range of mainframe and minicomputers, including VAX/VMS and Prime.

Price: £290 for the IBM PC version; £1690 and up for the mainframe and minicomputer versions.

Contact: Polyhedron Software Ltd., Magdalen House, 98 Abingdon Rd., Standlake, Witney, Oxfordshire OX8 7RN, U.K., (08673) 1579.
Inquiry 978.

40- and 80-megabyte Hard Disk Drives

Kyocera offers the KC-40CS and the KS-80CS, two 3½-inch hard disk drives with capacities of 40- and 80-megabytes, respectively. Both hard disk drives feature internal SCSI controllers, data transfer rates of 1.5 megabits per second, and average access times of 28 milliseconds. When you turn the power off, the head automatically retracts to the shipping zone and the actuator locks.

Price: 100,000 yen for the KC-40CS; 150,000 yen for the KC-80CS.
Contact: Kyocera Corp., Tokyo Office, 2-3-14 Yaesu, Chuo-ku, Tokyo 104, Japan, (03) 274-1551.
Inquiry 999.

Supermini as MS-Networks Server

The DG/PC*1 system from Nippon Data General lets you use its Eclipse MV superminicomputers as MS-Networks servers. It supports connection to IBM PC AT, NEC PC-9801, and DG/One Model 2J personal computers, which lets you use them as MV family termi-

continued

OEM'S WELCOME

EE286 B-II
BABY-AT-MOTHERBOARD

16 MHz/0 WS

DISTRI-BUTORS WANTED

MADE IN W.-GERMANY by EE

Q.C. O.K.

THE MOST RELIABLE DESIGN
- Highest Quality Control With German Standard
- Manufactured With Siemens-SMD-Automatic-Placement-Machine
- Under Industrial Application Tested
- Only 1-Class Components
- 95% Off All Sockets From AMP
- CPU: AMD-80286-16

THE MOST FUTURE-ORIENTED DESIGN
- 80% SMD-Components
- Uses NEAT-Chips-Set from C&T
- 8/16 MHz Zero-Wait-State Operation
- Programmable Bus-Clock-Speed
- Expandable Upto 8 MB On Board
- Support's EMS LIM 4.0
- OS/2 Compatible
- Xenix/Unix/Concurrent-DOS Compatible
- Interleaved Memory Allows Use Of 100ns-DRAM
- Uses SIM-DRAM-Modules
- Uses AWARD-BIOS Latest Version
- Same Size As XT-Main-Board

CALL US TODAY!!


Electronic Equipment
Computervertrieb
D-8060 Dachau
Ludwig-Thoma-Str. 9
Telefon (49) 8131 / 4272
Telefax (49) 8131 / 82667
Telex 527 503

Circle 325 on Reader Service Card

LET'S RELIEVE YOU OF YOUR HEADACHE WITH .....



- Microprocessor 80286-12
- 512K, 640K, 1, 2 or 4MB Memory on board, expandable to 16MB
- Bugs free in using 150ns slow RAM

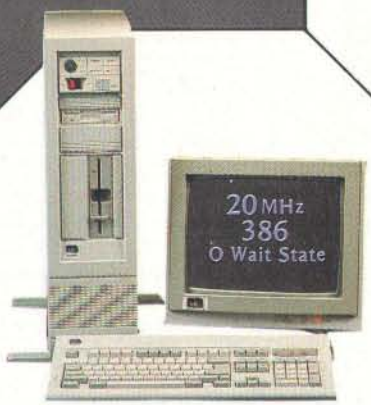

- Microprocessor 80386-20
- 1, 2, 4 or 8MB memory on board expandable to 16MB
- Interleaved page mode allows superfast performance



- Microprocessor 80386-25
- Supports 80387 Co-processor
- Fully support all network software

A Brilliant Combination

SMT

By the end of 1988, ABC will be introducing a new technology in PC board manufacturing called "SURFACE MOUNT TECHNOLOGY" which will further augment our current productiion capacity to cope with present and future expansion as we progress towards the year 2000.



This new technology gives a better quality on our products .The fully automated assembly line eliminates any human error during the manufacturing process. Reduced size on components will further reduced the size of the finished products.

See us at

COMDEX/Fall '88

November 14-18, Riviera Hotel, Las Vegas, Neveda, U.S.A.

ABC

ABC Computer Co. Ltd.
Manufacturer & Exporter

Basement 66, Golden Shopping Centre, 148 Fuk Wah Street, Shamshuipo, Kowloon, Hong Kong.
Tel: 3-7290238 (12 lines) Fax: 3-7427636 (After October, 88 our fax will change to Fax: 3-879279)
Telex: 52178 ABCTC HX Cable: ABCTDGCOHK

Circle 311 on Reader Service Card


nals. Local-area network hardware includes Ethernet, Cheapernet, and a low-priced StarLAN designed for laptop connection.
Price: 190,000 yen for StarLAN for one personal computer.
Contact: Nippon Data General Corp., 4-3-13 Toranomon, Minato-ku, Tokyo 105, Japan, (03) 438-361.
Inquiry 968.

An X.25 Board for the VMEbus

Compcontrol's CC-125 is a double-height X.25 board for the VMEbus that implements the X.213 specification for connecting to layer-four OSI (Open Systems Interconnection) software. The board lets you transfer packet-switched data at rates of up to 64 kilobits per second across public and private data networks.

The board has a 16-MHz MC68000 microprocessor, a WD2511A Packet Network Interface chip with an integral direct-memory-access controller, 64K bytes of dual-ported RAM, and up to 256K bytes each of static RAM and EPROM. Besides one X.25 channel, there is an RS-232C channel that you can connect to a terminal for software development, communications monitoring, and diagnostics.

The CC-125 implements layers 1, 2, and 3 of the OSI seven-layer model. Layer 1, the physical layer, conforms to the X.21 bis (V.24/V.28) specification. With layer 2, the data-link layer, Compcontrol claims you get an error-free transmission channel using the Link Access Procedures Balanced protocol. Layer 3, the network layer, handles the X.25 packet-level protocol and imposes flow control to prevent overloading of the communication links.

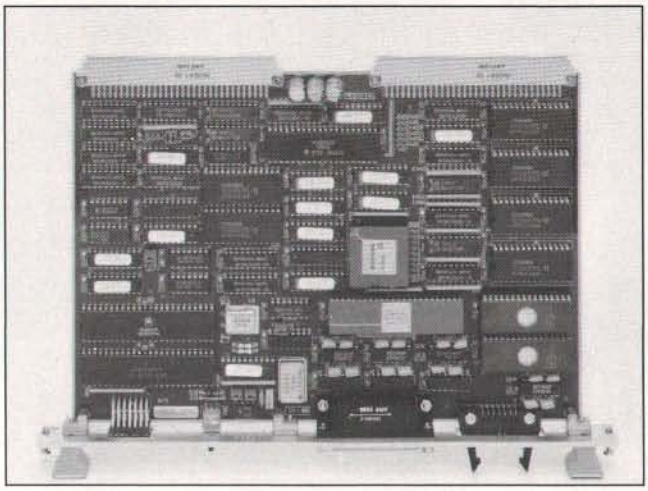

The CC-125 X.25 board for connecting to layer-four OSI.

Layer 4 messages between the VMEbus and the CC-125 pass through the board's dual-ported RAM, according to the OSI's X.213 Connection-oriented Network Service (the messages are coded to the X.409 recommendation). It transmits messages in the form of Network Service Data Units, which can be up to 4K bytes long; the board transmits up to 30 units per second (unit size = 128 bytes) across a communication line having a 64-kHz clock rate.

The CC-125 acts as a VMEbus slave and lets you set up to 16 simultaneous logical channels, normally dedicated to one user or task each. You can use the on-board interrupter to generate a VMEbus interrupt on any of seven software-selectable levels.
Price: $3675 U.S.
Contact: Compcontrol B.V., Stratumsedijk 31, P.O. Box 193, 5600 AD Eindhoven, Holland, (040) 124955.
Inquiry 868.

New 80386 Panacom M Machine Uses OS/2

The CV-M800HE from Matsushita Electric Industrial is a new 80386 32-bit machine in its Panacom M series. At the same time, the company has adopted Japanese MS OS/2 and Microsoft Windows 2.0.

The new machine uses a 20-MHz 80386 CPU, has a 32K-byte cache memory, and offers compatibility with the Fujitsu FM R-70 computer. Main memory is from 2 to 18 megabytes, and storage consists of two 1.2-megabyte floppy disk drives and an internal 40-megabyte hard disk drive. Four 32-bit data-bus expansion slots consist of two rows of 16-bit slots each so you can use existing boards.

Software compatibility is assured for the existing 80286 machines: the CV-M700 and the CV-M500. Graphics display is 1120 by 750 pixels with a choice of 16 colors from a palette of 4096, which is the same as for the CV-M700. The optional 16-pixel card offers the same 640- by 400-pixel format as of the CV-M500.
Price: 1,268,000 yen for a system with a 15-inch color monitor, a keyboard, and MS-DOS 3.1.
Contact: Matsushita Electric Industrial Co. Ltd., Tokyo Branch Office, National No. 1 Building, 1-1-2 Shiba-Kouen, Minato-ku, Tokyo 105, Japan, (03) 437-1121.
Inquiry 985.

Interface Management for C Programmers

Systemstar Ltd.'s C-Scape is an interface management system for C programmers that incorporates a screen designer and a function library for windowing applications, pull-down and Lotus 1-2-3-style menus, data validation, text handling, and help systems. C-Scape's 40 features cover most aspects of screen, cursor, and keyboard I/O, and device drivers are supplied for a number of peripherals.

You can paint or capture screens with the screen designer and turn them into data-entry forms for which C-Scape generates the C source code. With the screen capture ability, you can use C-Scape to port applications from other languages by capturing their screens and generating C code.

C-Scape is portable among MS-DOS, Unix, Xenix, VAX/VMS, Apollo, Data General, and other environments. It generates code that you can compile with Microsoft C, Quick C, Turbo C, and Lattice C, with a direct interface to the dbVISTA III database's data-dictionary format.

Systemstar is offering C-Scape source code to developers; the run-time license is free of royalties.
Price: £9 for a demonstration package.
Contact: Systemstar Ltd., 1-3 Parliament Sq., Hertford SG14 1EX, U.K., (0992) 500919.
Inquiry 979.

SAVE 15% ON THESE NEW BOOKS FROM McGRAW-HILL

INTRODUCING PC-DOS AND MS-DOS

By T. Sheldon. *374 pp., illus., softbound* Find out about the free advanced capabilities of DOS and how to use them. "Wonderfully enlightening... well-written... my pick for technical book of the year." — *Online Review* 056559-7. Regular Price: $18.95 **Your Price: $16.10.**

THE WORKSTATION DATA LINK

The Micro and Mainframe Data Exchange
By M. Adrian. *256 pp., illus., softbound* Shows you how to transfer many types of data files between microcomputers and mainframes and successfully integrate microcomputers into the corporate world. 000474-9. Regular Price: $24.95. **Your Price: $21.20.**

HOW TO BE A SUCCESSFUL COMPUTER CONSULTANT

By A. R. Simon. *256 pp., illus., softbound* Everything you have to know to set up and run your own computer consultant (or software development) business, full- or part-time. No business experience required! 057296-8. Regular Price: $18.50. **Your Price: $15.70.**

A COMPREHENSIVE GUIDE TO AI AND EXPERT SYSTEMS

Now available in a TURBO PASCAL Edition! This new edition shows you how to apply AI programming techniques to create expert systems in TURBO PASCAL for your own use. 037476-7. Regular Price: $19.95. **Your Price: $16.95.**

By R. I. Levine, D. E. Drang, & B. Edelson. *256 pp., 99 illus., softbound* All about artificial intelligence and how to utilize it on your personal computer. Gives you everything from basic concepts to sophisticated programming techniques. 037470-8. Regular Price: $19.95. **Your Price: $16.95.**

INTRODUCING UNIX™ SYSTEM V

By R. Morgan & H. McGilton. *480 pp., illus., softbound* Guides you step by step through the facilities, commands, utilities, and applications of System V, AT&T's new version of the UNIX operating system. 043152-3. Regular Price: $19.95. **Your Price: $16.95.**

UNIX™ UTILITIES: A Programmer's Guide

By R. S. Tare. *640 pp., illus., softbound* Save time and effort with popular UNIX utilities! Helps you write efficient, bug-free programs *and* significantly reduce turnaround time. 062884-X. Regular Price: $24.95. **Your Price: $21.20.**

McGraw-Hill Computer Books and Software

CALL TOLL-FREE 1-800-2-MCGRAW

dBASE DEMYSTIFIED: dBase II/III/III Plus™ Applications and Solutions to Real Problems

By L. Barnes *288 pp., 120 illus., softbound* Covers the full range of dBase features and shows how to apply the various releases of dBase to real-world problems. 003844-9. Regular Price: $19.95. **Your Price: $16.95.**

DATABASE EXPERT'S GUIDE TO SQL

By Frank Lusardi. *224 pp.* This user-friendly guide provides programmers and managers with a thorough introduction to Structured Query Language (SQL) and relational database concepts. It describes the language's constructs and guides you through complex syntactical possibilities, while emphasizing SQL's practical use in designing and implementing databases.
Hardcover 039006-1 Regular Price: $39.95 **Your price: $33.95.**
Softcover 039002-9 Regular Price: $24.95 **Your Price: $21.20.**

MICROEXPERT

By B. Thompson & W. Thompson. Your own expert system! This affordable expert system shell allows you (beginner or programmer) to see how a system works as you build it yourself. Software includes tutorial for design of knowledge base and creation of rules. Source code provided. "Highly recommended," *Online Today.*
IBM PC 852109-2 Regular Price: $64.95 **Your Price: $55.20.**
Apple II 852110-6 Regular Price: $54.95 **Your Price: $46.70.**

HARD DISK MANAGEMENT IN THE PC & MS DOS ENVIRONMENT

By Thomas Sheldon. *224 pp., illustrated.* This guide for organizing and managing a hard disk system gives procedures needed to build a menu system and directory structure.
Softcover 056556-2 Regular Price: $24.95 **Your Price: $21.20.**

For fast service call TOLL-FREE 1-800-2-MCGRAW or use coupon below. 15-day examination period.

McGraw-Hill Book Company
P.O. Box 400, Hightstown, NJ 08520

Please send me – at 15% off the regular price – the products whose code numbers (the number before the regular price in above blurb) I have checked below. I understand I have 15 days for free examination before I send payment for those products I want to keep (plus postage, handling, and local tax) and return any unwanted products postpaid.

☐ 056559-7 $16.10	☐ 057296-8 $15.70	☐ 852109-2 $42.45
☐ 043152-3 $16.95	☐ 003844-9 $16.95	☐ 852110-6 $42.45
☐ 062884-X $21.20	☐ 037470-8 $16.95	☐ 852138-6 $42.45
	☐ 037476-7 $16.00	

Name_____

Address_____

City_____ State_____ Zip_____



Finally, there's an SQL that gets back to BASIC. And COBOL. And C. And Pascal.

As a programmer, you've probably already faced it—the database dilemma. Do you use an SQL for easy database handling, or a true programming language for maximum power and flexibility?

Now you can do both with XQL®, the relational data management system from the developers of Btrieve.®

The Programmer's SQL. With XQL, you can access your data with the ease of Structured Query Language through simple subroutine calls from traditional programming languages. XQL supports standard SQL syntax, including subqueries, unions and security groups.

XQL Relational Primitive Operations. In addition, XQL lets you bypass the SQL level and perform highly efficient, relational primitive operations directly. You get all the functionality of a relational database model without the constraints of a 4th generation language.

Building on Btrieve. The heart of Novell's family of data management tools is Btrieve. By letting you access multiple records at a time, XQL adds a powerful dimension to Btrieve. XQL incorporates sophisticated data manipulation features which allow you to access data by field name, move forward or backwards through the database, compute fields from other fields or constants, and even work with composite records built from multiple, joined Btrieve files.

Like Btrieve, XQL offers features like multi-user support, fault tolerance, comprehensive documentation, and expert technical support. And you never pay royalties on your XQL applications.

Solve the database dilemma with XQL, the SQL that speaks your language. See your authorized Novell dealer, or call us for more information.

Novell GMBH
Schiess-Strasse 55
4000 Dusseldorf 11
West Germany
(0211) 59 73-0
Fax 49 211 5911 49
Telex 858 7570

Novell UK LTD.
Avon House
Sweetwell Rd. Bracknell
Berkshire RG12 HH
(0344) 360401
Fax (0344) 860353/4
Telex 846783

NOVELL

Requires Btrieve 4.1x and PC-DOS or MS-DOS 2.x, 3.x.

Circle 346 on Reader Service Card

FREE Information Retrieval Service

To assist you in making your evaluations, purchasing decisions, or recommendations, you can request further information directly from the manufacturer or service company on products and services advertised in this issue. There is no charge, no obligation. Just complete and mail the attached self-addressed reply card, and we'll do the rest.

1 Circle numbers on reply card which correspond to numbers assigned to items of interest to you.

2 Check all the appropriate answers to questions "A" through "F".

3 Print your name and address and mail.

Fill out this coupon carefully. PLEASE PRINT. Requests cannot be honored unless the code is included. This card is valid for 6 months from cover date.

A. What is your primary job function? (Check one only)

1 ☐ Business Owner, General Management, Administrative
2 ☐ MIS/DP, Programming
3 ☐ Engineering/Scientific, R&D
4 ☐ Professional (law, medicine, accounting)
5 ☐ Other

B. How many people does your company employ?

1 ☐ 25 or fewer
2 ☐ 26–99
3 ☐ 100–499
4 ☐ 500–999
5 ☐ 1000 or more

C. Reason for request: (Check all that apply).

1 ☐ Business use for yourself
2 ☐ Business use for your company
3 ☐ Personal use

D. Your next step after information is received:

1 ☐ Purchase order
2 ☐ Evaluation
3 ☐ Specification/Recommendation

E. Please indicate the product categories for which you influence the selection or purchase at your (or your client's) company or organization. (Check all that apply).

1 ☐ Microcomputers
2 ☐ Peripherals
3 ☐ Software
4 ☐ Accessories and supplies

F. For how many microcomputers do you influence the purchase of products at your (or your client's) company or organization?

1 ☐ 1
2 ☐ 2–4
3 ☐ 5–9
4 ☐ 10 or more

Name _____

Title _____

Company _____

Address _____

City _____ *Country* _____

Code _____ *Telephone* _____

CIRCLE FOR FREE INFORMATION — OCTOBER 48AINT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108
109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135
136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162
163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594
595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621
622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648
649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675
676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702
703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729
730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756
757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783
784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810
811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837
838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864
865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891
892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918
919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945
946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972
973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999

PLACE POSTAGE HERE

BYTE

P.O. Box 929
Yardley
Birmingham
England, B25 85

FREE Information Retrieval Service

To assist you in making your evaluations, purchasing decisions, or recommendations, you can request further information directly from the manufacturer or service company on products and services advertised in this issue. There is no charge, no obligation. Just complete and mail the attached self-addressed reply card, and we'll do the rest.

1 Circle numbers on reply card which correspond to numbers assigned to items of interest to you.

2 Check all the appropriate answers to questions "A" through "F".

3 Print your name and address and mail.

PLACE POSTAGE HERE

BYTE

P.O. Box 929
Yardley
Birmingham
England, B25 85

Fill out this coupon carefully. PLEASE PRINT. Requests cannot be honored unless the code is included. This card is valid for 6 months from cover date.

A. What is your primary job function? (Check one only)
1 ☐ Business Owner, General Management, Administrative
2 ☐ MIS/DP, Programming
3 ☐ Engineering/Scientific, R&D
4 ☐ Professional (law, medicine, accounting)
5 ☐ Other

B. How many people does your company employ?
1 ☐ 25 or fewer
2 ☐ 26–99
3 ☐ 100–499
4 ☐ 500–999
5 ☐ 1000 or more

C. Reason for request: (Check all that apply).
1 ☐ Business use for yourself
2 ☐ Business use for your company
3 ☐ Personal use

D. Your next step after information is received:
1 ☐ Purchase order
2 ☐ Evaluation
3 ☐ Specification/Recommendation

E. Please indicate the product categories for which you influence the selection or purchase at your (or your client's) company or organization. (Check all that apply).
1 ☐ Microcomputers
2 ☐ Peripherals
3 ☐ Software
4 ☐ Accessories and supplies

F. For how many microcomputers do you influence the purchase of products at your (or your client's) company or organization?
1 ☐ 1
2 ☐ 2–4
3 ☐ 5–9
4 ☐ 10 or more

Name _____

Title _____

Company _____

Address _____

City _____ *Country* _____

Code _____ *Telephone* _____

CIRCLE FOR FREE INFORMATION — OCTOBER 48AINT

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108
109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135
136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162
163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594
595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621
622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648
649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675
676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702
703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729
730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756
757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783
784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810
811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837
838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864
865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891
892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918
919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945
946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972
973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999

SHORT TAKES

BYTE editors offer hands-on views of new products

3-in-One P321SLC

Illustrator 88

AppleCD SC

Super PC-Kwik

PolyBoost II

Tickler/2

Zortech Comm Toolkit



Toshiba 3-in-One: The Colorized Version

THE FACTS

Toshiba 3-in-One
P321SLC
$949

Interfaces required:
Centronix parallel or
25-pin RS-232C.

Toshiba America Inc.
Information Systems
Division
9740 Irvine Blvd.
Irvine, CA 92718
(714) 583-3000
Inquiry 851.

Coloring movies has gotten Ted Turner a lot of criticism, but no one can object to what Toshiba has done to its 24-pin dot-matrix printer. Besides being fast and capable of high-resolution printing, the new Toshiba **3-in-One P321SLC** can print in four colors and can produce some remarkable output. Using combinations of the cyan-magenta ribbon, you can get output in up to seven colors, including black. Green, orange, and purple can be simulated.

Assembling the printer and setting up the paper feed takes about 3 minutes, but once the mechanical requirements are taken care of, changing configurations is a breeze. The front panel's four switches and liquid crystal display let you access all the configuration parameters through layers of setup menus. More common parameters (e.g., font, pitch, and emulation) are available in the first layer, while everything from RAM allocation to horizontal registration can be adjusted if you care to delve deeper.

The printer comes with 34K bytes of memory that is shared between the print buffer and downloadable fonts. There are two card slots on the front of the machine for optional 32K-byte RAM modules or font cards. My evaluation system came with two font cards, which let me access a total of five typefaces. Courier, Prestige Elite, and High Speed are the standard ones. Typefaces can be scaled between 10 and 20 points.

Printing speed varies from job to job, but the P321SLC is always noticeably fast. Draft-quality documents zoom by at a rated print speed of 216 characters per second, while letter-quality printing is rated at a respectable 72 cps. I timed one letter-quality sample and found it took about 50 seconds to print a little less than 2000 characters. For the average text job, expect to wait about a minute per page.

Resolution is excellent, as is typical of 24-pin printers. The clarity really shows on fine line graphics and small, narrow typefaces like Prestige Elite. The print head is pin-addressable and can provide graphics at up to 180 by 360 dots per inch.

While printing in color provides you with a versatility you can't achieve in monochrome, it also opens doors to a few problems. The biggest problem I had was finding drivers in my applications that would let me print in color. The P321SLC supports three emulations: Toshiba/Qume, IBM Proprinter, and IBM Color Printer. While applications often include Toshiba drivers, several notable packages—ACAD 2.52 and Dr. HALO III 3.0, among others—support only the monochrome versions, and you are forced to fall back on IBM emulation.

The detailed 268-page user's manual has a technical reference section that describes all the ASCII escape sequences. Using these, I generated color text by embedding the commands in XyWrite. Instructions are included for creating color text using MultiMate and other popular packages. I printed several graphics images using Harvard Graphics 2.10. Narrow line images like maps and mechanical design plots turned out very well, while more filled drawings tended to show lines where the printer had made repeated passes.

The new 3-In-One adds color to a fine line of Toshiba printers. With this and other dot-matrix printers becoming more and more affordable, high-resolution color may well be the common output of the future.

—Steve Apiki

Illustrator 88: PostScript Drawing Gets Better

Adobe's Illustrator and Aldus's FreeHand are like two great baseball teams slugging it out, with one team going ahead in the top of the inning and the other team coming back to scratch out the tying and go-ahead runs.

Adobe batted first in 1986 and scored impressively with Illustrator, which established a whole new class of drawing program that uses the PostScript language to create artwork made up of lines and Bézier curves. Earlier this year, Aldus tied the score and

continued

went ahead with FreeHand, which does wonders with colors and had on its roster one thing Illustrator lacked: a freestyle drawing tool. And now Adobe has sent up **Illustrator 88**. The score has definitely changed.

The new Illustrator has a freestyle drawing tool, which works like the pencil in MacPaint. This addition to the toolbox gives you considerably more freedom when you're working on an illustration. The program is primarily for producing clean lines and curves—which you do by laying down a series of anchor points and then having the program connect them—but there are times when you need more flexibility than the connect-the-dots approach provides.

Another big change to the Illustrator lineup is an automatic tracing tool, a significant feature lacking in FreeHand. Both programs let you take an image and use it as a template; using different tools, you trace over that template and then use the tracing (the top layer), which looks much more polished than the original, in your illustration. This process is how these PostScript drawing packages, with their skill at producing clean, perfect lines, let you transform a rough sketch into a sharp, well-defined piece of artwork. Illustrator 88's autotrace tool makes tracing a rough image a painless—and very fast—process. A brilliant addition.

Illustrator can now do four-color separations—one area where FreeHand had gone ahead—but uses a separate utility to handle the process, whereas FreeHand does it from within the application. Adobe has added the glorious Pantone palette of colors, which you can also use to make custom colors of your own. If you're lucky enough to have a Macintosh II and a color monitor, you'll be able to produce graphics that are just downright lovely. While a PostScript drawing program like Illustrator can create superb engineering-type artwork quickly—it's perfect for schematics, diagrams, and models—the addition of color capabilities makes it suitable for softer, nontechnical work as well.



THE FACTS

Illustrator 88
$495

Requirements:
A Macintosh Plus with an 800K-byte external hard disk drive and System 4.2 or higher.

Adobe Systems
1585 Charleston Rd.
P.O. Box 7900
Mountain View, CA
94039
(415) 961-4400
Inquiry 852.

One of FreeHand's nice effects is its shading capabilities, which let you fill an image with graduated color or intensity. Illustrator 88 has a tool that produces similar results, but it is considerably harder to use. In fact, I found this Blend tool to be the most frustrating part of the program.

You'd better have a real good grip on Illustrator's main elements (i.e., paths, endpoints, and anchor points) and terminology before you tackle blending. I made the mistake of just trying to feel my way through the process of blending two different shapes and kept getting hit with error messages like "Please use the Blend tool on a selected endpoint of an ungrouped open path." This is not MacPaint. You can't just pick up a brush and go to work. Save yourself lots of time and frustration by reading the manual.

Illustrator has not improved much in its text tools. You can do some fancy things with characters and fonts—like changing their shapes and filling them with patterns—but you can't mix fonts or sizes within a chunk of text. And some users have criticized the program's lack of kerning control.

While Illustrator 88's preview mode is handy, you can't do any work to the drawing on the screen. You have to switch back to the raw version to make any changes. It took me a while to stop instinctively trying to edit the drawing in preview mode, which is something it is possible to do in FreeHand.

One thing to know before getting into Illustrator is the oodles of memory it can use. You have to pay something for the power of this program, but on a 1-megabyte machine, which is the minimum, you don't have much room to work with.

Criticizing Illustrator 88 is a bit like criticizing Brooks Robinson as a third baseman. How can you argue with something that gets the job done and done gracefully? As for the contest between Illustrator and FreeHand, I'd say Adobe has tied the score, maybe even gone ahead.

—D. Elvis Barker

Listen While You Work: Apple's CD-ROM Drive

The **AppleCD SC** CD-ROM drive gives Macintosh and Apple II users access to applications containing up to 550 megabytes—and the chance to listen to music while working with all that data. Since the CD-ROM drive uses the small-computer-system-interface (SCSI) port to connect to the computer, hooking it up is trivial. Just connect a SCSI cable ($50 at Apple's prices) between the Mac and the AppleCD SC. If it's the only SCSI device on the system, install the SCSI terminator plug ($30) and the AppleCD SC is ready for action. You also need to install the CD-ROM drive software driver, which lets the system recognize the AppleCD SC.

Unfortunately, while I was testing the drive, most CD-ROM software developers had not yet released their products. By the time you read this, however, several CD-ROM applications should be available, and more vendors are expected to announce products for the AppleCD SC this fall and early next year.

I had to content myself with Apple's "learning disc," which presents a number of third-party applications currently under development, all running under HyperCard 1.2 (HyperCard 1.1 does not support the AppleCD SC). These applications to come include Grolier's New Electronic En-

continued



Embedded systems designers have already used **CrossCode C** *in over 172 different applications.*

Introducing CrossCode C for the 68000 Microprocessor Family

Finally, a 68000 C Compiler that's tailor-made for ROMable applications

CrossCode C is designed *specifically* to help you write ROMable code for all members of the Motorola 68000 family.

A ROMable C Compiler?

To get truly ROMable code, you have to start with a truly ROMable compiler. Here are three **CrossCode C** features that you won't find in any ordinary C compiler:

- Compiler output code is split into five independent memory sections that you can assign into ROM or RAM as you please.
- You can optimize the code for your application because *you* control the sizes of data types. For example, you can optimize for speed by using two byte *ints*, or get maximum versatility by using four byte *ints*.
- You can easily write assembly language routines that call C functions and vice-versa, because the compiler uses simple, well documented parameter passing conventions.

How About Low Level Control?

CrossCode C comes with an assembler that has all the features that assembly language programmers require. In fact, you could write your whole application with it:

- The assembler features an advanced macro language, conditional assembly, "include" files, and an unlimited size symbol table.
- Detailed cross references show you where you've defined and referenced your symbols.
- After a link, you can actually convert your "relocatable" assembler listings into "absolute" listings that contain absolute addresses and fully linked object code.

Can It Handle The Link?

The **CrossCode C** linker is designed to handle truly huge loads. There are no limits on the number of symbols in your load or on the size of your output file. And you can always count on full 32 bit target addressability, because the linker operates comfortably in the highest ranges of the 68020's address space.

How Does It Get To ROM?

CrossCode C comes with a *downloader* that puts you in touch with all EPROM programmers and emulators. It can convert your load into Motorola S-Records, Intel Hex, Tek Hex, Extended Tek Hex, and Data I/O ASCII Hex. You can also produce a binary image and convert that image into any format you might want. In all formats, bytes can be split into EPROMs for an 8, 16, or 32 bit data bus.

Why Wait?

Once you start using **CrossCode C**, you may just wonder how you ever got the job done before! It's available under MS-DOS for just $1595, and it runs on all IBM PCs and compatibles (640K memory and hard disk are required). Also available under UNIX & XENIX.

CALL TODAY for more information:

1-800-448-7733

Inside Illinois or outside the United States, please dial

PHONE: **1-312-971-8170**
FAX: **1-312-971-8513**

SOFTWARE DEVELOPMENT SYSTEMS, INC.
3110 WOODCREEK DRIVE
DOWNERS GROVE, ILLINOIS 60515 USA

CrossCode™ is a trademark of SOFTWARE DEVELOPMENT SYSTEMS, INC. MS-DOS® is a registered trademark of Microsoft. UNIX® is a registered trademark of AT&T. XENIX® is a registered trademark of Microsoft.

Circle 135 on Reader Service Card

Quality Was Never Priced So Low!

2400 bps
2400 / 1200 / 300 bps
MODEM

ONLY
$100
MADE IN U.S.A.

5 Year Parts and Labor Warranty

Our **2400HC²** Hayes Compatible Half Card modem is for IBM PC/XT/AT and compatible computers. It uses the standard 'AT' command set. Included with our modem we supply communications software, a 7 foot cord and documentation.

We build our modems at a mil-spec board house located in suburban Chicago, using quality components. We test every modem shipped and back our confidence in our quality with a 5 year parts and labor warranty from the factory and a 30 day money back guarantee.

Kiss Engineering Inc.

162 N. Franklin St. • 5th Floor • Chicago, IL 60606
Toll Free Order Line for orders only 1-800-442-2285
For orders in Illinois 1-312-358-1501
Kiss Engineering Technical Support 1-800-442-2285

Orders within the USA (including Alaska & Hawaii) are shipped FREE via UPS.
Payment in U.S. funds drawn on a U.S. bank required.
COD orders placed before 2 pm CST shipped same day.
Illinois residents add 8% sales tax.
We do not accept credit cards.
Please send check or money order for $100.

Subscription Problems?



We want to help!

If you have a problem with your BYTE subscription, write us with the details. We'll do our best to set it right. But we **must** *have the name, address, and* **zip** *of the subscription (new and old address, if it's a change of address). If the problem involves a payment, be sure to include copies of the credit card statement, or front and back of cancelled checks. Include a "business hours" phone number if possible.*

BYTE
Subscriber Service
P.O. Box 7643
Teaneck, NJ 07666-9866

THE FACTS

AppleCD SC
$1199

Requirements:
Apple Macintosh or Apple II with a SCSI cable; HyperCard 1.2 recommended for use on the Macintosh.

Apple Computer
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010
Inquiry 853.

cyclopedia, Stanford University's The Electric Cadaver for studying human anatomy (see the August Microbytes), and samples from The Whole Earth Catalog. Most of the sample applications include lots of graphics and sound and are an impressive demonstration of the potential of the CD-ROM.

Accessing the drive through HyperCard is no different from accessing a HyperCard stack on a floppy disk or a hard disk. The drive appears as an icon on the desktop, and you can open it just like any other folder or stack. The main difference, of course, is that you can't write to the CD-ROM drive or make any changes to the data that's on the disk.

While HyperCard will probably be the main interface for CD-ROM software on the Macintosh, Apple will provide support for the High Sierra ISO disk format, which is dominant in the CD-ROM industry. When the High Sierra system software is available, you can get it by mailing Apple a coupon that comes with the AppleCD SC. (High Sierra will be supported on both the Macintosh and Apple II, Apple says.)

A slick feature of the AppleCD SC is its ability to play standard audio compact disks using a desk accessory called CD Remote, which controls the audio disk. The CD-ROM drive has sockets for connecting earphones, stereo speakers, or a stereo amplifier. To use the AppleCD SC as a stereo system, simply click on CD Remote and insert an audio disk in the drive. CD Remote presents a panel on the screen, where you can click on various buttons to play certain selections, switch tracks, pause, repeat, and so forth. You can also remove the panel from the screen and the CD will continue to play as a background task.

The AppleCD SC drive is an excellent product, but it's pretty expensive at $1199 (add another $80 for cabling). The biggest disappointment is the lack of software at this time. Unless there's an application out there that you've got to have right now, it's probably best to wait until more software is available.

—Nick Baran

Two Great Caching Programs

As processors get faster and faster, disk I/O becomes more and more of a bottleneck. A few major manufacturers (notably, IBM and Compaq) package disk-caching software with their systems to speed up read/write operations.

A disk cache selectively buffers disk reads and writes, substituting fast RAM accesses for unnecessary or repetitious—and slow—disk operations. A cache offers many of the speed benefits of a RAM disk but is easier to use. And it's also safer, because a cache will automatically "write through" to the disk instead of requiring an explicit save or copy command.

I looked at two inexpensive disk-caching programs that widen the bottleneck by speeding up input and output: Multisoft's **Super PC-Kwik** and Polytron's **PolyBoost II**. Both offer blazing speed and impressive bells and whistles.

continued

MINUTEMAN®

UNINTERRUPTIBLE POWER SUPPLIES



"More Powerful Than Ever!"

TOTAL POWER PROTECTION

BLACKOUTS Enables user to operate during complete loss of power.

BROWNOUTS User is protected from low AC voltage below 102 volts.

OVERLOADS Automatic shutdown in overload situation to protect UPS from inverter burnout.

OVERVOLTAGE UPS runs on inverter (117 volts) when AC voltage exceeds 132 volts.

SURGES/SPIKES Clamps transients above 200 volts with an energy rating of 100 joules or less.

EMI/RFI Three stage filtering for clean AC power.

- **FULL ONE YEAR WARRANTY**
- **ORDER-SHIP SAME DAY**
- **1 MILLISECOND TRANSFER TIME***
- **SYNCHRONIZED SINEWAVE***

*250 watt and 500 watt units offer 4 msec transfer time, PWM waveform

PARA SYSTEMS, INC.

1455 LeMay Dr.
Carrollton, TX 75007

Telephone:
(214) 446-7363

1-800-238-7272

FAX: (214) 446-9011 TELEX: 140275 OMEGA

Power Output	120 Volt Models	230 Volt Models
250 WATT	$ 379.00	$ 429.00
300 WATT	$ 549.00	N/A
500 WATT	$ 699.00	$ 799.00
600 WATT	$ 899.00	$1049.00
1200 WATT	$1499.00	$1749.00
1600 WATT	$1999.00	$2299.00

Suggested Retail

See us at
COMDEX/Fall '88
November 14–18, 1988
Las Vegas Convention Center
Booth #163



Optional Battery Packs Not Shown

UL 250, 300 and 500 Watt Models

Compact Disk Products, Inc.
CD-ROM/WORM
ALL PRODUCTS, LOWEST PRICES, EXPERT ADVICE
INTRODUCTORY OFFERS
Hitachi 1503S or 3500S CD-ROM Drive with your choice of:
- McGraw Hill Science and Technical Reference Set $895
- Grolier Electronic Encyclopedia $995
- Microsoft Bookshelf $895
- PCSIG Library (Disks 1 - 1000) $895
CD-ROM SOFTWARE
Oxford English Dictionary .... NEW $945
Comstock Stock Photography On CD .... NEW $445
Educorp Public Domain/Shareware for the Mac .... NEW $249
The New Grolier Electronic Encyclopedia $359
McGraw Hill or Bookshelf or PCSIG $269
The Bible Library $495
Kirk-Othmer Encyclopedia of Chemical Technology $845
Registry of Mass Spectral Data $2655
Geovision U.S. Atlas and Mapmaker $795
TOLL FREE ORDER LINE · 800-MEGABYTe (634-2298)
CD-ROM and WORM DRIVES
Hitachi 1503S External CD-ROM Drive with Audio $729
1503S with Digital Audio Output $1229
Hitachi 3500S Internal 1/2 Height CD-ROM Drive w/Audio $719
Maxtor 800 MB WORM Drive $3799
Optotech Laserbank 400 MB WORM Drive $2799
Portable 286 with CD-ROM Drive $3795
CD-Play ($89) Pop-up utility that permits user to play all audio CDs on Hitachi and compatible drives. Output to headphones or amplifier.
CD-Play+Sampler ($149) Same features as CD-Play plus the ability to name two points on an audio CD and loop between them.
CD-AudioFile ($149) Automatically creates database records of all your audio CDs. Allows you to store a preferred play sequence for each disk. Automatic recognition of CDs. Creates DBase compatible records.
CDP
Compact Disk Products
217 E. 85th St.
New York, NY 10028
Tel. 212-737-8400
Fax 212-439-9109
Compuserve 75530,214
Free 3 Month Subscription to CD-ROM Review with orders over $300
INTERNATIONAL ORDERS A SPECIALTY
Australian Agent: KEWTEL
145 Cotham Rd.
Kew, Victoria 3101
Tel. (03) 817-5933



- **Remains in Place** while you use your computer.
- **Avoids Costly Repairs.** Protects delicate electronics from dust, spills, smoke, ashes, staples.
- **Soft, Flexible,** retains normal keyboard feel.
- **Washable, Durable High-Tech Polymer** lasts years.
- **Hundreds of Models.** SafeSkin is available for most PCs, laptops, workstations and clone keyboards.
- **Office • Home • Factory • Classroom • Laboratory**

List Price $29.95. Please call or write for free color brochure. Dealer inquiries encouraged.

SafeSkin™
Keyboard Protector
Merritt Computer Products, Inc./4561 S. Westmoreland
Dallas, Texas 75237/(214) 339-0753 • Fax (214) 339-1313

THE FACTS

Super PC-Kwik
$79.95

Multisoft Corp.
15100 Southwest Koll Pkwy., Suite L
Beaverton, OR 97006
(503) 644-5644
Inquiry 854.

PolyBoost II
$79.95

Polytron Corp.
1700 Northwest 167th Pl.
Beaverton, OR 97006
(503) 645-1150
Inquiry 855.

Requirements for both: IBM PC, XT, AT, PS/2, or compatible with DOS 2.0 or higher, 5K bytes to 5 megabytes free memory (conventional, extended, or expanded), and a hard disk drive.

Both will accelerate the disk I/O of almost any Intel-based machine, and both can exploit conventional, extended, or expanded memory; users of IBM PC AT–class machines also can put to use the top 384K bytes on their 1-megabyte motherboards without the Lotus/Intel/Microsoft Expanded Memory Specification or any other memory-enhancing scheme.

I tried both caches on a 16-MHz Compaq 386 with 2 megabytes of memory and on a 16-MHz Club American 386 with 1 megabyte of memory. Both programs worked flawlessly and boosted disk throughput from 3 to 7 times that of the same machines without caches. (For workaday applications, a speed increase of 3 or 4 times is typical.) I found that both programs were faster than the caching program Compaq supplied; I've stopped using Compaq's cache.

While both caches are fast, PolyBoost II is marginally faster than Super PC-Kwik. For example, a read/write-intensive operation like decompressing a series of archived text files took 22 seconds with PolyBoost II installed and 24 seconds with Super PC-Kwik installed. (With no cache, the decompression took 39 seconds.)

A few seconds here or there won't add up to early retirement, but if speed is the determining factor (it is for me), PolyBoost II is the better choice. On the other hand, because their performances are close, the bells and whistles each of these programs offer may tilt the balance one way or the other for you.

Super PC-Kwik has a mind-boggling array of options to optimize its operations for your usage patterns. It also runs cooperatively with Multisoft's versatile PC-Kwik Print Spooler (sold separately for $45): The two programs can dynamically share the same memory above 640K bytes. It's pretty slick. In effect, it uses the same RAM to preferentially buffer and accelerate whatever the current *slowest* I/O operation is.

PolyBoost II takes a different tack: It's actually a suite of several programs, including a cache, a keyboard enhancer (which speeds up keyboard response and includes a command-line editor), a screen speedup program (for monochrome or color displays), a disk unfragmenter, and several other utilities. The combination of disk, keyboard, and screen speedups that results when using PolyBoost II is impressive enough to make your computer feel like a new and much faster animal.

Any cache is better than no cache; and these caches are better than some others. You really can't go wrong with either.

—Fred Langa

continued




Why do institutions worldwide trust ARC? Before you purchase your next computer, call us. You owe it to yourself to find out.


ARC American Research Corporation

(2) 633500	274-8350	967211	(40) 660051	(1) 442-7154				
(1) 687699	(2) 852-0232	2421812	(52) 609-100	(2) 396-9900	562459	257-581	(213) 265-0843	
(22) 825575	(222) 934212	1681169	(31) 658551	(3403) 90911	(2) 402391	(2) 251-7078	(1) 684-4144	
(42) 12560	3826-5007	128-68481	(14) 415-206	(21) 380-2717	(3) 798-2663	297-475	574980	

Circle 17 on Reader Service Card (DEALERS: 18)

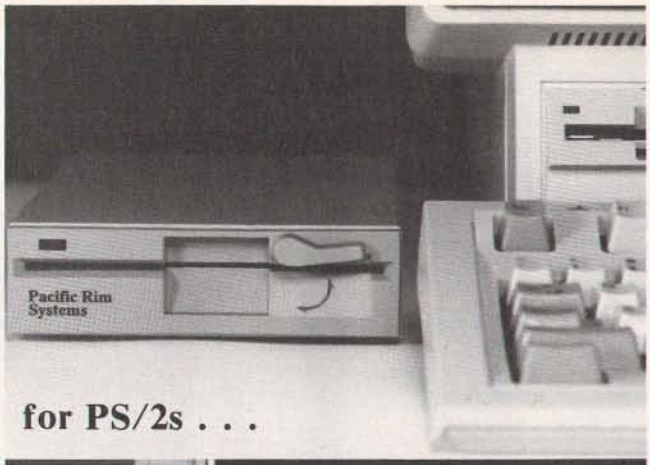

for PS/2s . . .

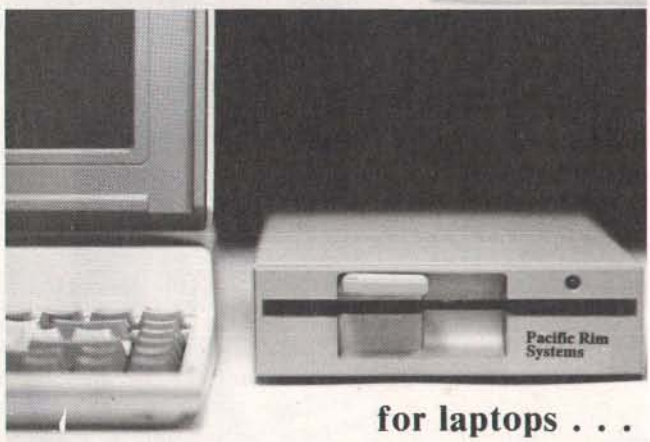

for laptops . . .

End 3½ Inch Frustration

Complete solutions for using 5¼" diskettes on your 3½" based computer.

Our solutions for IBM® PS/2® computers are available in either 1.2MB or 360KB varieties, ending frustrations for all media standards. Both are **complete** with everything needed for any model PS/2 in a single box. No power supply, no adapter board, and we don't waste an expansion slot.

Our laptop solutions also offer "one-drive-fits-all" convenience. Simply order the cable for the computer of your choice. All popular laptops are supported.

Customized versions available for special applications. Domestic and international resellers welcome.

5¼" Subsystem Specialists

Pacific Rim Systems, Inc.

2570 Barrington Court
Hayward, California 94545
FAX: (415) 782-1017
Telephone: (415) 782-1013

A Personal Tickler That Runs under OS/2

Despite having to keep track of such things as meetings, deadlines, and my wife's birthday, I've frankly found today's crop of memory-resident personal schedulers a real pain. I don't have the time to learn them, and they take up huge chunks of my limited MS-DOS RAM real estate. So, with all this computing "power" on my desk, I still use pocket- and desk-size calendars to schedule my days.

But that may change pretty darn fast. **Tickler/2** is by far the most powerful personal scheduler I've seen. It has a bunch of handy features and tricks, a simply elegant user interface, and a low price, and it runs only under OS/2.

Tickler/2 is the electronic equivalent of those famous paper-based tickler files that many disgustingly organized people use. A classic tickler file takes up loads of space by using individual file folders, one for each day in the month, along with folders for individual months and upcoming years. You fill these folders with pieces of paper: notes, reminders, letters to follow up, and so on. It can get absurdly crowded and confusing, and you're up the creek if you misfile an important paper.

This program uses OS/2's extended memory capacity and multitasking abilities to offer a huge amount of options. Besides the normal chore of entering appointments, you can set messages to appear on your screen at just about any interval or on any date, even years in advance. It also has a relative scheduling feature that lets you enter a major event and then indicate when and how often you want to be reminded of it. If you tell it to be merciless, Tickler/2's "nag" feature will continually remind you of something you need to get done until you indicate you've done it. It will also count down the days (or hours) until deadline. Features like this are just the thing for foot-dragging editors who put off writing Short Takes until the last minute.

Tickler/2 also lets you attach OS/2 commands to a message. With this feature, you can have Tickler/2 do things like automatically sending a monthly report to the boss or performing a weekly hard disk backup. I used it to automatically log on to BIX overnight, get my electronic mail, and file conference messages. Sure, you can do this with several MS-DOS programs, but the fact that it's integrated with Tickler/2's other features makes it handy indeed.

But the most intriguing feature is something that is called a "named event." You can attach a virtually unlimited list of messages to an event that you can't pin down to one particular time. For example, if you sell computers, you can enter messages that are set to start every time a customer buys a system, doing things like sending a thank-you letter, service reminders, and even a "trade-in time" reminder a few years in the future.

continued

THE FACTS

Tickler/2
$80

Requirements:
IBM PC AT, PS/2, or compatible with OS/2 Standard Edition 1.0 or higher and a hard disk drive.

Enyart Development Corp.
7000 East 70th Ave.
Commerce City, CO 80022
(303) 286-8686
Inquiry 856.

Circle 299 on Reader Service Card (DEALERS: 300)

THE COMPUTER PROFESSIONALS' BOOK SOCIETY

The easy, reliable way to satisfy your professional book needs.


Take 3 books for only $1.95

(Values to $219.80)

and get ***The Handbook of Computers and Computing*** *FREE!*




2740 $34.50



9760 $17.95




3098 $44.50
Counts as 2



2959P $19.95




9808P $34.95



9814P $39.95



3028 $25.95




2951P $17.95



9777 $49.95




2856P $18.95




9786 $32.95



2937 $29.95



2890 $32.95



9779P $22.95



9832 $36.95



2838 $19.95



2845 $29.95




9136 $34.95



2916P $19.95




2763 $27.50



2637 $22.95




9815 $38.95



3019 $39.95
Counts as 2



2807P $14.95



3016 $24.95




9824 $49.95




9812 $38.95



9813 $39.95



9763P $19.95



9751 $35.95


The Handbook of Computers and Computing

FREE when you join!

Edited by Arthur Seidman and Ivan Flores

Featuring 50 original articles by leading computer experts, this professional sourcebook delivers the essentials you need in both hardware and software areas.

874 pp. **(a $79.95 value)**



How the Club Works

YOUR BENEFITS: You get 3 books for $1.95 plus shipping & handling when you join. You keep on saving with discounts from 20 to 50% as a member.

YOUR PROFESSIONAL BOOKSTORE BY MAIL: Every 3-4 weeks, you will receive the Computer Professionals' Book Society News describing the Main Selection and Alternates, as well as bonus offers and special sales, with hundreds of titles to choose from.

AUTOMATIC ORDER: If you want the Main selection, do nothing and it will be sent to you automatically. If you prefer another selection, or no selection at all, simply indicate your choice on the reply form provided. As a member, you agree to purchase at least 3 books within the next 2 years and may resign at any time thereafter.

BONUS BOOKS: Starting immediately you will be eligible for our *Bonus Book Plan* with savings of up to 80% off publishers' prices.

IRONCLAD NO-RISK GUARANTEE: If not satisfied with your books, return them within 10 days without obligation!

EXCEPTIONAL QUALITY: All books are quality publishers' editions especially selected by our Editorial Board.

All books are hardcover unless number is followed by a "P" for paperback. (Publishers' Prices shown) BYP-1088

© Computer Professionals' Book Society, Blue Ridge Summit, PA 17294-0870

Circle 63 on Reader Service Card

A Message To Our Subscribers

FROM TIME TO TIME WE MAKE THE BYTE subscriber list available to other companies who wish to send our subscribers material about their products. We take great care to screen these companies, choosing only those who are reputable, and whose products, services, or information we feel would be of interest to you. Direct mail is an efficient medium for presenting the latest personal computer goods and services to our subscribers.

Many BYTE subscribers appreciate this controlled use of our mailing list, and look forward to finding information of interest to them in the mail. Used are our subscribers' names and addresses only (no other information we may have is ever given).

While we believe the distribution of this information is of benefit to our subscribers, we firmly respect the wishes of any subscriber who does not want to receive such promotional literature. Should you wish to restrict the use of your name, simply send your request to the following address.

BYTE MAGAZINE
ATTN: SUBSCRIBER SERVICE
P.O. Box 7643
TEANECK, NJ 07666-9866



ABRA 2000
only **$995** for IBM PC & Macintosh
Human Resources

***Magically* cuts paperwork and saves time.**
Prepares accurate personnel reports instantly!

The ideal solution for most personnel needs:

- Complete Employee Record Keeping.
- Salary Reviews, Job History & Salary Analysis.
- Benefit Statement, Insurance & COBRA Reports.
- EEO Reports, I-9 Tracking, Injuries & Licenses.
- Organizational List, Phone Directory & Birthdays.
- Skill Retrieval, Education, Training & much more.
- Over 50 Reports, plus optional report writer.
- Attendance Tracking & Multi-User options.
- **New Applicant Tracking System available.**

Easy to use – even for novices. And ABRA 2000 is "proven" with over 800 happy customers.

It's not an illusion... Test the magic!
Call Today or Send $25 for Demo and Manual.

ABRAcadabra SOFTWARE
5510 - 9th Street North, St. Petersburg, FL 33703 (813) 525-4400

Tickler/2 is actually made up of two programs: There's a foreground editor/database for entering your messages and schedule, and a 36K-byte program runs as a detached task under OS/2. The latter triggers the reminder messages. And since it's OS/2, there's no "RAM cram" or ill-behaved terminate-and-stay resident programs.

Tickler/2 is one of the easiest-to-use programs I've seen. You don't have to learn esoteric syntax to enter messages and times; in most cases, you just have to type a few keystrokes and highlight a date or time using the cursor keys.

—Stan Miastkowski

Zortech's Comm Kit

Zortech's Comm Toolkit package is an eye-opening collection of programs geared to the programmer involved with serial-port communications and anxious to get on with it. Here you'll find functions that cover the entire range of communications complexities: from rudimentary "send-a-byte-out-the-serial-port" to a single function that implements batch Kermit-protocol transfers. Zortech provides source code compatible with Microsoft C (Quick C), Turbo C, and (understandably) the Zortech C compiler. If your favorite compiler isn't on that list, you can modify the source code so your own compiler will not have an immune reaction.

That's right, Zortech provides the complete source code, right down to the low-level library routines.

If you're going to do any kind of terminal emulation, you're going to need to deal with screen-driver software. Here's where Comm Toolkit scores again. You'll find definitions for a standard display as well as a Windows driver. Also, Zortech includes source code for ANSI, VT-52, and VT-100 emulators.

I linked my XT clone and my AT clone and decided to test Minicom and Maxicom, the two communications programs in the package. I put the Zortech programs on one end and HyperAccess on the other. Zortech's programs had trouble on my Xitses (the MCT-IO multiserial board from JDR Microdevices), but they seemed to do better when I tried them on the AT clone with a stock IBM serial card. Even then, when I changed the data transfer rate from the menu in Maxicom, the system stopped receiving (though, mysteriously, it could transmit).

When things worked, I ran XMODEM and Kermit transfers in both directions up to 9600 bits per second with modest throughput. I attribute the program's unimpressive speed to the fact that the XMODEM and Kermit code appear to do no explicit record buffering and therefore suffer from frequent disk accesses.

I have mixed feelings about the Zortech Comm Toolkit. If the bugs get cleaned out, there's certainly plenty of usable code here. You might need to do some work to get the code compatible with your serial interface—particularly if you're using a nonstandard clone board. But if you've got some communicating to do and don't mind a little low-level programming, you ought to check it out.

—Rick Grehan ■

THE FACTS

Zortech Comm Toolkit
$49.95

Requirements:
IBM PC or compatible with Microsoft Quick C, Borland Turbo C, or the Zortech C compiler; DOS 2.0 or higher.

Zortech, Inc.
361 Massachusetts Ave.
Arlington, MA 02174
(617) 646-6703
Inquiry 857.

 Circle 7 on Reader Service Card



Teach yourself Expert Systems Technology Interactively on your IBM PC with this Comprehensive On-line Study Course

Experteach-III Includes:

- The Structure of Expert Systems.
- Inference, Forward and Backward Chaining.
- Inexact Reasoning.
- Frames and Inheritance.
- Intelligent Database Systems.
- Knowledge Acquisition.
- Knowledge Representation.
- Building Expert Systems.
- Automatic Knowledge Acquisition Systems.
- Machine Learning and Induction.
- Expert System Verification.
- Case Studies of Expert Systems.
- Use of Conventional Languages.
- Source Code in C and Pascal.

IntelligenceWare, Inc.

Leading in Artificial Intelligence Applications™

Experteach-III and IntelligenceWare are trademarks of IntelligenceWare, Inc. IBM PC is a trademark of IBM Corporation.

Experteach-III is a comprehensive guide to Expert System Technology consisting of a uniquely integrated collection of Expert System tutorials, case studies, and interactive on-line teaching programs.

You are introduced to Expert Systems technology with easy to understand text and interactive tutorials allowing you to test your comprehension of the concepts presented. Experteach-III draws its power from the uniform integration of Expert System concepts and provides you with a broad and overall view of the Expert System field.

A clearly written tutorial text is included along with well designed on-line interactive tutorials. Together, they provide a concise exposition of Expert Systems technology. Experteach-III graphically explains concepts such as forward and backward chaining, pattern matching, backtracking, conflict resolution, inexact reasoning, frames and inheritance, object oriented programming, etc. These concepts are explained in a step-wise, easy to understand manner.

Experteach-III provides an in-depth understanding of the inner structure of Expert Systems technology.

Experteach-III is based on extensive experience in teaching Expert System concepts in associaion with IEEE, ACM, UCLA, and the Continuing Education Institute.

IntelligenceWare, Inc.
9800 S. Sepulveda Blvd., Suite 730
Los Angeles, CA 90045
(213) 417-8896

☐ I don't want to let technology pass me by! Send ___ copies of Expertech-III at $129 each.

☐ Check or money order payable to IntelligenceWare, Inc. is enclosed.

☐ Charge my ☐ Visa ☐ MC ☐ AMX
No. _____ Exp. Date _____

Shipping and handling, US: $5, Canada and Hawaii Air: $15, Overseas Air: $25.
CA residents please add 6.5% sales tax.

☐ Send me information on other IntelligenceWare Products.

Name _____

Company _____

Address _____

_____

Tel. No. _____ Ext. _____


Signature _____

System Requirements: IBM PC, PC/XT or PC/AT 512K memory

ISBN 0-945877-01-3

Train Your PC to Read...

...the Same Things You Read!

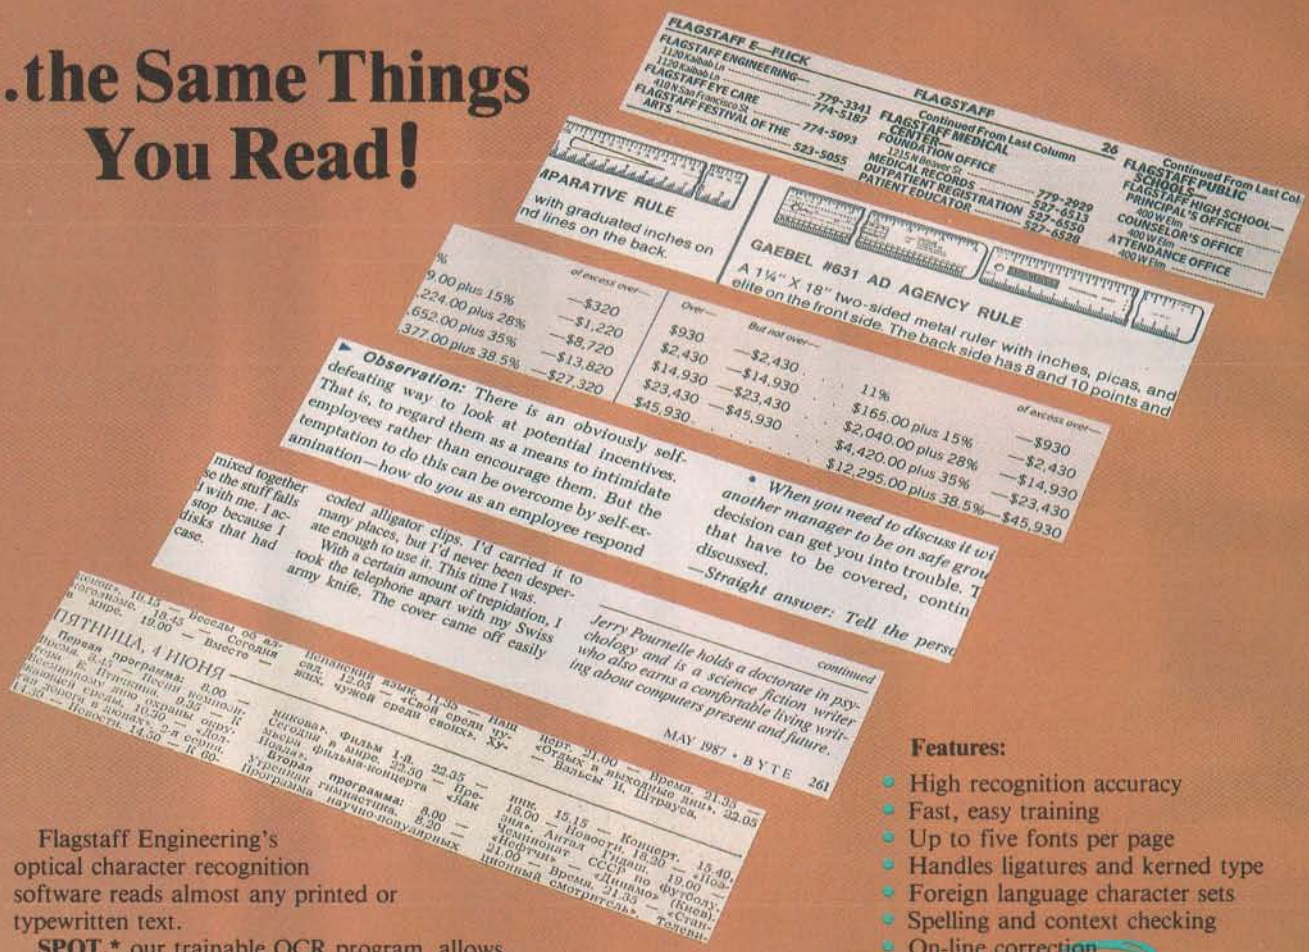

Flagstaff Engineering's optical character recognition software reads almost any printed or typewritten text.

SPOT,* our trainable OCR program, allows you to compile information from books, magazines, typewritten records, genealogical data, directories, catalogs, and public documents, including foreign-language material. The data captured by **SPOT** can be used by database, word processing, desktop publishing and typesetting applications.

SPOT's flexible output options allow you to preserve the original page format, including columns and margins. Reformatting options include the choice of DCA or ASCII output files, with options to generate single-column output from multiple-column text.

Features:

- High recognition accuracy
- Fast, easy training
- Up to five fonts per page
- Handles ligatures and kerned type
- Foreign language character sets
- Spelling and context checking
- On-line correction
- Affordable at **$995.00**

Flagstaff Engineering leads the PC industry in desk-top conversion systems for 9-track tape and 8-inch diskette data files. We have already supplied thousands of customers worldwide with our OCR systems. Call for the best prices on Panasonic, Hewlett-Packard, and Canon scanners. Dealer and volume discounts are available.

Flagstaff Engineering can modify the software code to meet your custom applications. For details, call us at (602)779-3341.

**Syntactic Pattern Optical Translator*

FLAGSTAFF ENGINEERING

Come see us at COMDEX Booth #C107

1120 Kaibab Lane • Flagstaff, AZ 86001

(602)779-3341 • Telex 705609 • FAX (602)779-5998

Circle 95 on Reader Service Card (DEALERS: 96)



STICK SHIFT OR AUTOMATIC?

Jerry takes a look at the new version of Windows and delves into the history and functionality of Sprint

The other day, Mrs. Pournelle and I were walking in the hills behind Chaos Manor. When we came down into the back-road area, we saw a young man trying to teach his girlfriend to drive. "That's the real test," Roberta said. "Teaching her to drive, or teaching her to use a computer, it's the real test of true love."

"Stick shift car, too," I said.

She shrugged. "All computers are stick shift."

I've been thinking about that.

Of course, the Macintosh tries to get away from the "stick shift" image, and it has a lot of converts. My youngest boy enters college this fall. He has a Mac Plus. One of his older brothers wants to trade his IBM PC AT for a Mac. Both claim they're not interested in learning about computers, they just want to use them. I remember saying something like that back when I began this column more years ago than I want to admit. My friend and colleague Tom Clancy does all his work on a Mac and isn't vaguely interested in learning about PCs. Perhaps it's valid to think of the Mac as the first automatic shift machine.

If so, then the PC world is beginning to breathe down the Mac's neck.

Windows

I suppose I have to be careful what I say, lest I get myself involved in Apple's silly lawsuit against Microsoft and Hewlett-Packard; but I've just come back from a Microsoft-sponsored Windows exposition, and I can only conclude that Windows is hastening the process of the "Macintoshization" of the PC. If you prefer to say that Windows is now implementing many of the ideas developed at Xerox's Palo Alto Research Center (PARC) lo these many years ago, then partly perfected by Niklaus Wirth, and finally popularized by Apple's Macintosh, feel free. The point is that Windows consciously attempts to make the PC an automatic shift computer.

Of course, automatic shifts need cars that are higher-powered. Same with computers. If you have an ordinary PC or XT, I don't recommend Windows. If you want multiple applications—sort of like the Macintosh MultiFinder—and you have an XT with a hard disk drive and a good bit of RAM disk as well, DESQview is marginally better than nothing. Windows isn't for you; it's just too slow. I don't really recommend either for slow machines.

If you have an AT, you have more choices. Windows/286 is Microsoft's newest. It isn't very good at taking ordinary DOS programs and running them in the Windows environment. Still, Windows/286 version 2.10 is a distinct improvement over the older Windows, and it's not all *that* bad. Windows/286 can run DOS stuff, provided that your AT computer is fairly vanilla, the program isn't too badly behaved, and you hold your mouth right; but it will be slow, even if you've got a fast system. If all you want to do is run standard DOS programs, you'll probably be better off with DESQview.

Windows/386 is better yet. Windows/386 on an 80386 machine is better than DESQview on an 80286 machine. On the other hand, DESQview works spectacularly better on an 80386 than it does on an 80286; and Windows/386 is still slower than I like. There is room for a difference of opinion. People I respect like Windows/386 a lot. It certainly is usable, if slow.

Windows/386 isn't easy to install. It doesn't like a number of EGA cards (Orchid and Paradise seem to be all right). The Setup program takes quite a long time, and if you have to make any changes in your installation, you must start all over again. This can be quite annoying.

When you're installing Windows/386, I advise you to throw away your `AUTOEXEC.BAT` and `CONFIG.SYS` files. Windows/386 will construct new ones. Let it. Don't set up any buffers, or environment, or paths, or anything else while you're trying to get Windows/386 going. Then, when you have Windows/386 up and running, you can tweak the start-up files to see what you can get away with.

You want to be real careful about what DOS you're running, too; I'm still getting DOS version incompatibility errors in Windows/386 long after I thought I'd eliminated all possible sources of such errors. I still don't understand that; it could be that I've added something odd to my `CONFIG.SYS` file or tried to use DOS extensions for the CD-ROM reader.

If you have a very vanilla system and don't use networking, running ordinary programs under Windows does have some advantages. Windows has convenient features, like its own pop-up notebook and calculator (but no calendar), and it does make switching from one program to another a lot easier (although not easier than DESQview). Where Windows—/286 or /386—really shines, though, is running programs developed especially for use with Windows. Some of those work spectacularly well. The Windows screens are laid out well and are as easy to understand as any Mac screen. Windows screens are more customizable, too.

I'm just beginning to collect software that's been specially adapted to work with Windows. Most of it, like Microsoft Excel and MacInTax PC, comes with a run-time package so that you don't really need Windows; but it's much better if

continued

you have Windows and are familiar with it. Windows/386 running programs adapted for Windows runs like lightning, and it does all the things the Macintosh MultiFinder is supposed to do but hasn't quite perfected.

When I'm using Windows to run programs like Excel and MacInTax, I understand why Apple was so terrified of Windows that they brought in the lawyers. The interface is at least as good as Apple's; indeed, many will think Windows does the integration of mouse and keyboard better than the Macintosh does. The various operations are smooth and intuitive. Better yet, you don't give anything up; you can still use DOS with its wild-card commands.

We did notice that, probably because of the lawsuit, Windows no longer has "TRASH" as the place to put deleted files. The legend under the icon (which doesn't look like Apple's Trash) now says "GARBAGE." Roberta suggested they have an icon of the kitchen sink and label it "DISPOSALL," which inspired me to think up a large vortex with the label "BLACK HOLE." Apparently, Apple is adamant about owning the Trash, and nearly everyone is willing to let Apple have it if they want it so bad.

We made that suggestion at the Hewlett-Packard booth at the Windows show. Hewlett-Packard has a Windows adaptation called NewWave. The demonstrator chuckled and called in the icon editor. Within a couple of minutes, he had a kitchen sink labeled "DISPOSALL," and he was starting in on the "BLACK HOLE." I didn't get much chance to look at NewWave, but from what I did see, I was impressed.

I wasn't much of a Windows fan when the program was first introduced, but I can see how I might become one if they can get enough programs adapted for it. Windows doesn't yet do much with devices like CD-ROM drives—Microsoft Bookshelf is a pain to get going in the same window with your word processor, but then it's a pain to get DESQview to handle it, too.

Microsoft tells software developers that the best way to learn to write software for OS/2 and Presentation Manager is to begin with Windows. From what I've seen, if you're developing new software, you might want to seriously consider adapting your stuff for Windows, no matter what you think of OS/2.

They are going to have to speed things up, though. I suspect the way to do that will be with faster video boards. Most of the wait comes from having Windows draw stuff on your screen.

Windows hasn't yet got us out of the stick shift era, but it looks like the next revision just may do it.

Actor

One program that has been adapted for Windows is the Actor language. This is one of the family of languages that includes Smalltalk: you have data classes, and you send messages to them; then they do things, like make new windows with certain features, or put images on the screen, or do calculations. Actor is interactive and compiles as you write it, producing threaded code like Forth; but it's said to be a great deal easier to learn, and to use, than Forth.

I don't know. My only exposure to Actor was in a demonstration at the Windows seminar. I was impressed, but then one is often impressed by demonstrations; the acid test will be to see if I can write programs with it when I get it here. I will say that it sure looked like it understood how to interact with Windows; I watched them create several small programs to my specifications, and it seemed like child's play. More when I know more, but my first impression is that Actor and Windows may be made for each other. If you're a language collector or if you're seriously interested in Windows, take a look at Actor.

Special Days and Footprints in History

An outfit called The Salinon Corporation has a series of programs called the "Life and Times" series. One program is called Special Days: you put in data, say someone's name, birthplace, and birthdate. The program looks things up in its databases, trundles out a printout that wishes the subject a happy birthday, then proceeds to report on things like what happened on that day in history; who else was born in the subject's home state; what popular songs were current the year the person was born; even prices of goods, like eggs and bicycles, back then.

It will do the same for anniversaries: it prints out your names, some congratulations, and then a summary of what things were like at 5-year intervals since you were married. (Incidentally, make sure you have the proper date set in your computer; it uses the system's date in its message calculations.)

I wasn't terribly impressed with the program, but just for the heck of it I fed it Roberta's birthday and our anniversary, printed the results, and gave the printouts to her. Apparently, she rather liked them. I don't know if she'd have liked it so much if I'd paid the full $39.95 they want for the program, but possibly; and of course you can use it to generate birthday cards for all your friends.

There's nothing to using Special Days; there's a manual, but I can't think why you'd want to look into it. Everything is explained on-screen, and if you do get stuck—which isn't easy—there's plenty of context-sensitive help. It's a really neat user interface.

I also have Salinon's Footprints in History. This is a more complicated program with much the same user interface. What you do is input someone's name, date of birth, and any other events (with dates) in the subject's life. The more dated events you can put in (entering school, graduations, marriage, children born, whatever), the better.

The output is a chronological table. The events come out unchanged (except that it tells you what day of the week things happened on); but they're embedded in other events. You might have: July 19, 1969, Alfred E. Neuman flunks third grade again; July 20, 1969, Neil Armstrong is the first man to walk on the moon; and stuff like that. The Alfred E. Neuman (or whomever you're making this up for) events are put in by you; the others come from the program's databases. (Most people would probably be a bit more dignified in picking events in Alfred E. Neuman's life.)

My major criticism with these programs is there's no way to add items to the program's databases. You go with what they furnish. Also, it's not clear to me what algorithm they use to select the order and importance of events: I used the "Special Day" feature of Special Days to prepare a report on July 20, 1969, and while it did tell me this was the day Neil Armstrong walked on the moon, the event it put up first was "Yoko Ono marries John Lennon."

Who knows, maybe Lennon's marriage was more important than the first trip to the moon, but you'll never convince me of that.

FastTRAP

I must have said a hundred times that I'm not fond of mice. I can never *find* the mouse, to begin with. The darned fool things are always getting buried. Once my mouse was completely buried under enough paper that the left-hand key was pressed down by the weight of the stuff on top of it. This caused weird problems when the machine was powered up and the `AUTOEXEC.BAT` file brought in DESQview. It took me 10 minutes to figure out what was wrong with my computer.

continued

Order Status,
Technical & Other
Info. (602) 246-2222
FAX #(602) 246-7805
Call for programs not listed

WAREHOUSE DATA PRODUCTS

MICROSOFT PC Excel
SPECIAL $273

TOLL-FREE ORDER LINE 1-800-421-3135

NOW AVAILABLE

MICROSOFT MACH 20 ..... $309
MICROSOFT WINDOWS 386 ..... $110

FREE SOFTWARE!

Purchase over $100 and receive one of these disks absolutely FREE! Purchases over $250 get two free disks, over $400 get three, or get all four disks when your purchase is over $500! **1) MIXED BAG. 2) PC-WRITE. 3) FONT-SET. 4) ABC-LIST.**

– SOFTWARE –

Accounting
Dac Easy Acct. 3.0	Low Price
Dac Easy Light	$39
Dac Easy Payroll	Low Price
Dollars & $ense	94
In House Acct.	112
Managing Your Money 4.0	117

Communication Programs
Brooklyn Bridge Universal	$75
Carbon Copy Plus	108
Crosstalk XVI	89
Crosstalk MK4	110
Flying Dutchman	64
PC Anywhere III	96

Data Base Managers
Clipper	$370
Condor 3	325
DataPerfect	Low Price
DBase III Plus	375
DB-XL Diamond	115
Fox Base Plus	194
Genifer	189
Paradox 2.0 Premium	435
PFS: Pro File	139
Powerbase	169
Q&A 3.0	Call
Quicksilver Diamond	329
Revelation Advanced	485
R Base For DOS	425
Reflex	90
Relate & Report	112
VP Info	65

Desktop Publishing
Pagemaker Ver. 3.0	$475
PFS: First Publisher 2.0	73
Ventura Publisher	489

Graphics
Boeing Graphics	$200
Chartmaster	199
Design Cad 2D & 3D	148
Diagram Master	199
Easy Cad	109
Generic Cad	49
In-A-Vision	270
Microsoft Chart 3.0	225
Newsroom Pro	65
Printshop	33

Integrated
Ability Plus	$145
Enable	352
Microsoft Works	108
PFS 1st Choice	79
Smart System	405
Symphony	465

Languages
Lattice C Compiler	$220
Microsoft C Compiler Ver. 5.0	Call
Microsoft Fortran Ver. 4.1	260
Microsoft Macro Assembler Ver. 5.1	88

Languages
Microsoft Pascal	$176
Microsoft Quick Basic 4.0	59
Microsoft Quick C	Call
Ryan McFarlan Fortran	390
Ryan McFarlan Cobol	612
Turbo Basic	Call
Turbo C 1.5	59
Turbo Pascal	Call
Turbo Prolog	90

Multi-User Software
Fox Base +	$299
Microsoft Word	195
Word Perfect 5.0	339
Word Perfect Modules	ea 75

Project Manager
Microsoft Project	$305
Super Project Plus	255
Timeline 3.0	323
Total Havard Man. 2	355

Spreadsheet
Lotus 1-2-3	$280
Microsoft PC Excel	273
Quattro	143
Surpass	329
Twin	35
VP Planner Plus	88

Utilities
Core Fast	Low Prices
Copy II PC	$19
Copywrite	39
Cubit	39
Desqview 2.01	72
Direct Access	49
Eureka	Call
Fastback Plus	89
Formtools	56
Graph in the Box 2	Call
Mace	55
Microsoft Windows 286 Ver. 2.1	59
Norton Advanced	75
Norton Utilities	48
PC Tools Deluxe	37
Prokey 4.0	70
Q DOS II	49
Righwriter	75
Sidekick Plus	115
Sideways	39
SQZ Plus	55
Superkey	55
Lightening	79
XTree	35

Word Processing
Microsoft Word 4.0	$185
Multimate Advantage II	285
Q and A Write	110
Webster Spellcheck	37
Word Perfect Ver. 5.0	Call
Word Perfect Executive	124
Word Perfect Library 2.0	65
Wordstar Pro	233
Wordstar 2000 + Personal Ed.	229

– HARDWARE –

Accessories
Copy II PC Deluxe Bd.	$101
Curtis Ruby +	69
Logical Connection	429
Mach III Joystick	36
Masterpiece	85
Masterpiece +	95
150 Watt Power Supply	69

Boards
AST	
Rampage/2	Call
Rampage 286 w/512K	$299
Sixpac Plus w/64K	129
EVEREX	
2MB Above PC/XT w/o Mem	79
3MB Above AT w/o Mem	89
ORCHID	
Ram Quest Extra PS/2	Call
INTEL	
Above PC 64K	225
Above 286 w/512K	344
Orchid Tiny Turbo	289

COMPUTERS
EVEREX	
286, 10MHz, 0 Wait	$1149
286, 10MHz, 1 Wait	999
286, 12.5MHz, 0 Wait	1349
ACER	
710 w/o Monitor	Call
900 w/o Monitor	Call
SHARP	
PC 4501	$765
PC 4502	Call
PC 4521	Call
TOSHIBA	
T1000	799
T3100	Call
T3200	Call
ZENITH	
Super Sport 286/20MG	Call
Super Sport 8088/2-Floppies	Call
Super Sport 8088/20MG	Call
NEC	
Multispeed-2	Call
All Other NEC Products	***Call***

Hard Cards
Plus 20 MB	$529
Plus 40 MB	659

Hard Drives
Seagate 20 MB w/cont	Call
Seagate 30 MB w/cont	Call
Seagate 40 MB AT 251-2	$399
Seagate 80 MB AT	579
Seagate ST-125 w/cont	329
Seagate ST-138 w/cont	399
Priam	Call

Monitors
AMDEK	
410 Amber	$145
MAGNAVOX	
RGB	255
SIGMA	
Laserview + 19"	Call
SAMSUNG	
Flat Amber	Call
TTL Amber w/tilt	76
Color w/tilt	249
Viking	Call

Printers
CITIZEN	
MSP 40	$285
120 D	146
MSP 50	385
EPSON	
LQ 500	349
LQ 850	559
FX-850	Call
LASERS	
Other Lasers	Call
AST TURBO PS	Call
OKIDATA LASERLINE 6	1379
OKIDATA	
OKI 320	Call
OKI 321	Call
OKI 390	499
OKI 391	689
STAR MICRONICS	
NX 1000	180
NX 1000 Color	238

We Stock The Products That We Sell.
We Are Authorized To Repair Many Major Manufacturer's Products.
Having Technical Problems? – Call Us!
Any Hardware Purchased From Us – 7 Day DOA – We Replace It – Not Repair It.
Visit Us In Phoenix! We Have A Retail Storefront To Serve You.

EGA Boards
AST VGA +	$320
All Other AST Products	***Call***
ATI Ega Wonders	175
Genoa Super EGA Hi-Res +	186
Orchid Designer	259
Paradise Auto 480	179
Paradise VGA Plus	269
Paradise VGA Proff.	399
Vega VGA	275

EGA Monitors
Casper	$410
Princeton Ultra Scan	539
Mitsubishi Diamond Scan	509
NEC – Multisync II	609
Zenith 14" Flat Screen	650

Modems
AZ 2400 INT w/o Soft	$129
Everex 300/1200 w/ Soft	69
Everex 2400 EXT, Error Cor.	189
Hayes 1200 EXT w/o soft	299
Hayes 1200B INT w/ Soft	289
Hayes 2400 EXT w/o Soft	435
Novation Parrot 1200 w/Soft	99
U.S. Robotics 2400 w/o Soft	335

Mice
Genius	$49
Logitech	68
Microsoft Bus w/Paintbrush	92
Microsoft Serial	92
Optimouse w/Dr Halo	89
Optimouse w/DPE	185

TERMS: Shipping mininmum is $5.00. AZ orders + 6.7% sales tax. Personal check/company check – allow fourteen (14) days to clear. We accept purchase orders from authorized institutions for 3.5% more than cash price. All returns are subject to our approval. There will be a 20% restock fee. Minimum phone order $50. All prices are subject to change. Due to copyright laws we cannot take back any open software.

TOLL-FREE ORDER LINE 1-800-421-3135
WAREHOUSE DATA PRODUCTS
2701 West Glendale Ave. • Phoenix, AZ 85051
We do not guarantee compatibility

VISA MasterCard
No Charge for MasterCard or Visa

Servicing our PC buyers with low pricing and technical experience since 1979.

Phone Hours:
Monday thru Friday 6:30am-9:00pm MST
Saturday 9:00am-5:00pm MST



ATTENTION:

dBASE III PLUS
Programmers & Developers

Increase your dBASE III PLUS™ program speed up to 15 times!

Design and distribute compiled dBASE programs royalty-free!

Protect your vulnerable source code from inquiring minds!

Develop dBASE applications without dBASE III PLUS!

dBFast $99.00

. . . a powerful MS-DOS compiler for the dBASE III PLUS language which explodes storage and performance restrictions imposed by other, much more expensive compilers.

Lightning Compilation Speed

Maximize programming and testing efficiency. dBFast's unique memory-resident "Engine" (only 87K) compiles typical dBASE III PLUS programs in just 3-6 seconds with no linking step required.

Incredibly Fast Execution

dBFast compiled programs run up to 15 times faster than interpreted dBASE. On independently developed test suites, dBFast has proven time & again that something indeed . . . *outruns the fox!*

Small, Efficient .EXE Files

With no bulky run-time library to clutter your .EXE files, dBFast compiled programs consume as little as 2K of disk space! Typical Programs take 5-30K.

Hassel-free Multi-User Conversion

dBFast's Autolock command enables multi-user/LAN protocols in one short line of code. Eliminates system lockups and data collision!

dBFast/Mac $199.00

. . . a rich, interactive "Programming Environment" that allows you to combine the power and verstility of the dBASE III PLUS programming language with the intuitive human interface of Macintosh!

Interactive Programming Environment

Maximize your programming efficiency with dBFast/Mac's interactive compiler/editor. Develop, compile, debug, and run your applications - on the fly - without ever leaving this powerful programming environment.

Accelerated Program Execution

dBFast/Mac compiled programs run up to 200 times faster than interpreted dBASE. On independently-developed test suites, dBFast/Mac is up to 30% faster than FoxBASE+/Mac™!

Language Extensions For Mac's Friendly Interface

Easily implement the powerful Macintosh user interface adding mouse support, pull-down menus, multiple windowing, and click-on buttons to your dBASE programs.

dBASE III PLUS Portability

Capitalize on your prior MS-DOS development efforts by porting your existing .PRG and data files to dBFast/Mac where you may easily add the powerful Macintosh interface. Data files transfer as well, eliminating the need to rekey your data.

Sold By Quality Software Dealers Throughout The World

For Sales Information, Please Call (800) 356-6356

dBFast, FoxBASE+/Mac, Macintosh, and dBASE III PLUS are trademarks of dBFast, Inc., Fox Software, Apple Computers,Inc,. and Ashton-Tate, respectively.

Mice are inconvenient, and often I've wished for some kind of trackball arrangement. Now I have one.

FastTRAP is a neat little trackball system with three buttons (see "Four Surrogate Mice" by Jeff Holtzman in the August BYTE). It comes with software capable of emulating any mouse you're accustomed to, and it does all that very well. MicroSpeed also encloses a little booklet illustrating 101 things you can do with your old mouse, including using the cord as a noose to hang your cat.

The FastTRAP trackball comes with a DB-25 connector. The MicroSpeed executives seemed nonplussed when I explained that most AT machines come with DB-9s on their serial ports. MicroSpeed does sell, at extra cost, a cable adapter that will let you plug FastTRAP into your AT's DB-9 port.

FastTRAP has a good hefty feel to it. The box is a bit thick for my taste. I'd have preferred it not to stand quite so high off the table, but that's certainly a matter of taste. It's not impossibly high, and indeed I can think of reasons for making it the height it is.

If you're doing CAD-type work, FastTRAP may be exactly what you're looking for. There are two models; one has a wheel in addition to the trackball. The wheel is used for three-dimensional data control, as in a CAD program.

For CAD and similar work, FastTRAP is at least as good as a mouse, and most will probably find it a lot better. Control is smooth and precise, and it's a lot easier to move the cursor across long distances. Just as a trackball is superior to a joystick for many games, it's much better than a mouse for a number of business operations.

What you can't do with a trackball is use it as an ordinary mouse. In my judgment, FastTRAP will never replace the mouse with programs like Windows or Microsoft Word, because it's almost impossible to do click-and-drag operations with a trackball system. I simply cannot hold down one of the FastTRAP buttons and simultaneously maneuver the cursor without using both hands. It isn't just me. No one else at Chaos Manor can do it, either. Human hands just aren't built that way.

It's thoroughly obvious once you think of it, but I confess this discovery surprises me, especially since I've been a strong advocate of trackballs for some time now, and I am still extremely fond of the WICO SmartCat keyboard with its integral trackball. (Alas, WICO couldn't keep the price down to anything reason-

continued

Circle 76 on Reader Service Card

THE PROGRAMMER'S SHOP

helps save time, money, and cut frustrations. Compare, evaluate, and find products.

Translate for Portability, Easier Coding, Faster, Smaller Code, and No Royalties.

These are the reasons to translate from one source language to another.

Each of these products translates up to 85% - 95% of your code automatically. If you want to cut your conversion time by at least 50%...
Call one of our Tech Reps for help choosing TODAY.

	List	Normal	SPECIAL
Compile 1-2-C - Lotus 1-2-3 to C	$299	$269	**$249**
BAS_C commercial - Basic to C	$375	$329	**$299**
DBX - dBASE III to C	$550	$529	**$449**
DBX source to libraries	$400	$379	**$349**
FOR_C - Fortran 77 to C	$750	$679	**$599**
R-DOC/X - convert WP formats	$149	$135	**$125**
Turbo to C - by TGL	$595	$549	**$499**

Order before 10/31/88 and mention "BYA88" for these Special Prices

386 Development Tools

386 Assembler/Linker	PC	$ 389
386 Debug - by Phar Lap	PC	$ 129
386/DOS Extender	PC	$ 919
DESQview PS/2	PC	$ 109
F77L-EM - by Lahey	MS	Call
FOXBASE+/386	PC	$ 419
High C - by MetaWare	PC	Call
MS Windows/386	PC	$ 129
OS/286 & 386 by AI Architects	PC	Call
Paradox 386	MS	$ 649
VM/386 multitasker - by IGC	PC	$ 229

Basic & Addons

Exim Toolkit		$ 85
LaserPak Professional - by Crescent		$ 139
MS QuickBASIC V4.0		$ 69
QuickPak Professional - by Crescent		$ 139

C Language-Compilers

AZTEC C86 - Commercial	PC	$ 499
C86 PLUS - by CI	MS	$ 359
High C Optimizing Compiler	PC	Call
Instant-C/16M	PC	Call
Lattice C - V3.3	MS	$ 259
Microsoft C 5.1 - with Codeview	MS	$ 299
Microsoft Quick C	MS	$ 69
NDP C-386 by MicroWay	MS	$ 529
Turbo C by Borland	PC	$ 67
Watcom C6.0	MS	$ 259

C Language-Interpreters

C-terp by Gimpel - full K & R	MS	$ 219
C Trainer - by Catalytix	PC	$ 89
Interactive C by IMPACC Associates	PC	$ 189
Run/C Professional	MS	$ 145
Run/C	MS	$ 79
Turbo C-terp	PC	$ 119

C Libraries-Files

BTree/ISAM - Single user	MS	$ 99
CBTREE - Source, no royalties	MS	$ 129
c-tree by Faircom - no royalties	MS	$ 329
r-tree - report generation	PC	$ 239
dB2C Files	MS	$ 189
db_VISTA - Source	MS	Call

C Libraries-General

Blackstar C Function Library	PC	$ 99
C Tools Plus - V5.0	PC	$ 99
C Utilities by Essential	PC	$ 119
Greenleaf Functions	PC	$ 129
Turbo C Tools by Blaise	PC	$ 99

C-Screens, Windows, Graphics

C-Worthy Interface Library	PC	$ 249
dBASE Graphics for C	PC	$ 69
ESSENTIAL GRAPHICS - fast	PC	$ 235
GraphiC - new color version	PC	$ 279
Greenleaf Data Windows - incl. source	PC	$ 229
Quick Window/C	PC	$ 75
Terminal Mapping System	PC	$ 279
TurboWINDOW/C - for Turbo C	PC	$ 75
VC Screen	PC	$ 119
View Manager by Blaise	PC	$ 199
Vitamin C - source, menus	PC	$ 159
Windows for C - fast	PC	Call
Windows for Data - validation	PC	Call

Note: All prices subject to change without notice. Mention this ad. Some prices are specials. Ask about COD and POs. Formats: 3" laptop now available, plus 200 others. UPS surface shipping add $3 per normal item.

RECENT DISCOVERY

SYCERO db - Extensible Clipper/FoxBASE generator allows you to incorporate your code into SYCERO. Up to 30 databases, 14 indexes, 10 levels of submenus and overlaying of 26 programs. Network version available.
$449 SYCERO db NET, $649

DataBase & File Management

Advanced Revelation	PC	$ 779
CLARION - complete environment	PC	Call
DataFlex by Data Access	PC	$ 595
Magic PC - visual database	PC	$ 169
Paradox V2.0 List: $725	PC	$ 499
Paradox Network Pack	PC	$ 719
R:Base for DOS	PC	$ 549
XDB-SQL Database	MS	$ 449

Dbase Language

Clipper compiler	PC	$ 389
dBASE III Plus	PC	$ 399
dBASE III LANPack	PC	$ 649
DBXL Interpreter by Word Tech	PC	$ 99
FoxBASE+V2.0	MS	$ 259
McMax by Nantucket	MAC	$ 235
Quicksilver Diamond	PC	$ 369

Dbase Support

dBRIEF with BRIEF	PC	Call
dBC III by Lattice	MS	$ 169
Documentor - dFlow superset	MS	$ 229
Genifer by Bytel - code generator	MS	$ 249
Integrated Development Library	PC	$ 129
Networker Plus	MS	$ 229
QuickCode III Plus	MS	$ 189
R&R Report Writer	MS	$ 139
Seek-It - Query-by-example	PC	$ 79
Silver Comm Library	MS	$ 139
Tom Rettig's Library	PC	$ 79
UI Programmer - user interfaces	PC	$ 249

Other Products

Back-It by Gazelle	MS	$ 119
Baler	PC	$ 459
CO/SESSION - remote access	PC	$ 229
Dan Bricklin's Demo II	PC	$ 169
Disk Technician - smart upkeep	PC	$ 89
Fast Back Plus	PC	$ 149
Easy Flow V5.0	PC	$ 125
Link & Locate	MS	$ 309
Mace Utilities	MS	$ 85
MathCad	PC	$ 279
MKS RCS	MS	$ 155
PC/Tools Deluxe-by Custom	PC	$ 69
Plink 86 PLUS - overlays	MS	$ 275
PVCS Corporate - by Polytron	PC	$ 339
PVCS Personal	PC	$ 135
R-DOC/X	MS	$ 135
Seidl Version Manager	Ms	$ 269
Source Print - V3.0	PC	$ 75
Synergy Layout	PC	$ 139
Tree Diagrammer	PC	$ 65
Visible Computer: 8088	PC	$ 65
WKS Library by Raima	PC	$ 179

New Greenleaf Library

Greenleaf SuperFunctions - Over 350 new functions. Expanded memory interface. Mouse interface, interrupt processing, and numerous date and time routines. $ 199

THE PROGRAMMER'S SHOP
Your complete source for software, services, and answers.
5-B Pond Park Road, Hingham, MA 02043
Mass: 800-442-8070 or 617-740-2510 8/88

Call for a catalog, literature, and solid value
800-421-8006

Circle 207 on Reader Service Card

Introducing BRIEF V2.1

BRIEF™ Users: Now you can have fast compilation AND an integrated, productive environment.

Over 5,000 of you were forced to make sacrifices to use BRIEF, The Programmer's Editor. Advanced compilers and new programming environments, like Turbo C and QuickBASIC, took up so much RAM that BRIEF could not fit in the same 640k.

If you wanted to retain BRIEF's uniquely powerful features[1] while working with larger programs, you had to sacrifice speed and continuity. Instead of a tight Edit-Compile-Edit loop, you had to slog through an obsolete Edit-Exit-Compile-Exit-Edit loop.

Now you no longer have to make that sacrifice.

You can enjoy the features[1] that have made BRIEF the best-selling and the best regarded[2] programmer's editor without sacrificing environment integration.

Version 2.1 of BRIEF can be swapped in and out with a single keystroke — allowing immediate compilation with even the largest compilers: Microsoft C5.0, QuickC, Turbo C, Lattice C, dBXL, FoxBASE+ v2.0, Clipper, etc.

[1] For example: real multi-level Undo (not simply Undelete), flexible windowing, unlimited file size, unlimited number of simultaneous files, automatic language sensitive indentation.

[2] For example:
"The quintessential programmer's editor." — ***Dr. Dobb's Journal*** "Right out of the box, it's a versatile, extremely powerful editor that handles most any programming task with aplomb." — ***Computer Language*** "Simple to learn and use and extremely sophisticated. Strongly recommended." — ***PC Magazine*** "Not only the best programmer's text editor I've ever seen, but it is also a tour de force in the way it was conceived and implemented."— ***Computerworld*** "So far surpasses users' expectations that it is revolutionary." — ***MicroTimes Magazine*** "BRIEF is truly outstanding." — ***Microsoft Systems Journal***

Current BRIEF Users:

Call Ann for details on 4 other important enhancements. Registered users of versions 2.0 or 2.01 update for only $35.

Haven't tried BRIEF yet?

BRIEF retails for $195. Call Ann today for a no-risk, 60-day trial with a full, money-back guarantee.

Call toll-free today
800-821-2492

Solution Systems

541 Main Street, Suite 410
South Weymouth, MA 02190
617-337-6963

Circle 245 on Reader Service Card

able and no longer makes that keyboard, which is a real pity.) Of course, the WICO trackball keyboard came out well before click-and-drag became established as a standard mouse operation; I never had to use the WICO keyboard that way, or I'd have discovered the difficulty long ago.

It should be possible to design a trackball that would allow click-and-drag, but the ball would have to sit to the *side* of the buttons, which would preferably be on the side of the box enclosing the trackball; it's hard to describe what I'm talking about, but imagine a keyboard with a trackball in the upper right corner (for right-handed operations) with three buttons on the side of the keyboard where your fingers would naturally rest if your thumb were on the ball. This would be at least as easy to use as a mouse. But I don't know of anyone who makes or plans such a keyboard.

I've just discovered that if you install FastTRAP as a two-button Microsoft Mouse, the middle button toggles drag on and off. This isn't as convenient as mouse click-and-drag, but it is possible to do it, and with time one might find that better than mouse operations. I'll try it for a month and let you know.

HOW TO GIVE YOUR COMPANY A PIECE OF YOUR MIND.

Your company's most valuable resource is the knowledge and expertise of your key people. That's why you want to capture that expertise with 1st-CLASS Expert Systems so you can use it whenever and wherever needed.

The power you need. Without the programming. 1st-CLASS® is the expert system development tool you've been waiting for. It's full-featured and flexible, yet exceptionally easy to use. Multiple knowledge representations, and interfaces to windows, graphics, and programs (including Lotus 1-2-3® and dBASE®) make it powerful enough for technical people, yet simple enough for those with no programming or artificial intelligence experience.

Benefits you'll see right away. Because 1st-CLASS is so easy to use, it starts delivering benefits right away. Accurate and consistent decisions throughout your company. Reduced costs in manufacturing and support. And above all, a chance to apply the expertise of your best people to more situations than ever before.

Whether you're a startup or a Fortune 500, you'll quickly find 1st-CLASS a great help for your entire organization. Just as Du Pont, Travelers, Chrysler, Intel, IBM, and over 5000 others have already found out for themselves.

Priced from $495. to $1295. No fancy hardware required (just IBM or compatible PC). And no royalty fees or other hidden charges later on.

Ask for your tutorial package. It has everything you need to get moving fast, including a trial version of our newest release, 1st-CLASS FUSION.™

Why wait? Call toll-free today to order your tutorial package: **1-800-872-8812.**

1st-CLASS Expert Systems, Inc.

286 Boston Post Road Wayland, MA 01778 (617-358-7722 in MA).
For the IBM® PC. For the DEC VAX®(with added hardware). Priced from $495 to $1295. Tutorial package only $20.

Choice Words

A long time ago, Mike Wiener of Microlytics showed me an upcoming product, which turned out to be WordFinder, a synonym program based on algorithms developed at Xerox PARC. Mike thought there was a terrific product lurking in the Xerox algorithms, and since PARC didn't seem interested in developing it, he did under a joint venture agreement.

I've used WordFinder ever since. It works fine with the word processors I like, including Q&A Write; you can even get WordFinder at a discount when you buy Q&A Write. I like WordFinder, so I've paid little attention to other thesaurus and dictionary programs, on the theory that if it ain't broke, don't fix it.

That may have been a mistake.

Proximity Technology's Choice Words, which is based on the Merriam-Webster *Webster's Dictionary* and *Webster's Thesaurus*, is at least as good as WordFinder, and in some ways it is better. Choice Words will tell you what parts of speech your word may be and offer definitions by categories. It gives tenses for irregular verbs. It offers synonyms under different connotations of the word.

Installation of Choice Words is utterly simple. Just run the Install program, which, so far as I can tell, does nothing but create a subdirectory and copy the five disks into it.


Choice Words can be run as a pop-up program from within your word processor or as a stand-alone program. By far the better way to run it is as a pop-up, since that lets you use it while editing documents. There are two ways to do this. The simplest is to go to the directory containing Choice Words and type `PROX` to invoke the program. Once that's done, you can go to your word processor's subdirectory and bring in your text editor. The default pop-up keys are Alt/Left Shift/T for thesaurus and /D for dictionary. You can change those keys to almost anything you like.

The other way to install the program is to put its subdirectory in your `AUTOEXEC.BAT PATH` statement. Either way works fine. You can also put Choice Words into the same directory as your word processor, then bring them both up

continued

Circle 3 on Reader Service Card

SUGGESTION BOX.

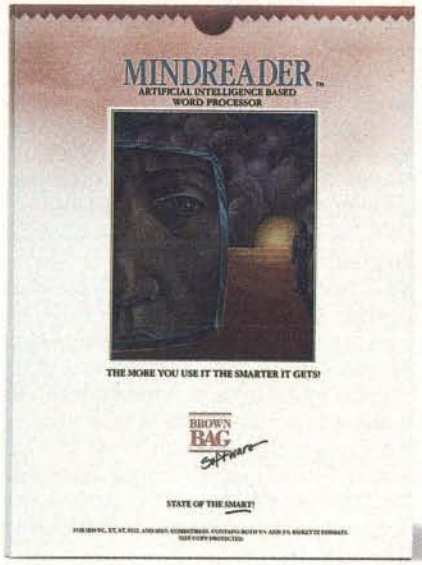

"MindReader's artificial intelligence approach to word processing is a technological breakthrough!"
—PC Magazine

MindReader.™ It's right for you because it writes for you.

MindReader, a new generation of software, is the first giant step toward the word processor of the future. The more you use it, the smarter it gets.

Its patented Artificial Intelligence Engine picks up your writing patterns. Then, as if it's "reading your mind," it anticipates what you're going to write next; suggesting words, phrases, paragraphs and even signature blocks in a "suggestion" window.

Simply select the appropriate suggestion with the press of a single key. Or continue typing.




"Hunt & peck" at a blistering speed!

MindReader is not just a simple editing tool. It's positively POW-erful! Here are just a few of its highly acclaimed features:

- Full-feature Word Processor
- Mail Merge
- Name & address book
- On-screen drawing mode
- Glossary for 260 of your "boilerplate" sentences/paragraphs.
- In-text mathematics with decimal tabs
- Text encryption/ decryption
- Plus FREE toll-free telephone support for 1 year!
- And MORE!

MindReader saves time and reduces errors!

With just a simple touch of a key, it can turn an earnest non-professional into an Ernest Hemingway.



Or turn an ant into anti-disestablishmentarianism. It's absolutely revolutionary!

In fact (if you like FACTS), after a few sessions with MindReader, your keystrokes will be reduced by as much as 80 to 90%.

No wonder PC Magazine awarded MindReader with their coveted *"Editor's Choice."*

A little skeptical?

Get a copy of MindReader to try for 30 days. (And while you're at it, pass copies around to your friends and associates for their evaluation.) If not totally sold on us, don't pay us a cent.*

No risk. No hassles. No fooling.

(This free 30 day evaluation period is available on all Brown Bag Software.)

Quantity discount and site licenses available.

To order call

800 523-0764

In California, call (408) 559-4545.

Or send your check for

$89.95 ($7.50 shipping & handling CA residents add sales tax)

Brown Bag Software®
File #41719, Box 60000
San Francisco, CA
94160-1719

BROWN BAG™ Software

State-Of-The-Smart.™

Offices in London 01 831 1106—
Köln 0221 7710923—Copenhagen 01 933837—
Amsterdam 020 233408—Zürich 01 2146224

© Copyright 1988 Brown Bag Software, Campbell CA 95008

*Our Shareware versions are older versions of our product, but are full-featured & fully-functional and yours to try for a FREE 30 day evaluation period.

with a batch file. The important thing is that all the methods work, and I had no trouble doing them. Like WordFinder, it works well with DESQview.

Choice Words works with a variety of word processors, including difficult ones like Q&A (and Q&A Write) and Microsoft Word. It's very fast, at least on my big Cheetah 386, and comparable in speed to WordFinder on all the machines we tried it on.

I find I'm not a big user of thesaurus programs. I practically never use one when I'm actually writing. On the other hand, I always load one into the system when I bring up a text editor, and when I'm doing a final edit on text, I do call up the thesaurus sometimes. If I didn't have one, I'd buy one; but then, my business is words. I don't have to use a tool very often to justify having it.

As to which one I'd buy, WordFinder or Choice Words, I confess I don't know. They're both very good. Choice Words gives you more information, but a consequence of that is it takes you a bit longer to use it. WordFinder is fast and nearly invisible until you want it, and it may give you all the information you need. Unlike WordFinder, Choice Words includes a very good dictionary program; if you have any need for an on-line dictionary (as opposed to a thesaurus), I haven't seen anything nearly as good.

If you do much writing, you'll probably want one of these programs. Choice Words is a good deal more than good enough. It's at least equal to the best.

Sprint

Philippe Kahn has been telling me about Sprint, Borland's new text editor, for over a year. Every few months, he'd offer me a copy; then, just before I got it, there'd be some new improvement they wanted to perfect. After a year of this, I finally got the program from Philippe himself when I visited him in Scotts Valley. We used LapLink to squirt it over from Philippe's Compaq portable to my Zenith Z-183.

That may not be the best way to get the program. I've found that demonstrations by an enthusiast tend to skip over difficulties that inevitably surface later. That was surely the case this time.

I don't have time to go through all the steps that lead me to this conclusion. Let me just state it: Sprint is a contender for the best word processor on the market today. It's fast and extremely powerful. It is almost completely customizable. It works with PostScript and all the other advanced stuff that's coming. It supports darned near every printer known to man and is able to make use of many of the fanciest features, including proportional spacing, automatic kerning, and the lot. It does indexing, and it sort of does outlining, although I would be surprised if a creative writer actually uses the severely limited outline processor in the current version. Sprint will make tables of contents and figures. It will work with short or long documents.

Sprint has a "swap file" system that automatically and unobtrusively saves your work every 30 seconds or so, so that even with a power failure you won't have lost much. I noticed that Philippe routinely shuts down his portable simply by turning it off: no saving his work, no exiting from Sprint. Just pull the plug in full confidence that everything will be there next time you power up. I'm writing this on one of the hottest days in the history of Los Angeles, with power fail-

Freedom of Press.



Over the last few years, Adobe Systems has brought forth some very revolutionary ideas.

Such as the Adobe PostScript® page description language. Adobe® Type Library. Adobe Illustrator 88.™ The Display PostScript™ system.

Software that gives you the freedom to create professional-quality reports, newsletters, business graphics and more. Using virtually any kind of computer. IBM® PC. Macintosh.® Mini or mainframe.

That's why choosing printers with PostScript software is your declaration of vendor independence. It's the only standard adopted by virtually every major company in the computer industry.

So any computers you have will work with any printers you buy equipped with PostScript software.

And that means even more choices when it's time to print. You can use laser and color printers. At a variety of resolutions. Or even professional typesetters.

The Adobe Type Library also gives you

Adobe, Adobe Illustrator and PostScript are registered trademarks and the Adobe logo, Adobe Illustrator 88, Display PostScript and the PostScript logo are trademarks of Adobe Systems Incorporated. IBM is the registered trademark of International Business Machines.

ures everywhere, so I appreciate a feature like that.

Having given my conclusion, let me add some qualifications. Sprint is *not* a text editor for everyone. Some users will love it. A good many others will really hate it. To explain why, I'll have to give some background.

Sprint was originally based on EMACS, one of the world's first full-page text editors. EMACS was written in TECO for big multiuser minicomputers (PDP-10 and PDP-11) at MIT by Richard M. Stallman, generally known as RMS. Stallman, who is famous for his view that software ought to be free, gave EMACS away. If he hadn't, he'd be a rich man. In its day, EMACS was the best programming editor in the world.

EMACS was then modified for microcomputers by an outfit called Mark of the Unicorn, and it appeared as a CP/M commercial product called The Final Word. Later, they put out a PCompatible version. Sprint is two generations later than that.

EMACS was a programmer's editor. It was adequate for writing text—indeed, it was a lot better for that than anything else available at the time—but it wasn't designed by a professional writer. Some additional features were suggested by writers, including me, but RMS is the archetypal hacker, and he included in EMACS everything he could think of. He then added a programming language that would let you do all the things he hadn't thought of.

The result was a hacker's dream—and very nearly a user's nightmare. Every key did something; EMACS was the original source for the joke about programs with Control-Alt-meta-cokebottle commands. The EMACS philosophy was that you could do anything you wanted if you would take the trouble to learn how. Surely you should do some of the work?

I was invited to learn EMACS in the 1970s when I had an ARPANET account at MIT. There was a TeachEmacs program running on the MIT computer, and that plus determination got me familiar enough with the program that I could use it. I even wrote an early BYTE column on-line using EMACS, and for a while there was a notion that Marvin Minsky and I would write a book together, with EMACS as the editor of choice.


The Minsky project died because we both had heavy schedules, and, besides, you can't really do a major project at 300 bits per second. Then I lost my ARPANET account. After that, I had no reason or opportunity to use EMACS until Mark of the Unicorn brought out their CP/M version, and they didn't send me a copy of that for a year or so.

By then, my mad friend MacLean and I had induced Tony Pietsch to customize his WRITE program to our specs. That was good enough that I wasn't much tempted to try anything else as long as I was using CP/M. When I changed from CP/M to PCompatibles, I didn't have MINCE (MINCE is not a complete EMACS), or The Final Word, or whatever EMACS had evolved into by then. Consequently, I haven't really used EMACS for 10 years. Then I got Sprint.

A lot of the rough edges have been knocked off, but Sprint has kept a great deal of the flavor of EMACS. In particular, it retains much of EMACS's flexibility. You don't reprogram Sprint in the same way that you would have programmed EMACS; indeed, Sprint is

continued

Freedom of Choice.

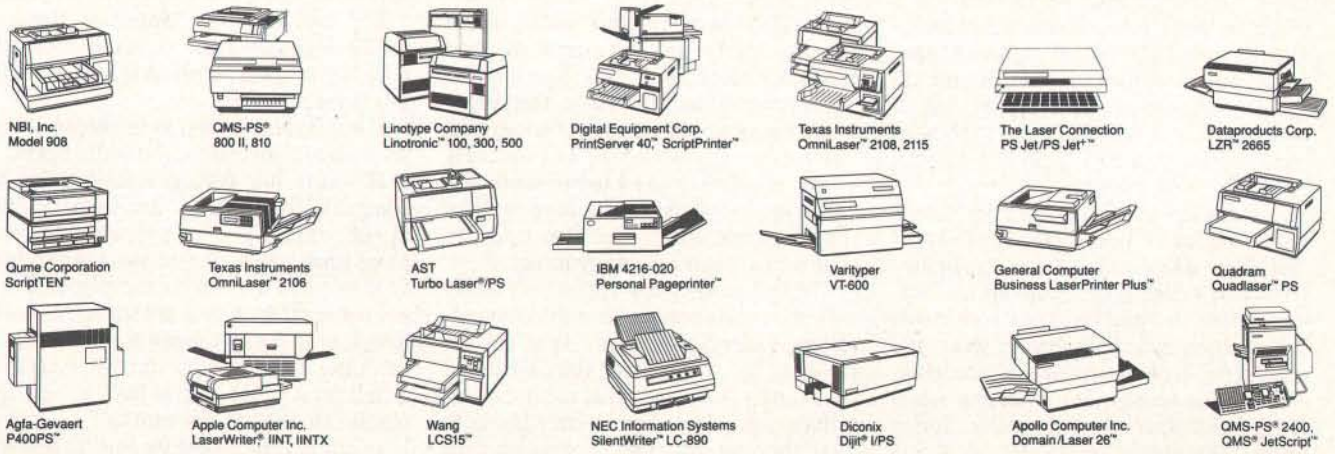

choices—literally hundreds of typefaces that let you communicate any idea more effectively.

Adobe Illustrator 88 software gives you freedom, too.

It lets you easily create anything from simple line drawings to complex masterpieces. Even if you can't draw a straight line.

And our new Display PostScript software is a powerful system that brings the power of Adobe's PostScript software to any PC or workstation display.

So before you invest in any laser printer, make sure it's equipped with PostScript software from Adobe.

For more information, call 800-29-ADOBE.

Because Adobe's PostScript software is your only guarantee of true freedom of expression.

ADOBE™ SYSTEMS INCORPORATED

POSTSCRIPT

Look for this symbol on computers, printers and other products that support PostScript software from Adobe Systems. It's your guarantee of quality and connectivity.

Macintosh is the registered trademark of Apple Computers, Inc. ©1988 Adobe Systems Incorporated. All rights reserved. This ad was produced using the Adobe Type Library and PostScript printers and typesetters. The illustrations were created with Adobe Illustrator® software.

more awkward in that respect. There's no miniwindow in which you can run miniprograms.

On the other hand, you can build really elaborate macros, either by putting them together yourself or by putting Sprint in learning mode and simply doing what you want it to learn. There are features it doesn't have that I've got in Q&A Write (just because Q&A Write is easy to use doesn't mean it isn't sophisticated and powerful), but that's quibbling; the bottom line is that Sprint has the most elaborate and powerful macro reprogramming capability of any editor on the market.

Sprint's concession to new users is an elaborate menu system, in which each menu item lets you call a submenu. It's all reminiscent of Wirth's Lilith operating system. There's a fast way to bypass the menus once you're familiar with Sprint. Until then, you can cascade through the menus until you find (sometimes with some difficulty) what you want Sprint to do, and then have it execute the command from within the menu window.

The menus include a truly amazing selection of predefined macros and pragmas (sort of a programming primitive command). There's a `DeleteToLineEnd` pragma, as well as `DeleteLine`. Either one can be assigned to any Alt or Control keystroke you like. There's also `exist [filename]`, which returns `TRUE` if the program can find a disk file called filename. There's `mark`, which will put a mark in your file. There's `SetLeftIndent`, and `DeleteRegion`, and `flags`, and I'm sure you get the idea. There are literally dozens of such pragmas, and in case you can't do what you want with one, you can probably build a macro out of several to do the job.

In addition to all that, Sprint comes with a series of preprogrammed setups that allow it to emulate the command interface of a dozen other popular text editors. Note the emphasis on *command*; Sprint does not, contrary to what you may infer from Borland's advertising, emulate the screen and reporting interface of any other word processor. Sprint looks like Sprint no matter what it's emulating.

Of course, you can do a lot with Sprint's screens, too. Colors are adjustable. So are on-screen margins. Also, you're not stuck with what you see on the screen: Sprint, like Electric Pencil, WordStar, and WRITE, lets you embed print formatting commands into the text, so that what you see isn't necessarily what you get. For some people, that's a feature. Others, however, will consider it a bug.

Sprint's use of embedded formatting commands means that Sprint files are clean, plain ASCII with some control characters. That makes it easy for popular writer-assistant programs, such as Grammatik III and Readability, to access and alter Sprint files. One of my main difficulties with Q&A Write—which is what I'm still using—is that it stores a status word for every line. This gives Q&A Write great power but makes it impossible to use any kind of external program that changes line lengths. Microsoft Word has much the same difficulty. Sprint doesn't.

A lot of the rough edges have been knocked off, but Sprint has kept a great deal of the flavor of EMACS, an early full-page text editor.

The good news, in other words, is that Sprint really has retained the old EMACS flexibility. You can use it to design your own basic interface, then begin to add macros until you've got something that's extremely powerful and uniquely yours, adapted to the kind of work you do. After a while you'll have written your own text editor, one that caters to your every whim and idiosyncrasy.

The bad news is that Sprint isn't really very nice until you've done the customization. Indeed, when you first set the program up, it can drive you half out of your mind. No matter what emulation interface you adopt, Sprint isn't going to work the way you expect it to—not until you get used to it. Vanilla Sprint is pretty god-awful, especially if you're asking it to emulate something else you're accustomed to, because while Sprint in emulation mode may—more or less—do what you expect it to when you give it a command, it sure won't *look* like what you're accustomed to seeing while it does it.

Of course, this all reminds me of XyWrite, which is also easily customized and isn't very useful until you've done that. XyWrite has been around long enough that there are precustomized specialized versions, such as Nota Bene, adapted for particular purposes. Sprint is still new, but I predict it won't take long before third parties will sell you Sprint customization packages.

More important, though, is Borland's upgrade policy. If you buy a copy of Sprint now, you can have confidence that Borland will pay attention to user and reviewer complaints and suggestions, bring upgrades out in a timely manner, and not charge you a fortune for the upgrades when they're released. I've made several suggestions that Philippe Kahn has his people working on, and I'm quite sure I'm not the only critic he pays attention to. As an example, Sprint doesn't yet import and export Atex files, but Borland is working on it.

Sprint makes it pretty easy to change over from your old word processor, in that it will import and export files to and from DisplayWrite, Microsoft Word, MultiMate, MultiMate Advantage, Wang IWP, WordPerfect 4.2, WordStar, and WordStar 2000—and, of course, ASCII. The conversions are quick and painless. Even if you hate Sprint, it may be worth buying for this feature. I have seen conversion programs no better than this sell for more than Sprint does. Of course, it does not convert Q&A Write files, which is one reason I'm not using Sprint to write this column. Maybe a later version will.

My conclusion on Sprint is that if you're a professional writer concerned with your tools, Sprint is more than worth looking into.

If you write a lot and aren't happy with your current text editor, consider Sprint.

If you're just getting started using a computer for writing, don't start with Sprint unless you're prepared to put some time into it. Sprint was written for sophisticated users who are prepared to put some effort into learning it and customizing it. I don't mean that beginners can't use it; but they're likely to be frustrated for a while. Sprint isn't as easy to use as Q&A Write, for example.

If you're responsible for setting up and customizing text editors for a whole bunch of workstations, Sprint is worth looking into. Assuming you know what you're doing, you can customize it for your establishment. Also, suppose you have engineers or analysts who prefer to use their own editor but you want to integrate their work. Sprint can read in all their files, merge them, and write out

continued

Periscope's *New* Version 4

...Gives you all the right stuff for debugging! No matter which model you pick, you have the same powerful software to help you track down hard-to-find bugs fast.


Periscope's hardware adds the power to solve the really tough debugging problems.

The break-out switch lets you break into the system any time. You can track down a bug instantly, or just check what's going on, without having to reboot or power down and back up. That's really useful when your system hangs! The switch is included with Periscope I, Periscope II, and Periscope III.



The **NEW** Periscope I memory board keeps all debugging information out of the lower 640K. Can be used in PCs, ATs, and 386s with both EGA / VGA and EMS boards installed. The Periscope break-out switch enables you to recover from a hung system. Included with Models I, II, and III.

Periscope I has a **NEW** board with 512K of write-protected RAM, user-expandable to 1MB, for the Periscope software, symbol tables, and all related debugging information. Normal DOS memory (the lower 640K) is thus totally freed up for your application, and Periscope is protected from being overwritten by a run-away program. The new board's footprint is only 32K, so you can use it in PC, AT, and 386 systems with EGA/VGA and EMS boards installed (not possible with the previous 56K board). It can also be used with Periscope III to provide additional write-protected memory.



Periscope III has a board with 64K of write-protected RAM to store the Periscope software and as much additional information as will fit. AND...

The Periscope III board adds another powerful dimension to your debugging. Its hardware breakpoints and real-time trace buffer let you track down bugs that a software-oriented debugger would take too long to find, or can't find at all!

The Periscope III hardware-breakpoint board captures information in real-time, so you'll find bugs that can't be found with a software-based debugger.

Periscope's software is solid, comprehensive, and flexible.


It helps you debug just about any kind of program you can write...thoroughly and efficiently.

Periscope's the answer for debugging device-drivers, memory-resident, non-DOS, and interrupt-driven programs. Periscope works with any language, and provides source and/or symbol support for programs written in high-level languages and assembler.

David Nanian, President of Underware, Inc. (of BRIEF fame) says this about the new Periscope Version 4:

"Periscope has always been an unbelievable assembler-level debugger. Version 4 has turned it into a terrific source-level debugger as well. Aside from major enhancements like the source-level improvements, all the little changes make a really big difference, too. For instance, symbol lookups and disassemblies are noticeably faster, and highlighting the registers that have changed really makes life easier. Once again, Periscope has raised the industry standard for debuggers!"

Periscope software & 250+ page manual

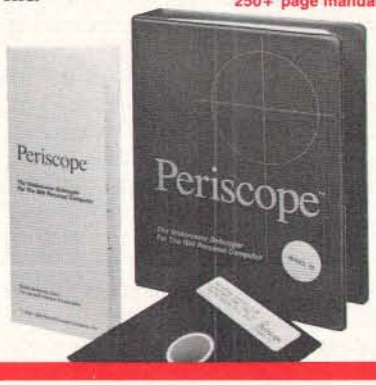

What's New in Periscope Version 4:

- View local symbols from Microsoft C (Version 5)
- Debug Microsoft windows applications
- Set breakpoints in PLINK overlays
- Improved source-level support
- Monitor variables in a Watch window
- 80386 debug register support
- Debug using a dumb terminal
- PS/2 watchdog timer support
- Use mixed-case symbols
- Set breakpoints on values of Flags
- Much more!

- **Periscope I** includes a **NEW** full-length board with 512K of write-protected RAM; (user-expandable to 1MB); break-out switch; software and manual for $695.
- **Periscope II** includes break-out switch; software and manual for $175.
- **Periscope II-X** includes software and manual (no hardware) for $145.
- **Periscope III** includes a full-length board with 64K of write-protected RAM, hardware breakpoints and real-time trace buffer; break-out switch; software and manual. Periscope III for machines running up to 10 MHz with one wait-state is $1395.

Due to the volatility of RAM costs, prices on board models are subject to change without notice.

REQUIREMENTS: IBM PC, XT, AT, PS/2, 80386 or close compatible (Periscope III requires hardware as well as software compatibility, thus will not work on PS/2 or 80386 systems); DOS 2.0 or later; 64K available memory (128K at installation time); one disk drive; an 80-column monitor.

Call us with your questions. We'll be happy to send you free information or help you decide on the model that best fits your needs.

Order Your Periscope, Toll-Free, Today!
800-722-7006

MAJOR CREDIT CARDS ACCEPTED

The Periscope Company, Inc.

1197 PEACHTREE ST. • PLAZA LEVEL
ATLANTA, GA 30361 • 404 / 875-8080

BEST BUY IN THE MARKET!

80286 EGA SYS w/ 20 MB HDD

- 80286-10 (10/6 MHz) ■ 640K RAM
- 1.2MB FDD ■ 200W POWER SUPPLY
- 101 KEYBOARD ■ 808287 MATH SOCKET
- W.D. CONTROLLER (2 HDD, 2 FDD)
- TURBO-SPEED BUTTON W/LED INDICATOR
- KEYBOARD LOCK & RESET BUTTON
- PHOENIX BIOS ■ 20 MB HDD (ST-225)
- SERIAL,PARALLEL, GAME PORT
- EGA G CARD (AUTO S/W)
- EGA MONITOR (640 x 350)
- COMPUTER CABINET DIMENSIONS 21"L x 16.5"W x 6"H

$1595.

OPTION: ■ 12MHZ 0 WAIT STATE
OPTION: ■ NEW COMPACT SIZE CABINET (DIMENSION - 14.5"W x 16"L x 7"H)



MDL-286 DESKTOP SYS MDL-286 TOWER SYS

TURBO-XT MONO SYS w/20MB HDD

- 8088-2 8 MHz TURBO CPU
- 640K RAM ■ 1-360K FLOPPY DISK DRIVE
- 1-20 MB HARD DISK W/CONTROLLER
- CLOCK CALENDAR W/BATTERY BACKUP
- SERIAL,PARALLEL,GAME PORT
- MONO GRAPHIC CARD
- 12" TTL AMBER MONITOR
- FRONT RESET & TURBO SWITCH
- POWER & TURBO LED INDICATOR
- 101 FULL FUNCTION ENHANCED KEYBOARD
- 150W POWER SUPPLY

$895.

80386 COMPUTER SYSTEM w/40MB HDD

- 32 bit 80386-16 MHz CPU ■ 40 MB HARD DISK (ST-251 40ms)
- 1 MEG RAM (80ns) ■ 1.2 MB FLOPPY DISK DRIVE
- 200W POWER W/DESKTOP CASE
- SERIAL, PARALLEL, GAME PORT ■ 101 ENHANCED KEYBOARD
- MONO GRAPHIC CARD ■ 14" TTL AMBER MONITOR

$2785.

1 800-545-9777
COD requires cash
SUNTRONICS, INC.
Since 1976

HEAD OFFICE
12603 S. CRENSHAW BLVD.
HAWTHORNE, CA 90250 M-F 8:30-5:30
(213) 644-1140
ORANGE CO. STORE
108 W. KATELLA AVE. M-F 10-6
ORANGE, CA 92667 SAT 10-5
(714) 538-0929
CUSTOMER SERVICE (213) 644-1140

1 YEAR WARRANTY PARTS & LABOR ALL ITEMS IN STOCK!
PRICES SUBJECT TO CHANGE WITHOUT NOTICE
CALL FOR OTHER CONFIGURATIONS
■ 30 DAY MONEY BACK GUARANTEE!
YOUR COMPLETE SATISFACTION IS OUR TOP PRIORITY. ANY SUNTRONIC SYSTEM MAY BE RETURNED WITHIN 30 DAYS FROM THE DATE OF SHIPMENT FOR REFUND LESS SHIPPING CHARGE.*
* ITEMS RETURNED MUST BE AS-NEW WITHOUT MODIFICATION OR DAMAGE. ALL MANUALS AND PACKAGING MUST BE INCLUDED. RETURN SHIPPING MUST BE PREPAID AND INSURED, BEARING A RMA (RETURN MATERIAL AUTHORIZATION) ON THE SHIPPING LABEL.

Circle 248 on Reader Service Card

files in an alternate file format.

If you're a programmer, Sprint is very much worth looking into. After all, it was designed by the hacker's hacker. At the moment, Sprint doesn't really "understand" very many computer languages; but the macro capability is powerful enough that it won't be long before people teach it to, say, look for unbalanced parentheses in BASIC, unclosed parentheticals in Lisp, improperly structured procedures in Pascal, and that sort of thing. I know Sprint can do this, because there have been language-specific configurations of EMACS for at least 10 years.

If you write a lot, you're happy with what you have, you don't want to customize, and you'll be blasted before you'll spend the time to learn how to set up and use yet another word processor, ignore Sprint.

If you're furiously busy (as I am), pretty well satisfied with your current text editor (as I am), but wish you could teach it to do other tricks (as I do), then it's worth getting Sprint to play with and begin the—sometimes painful—process of customization (as I am doing).

Borland's new word processor is recommended, with qualifications.

Lascaux: "The Intelligent Calculator"

I get about a hundred programs a week. I can't possibly look at them all, but since I do try to balance this column, I periodically sift through piles. What I'm looking for is something new and different, and preferably published by someone you never heard of. After all, that's the way I discovered Turbo Pascal. Alas, I'm much more likely to discover Lascaux than another Turbo Pascal.

I don't think Lascaux is a potential Turbo Pascal, but it is more interesting than much of the garbage I get. It's a scientific calculator program; what makes it more than Yet-Another-Program is its handling of units (e.g., feet/meters and kilograms/pounds). According to the thin but readable instructions, you can teach Lascaux almost any units you like, after which it will convert as required when it calculates. Since it also does logs, trig, and fractional exponents, this looked like something pretty useful. I don't do as many orbital calculations as I used to, but I do try to keep my hand in.

Back in my aerospace days, we once converted the cruising speed of the TFX fighter (which became the FB-111) into furlongs per fortnight. I thought it might be fun to do that again, and Lascaux looked to be the tool to do it with.

Well, it will do it, but it's more work than I thought it would be. First, you have to install Lascaux. This isn't a matter of copying some files. The silly programmer has made it much more complicated than that. You tell the Install program on the distribution disk what options you want, and it generates a working version of Lascaux for you. The options are with and without math chip, and memory-resident or stand-alone. Why they don't include all four and let you manage by selective copying and renaming files I don't know.

Once you've got this thing installed, you may be tempted to copy the Tutorial program into the same directory as you've put the main program. *Do not do this*. The Tutorial disk contains files that have the same names as Lascaux regular files, but which are brain-damaged. The

continued

SPECIAL EDITION



GEO SCHIRMER BBM

SYSTEMS represents the state of the art in computers and communications. The 11th international trade fair and congress will be held in Munich in 1989. SYSTEMS is an absolute must for the entire DP industry. Highly qualified experts and decision-makers, distributors, buyers and OEMs from all over the world gather information at SYSTEMS on modern communications technology and applications. Make contacts that are worthwhile! In 1987 alone, there were 146,000 visitors to the trade fair. SYSTEMS 89 offers the right setting for optimum product presentation and for profitable talks between users and suppliers. If you need further information, simply ring: Munich, Phone (89) 51 07-0, Italy, Phone 0376-969235/6, France, Phone (1) 45 75 62 56, Great Britain, Phone 01-948 5166/940 4625, USA, Phone (201) 652-7070, Japan, Phone (03) 593-1641 (Tokyo), (06) 447-0021 (Osaka).

SYSTEMS 89

SYS®

Computers and Communications
11th International Trade Fair and International Congress
Munich, 16—20 October 1989

MESSE MÜNCHEN INTERNATIONAL

Circle 295 on Reader Service Card

unit tables are all scrambled up. After you run the Tutorial program (and you had better run it, because Lascaux's user interface is quite hostile and rude into the bargain) and then try to run the program itself, it won't know what you're doing, and if you try to examine the units it thinks it understands, you'll see only garbage. The only remedy is to go back and run Install again.

After that, you've got to do some definitions. Lascaux understands what a "sec" is, but if you want something per second, you'll have to tell it that 1 second is one sec. It knows "ft" but not "foot." There are other bothersome omissions.

If you're trying to define complex units, you can really go nuts. Although Lascaux has some units that have spaces in them—Light Year is an example—if you want to define something as, say, furlongs/fortnight, you *must not* type in the "/"; instead, you just put in a space and hope that the program infers what you want.

Once you get past the badly designed user interface, Lascaux actually works pretty well. It's fast. There are built-in units and constants. Oddly enough, however, "Speed of Light" is a constant (in meters/second—or as Lascaux would have it, meters sec), not a unit. You can't define the unit "c" as Speed of Light because "C" is defined as a coulomb, and apparently the program isn't case-sensitive unless it wants to be. I see I'm complaining again.

There is a rather badly documented "rename" feature; judicious use of that will solve a fair number of this program's problems. Indeed, the program itself is better than my impressions of it, which proves that if you're going to market programs, you probably ought to put a good bit more time into editing the program documents and smoothing the user interface than most programmers do.

I do find Lascaux useful; perhaps I ought to revive my old classification of "infuriatingly excellent."

Incidentally, the speed of light is 1,802,617,752,326.41 furlongs/fortnight.

MacMadness

We had a party here last night, and my son Alex's friend Clydene Nee brought up some University of California at San Diego public domain programs for my Mac II. (Available on most Mac bulletin boards, or bug Alex to get them onto BIX.) Now when I turn on the machine, I get ruffles of drums, the Twentieth Century Fox fanfare, and barking dogs. It's great sound, amazingly good quality for such a little speaker; indeed, it's good enough that I'm going to treat my Mac II to a real speaker and sound system. There are other fun programs, too.

One of the guests at the party was Kelly Freas, probably the best-known illustrator in the science fiction world. I'm rather proud of the book covers he's done for me. Kelly and his new bride Laura (she's at our local good music station, and on the air right now) were wondering what they should get for a computer, given that they'll need it to run his business. I thought about that all night.

I'm recommending a Mac II. For artistic work, Kelly would probably be better off with an Amiga; but I can't recommend that machine to him for his business. It's not that the Amiga can't do the job, it's just that neither Kelly nor Laura have much experience with small computers, and I'm afraid the Amiga isn't reliable enough unless you know a lot about the machine. The Mac II is just more stable.

I could have recommended a good 80386 PCompatible like the Zenith, especially now that SoftView has put out MacInTax in a PCompatible (Windows) version; but that's a stick shift machine. Mostly though, I think Kelly will just plain have more fun with a Mac.

I did notice that at my party people stood in line to play with the Amiga.

Winding Down

I'm out of space and there's still tons of new stuff. I have a new Vega VGA board from Video Seven that's said to support Windows/386 at blazing speeds; I can't wait to try it. There's Shoebox, a program that's supposed to help you manage small businesses (the kind that stuff receipts and notes into shoe boxes) and is spoken highly of by people I respect. There's a whole raft of scientific and engineering programs from MacNeal-Schwendler. They do practical problems like heat transfer, flight dynamics, and civil engineering, and a number of professionals swear by them.

I've got new facsimile and CD-ROM equipment for my Mac II.

The book of the month is by Robert Forward and Joel Davis, *Mirror Matter* from Wiley. Bob Forward is senior fellow emeritus at Hughes Research Lab-

continued

UTAH
COBOL™
NEW
VERSION 5.0
$69.95



For IBM® PC's, XT's, AT's and other DOS machines. Needs only 1 disk drive and 128K memory. This is the one you've heard so much about - with fast compile times, small object code modules, not copy protected, no royalties, and clear error messages. Version 5.0 is based upon ANSI-74 standards with new dynamite features including:
• Nested IF's and nested conditions.
• Indexed files (ISAM) with up to 24 keys (includes START verb). This advanced feature requires the software package Btrieve® which is optionally available.
• ACCEPT (line, column) numerics with decimal point alignment, numeric checking, AUTO-SKIP, SECURITY, LENGTH-CHECK, EMPTY-CHECK, ATTRIBUTE (color), FROM ESCAPE KEY, DAY, DATE, TIME, DAY-OF-WEEK.
• Fast memory mapped DISPLAY's (line, column) ERASE, BEEP, ATTRIBUTE (color). Can display entire screen with one DISPLAY statement.
• Windowing, pop-ups, color and overlays. This advanced feature requires the software package Saywhat?!™ which is optionally available.
• An easy to use, COBOL source code EDITOR with auto line numbering, A-margin, B-margin tabing with full screen cursor control.
Also available: Utah **SuperSort**®, a fast sort program callable from Utah COBOL; Utah **FORTRAN**; Utah **BASIC**; Utah **PASCAL**; Utah **PILOT**. Used by 50,000 professionals, students and teachers in 40 countries. 30-day money back guarantee. Discover the ease and simplicity of COBOL, today!

Phone order rushed by UPS 2nd Day Air:
(702) 827-3030

MasterCard VISA

Since 1977
Ellis Computing, Inc.
5655 Riggins Court, Suite 10
Reno, Nevada 89502

IBM is a registered trademark of International Business Machines, Inc. Btrieve is a registered trademark of Novell, Inc. Saywhat?! is a trademark of The Research Group. SuperSort is a registered trademark of Micropro International Corporation. Utah COBOL is a trademark of Ellis Computing, Inc. © 1987 Ellis Computing, Inc.

Circle 91 on Reader Service Card

Great Selection + Superior Service + Competitive Prices = Top Value

BEST SELECTION OF SOFTWARE TOOLS.



We have the technical expertise to fulfill your specialized needs in software development, circuit design, data analysis, CAD and much more. Call today!

- **No one offers you more variety.**
- **30-day Money-Back Guarantee***
- **Latest versions**
- **Over 500 name-brand products in stock, if you don't see it—call!**

Software Development Tools

ASSEMBLERS

ADVANTAGE Disassembler, Lifeboat	$ 279
Microsoft Macro Assembler	99
OPTASM, SLR Systems	109
Visible Computers..80286	90

BASIC

Flash-up, Software Bottling Co.	$ 80
MS Basic Comp. 6.0	199
MS QuickBASIC	69
QuickPak, Crescent Software	60
T BASIC, TransEra Corp.	453
Turbo Basic, Borland	69
Turbo Basic Toolboxes, Borland	69

C

C-terp, Gimpel	$ 232
Lattice C	289
w/Source	499
Microsoft C	299
QuickC, Microsoft	69
Turbo C, Borland	69

C LIBRARIES

C TOOLS PLUS 5.0, Blaise	$ 101
C Utility Library, Essential	125
Essential Communications	125
Greenleaf Turbo Functions	79
Greenleaf Comm Library	169
Greenleaf Functions	155
Greenleaf SuperFunctions	179
PforCe, Phoenix	215
TimeSlicer, Lifeboat	279
TURBO C TOOLS, Blaise	101

COBOL

MS COBOL, Microsoft	$ 599
Realia COBOL	794
RM/COBOL-85, Austec	999
SCREENIO, Norcom	382

PASCAL

MS Pascal, Microsoft	$ 199
Turbo Pascal, Borland	69
Professional Pascal, Metaware	549

PASCAL LIBRARIES (TURBO)

Turbo Pascal Dev. Lib., Borland	$ 289
Metrabyte DSA TOOLS, Quinn-Curtis	90
Turbo Pascal 5 & 6 Tools, Quinn-Curtis	69
Turbo HALO, Media Cybernetics	80
Turbo MAGIC, Sophisticated Software	179
Turbo ASYNCH PLUS, Blaise	101
Turbo Power Tools Plus, Blaise	101

MODULA-2

LOGITECH Modula-2	
Compiler Kit	$ 81
Development System	199
Toolkit	141
StonyBrook Modula-2	179

386 DEVELOPMENT TOOLS

386-Max, Qualitas	$ 66
ADVANTAGE 386 C, Lifeboat	839
FoxBASE+/386	459
High C, Metaware	839
NDP FORTRAN, Microway	529
PharLap 386|ASM/LINK	409

386 SOFTWARE

DESQview, Quarterdeck	$ 115
Microport—Sys. V/386 Comp.	769
MS Windows/386, Microsoft	130
PC MOS/386, Software Link	CALL
VM/386, IGC	182
SCO XENIX SYS V 386 (complete)	1279

DEBUGGERS

Periscope III	$ 1143
OTHER Periscope Products	CALL
Advanced Trace-86, Morgan Computing	121
Breakout, Essential	89
Tdebug PLUS V.4.0, Turbo Power Soft	39
w/Source	80
Pfix86plus, Phoenix	215

EDITORS

BRIEF, Solution Systems	$ CALL
w/dBRIEF	CALL
EDIX, Emerging Technology	169
EMACS, Unipress	268
Epsilon, Lugaru	151
KEDIT, Mansfield	120
MULTI-EDIT, American Cybernetics	90
Norton Editor	70
PC/EDT+, Boston Business Computing	269
PI Editor, Iliad Group	165
SPF/PC, Command Technology	185
VEDIT PLUS, CompuView	131

FILE MANAGERS

Btrieve, Novell	$ 185
Xtrieve	189
Report Option	109
Btrieve/N, Novell	$ 455
CBTREE, Peacock System	141
c-tree, Faircom	318
r-tree	241
dBC III, Lattice	172
dBC III/II w/Source	363
dBC III PLUS	599
db.VISTA OR db.QUERY, Raima	CALL
XQL, Softcraft	599

GRAPHICS

ADVANTAGE Graphics, Lifeboat	$ 229

GOTO

Essential Graphics	229
GraphiC, Software Endeavors	322
GSS Graphics Dev. Toolkit	409
HALO '88, Media Cybernetics	229
HOOPS, Ithaca Software	554
MetaWINDOW, Metagraphics	162
MetaWINDOW PLUS	232
Turbo WINDOW/C	80
Turbo HALO, Media Cybernetics	80

OBJECT-ORIENTED LANGUAGES

ACTOR, Whitewater Group	$ 439
ADVANTAGE C++, Lifeboat	479
PforCe++, Phoenix	215
Smalltalk/V, Digitalk	85
Smalltalk/V286	169

OPERATING SYSTEMS

Microport DOS Merge	$ 219
Microport Sys V/AT	549
SCO XENIX System V	979
Wendin-DOS 2.15	109
Other Microport, SCO, Wendin Products	CALL

SCREENS/WINDOWS

C Scape, Oakland Group	$ 282
Greenleaf Data Windows	219
MS Windows, Microsoft	69
MS Windows Develop. Kit, Microsoft	319
PANEL Plus, Lifeboat	395
PANEL /QC or /TC	99
Vitamin C, Creative Programming	149
Windows for Data, Vermont Creative	259
ScreenStar w/Source, Essential	169
SoftCode, Software Bottling Co.	119
Turbo POWER SCREEN	101

OTHER PRODUCTS

Advanced Norton Utilities	$ 99
Dan Bricklin's Demo Program II	179
MKS Toolkit	139
MS OS/2 Programmer's Toolkit	239
PC lint, Gimpel	101
Plink86Plus, Phoenix	279
Polytron PVCS CORPORATE	359
Pre-C, Phoenix	159
SEIDL Version Manager	269
Source Print, Aldebaran Labs	81

Science & Engineering Software

CIRCUIT DESIGN/SCHEMATIC CAPTURE

HiWIRE, Wintek Corp.	$ 849
MICRO-CAP II, Spectrum Software	759
PSpice, MicroSim	899
Device Equations Source	309
Probe graphics post-processor	399
Parts parameter estimator	399
Monte Carlo Analysis	309
Digital Files	309
Schema II, Omation	449
smARTWORK, Wintek Corp.	849
Tango PCB, ACCEL Tech	469
Tango Route	469
Tango Schematic	469
Tango Tools	279

DATA ACQUISITION/SIGNAL ANALYSIS

Asyst 2.9	$ 2,179
Asyst Modules 1, 2, 3	1,989
Asyst Modules 1, 2, 4	1,989
Asyst Module 1, 2	1,609
Asystant Plus	849
Asystant GPIB	629
Asystant	469
DADISP, DSP Systems	749
DADISP-488	175
Fourier PERSPECTIVE II, Alligator	329
HYPERSIGNAL, Hyperception	309
HYPERSIGNAL Plus	439
LABTECH Acquire, Lab Tech. Corp.	179
LABTECH CHROM,	709
LABTECH Notebook,	759
LABTECH Real Time Access,	269
Lotus Measure	445
QED D.A. and Control, Hart Scientific	799
SNAP-CALC, HEM Data Corp	350
SNAP-FFT	295
SNAPSHOT STORAGE SCOPE	495
UnkelScope Junior, Unkel Software	109
UnkelScope Level 1	315
UnkelScope Level 2+	499

PLOTTING AND GRAPHING

ChartBuster PC, Interchart Software	$ 369
Datatap Graph, Milhalisin Assoc.	259
Omniplot, Scientific Endeavors	269
PC MAP III, Peerless Engineering	755
PLOTZ, Curtis Technical Soft	319
TECH*GRAPH*PAD, binary engineering	359

EQUATION SOLVERS

Eureka: The Solver, Borland	$ 119
MathCAD 2.0, MathSoft	282
Math Mate, MCAE Technologies	89
muMATH, Soft Warehouse	189
SolveIT!, Structured Scientific Software	79
Solver-Q, SDDC	79
TK!Solver Plus, Universal Tech Sys	379

CAD

AutoCAD, by Autodesk	$ CALL
Autosketch, by Autodesk	65
Speed Enhanced Version	79
Design CAD, American Small Bus. Comp	219
Drafix 1 Plus, Foresight	239
Drafix 3-D Modeler, Foresight	169
EASYCAD, Evolution Computing	139
ECAD, Pelton Engineering	699
FASTCAD, Evolution Computing	1,849
Generic CADD	69
Generic 3-D Solid Modeling	159
3-D Rendering Module	119
Other Generic Software Products	CALL
In*A*Vision, Micrografx	459
Windows Draw w/Clip Art	239
Windows Graph	319
LaserCAD, DSL Link	89
PRO-3D/PC, Enabling Technologies	355
TurboCAD, MSA Group	79

AUTOCAD ADD-ONS

AutoESL, Systems Unlimited of CA	$ 279
AutoSHAPES	189
FSIMPLEX,	89
Turbo View, Sublogic Corp.	449

MOUSE PRODUCTS

LOGITECH HiREZ Mouse	$ 149
LOGITECH Serial or Bus Mouse	99
LOGITECH Combos	CALL
LOGITECH Series 2 Mouse	89
Microsoft Ser or Bus Mouse	99
W/Easy CAD	119
W/MS Windows	139
SUMMAMOUSE, Summagraphics	99

APL LANGUAGE

APL*PLUS/PC, STSC	$ 499
APL*PLUS PC TOOLS,	209
Pocket APL	80

SCIENTIFIC TEXT PROCESSING

CHEM-TEXT, Molecular Design Ltd.	$ 1,500
EXACT, Technical Support Software	419
EXP, Brooks/Cole Publishing	129
For Math, Shantha Software	379
Lotus Manuscript	445
PC TEX, Personal TEX	229
T3 Sci. Word Proc., TCI Software Res.	499

STATISTICS

ABstat, Anderson Bell	$ 315
CSS, StatSoft	469
Microstat II, Ecosoft	319
NWA STATPAK, Northwest	359
P-STAT	659
The Scientific Wheel, Dalin Inc.	99
SPSS/PC+,	749
StatPac Gold, Walonick Associates	539
STATS+, StatSoft	139
SYSTAT	549
With SYGRAPH	709

ADDITIONAL S&E PRODUCTS

ATLAS*GRAPHICS, STSC	$ 339
Atoms, Curtis Technical Soft	25
COMPEDITOR, Aveco Inc.	155
Engineer's Aide, Eng Prog Concepts	649
LASCAUX 1000 Calculator	55
PC-Matlab, The Math Works	659
Control System Toolbox	459
System ID Toolbox	459
POINT FIVE, Pacific Crest	279
The Professional Wheel, Dalin Inc.	199
Units, Curtis Technical Soft	25

FORTRAN LANGUAGE

DIFF-E-Q, Microcompatibles	$ 449
Extend, Design Decisions	131
Grafmatic, Microcompatibles	119
Lahey F77L FORTRAN	429
Lahey Personal FORTRAN	89
MathPac, Systolic Systems	445
Microsoft FORTRAN w/CodeView	299
Numerical Analyst, Magus	249
Plotmatic, Microcompatibles	119
RM/FORTRAN, Austec	479
Spindrift Library	135
SSP/PC, Lattice	279

GAUSS

GAUSS Prog. Lang., Aptech Sys	$ 189
GAUSS Math & Stat System	380

X-ASMS/SIMULATORS

Microtec, Relms, Uniware, Quelo	$ CALL

Ordering Information

We accept AMERICAN EXPRESS, MC, VISA and PERSONAL CHECKS. There is no surcharge on credit card or C.O.D. New York State residents must add sales tax. Shipping and handling $3.95 per item within the U.S., sent UPS ground. Rush and international service available. Call for prevailing rates.

- International orders add $10 for export preparation.
- Prices and policies may change without notice.
- **Dealers and Corporate Buyers call for special rates.**
- **Mail orders must include phone number.**
- Ask for details before you buy; some manufacturers won't take returns if disk seals are broken.

Call for your FREE catalog today!

In the U.S. call

1-800-333-3141

International Orders: **914-332-0756**

Science & Engineering SOFTWARE CO.


55 South Broadway, Tarrytown, NY 10591

Circle 116 on Reader Service Card

ChiWriter

NOW WITH MICROSPELL

How are you currently producing your scientific documents? Are you using a "golf ball" style typewriter? A regular word processor, hand lettering the special symbols? Are you fighting against a "what-you-see-is-definitely-not-what-you-get" system with a special command language? Or are you using one of our competitors' expensive and inflexible programs? Find out how ChiWriter can solve your scientific word processing problems.



From an actual ChiWriter screen display

Powerful Scientific/Multifont Word Processing at a Reasonable Price

ChiWriter is a complete word processor, designed especially for scientific and foreign language text. Its features include: intuitive formula editing commands, automatic pagination, variable headers and footers, footnotes, box draw mode, a notepad window, and an integrated spelling checker.

Best of all, ChiWriter is completely "what-you-see-is-what-you-get." Even complicated formulas can be entered easily because the screen display corresponds exactly to the printout.

ChiWriter runs on an IBM PC with CGA graphics, 2 floppy or 1 hard/1 floppy drive, and an Epson/IBM compatible 9 pin printer. Hi res screen suport (Hercules, EGA, VGA, AT&T), 24 pin printer support, and laser printer support (HP LaserJet, PostScript) are available.

In Short: An easy-to-use WYSIWYG package with powerful scientific/multifont word processing at a bargain price.

PC Magazine, July 1988

☐ ChiWriter Program $24.95	$99.95
☐ Hi Res Screen Support	$24.95
☐ 24 Pin Printer Support	$24.95
☐ Laser Printer Support	$59.95
☐ International Keyboard Support	$19.95
☐ Chemistry Support	$49.95
☐ Word Perfect Converter	$49.95
☐ Conographic Font Set	$149.95
☐ MergeChi Mail Merge Facility	$24.95
☐ IndexChi Index Generator	$59.95
☐ Shipping & handling	$_____

$5 U.S. & Canada, $10 Europe, $15 elsewhere

Name _____

Address _____

_____

City _____

State _____ Zip _____ Country _____

Phone ( ) _____

Payment by ☐ Check ☐ Purchase Order ☐ VISA ☐ MC

Card # _____ Exp. ___/___

B10

Horstmann Software Design Corporation
140 E. San Carlos St./P.O. Box 5039
San Jose, CA 95150-5039, USA
(408) 298-0828

horstmann software

Items Discussed

Actor $495
The Whitewater Group
Technology Innovation Center
906 University Place
Evanston, IL 60201
(312) 491-2370
Inquiry 935.

Choice Words $99
Proximity Technology, Inc.
3511 Northeast 22nd Ave.
Ft. Lauderdale, FL 33308
(305) 566-3511
Inquiry 936.

FastTRAP
serial version $149
bus version $169
MicroSpeed
5307 Randall Place
Fremont, CA 94538
(415) 490-1403
Inquiry 937.

Lascaux "The Intelligent Calculator" $59.95
Lascaux Graphics
3220 Steuben Ave.
Bronx, NY 10467
(212) 654-7429
Inquiry 938.

NewWave $195
Hewlett-Packard Co.
3000 Hanover St.
Palo Alto, CA 94304
(415) 857-1501
Inquiry 939.

Special Days $39.95
Footprints in History $39.95
The Salinon Corp.
P.O. Box 31047
Dallas, TX 75231
(214) 692-9091
Inquiry 940.

Sprint $199.95
Borland International, Inc.
1800 Green Hills Rd.
P.O. Box 660001
Scotts Valley, CA 95066
(408) 438-8400
Inquiry 941.

Windows/286 ..... $99
Windows/386 ..... $195
Microsoft Corp.
16011 Northeast 36th Way
P.O. Box 97017
Redmond, WA 98073
(206) 882-8080
Inquiry 942.

oratories and knows more about gravity and antimatter than anyone except Stephen Hawking and Roger Penrose. He also writes some good science fiction.

One computer book of the month is by Nancy Andrews, *Windows* from Microsoft Press. Fair warning: it's an "official guide" and therefore glosses over all the problems. I recommend it as a good introduction to what Windows is all about, but if you want to learn about Windows warts and all, you'll have to go elsewhere. The other computer book of the month is by Gerard J. Holzmann, *Beyond Photography, the Digital Darkroom* from Prentice Hall. It will tell you a *lot* about what can be done with digital image processing and how to do it. Some of it's amazing. I wonder if photographs will be courtroom evidence any longer.


The game of the month remains Strategic Conquest. We still haven't got it to play on the Mac II, but it goes great guns on the Mac Plus. The game of the month would have been F/A-18 Interceptor from Electronic Arts for the Amiga, but there was a problem. Once in a while someone gets lucky and gets to play the game, but most of us can't get past the crazy code-wheel "security" system. It's far more complicated than the game itself. I might even prefer copy protection, except that Electronic Arts is the outfit that had a scheme for the Commodore 64 that caused the machine to bash its disk drives out of alignment. Heaven knows what they could do to an Amiga. We'll tell you more about F/A-18 Interceptor when we can find a cryptographer to help us with their code wheel. ■

Jerry Pournelle holds a doctorate in psychology and is a science fiction writer who also earns a comfortable living writing about computers present and future. Jerry welcomes readers' comments and opinions. Send a self-addressed, stamped envelope to Jerry Pournelle, c/o BYTE, One Phoenix Mill Lane, Peterborough, NH 03458. Please put your address on the letter as well as on the envelope. Due to the high volume of letters, Jerry cannot guarantee a personal reply. You can also contact him on BIX as "jerryp."

READ THIS.



BUY THIS!



Looking for a

Personal Information Manager?

"Look no further . . . PC-OUTLINE *plus*™ is the one to buy!"

PC Week

PC-Outline *Plus* is an intuitive tool that manages words, projects, thoughts, ideas, people and, yes . . . your productivity.

With astounding efficiency, speed and ease!

PC-Outline *plus*

It thinks of things you're too busy to think of.

For instance, putting random information in its right place.

It does to ideas, tasks and projects what spreadsheets do to numbers.

The text editing features are so powerful you can actually use PC-Outline *Plus* as your pop-up word processor!

Here are just a few of the many features that make PC-Outline *Plus* "the one to buy":

- Powerful Word Processor capabilities
- Outlining features
- Project manager
- Category view/sort
- WordPerfect® WordStar® & MS Word® user-interfaces
- FREE and TOLLFREE support for 1 year
- 9 windows
- Prioritizing
- Macros
- Memory Resident option
- Auto save
- And MORE!





We call this feature "Hide & Show." You'll call it a godsend. With the touch of a key, suddenly an outline shows only the essential points. One keystroke will reveal the details again.

A little skeptical?

Get a copy of PC-Outline to try for 30 days. (And while you're at it, pass copies around to your friends and associates for their evaluation.) If not totally sold on us, don't pay us a cent.*

No risk. No hassles. No fooling! (This free 30 day evaluation period is available on all Brown Bag Software® products.)

Lotus®? Load US!

Quantity discount and site licenses available.

To order call:

800-523-0764

In California, call (408) 559-4545.

Introductory Price:

$195 ($7.50 shipping & handling CA residents add sales tax)

Brown Bag Software®
File #41719, Box 60000
San Francisco, CA
94160-1719

BROWN BAG™ Software

State-Of-The-Smart.™

Offices in London 01 831 1106—
Köln 0221 7710923—Copenhagen 01 933837—
Amsterdam 020 233408—Zürich 01 2146224

*Our ShareWare versions are older versions of the product, but are full-featured & fully-functional and yours to try for a FREE 30 day evaluation period.

© Copyright 1988 Brown Bag Software, Campbell CA 95008

Circle 262 on Reader Service Card

THE NEW STANDARD FOR HIGH PERFORMANCE STATISTICAL SOFTWARE

CSS

COMPLETE STATISTICAL SYSTEM
WITH DATA BASE MANAGEMENT
AND GRAPHICS


A powerful, comprehensive, elegant, and super-fast statistical package for IBM (PC, AT, PS/2) and compatible computers. ■ The CSS optimized user interface with fast hierarchical menus incorporates elements of artificial intelligence; even complex analyses require only a few keystrokes (batch processing is also supported). ■ CSS features comprehensive, state of the art implementations of: *Basic statistics, Multi-way frequency tables, Nonparametric statistics, Exploratory data analysis with analytic graphs, Multiple regression methods, Time series analysis with modeling and forecasting (incl. full ARIMA), General ANOVA/ANCOVA/MANOVA, Contrast analysis, Discriminant function analysis, Factor analysis, Principal components, Multidimensional scaling, Item analysis/Reliability, Log-linear analysis, Cluster analysis, Non-linear estimation, Logit/Probit analysis, Canonical analysis, Survival and Failure Time analysis (Censored data), Quality Control analysis, and much more.* ■ All statistical procedures are integrated with fast data base management and instant, presentation quality graphics (over 100 types); full support for all mono and color graphics boards (incl. VGA) and over 100 plotters and printers (incl. the HP and Postscript standards). ■ All CSS screen output is displayed via customized Scrollsheets™ (i.e., dynamic, user controlled, multi-layered tables with cells expandable into pop-up windows); all numbers in a Scrollsheet™ can be instantly converted into a variety of presentation quality graphs; contents of different Scrollsheets™ can be instantly aggregated, combined, compared, plotted, printed, or saved. ■ The flexibility of the CSS input/output is practically unlimited: CSS offers an intelligent interface (read/write) to all common file formats (Lotus, Symphony, dBII, dBIII+, DIF, SYLK, . . .) and special utilities to easily access data from incompatible programs; graphics can be saved in files compatible with desktop publishing programs (Aldus, Ventura). ■ CSS data files can be as large as your operating system (DOS) allows; OS/2 version coming soon. ■ CSS precision exceeds the standards of all common precision benchmarks. ■ *Technical note: The CSS user interface and all I/O were written in Assembler and bypass DOS; graphics and data management were written in Assembler and C; the computational algorithms were written in Assembler and optimized Fortran.* ■ $495 (plus $5 sh/h); 14-day money back guarantee.

Circle 246 on Reader Service Card



StatSoft

2325 East 13th Street ▪ Tulsa, OK 74104 ▪ (918) 583-4149
Fax: (918) 583-4376
Overseas Offices: StatSoft of Europe (Hamburg, FRG), ph: 040/4200347, **StatSoft UK** (London, UK), ph: 0438/310056 or 316561, **Hearne Software** (Melbourne, Australia), ph: 613-497-4276

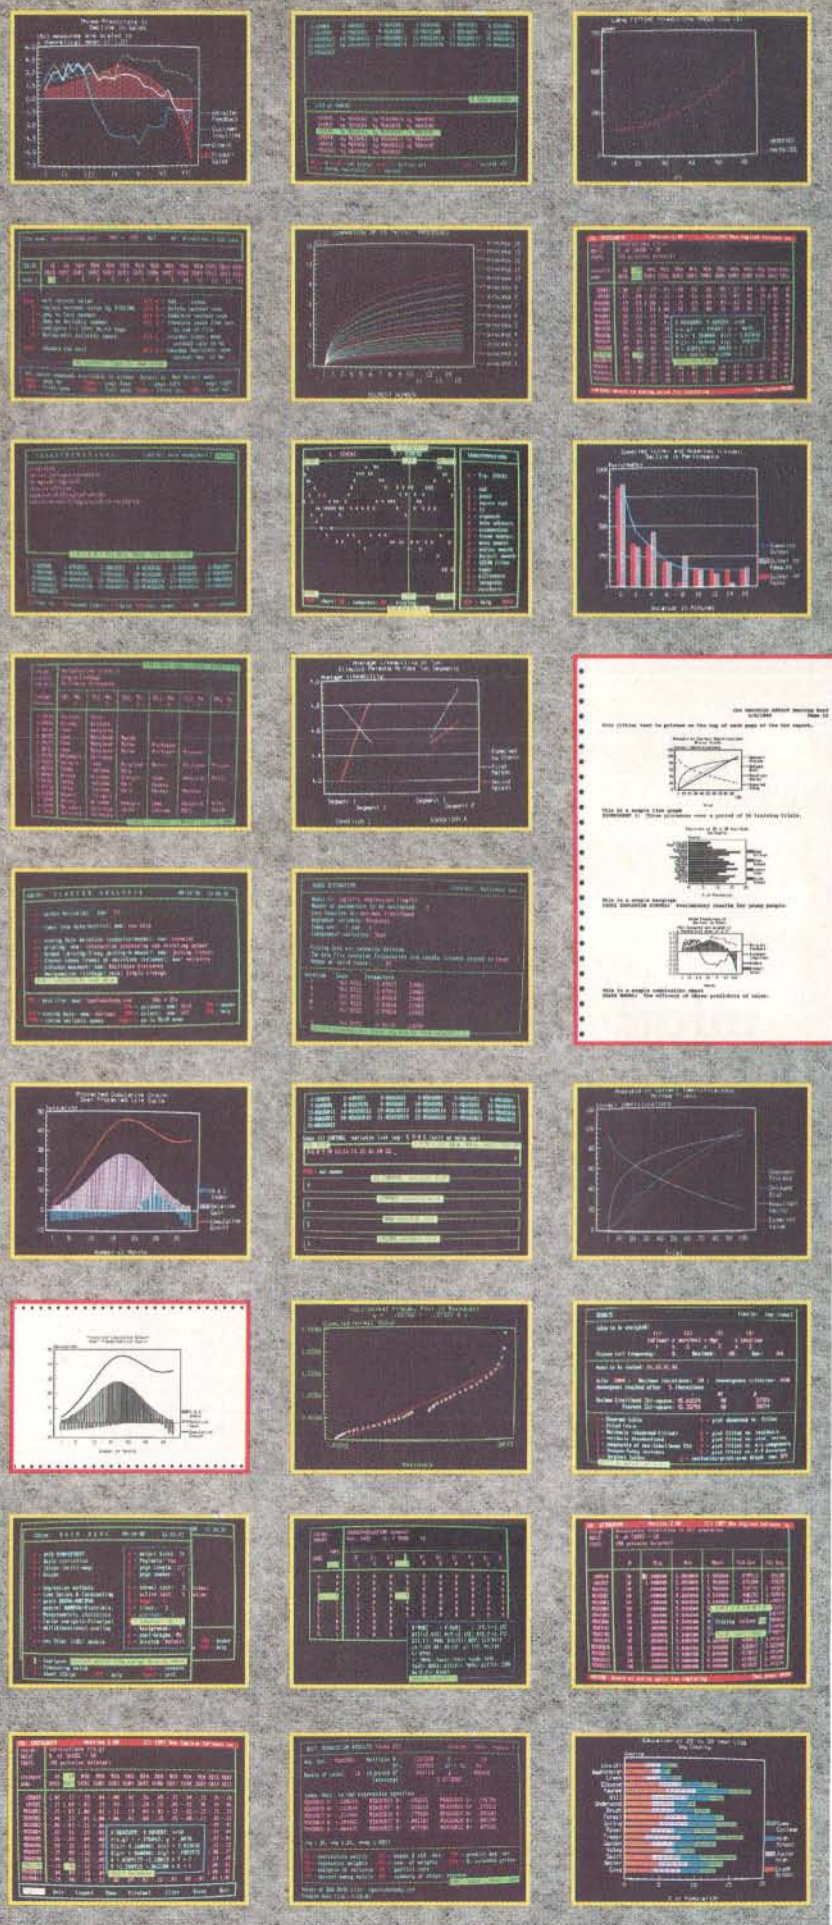

SPRINT WITH CAUTION

Borland's new word processor doesn't live up to Ezra's expectations; plus, more on project-management software



When Lotus announced that it was pulling the plug on Modern Jazz for the Macintosh, I was somewhat disappointed. The Mac universe could use another strong integrated product; I'd been hoping that the program would be a worthy challenger to Microsoft Works. However, it takes guts (not to mention financial stability) to do what Lotus did, and there's a lot of merit in abandoning a product that simply doesn't measure up, even if it means discarding years of labor and a significant cash investment. Though Lotus has taken heat for its inability to bring Modern Jazz to market, you have to admire the company's commitment to quality. It has sent a strong, comforting message to its customers—past, present, and future.

I am far less troubled than I used to be by companies that fail to meet their announced shipping dates. If it takes a few extra weeks or months to deliver a product that's bug-free and reliable, the wait is a minor inconvenience. I'd rather lose time than data.

But what can be said about big firms that release substandard products? What does it say about their attitude toward their customers? Something to think about, isn't it?

Too Much, Too Late

Sprint: The Professional Word Processor (Borland International, $199.95) should have been a winner. The theoretical appeal of the program is unquestionable: You're promised an editor with powerful formatting capabilities, a selection of user interfaces, and one of the most extensive macro languages ever devised. The price is quite reasonable for a full-featured word processor. And it comes from the company that brings us such jewels as SideKick, Reflex, and Paradox, all of which rank among my favorite programs.

Unfortunately, Sprint is nothing to write home about. It doesn't qualify as a total disaster, but cosmetics are slipshod, and Sprint's most highly touted feature—the ability to switch among a half-dozen "user interfaces"—is far less impressive than Borland's advertising would have you believe. The product seems somehow strangely unfinished; I couldn't escape the sense that I was working with a programmers' prototype rather than with a final release. The menus are unappetizing lists of commands that pop up gracelessly; Borland has given us better-looking word processing in both SideKick and the Turbo Pascal Editor Toolbox.

I was disappointed with Sprint. Though I've tried for over a month to develop some affection for it, I just can't do it. I've come to expect miracles from Philippe Kahn; perhaps I was simply demanding more from Sprint than any MS-DOS word processor could ever give me.

Installation starts out looking easy but turns into a headache. The Setup program opens with a menu that suggests a pleasantly mindless cruise through a series of configuration options. The numbers on Sprint's 11 disks have little to do with the sequence in which their contents are loaded; I had to do a mad dance of disk shuffling.

After installing the main program modules, the Setup program asks if you'd like to have it modify your AUTOEXEC.BAT and CONFIG.SYS files without telling you what it intends to do to them (a practice I despise); you can opt to have

continued

ILLUSTRATION: MARY ANN SMITH © 1988

it make the changes or to copy examples of the two files into your Sprint directory. Since I'm wild about punishment, I decided to let it make the modifications. Instead, the program gave me the examples. When I went back and requested examples, hoping to get the changes, it gave me the examples again.

All hell broke loose when I got to the printer-installation segment. I selected an option that would let me specify the port to which my printer was attached, and found myself locked in an endless loop in which the program kept requesting the Setup disk and refusing to recognize that the disk was, indeed, in drive A. I was able to hit the Escape key and exit back to the main menu, but from that point on, one of the screens having to do with printers kept on appearing in the middle of totally unrelated operations. I tried this several times, choosing different printers, and the result was always the same. I could have Sprint send output to the standard PRN device or to a file; if I wanted to pick a port, I was flat out of luck. Ouch.

After about 10 runs through the Setup program, I figured Sprint was as installed as it was ever going to be. Choosing to let the program give me the dictionary, the thesaurus, and all the user interfaces and file conversions, Sprint was occupying close to 2.5 megabytes of my hard disk drive. (If you choose only one interface and forget about conversions, you can keep it to between 1 and 1.5 megabytes.) Since macros, formats, interfaces, overlays, translation routines, printer definitions, dictionaries, and suchlike are all separate files, I had 59 entries in my directory. I refuse to think about using this program without a hard disk drive.

Anyway, I plowed on without giving the manual more than a quick skim. After all, I know many word processors, right? Sprint unceremoniously flashed a brief copyright notice and dropped me directly into the editing screen of the advanced Borland interface: ruler at the top, status line at the bottom, and not the slightest hint of how to do anything further. A quick check of the reference card led me to the F10 key, and I brought up the main menu. I was amazed to discover that on my EGA monitor/video card combination, the initial letters on the menu, which can be used to invoke commands, were highlighted in *white on white*. I found the Customize menu, changed the colors to something readable, and loaded the WordStar interface, with which I thought I'd be more at ease.

What I See Is Not What I Expected to Get

Borland and I have a difference of opinion on what constitutes a user interface, I guess, because I was expecting to see a screen that looked like good old WordStar. What I got was a screen that looked like the good old advanced Borland interface. No visible difference. And typing the WordStar Control-key command prefixes brought up menus along the right side of the screen, in exactly the same position the Borland interface uses.

Borland and I have a difference of opinion on what constitutes a user interface, I guess.

I hit F1 for help and was treated to an ominous message: "If you are not familiar with WordStar, Borland suggests that you use the more powerful Sprint interface instead." I didn't think this was a good way to instill confidence, but most of the standard WordStar commands appeared to be available, so I began to do some editing.

I typed a few words and then tried to use the arrow keys to back up and correct a couple of typing mistakes. Couldn't do it; the cursor was frozen in place at the end of the line. I had no idea if I had done something wrong or if Sprint was in the process of crashing, but I started punching Control and function keys at random to see if I could produce a response. Nothing but an occasional beep. At that point, I went off and made myself a cup of tea.

When I returned, the cursor had moved to the front end of the line, and a string of *K*'s stretched off the right side of the screen. I tried WordStar commands and cursor keys to move along the line, but they didn't do anything. The up-arrow key worked, however, and I moved up to the ruler line, which I was able to delete, much to my surprise. Then, since I had magically regained access to the help screen, I moved from there to the main Sprint menu and tried to reload the advanced Borland interface. I wanted to see if the cursor would start moving in a different environment.

I accomplished the interface shift, but the text vanished. So much for the autosave feature that protects you from data loss if you stop typing for a few seconds. Needless to say, I have not been able to replicate this experience, although in subsequent trials with the WordStar interface, I've managed to lose large chunks of text without knowing why.

I then spent a few hours reading the documentation, which is both exhaustive and exhausting. The manuals are perfect-bound, which means broken spines if you try to flatten them out, and printed in dense black type. The word "unrelenting" springs to mind.

The next time I tried the program, I went with the Microsoft Word interface. Yes, it looked exactly like the advanced Borland interface, but the menus employed Word's command set. When I began typing, Sprint put in all the symbols Word uses to indicate spaces, returns, tabs, and suchlike. I was impressed until I switched back to pure Borland and noticed that the funny symbols didn't go away. It turns out that loading the Word interface sets preference options that determine the appearance of your text, but the other interfaces aren't bright enough to look for the same options and reset them.

OK. Having had my fill of the imitative interfaces, I did the rest of my testing in Borland mode. On my Tandon PC AT clone, the program was certainly fast enough for me, even throttled down to 6 MHz. Block moves, margin changes, spelling checking, and basic editing operations were quite acceptable, and I hummed along contentedly for a while. As I began to try out more sophisticated features, though, I encountered a series of oddities inherent to Sprint's design.

You can have as many as 24 files open at any one time, with up to 6 appearing simultaneously on-screen. That's nice, until you discover that windows are horizontal only. Forget side-by-side comparisons of narrow columns; can't be done. Windows stretch the full width of the screen, and each displays a status line at the bottom. Let's see: If you try for the maximum of 6 windows on a standard 25-line display, that's 6 lines deducted for status information, leaving you 19 lines to be divided six ways. Unless you can do something useful with 2- and 3-line windows, you'd better forget the maximum and plan for only 3 or 4 files open on the screen.

According to the documentation, you can do complex formatting, like creating

continued

CELEBRATING OUR 20TH YEAR 1968-1988

MONTGOMERY GRANT

BYTE 10/88

Retail Outlet: Penn Station, Main Concourse
(Beneath Madison Square Garden) NYC,N.Y.10001
Store Hours: Mon-Fri 8:30-8/Sat-Sun 9:30-7

OUTSIDE USA----*CALL*
(718)692-0071
FOR CUSTOMER SERVICE
Call Mon-Fri:9:30am-4:30pm
(718) 692-1148

FOR ORDERS & INFORMATION CALL TOLL FREE
1-800-759-6565

OR WRITE TO:
Montgomery Grant Mail Order Dept.
P.O. Box 58 Brooklyn,NY 11230
FAX NO. 7186923372
TELEX 422132 MGRANT

OPEN 7 DAYS A WEEK FOR ORDERS: Monday-Friday9am-7:30pm/Saturday & Sunday 9:30am-6pm (EDT)
NO SURCHARGE FOR CREDIT CARD ORDERS / WE INVITE CORPORATE & EDUCATIONAL CUSTOMERS
CORPORATE LEASING AVAILABLE

LAPTOPS



AMSTRAD PPC-640 SD
640 K
720 K Floppy Drive
Built-in 2400 Baud Modem
$799

NEC MULTISPEED EL.....$1299
NEC MULTISPEED EL.II.....$1449
NEC MULTISPEED HD.....$2179

TOSHIBA 1000.....$729
TOSHIBA 1200 H.....$2199
TOSHIBA 3100/20.....$2929
TOSHIBA 3200.....$3695
TOSHIBA 5100.....$4740

ZENITH 184 SUPERSPORTS W/ 2FLOPPYS.....$1469
ZENITH 184-2 SUPERSPORTS W/ 20MB.....$2199

SPARK by DATAVUE 640K w/2 720K DRIVES.....$949
SPARK EL.....$1099

MODEMS, EXTERNAL DRIVES & ACCESSORIES available for all laptops

EPSON



EPSON EQUITY 1+ Package
IBM PC/XT COMPATIBLE
• 640K RAM w/Clock Calendar 360K Drive • Keyboard • Serial & Parallel Ports • 12" High Resolution Monitor • Box of 10 Diskettes
$769

Same Pkg. w/One Floppy & 20 MB Hard Drive $1029
Same Pkg. w/Two 360K Floppy Drives $849



EPSON EQUITY III+
40 MB Hard Drive Package
IBM AT Compatible
• Keyboard • 80286 Processor 640K RAM • 6/8/10 MHz • 1.2 MB Floppy Drive • 40 MB Hard Drive 12" Monitor • 8 Expansion Slots Serial and Parallel Ports
$1899



EPSON EQUITY II+
IBM AT Compatible Hard Drive Package
Keyboard • 640K RAM • 80286 Microprocessor • 1.2 MB Floppy Drive • 20 MB Hard Drive • Mono Monitor
$1399

LOGITECH MOUSE M-7 $59.95

IBM XT



Hard Drive Package
• IBM XT Computer • IBM Keyboard 256K RAM Expandable to 640K • 360K Disk Drive • 20MB Hard Drive • Package of 10 Diskettes (Monitor Optional)
$1199

IBM XT Package with 2 360K Floppy Drives $999



PACKARD-BELL 386
40 MB Hard DriveSystem
IBM AT Compatible
• 1 MB RAM • 80386 16 MHz Microprocessor • 1.2 MB Floppy Drive • 40 MB Hard Drive • 8 Expansion Slots • Enhanced Keyboard • Serial & Parallel Ports • 12" Monitor
$2699

IBM® PERSONAL SYSTEM 2

MODEL 50
640 K RAM 1.44MB Floppy Drive 20 MB Hard Drive
$2499
Monitor Optional



PS/II Model 30.....$1199
PS/II Model 30 w/20 MB.....$1599
PS/II Model 50 w/30 MB & 1.44MB Floppy.....$2849
PS/II Model 60 w/44 MB & 1.44MB Floppy.....$3299
PS/II Model 60 w/70 MB & 1.44MB Floppy.....$3619
PS/II Model 70 w/60MB & 1.44MB Floppy.....$4299
PS/II Model 80 w/44 MB & 1.44MB Floppy.....$4295
PS/II Model 80 w/70MB & 1.44MB Floppy.....$4795
5.25 External Drive for PS/II.....$169

IBM PERSONAL SYSTEM II MONITORS
8503 Monochrome Monitor.....$199
8512 Color Monitor.....$449
8513 Color Monitor.....$519
IBM Proprinter II.....$369

MONITORS
THOMSON 14"CGA Monitor....$289
MAGNAVOX 13" RGB Color Monitor.....$199
MAGNAVOX EGA Monitor.....$339 w/ EGA Card.....$459
MAGNAVOX VGA Monitor.....$449 w/ VGA Card.....$669



Laserjet SeriesII $1629

1 MB Expander.$349 HP DESKJET PRINTER.$719

We Can Reconfigure Any Of Our Computer Packages To Your Specifications. Call For Information. We Carry Modems, Drives, Cards, Color Monitors & All Other Accessories For Your Computer.

NEC® PowerMate® 1

IBM PC/XT/AT COMPATIBLE
PACKAGE
• 800286 10 MHz Processor 640K RAM • 1.2 MB Floppy Drive 12" Monitor
$1249



Same Package with NEC 20 MB Hard Drive $1479
Powermate II with Monitor $1679

COMPAQ

DESKPRO 386 *MODEL 40*
Hard Drive Package
• Keyboard • 80386 16 MHz Microproccessor • 1 MB RAM • 40 MB Hard Drive • 1.2 MB Floppy Drive (monitor optional)
$4295

PACKAGES

APPLE IIC W/ 12" MONITOR.....$529
APPLE IIE W/ 5.25 DISK DRIVE & 12" MONITOR.....$749



Apple IIGS Computer • 3.5" Disk Drive • Apple RGB Color Monitor Package of 10 Diskettes • All Cables & Adaptors • Package of 10 Diskettes • Apple Software
$1379

MAC PLUS Computer Package.....$1279
IMAGEWRITER II Pinter.....$449
IMAGEWRITER LQ.....$1049
MAC SE Computer w/ Dual Drive.....$1949
MAC SE Computer w/20MB APPLE Hard Drive.....$2599
APPLE MAC II w/ Keyboard.....$2799

LEADING EDGE

MODEL D Package
IBM PC/XT Compatible
512K RAM Keyboard 4.7-7.16 MHz. 360K Floppy Drive 12" Monitor 8088-2 Processor
$729



Same Package w/ 20MB Hard Drive $989
Same Package w/ 30MB Hard Drive $1039

LEADING EDGE D2

IBM AT COMPATIBLE 20MB HARD DRIVE PKG.
Keyboard 1.2MB Floppy 20MB Hard Drive 80286 Processor 12" Mono Monitor
$1499



Same Package w/ 30 MB Hard Drive $1549

NEW PC1640

Keyboard 640K RAM Turbo Speed 1 360K Drive Mono Monitor Free Mouse & Software
$649
w/ 20MB.....$899



PRINTERS

EPSON

FX-1050	$489.95
FX-850	$349.95
LQ-500	$315.95
LQ-800	$329.95
LQ-850	$509.95
LQ-1050	$709.95
LQ-2500	$829.95
EX-800	$419.95
LX-800	$199.95

PANASONIC

1080i-II	$159.95
1092i	$299.95
1091i-II	$189.95
KXP-1524	$499.95
KXP-1595	$409.95
KXP-4450 Laser	$1549

TOSHIBA

321-SL	$449.95
341-SL	$629.95

PRINTERS

STAR

NX-1000 RAINBOW	$219.95
NX-1000	$169.95
NX-15	$299.95
NX-2400	$339.95
NB-2410	$409.95

Citizen Printers IN STOCK

OKIDATA

OKI-120	$189.95
Okimate 20	$119.95
Okidata 180	$219.95
Okidata 183	$299.95

NEC

P-2200	$339.95

Diconix Printer For Laptops.....$289.95

commodore COLT

IBM PC/XT COMPAT. PACKAGE



Keyboard
Two 360K Floppy Drives
Serial & parallel Ports
Mono Monitor
MS DOS
$799

SEAGATE

20,30,40,60,80 MB HARD DRIVES IN STOCK

commodore

128 PACKAGE
Commodore 128 Computer • Commodore 1571 Disk Drive • Commodore 1902 Color RGB Monitor • Commodore 1515 Column Printer
$699

64/c PACKAGE
Commodore 64/c Computer • Commodore 1541 Disk Drive • Computer Printer • 12" Computer Monitor
$399

commodore AMIGA



AMIGA 500 Computer w/ 1084 RGB Monitor $799
AMIGA 500 Computer w/ 1084 Monitor &1010 3.5" Floppy Drive $999

ALL PERIPHERALS IN STOCK
AMIGA 2000 IN STOCK

VENDEX HEADSTART

IBM PC/XT Compatible
10 MHz Dual Floppy Drives 7 Expansion Slots • 512K Expandable to 768K • Parallel & Serial Ports Mouse • Available in Colo or Mono System. • Over $1000 Worth of Software - NO CHARGE!



Mono System $849
Color System $999

AMIGA 2000

IBM PC/XT COMPATIBLE RGB COLOR PACKAGE



- A-2000 Computer w/ Keyboard
- 1 MB Exp. to 9 MB
- Built-in 3.5" D. Dr.
- RGB Color Monitor
- 2088 iBM Compat. Bridge Card w/5.25" Floppy Disk Drive

$2049

INCLUDES FREE MOUSE AND SOFTWARE

commodore PC10-1

IBM PC/XT Compatible PACKAGE



• PC10-1 Computer • 512K RAM Expandable to 640K • 360K Disk Drive Enhanced Keyboard • Serial & Parallel Ports • 12" Monitor • AC Adaptors • All Hook-up Cables • Pkg. of 10 Diskettes
$499

Same Package with 20 MB Hard Drive $749

Rush Service Available
Call For Details

Circle 178 on Reader Service Card

Certified Checks, Bank Checks, Money Orders, Mastercard, Visa, Amex, Diners Club, Carte Blanche, Discover Card, C.O.D.s and approved P.O.s accepted. No additional surcharge for credit card orders. Non-certified checks must wait 2-6 weeks for clearance. Please add 5% for shipping and handling. APO/FPO addresses add 10% for shipping and handling. All APO/FPO are shipped first class priority air. N.Y. residents add applicable sales tax. Prices subject to change without notice. Not responsible for typographical errors. Return of defective merchandise must have prior return authorization number or returns will not be accepted. IBM PC, XT, AT are registered trademarks of International Machine Corp. All orders can be shipped Air Express. Call for details. For your protection we check for credit card theft. NYC DCA #00233.

NO ADDITIONAL SURCHARGE FOR CREDIT CARD ORDERS WE WELCOME CORPORATE & EDUCATIONAL ACCOUNTS

numbered lists, multiple columns, or indented outlines. In practice, because Sprint is not a WYSIWYG program, every time you try something fancy, you're flying blind.

The outline feature is a good case in point. Each time you want to indent a new sublevel, you have to insert the Sprint formatting command BEGIN OUTLINE, which appears as highlighted text. And for every BEGIN OUTLINE, you must provide a matching END OUTLINE command. A standard outline quickly begins to look like a Pascal program (although

Every time you try something fancy, you're flying blind.

flush left), with your lines and Sprint's commands interspersed. It's pretty easy to lose track of where you are because no information appears to tell you anything about position. Numbering is automatically generated to go with the indents, but only at print time; you can't see either indents or numbers while you're editing.

You can get a rough idea of what's happening by calling up Sprint's page-preview mode, which runs your text through the independent formatting program and displays the result. You can't edit while looking at the formatted version, and the documentation warns you that what you're viewing is only an approximation of the final output.

Sprint is an old-fashioned word processor; editing and formatting are accomplished by two separate programs. The editor has additional code to allow it to act as a shell for the formatter, but the two programs don't interact much. As an example, you don't see dynamic page breaks displayed by the editor; that's the formatter's job. The editor doesn't understand much about pages.

If you want to get an idea of how things are breaking, you can push the text through the formatter, which will place visible breaks in the file. These breaks won't respond to any changes you make to the text later; if you do some editing, you have to issue another repaginate

continued

OUR PLUG-IN CARDS GIVE YOU PLUG-IN CONTROL.

Your IBM PC/XT/AT or compatible can control any IEEE-488 instrument.



You can:
- ☐ Plug-in to BASIC, C, FORTRAN, or Pascal.
- ☐ Use HP-IB plotters, printers, and instruments.
- ☐ Spend less time programming.
- ☐ Call (617) 273-1818 and put us to the test.

Complete hardware and software solutions for just $395.

cec Capital Equipment Corp.
99 South Bedford Street
Burlington, MA. 01803



People are talking about us.

"Lahey specializes in FORTRAN Language Systems."

"Lahey has the fastest compilation speed."

"Lahey has the most mainframe extensions."


"Lahey has the best diagnostics."

"Lahey has a quick and easy to use debugger."

"Lahey has technical support you can count on."

"Lahey is rated #1 by reviewers."

"Lahey has a compiler for every FORTRAN user."

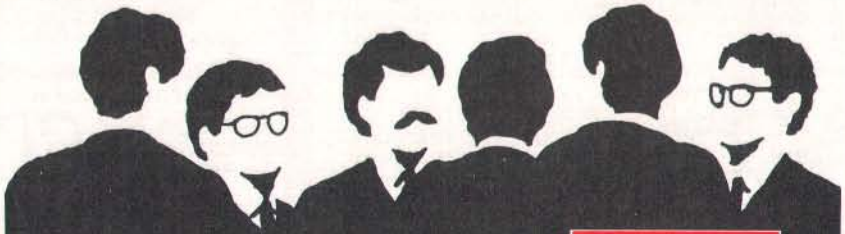

When people talk about FORTRAN the name mentioned most often is Lahey Computer Systems Inc.

Contact us to discuss our products and your needs. (800) 548-4778
Lahey Computer Systems, Inc. P.O. Box 6091, Incline Village, NV 89450
Tel: (702) 831-2500 FAX: (702) 831-8123 Tlx: 9102401256

Circle 137 on Reader Service Card

NEW

THE "DESKTOP PRESENTER PACK"



Everything you need for creating and giving presentations with your PC.

Now, you can make impressive, professional-quality, full-color presentations of any kind right at your desk with The DESKTOP PRESENTER PACK.

Everything you need is included: Colormetric® a high resolution graphics card for your PC, PictureIt™ business graphics software, and PCPrintmaker® desktop printing software.

With The DESKTOP PRESENTER PACK you will turn your personal computer into a full-capability workstation for creating professional-quality presentations quickly and easily. Then use your PC to give a video presentation in 1000 colors.

Or make high resolution slides, overhead transparencies or hardcopy all in full-color by simply plugging in a SlideMaker® or color printer.

Buy the DESKTOP PRESENTER PACK and make the best presentation of your career.

Call today 800-556-1234, ext. 234.
In Calif. 800-441-2345, ext. 234.

General Parametrics Corporation the makers of VideoShow

Berkeley, CA 415-524-3950

Circle 103 on Reader Service Card

Circle 70 on Reader Service Card


SPEECH PRODUCTS
For PCs and compatibles

SYNTHESIZER—only $79.95



The next versatile and best sounding speech product available for under $400! The amazing **Speech Thing** provides text-to-speech as well as PCM and ADPCM speech and music reproduction. Comes with "Thing" D/A converter that attaches to the parallel printer port **outside** the computer—ideal for laptops. Will not interfere with normal printer operation. Also comes with audio amplifier/speaker and power adapter. Software includes two advanced text-to-speech programs, digitized speech and music files, full screen waveform editor, sampling music keyboard, special effects mixing board, and drivers so you can add speech and sound effects to programs written in BASIC, C, PASCAL, and others. Includes 54 page manual. **SPEECH THING—$79.95.**

DIGITIZER—only $89.95



The **Voice Master PC Digitizer** is a full 8-bit PCM sampler board. Fits in any available slot. Up to 15,000 samples per second. Input pre-amp has automatic gain control and 4.5 Khz low pass filter. Includes a quality headset microphone. Software included for recording and editing sound files for playback through **Speech Thing.** Also includes a real-time spectrum display and oscilloscope display as well as assembly language source listings for writing your own drivers. BONUS: Voice recognition program included which is callable via an interrupt vector. Demonstration program written in GWBASIC. **VOICE MASTER PC DIGITIZER—$89.95.**

VOICE RECOGNITION—only $49.95



A price/performance break-through! Equal in performance to other systems costing hundreds more $$$. The amazing **Voice Master Key** program adds voice recognition to just about any program or application. You can voice command up to 256 keyboard macros. Fully TSR and occupies less than 64K. Instant response time and high recognition accuracy. Easy and fun to use—no compilers or editors required. Works with CAD, desktop publishing, word processor, spread sheet, even other TSR programs. **A genuine productivity enhancer. Voice Master Key** can also be called from within a program for adding voice recognition to custom applications. **Voice Master Key** requires the **Voice Master PC Digitizer** for operation. (Please note: **Voice Master Key** will not replace the keyboard or mouse except under certain circumstances. Not to be confused with the still unavailable "voice typewriter.") **VOICE MASTER KEY—$49.95.**

BONUS OFFER! Buy **Voice Master Key** with **PC Digitizer** for only **$129.95**—you save $10!
BETTER BONUS OFFER! Buy all three: **Speech Thing, PC Digitizer,** and **Voice Master Key** for only **$189.95**—you save $20!
ALL OF THESE PRODUCTS ARE OF PROFESSIONAL QUALITY.
ORDER HOTLINE: (503) 342-1271
Monday–Friday, 8 AM to 5 PM Pacific Time
Add $5 for shipping and handling on all orders. Add an additional $3 for 2nd day delivery. All goods shipped UPS. Master Card and VISA, money order, cashiers check or personal checks accepted (allow a 3 week shipping delay when paying by personal check). Foreign inquiries contact Covox for C&F price quotes. Specify computer type when ordering. 30 DAY MONEY BACK GUARANTEE IF NOT COMPLETELY SATISFIED. ONE YEAR WARRANTY ON HARDWARE. **Call or write for FREE product catalog.**

COVOX INC. 675-D CONGER ST.,
EUGENE, OREGON 97402 U.S.A.
TEL: 503-342-1271 FAX: 503-342-1283

command to relocate the breaks in the file. If you're used to any sort of dynamic formatting (as is found in most other word processors), this is awkward and confusing.

Should you make a mistake entering formatting commands, like forgetting to supply a matching END command for each BEGIN command, you won't find out about it until you run the formatter, either for preview or printout. The effect is like trying to write a program for a compiler without the advantage of a debugger.

Lots of Power; Who's It For?

True, Sprint has a lot of power. If you like to program, you can generate editing macros that will do just about anything you've ever wanted to do in a word processing program. The language is thorough and extensive, and it looks a bit like C. You can perform complicated search and replace operations, manipulate files, and even create new command sets (the user interfaces were all written as macros). There's some slight performance degradation when using macros as opposed to native commands, but it's barely noticeable on an AT-class machine. Similarly, you can program the formatter with a terse, often cryptic formatting language. Commands can reside within your document or in independent "style sheet" files that get sucked in when you run the formatter.

My major question about Sprint is: Who is this program for?

The resulting flexibility is marvelous, but determining how to make Sprint do its tricks is severely hampered by the documentation, which seems to be written mostly for programmers. Longer tutorials would help, particularly for writing macros. Code samples in the manuals are few and short, and the discussion of macro programming techniques is limited to 30 pages.

You do get a good selection of features with Sprint, including excellent spelling correction, a large thesaurus, mail merge, a huge amount of context-sensitive on-line help, good printer support, and the auto-save feature that kicks in when you've left the keyboard idle for a few seconds, but you can get those features elsewhere—which leads to my major question about Sprint: Who is this program for?

I'm not convinced that Sprint is the right tool for novices, though Borland assures me that its interface was carefully developed to appeal to new users. Intermediate users and those used to WYSIWYG will be thrown for a loop. Programmers (who'd appreciate the macro capabilities) would be just as satisfied with Pmate, MultiEdit, or the editor/debugger combos that come with most programming environments. That leaves Sprint appealing to an odd subset of the word processing world.

I accept Borland's contention that it serves the needs of offices that want chameleon interfaces for part-time and temporary employees used to other programs. For anyone else, the collection of surrogate interfaces is merely a transitional pathway into Sprint.

Borland includes an eye-opening pamphlet that details the ways in which its implementations of the interfaces differ from the originals; each interface gets two or three terse pages of exceptions and exclusions. And if you're going to do anything with macros or complex formatting, you're going to have to learn Sprint anyhow.

The program also seems well suited to environments that need heavy-duty formatting for long, complex documents that include many different types of materials. Encyclopedias, almanacs, technical training manuals, and software documentation would be perfect uses for the package. So Sprint would be excellent as the choice for word processing at (surprise!) Borland itself.

So here's a modest proposal: Since Sprint would seem to be a program designed by Borland for Borland, let's let Borland use it.

Project Mismanagement

Recently, I received a delightful letter from Hugh Roth on the subject of project-management software. Hugh has been battling several programs for the past few months, trying to develop scheduling systems for book publishing. The letter was long, articulate, and thought-provoking. With his permission, I've extracted a few of his key points; they're worth remembering if you're attempting to pick your way through the mine field of conflicting claims and in-

continued

Aztec C

Power to go the distance... Whatever that distance might be



From real time embedded applications to comprehensive commercial applications on Macintosh, IBM PC, Amiga, Atari, and others, Aztec C has earned a well-deserved reputation as an innovative, tough to beat, rock-solid C development system.

But don't just take our word for it—try it yourself. We know that the best way to understand what puts you ahead with Aztec C is to use it. That's why Aztec C systems purchased directly from Manx come with a 30-day, no questions asked, satisfaction guarantee. Call for yours today.

We can also send you information that details the special features and options of Aztec C. Plus information on support software, extended technical support options, and all of the services and specialized support that you may need when you're pushing your software to the limits and... beyond.

MS-DOS Hosted ROM Development Systems

Host + Target: $750 Additional Targets: $500

Targets:
- **6502 family**
- **8080-8085-Z80-Z180-64180**
- **8088-8086-80186-80286/8087-80287**
- **68000-68010-68020/68881**

Components:
- **C compiler for host and target**
- **Assembler for host and target**
- **linker and librarian**
- **Unix utilities make, diff, grep**
- **Unix vi editor**
- **debugger**
- **download support**

Features:
- **Complete development system**
- **Fast development times**
- **Prototype and debug non-specific code under MS-DOS**
- **Compilers produce modifiable assembler output, support inline assembly, and will link with assembly modules**
- **Support for INTEL hex, S record, and other formats**
- **source for UNIX run time library**
- **processor dependent features**
- **source for startup**

Aztec C Micro Systems

Aztec C is available for most microcomputers in three configurations: The Professional; The Developer; and The Commercial system. All systems are upgradable.

Aztec C68k/Am .... Amiga
source debugger–optional

Aztec C68k/Mac ... Macintosh
MPW and MAC II support

Aztec C86 ..... MS-DOS
source debugger • CP/M libraries

The followng have special pricing and configurations. Call for details.

Aztec C68k/At ..... Atari ST
Aztec C80 ..... CP/M-80
Aztec C65 ..... Apple II & II GS

Standard System $199
- C compiler
- Macro Assembler
- overlay linker with librarian
- debugger
- UNIX and other libraries
- utilities

Developer System $299
- all Standard System features
- UNIX utilities make, diff, grep
- UNIX vi editor

Commercial System $499
- all Developer features
- source for run time libraries
- one year of updates

MANX

C.O.D., VISA, MasterCard, American Express, wire (domestic and international), and terms are available. One and two day delivery available for all domestic and most international destinations.

Manx Software Systems
One Industrial Way
Eatontown, NJ 07724

Aztec C is available on a thirty-day money back guarantee. Call now and find out why over 50,000 users give Aztec C one of the highest user-satisfaction ratings in the industry.

Call 1-800-221-0440

In NJ or outside the USA, call 201-542-2121
Telex: 4995812 Fax 201-542-8386

Circle 152 on Reader Service Card

Circle 275 on Reader Service Card

Importers: It's time to change bad habits.

- Don't think Germans offer high quality only at high prices.
- Don't limit your market survey to Asian products.
- Don't forget to order our catalogue.

Printer Buffer inside cable.
For the average user, most buffers are too complicated.
So we designed a buffered cable with 64K or 256K inside.
Just a cable. As easy to use.
Nearly as inexpensive.



Take out your data.
In a battery-operated buffer. Up to 128K with parallel or RS232-input. Battery will hold data for as long as 3 years. Record and play as often as you like. Carry data to a printer or to another computer.



Share your printer.
Forget these boxes that occupy lot of your desk space. Forget the times when you had to switch manually. We have a cable that allows two computers share one printer automatically.



That's how T-switches should look like!
For IBM-compatibles. 2 printers to one computer. Complete set incl. all cables and a small switch-box. No bulky box on your desk!




Isolating line drivers
If a line driver is not optically isolating, you might face problems arising from different mains supplies. That's why our RS232-drivers are 100% isolated up to 1000 volts.



Data isolators
Transients on the mains supply or electrostatical discharges can cause erraneous data transmissions and even destruction of computers. We offer optical isolators.



Terminal bus.
Connect up to 16 terminals to one 2-wire bus. Save installation costs and gain flexibility and ease of use. MUX-BUS includes optically isolated line drivers.



Interfaces.
We have a complete line of interfaces: 20mA, Atari130, C64/128, Centronics, IEEE488, RS232 and RS422.
The following are registered trademarks: Atari, C64, C128, Centronics, IBM



Austria:	Zahrer, Wien	0222-347671
France:	Neol, Strassbourg	(88) 623752
Switzerland:	Weber&Co, Zürich	01-9302003
USA:	Tectrans, L.A.	(818) 2853121

Manufacturer and Exporter:

wiesemann & theis gmbh
MIKROCOMPUTERTECHNIK

winchenbachstr. 3-5
d-5600 wuppertal 2
west-germany

phone: 202-505077
telex: 859 16 56
fax: 202-511050

comprehensible specifications that characterize this peculiar niche of the software world.

Like many of us, Hugh sees a desperate need for good project-management tools. "Everywhere in business," he writes, "thousands of essentially unrelated dates are pumped into spreadsheets and databases and then pumped out as schedules. Garbage. One date has no relation to another unless there's some hard code behind the data." Yet most commercial packages are overly complex and, as a result, are rarely used.

Hugh cites poor handling of "tasks without resources that are based on time, rather than resource availability. You can kludge your way around this, but who wants to? The classic case is curing concrete. A certain number of calendar days must pass, independent of any resource. You can bet that most packages will not show the concrete curing on the weekend!"

He also blasts a tendency to assign unrealistic starting dates to tasks without precedents. Let's say your project has one isolated task that must be completed before the end of the second month, and it doesn't depend on any other resource used elsewhere in the project. "Most packages will show the task as starting when the project starts. Where is the person in business so virtuous or so unbusy that he can start a task 50 days early? This is a real flaw, or maybe the programmers don't want to fix it because it means several iterations of the calculation algorithm each time you calculate the schedule. The critical path must first be established, then tasks like this have to be calculated *backward*."

But the most disturbing points he raises relate to the overall design philosophy of project-management programs. "The general outlook of the packages is that a department does a few projects, each with a different set of resources, and these projects rarely overlap. Who wants to learn [the programs] for just a few projects?

The place where you need the power is where you have many projects drawing on a common resource pool. You need to be able to keep each resources calendar up to date and have any changes reflected in the individual projects. If one supplier goes on strike, and I have 50 projects that use this supplier, what do I have to do? Open and load 50 DOS files and scroll to the correct calendar and change it? Yuck!

"The other place that most packages fail is in cross-project reporting. When a department has 250 projects to traffic and develop, 250 individual schedules don't do too much good if I'm a supervisor and I've got one person out sick and another on vacation. I need to know, 'What do I *gotta* get out this week?' I know this is a tough problem. The 640K-byte barrier owns part of it, but most packages don't (by their design) acknowledge that this is a real problem. With much heavy breathing, they tell you 1000 tasks, 1600 with EMS, or some such. Gawd. You're out of runway by the time you link the fourth project.

"This kind of reporting is much more important than resource leveling, because many departments work on a 'do or die' type of schedule. Don't tell me you don't have enough bodies to get the job done! Get it done anyway!"

I realize that I've been troubled by the same questions, but I've never been able to identify the cause for my unease. In the future, I'll keep the "Roth Rules for Evaluating Project-Management Software" firmly planted in the back of my brain.

Hugh concludes by urging me to continue reporting on project-management packages. "They are a good way to keep your salary in others' hands. Some of them offer the opportunity to use a computer and make the job harder (as you pointed out). You get to use nifty things like 6-pen plotters. You get to spend several weeks figuring out the yes/no answer to the following preference-screen question: 'Show negative float on Gantt?' And, not to forget, you get to appreciate really simple, elegant, intuitive packages like Q&A and SuperCalc 4."

Amen. ■

Item Discussed

Sprint $199.95
Borland International, Inc.
1700 Greenhills Rd.
Scotts Valley, CA 95066
(408) 439-1060
Inquiry 934.

Ezra Shapiro is a consulting editor for BYTE. You can contact him on BIX as "ezra." Because of the volume of mail he receives, Ezra, regretfully, cannot respond to each inquiry.

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

THE CORPORATE SOURCE

BOFFIN LIMITED

COMPUTERS
HARDWARE
SOFTWARE
PRINTERS

2500 WEST COUNTY ROAD 42 • #5 • BURNSVILLE, MN 55337 • (612) 894-0595

A Small Case For BIG Performance!!!


TOSHIBA




CALL
T1000
T1200F
T1200H
T3100
T3200
T5100
CALL

ZENITH

SUPERSPORT
Dual Floppy
CALL
20 MB HD
CALL
SUPERSPORT 286/20
CALL



MITSUBISHI



New!

MP286L/20

- 11" Diagonal Black & White Display
- 20 MB Hard Disk
- 12 MHz 80286
- 1.4 MB Floppy Drive

Introductory Price

$2695.00

Dual Floppy (1.4 MB) Model
$2195.00

New!

From MegaHertz

Easy Talk 3270
3270 Emulation Card for Toshiba Laptops; Fully supports IRMA & IBM Emulation. Auto-Config. – No Jumper Changes required.
Includes software for 3270 and IND/FILE Transfer Support
$599.00

Easy EGA
EGA Card for Toshiba T1200 and T3100 Laptops. Supports MDA, HGC, CGA & EGA
$299.00

Easy Talk E2400
2400 Baud Modem for the Epson Equity LT
$239.00

Weltec . . .
External 5.25" FDD
$199
Specify TOSHIBA, ZENITH or NEC*
**No cable w/NEC Drive - Cable included in NEC Laptop Box*

MHz INTERNAL MODEMS
1200 Baud **$139** 2400 Baud **$239**
Specify:
Toshiba, NEC EL/HD, Zenith 181/183 or SupersPort

WonUnder
Single card expansion slot for the T1100+, T1200, T3100/20 & T5100 **$299**

Diconix 150P Portable Printer **$299**
Laplink Plus **$79**
When Purchased with any Laptop

- **Competitive Price**
- **Corporate Volume Discounts**
- **Net Terms to Qualified Corporate Accounts**

Prices Subject to Change Without Notice

To Order Call:

(800) 255-4012

IN MN: (612) 894-0595

FAX Number: 894-6175

Make your programs millions of times smarter.

More and more, programmers and workstation builders are using DESQview 2.0 as a development tool. The reason is simple. They can create powerful, multitasking solutions today for the millions of DOS PCs in use today. Solutions comparable to those promised for tomorrow by OS/2.

Some of the applications under development right now using DESQview 2.0 API Tools: CAD, Medical systems, insurance, 3270 mainframe communications, network management, real estate, typesetting, point of sale, education, commodity trading, stock trading and online voting.

The API Advantage

Programmers who take advantage of DESQview's API (Application Program Interface) get access to the powerful capabilities built into DESQview–multitasking, windowing, intertask comunications, mailboxes, shared programs, memory management, mousing, data transfer, menu-building and context sensitive help.

Bells and Whistles

A program taking advantage of the DESQview 2.0 API can spawn subtasks for performing background operations or new processes for loading and running other programs concurrently. It can schedule processing after an interval or at a certain time. It can use DESQview's intertask communications to rapidly exchange data between programs, share common code and data; or interrupt at critical events. It can use DESQview's menuing and mousing capabilities to create menus. And there's lots more it can do.

80386 Power

80386 programmers can take advantage of the 80386's protected mode for large programs, yet run on DOS and multitask in DESQview–side by side with other 80386 and DOS programs. The breakthroughs tha make this possible: DOS Extenders from PharLap Software and AI Architects and DESQview support of these DOS extenders

DESQview Developer Conference

So if you are a developer, looking to create programs with mainframe capabilities, but wanting to sell into the existing base of millions of DOS PCs, come to Quarterdeck's first DESQview API Developers Conference, August 16-18, 198 at the Marina Beach Hotel, in Marina del Rey, California. For more information call or write us.

Come learn about the DESQview 2.0 API and 80386 DOS Extenders. Meet 80386 experts as well as those smart people who are creating DESQview 2.0 API workstations solutions.

And if you want to get a leg up before the conference, ask us about the DESQview API Tools for assembler or C programmers.

Bringing New Power to DOS. DESQview 2.0 API Toolkit.

Quarterdeck


Quarterdeck Office Systems 150 Pico Blvd.,Santa Monica, CA 90405
(213) 392 9851

Circle 219 on Reader Service Card (DEALERS: 220)



BE SECURE, NOT SORRY

Nobody likes to worry about security, but people problems and accidents happen

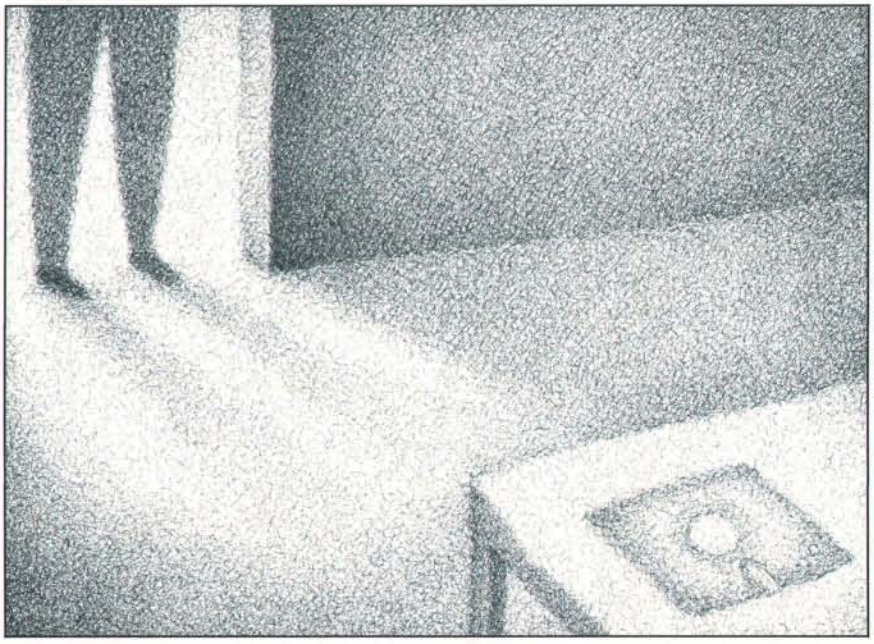

Your hard disk doesn't boot. Or maybe it does boot, but only one file is left, and it seems to be named GOTCHA. Or maybe one of your employees quits suddenly and his or her new employer seems to know who all your customers are. Usually, it takes something like this to get the managers interested in computer security.

Security is not the most glamorous area in computing. Managers don't like it because security systems cost money. Employees don't like it because they think it's too inconvenient. The technical staff doesn't like it because they think it gets between them and the machine.

They're all right, of course. But they're also all wrong. Many things affect security, and not all of them apply to all computer systems. For starters, let's look at why security is important, and why it's worth spending money on.

Time Is Money

While your computers are certainly worth something in themselves, their real value isn't in the hardware. Instead, it's in the information the machine contains and the machine's importance to your operations. If the information had to be located and reentered, how much would that cost you? If the computer is necessary to some facet of your operation, how much would you lose if it were missing and you couldn't do the work without it?

The problem boils down to two areas: the safety of the computer itself and the safety of the information it contains. Because physical security and data security are so different, the solutions to the problems usually seem different also. But, in reality, they are closely related. After all, if someone steals your computer, he or she probably has your data, too.

Physical Security

If you keep people away from your computer, they won't have the chance to steal it or fiddle with the stuff on the hard disk. If you keep it in a safe place, you won't have to worry about anything else happening to it, either. That's the basis of physical security.

Of course, you can't always keep the computer in the safest possible place. The users might not be able to work on it there, for one thing. But you can still keep people from taking the machine or tampering with it. The easiest way is to lock it. The IBM PC AT and most of its clones, as well as the IBM PS/2s, have a built-in lock that is reasonably effective against casual tampering. It secures the case and tells the computer to ignore the keyboard. While a determined person can pry open the case to override this feature, most people won't do that.

Not all computers have a keylock, though. If you can't keep your equipment in a locked room when it's not in use, you can at least lock it inside a cabinet. Again, this provides some security against casual tampering, but some of these cabinets are unwieldy and others provide a convenient way to roll an entire system out the door. If theft is your biggest worry, there are always systems like Anchor Pad that let you lock the computer system to a flat surface such as a tabletop. Then thieves have to steal the table along with the computer—a much more conspicuous act.

Data Security

If your business is like most other businesses, the biggest investment you have in your computer system is the data that's inside it. If that data disappears, you

continued

ILLUSTRATION: DAVE RIDLEY © 1988

could be out of business, or worse. In many cases, the data is worth a great deal more than the computer it resides in.

Protecting that data means preventing people from removing, altering, or copying it, and protecting yourself from losing the use of it through system failure. In the first case, people are the threat to data security. Some people are really out to do you harm. Others are simply careless or not trained properly. And then there's the problem of losing data through ordinary accidents and system failures. In any case, you're out of business, whether you lost your data through the actions of a disgruntled employee or because the head crashed on the hard disk.

Protecting against Loss

Data loss is the easiest problem to protect against. All you need to do is keep a current backup. Then, all it takes is a few minutes to restore your data, and you're back in business. How you back up your data, whether with a software product such as Fifth Generation System's Fastback Plus or a tape drive, makes little difference. What's important is that you do it.

The People Problem

Once you've taken care of protecting yourself against losing the data, then you have to worry about the people. Most instances of data loss that I have come across were the result of accidents. You can reduce the problem of unintentional data loss through training. Once people understand that formatting the hard disk makes it hard to use the data that was on it, they usually won't do it.

However, then there are the people who really want to erase everything or want your information for themselves. This is what most people think of when they think of computer security. This is also the focus of most security products and the area in which password access, encrypted data, and the like become important.

Depending on your type of business, malice may not be a significant threat. Most businesses, however, keep some sensitive information in their computers. It could be related to a firm's bidding process or personnel records, or it could be other data that will give your competition the edge. How do you keep this information secure?

First of all, keep the computer itself in a locked office. It's amazing what people will do out of curiosity, given enough time. Second, lock the computer, if you have one that will lock. Finally, consider some sort of security system.

Items Discussed

Watchdog.....$295.
Fisher International Systems
P.O. Box 9107
Naples, FL 33942
(800) 237-4510
(813) 643-1500
Inquiry 955.

Access II.....$165.
Access II+
With EPROM .....$175.
With halfcard .....$195.
Kinetic Software Corp.
Distillery Commons 240
Lexington Rd. at Payne
Louisville, KY 40206
(502) 583-1679
Inquiry 956.

Security Systems

There are hardware and software systems that will prevent unauthorized people from using the computer and permit others to perform only certain actions. These programs require users to identify themselves, and they require a password to use the computer.

I've already mentioned machines like the IBM PS/2s, which have a lock on the case. You can also set up the PS/2s so that you must enter a password before you can use the computer.

More thorough systems control nearly every aspect of the computer operation. Normally, they do this through a series of menus that control access to the operating system, restricting most users to a few selected operations. These systems do, however, restrict the flexibility of use. You need to decide if the individual case justifies this loss of flexibility.

A couple of the better-known security systems are Watchdog from Fisher International Systems and Access II from Kinetic Software Corp. Both companies base their security systems on multiple access levels through menus and user passwords. Kinetic includes a board that fits IBM PC–compatible computers and forces the machine to boot only off the hard disk.

Learning about Security

Before you get too deep into setting up security systems, it's probably a good idea to learn a lot about them. One interesting source of help is the National Computer Security Center. This organization operates under the auspices of the super-secret National Security Agency, but it exists to help all computer users learn more about security and to help the computer community cope with security issues.

The Center publishes a number of pamphlets, posters, and books that it will send you. You can pick up some of these materials free at computer shows or purchase them for a nominal fee. You can contact the Center at 9800 Savage Rd., Fort Meade, MD 20755, (301) 688-8744. The Center, along with the National Bureau of Standards, hosts the National Computer Security Conference each year. The conference is open to anyone and has tracks for people of all levels. This year it's in Baltimore, starting October 17 and running through October 20. The price for the conference is $150 before October 7 and $175 thereafter.

Does all this sound like a lot of trouble? Well, maybe. Many systems probably don't need a lot of security because they don't do much. But think about your other computers. What would happen to your business if the information in them disappeared or got to your competitors tomorrow?

OS/2 Update

A businessman asked me about OS/2 the other day. He wanted to know if he should put off buying his software until an OS/2 version came out. I advised him not to wait.

As you may remember from my August column, my investigations at COMDEX showed me that there was virtually no software available for use with OS/2, and much of what was could also be found for MS-DOS. Since then, I've gone to PC Expo. The picture hasn't gotten much better. The advice remains the same. If you need software, and there's a DOS version available now, don't wait.


Coming up in future issues—to LAN or not to LAN? Also, does productivity software really help productivity? ■

Wayne Rash Jr. is a member of the professional staff of American Management Systems, Inc. (Arlington, VA), where he consults with the federal government on microcomputers. You can reach him on BIX as "waynerash."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

$299 For 3-D CAD you can't beat by spending thousands more.



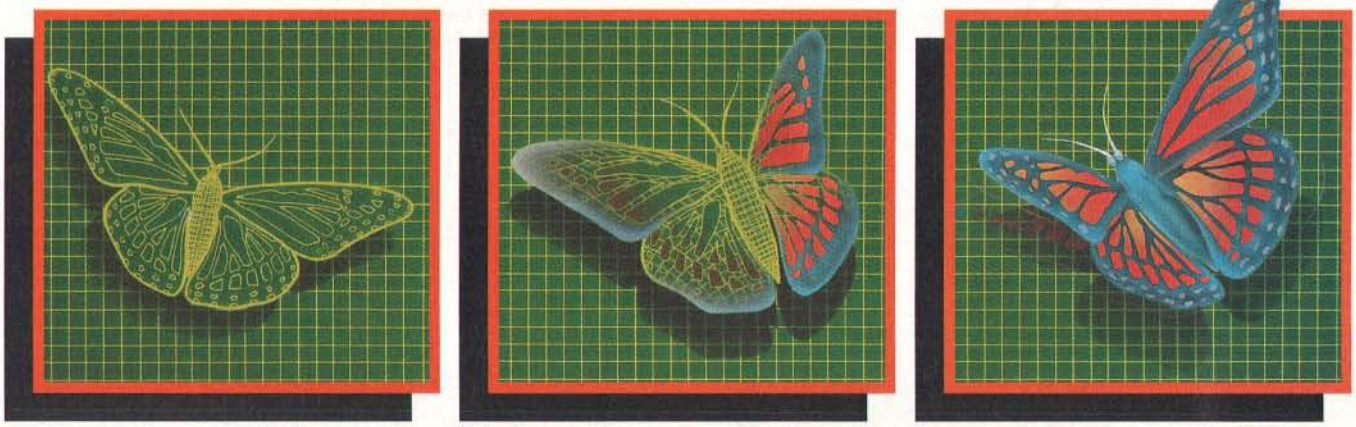

You can spend thousands of dollars for three dimensional CAD software and still not get the power and capability that DesignCAD 3-D offers for a remarkable $299! DesignCAD 3-D is proof positive that you don't have to spend a fortune for quality.

DESIGNCAD 3-D

DesignCAD 3-D allows you to develop and advance any design in 3 dimensional space, while providing you with features such as shading, hidden line removal, printer and plotter support. DesignCAD 3-D's extensive file transfer utilities allow you to: transfer documents to and from IGES, DXF HPGL, transfer to GEM and Post Script and to read ASCII text files and X, Y, Z coordinate files. It allows up to 4 simultaneous views (any angle or perspective) on the screen. Complex extrusions, extensive 3-D text capabilities, auto dimensioning and a host of other features are all included with DesignCAD 3-D, all at no extra charge.

The compatibility that DesignCAD 3-D offers you means that it can be used with almost any PC compatible system. It supports more than 200 dot matrix printers, more than 80 plotters and most digitizers and graphic adapters. DesignCAD 3-D can read drawings from most other CAD systems.

The best reason to buy DesignCAD 3-D is not the low price, the performance or the compatibility. The best reason is the amazing ease of use. DesignCAD 3-D's powerful commands mean that you can produce professional 3-D drawings in less time than you thought possible. In fact, we think you'll agree that DesignCAD 3-D is easier to learn and easier to use than any 3-D CAD system for IBM PC, at any price!

See your local computer dealer for DesignCAD 3-D, or contact:

To quote from P.C. MAGAZINE'S June 14, 1988 issue: "DesignCAD 3-D . . . delivers more bang per buck than any of its low-cost competitors and threatens programs costing ten times as much."

American
Small Business Computers, Inc.
327 S. Mill St., Pryor, OK 74361
(918) 825-4844 FAX 918-825-6359
Telex 9102400302

Call or write for a detailed brochure and a free demo disk.

Circle 20 on Reader Service Card

We've Invented the Future of Instrumentation Software . . . Twice.


With Words With Pictures

LabWindows


LabVIEW

Acquisition

Integrated libraries for GPIB, RS-232, A/D-D/A-DIO plug-in cards, and modular instruments.




Intuitive character-based function panels that automatically generate source code.




Front panel user interface with virtual instrument block diagram programming.

Analysis

Extensive libraries for data reduction, digital signal processing, and statistical analysis.




Over 100 analysis functions plus all the built-in functions of your language.




Over 250 icons for computation and analysis.

Presentation

Flexible high-performance graphics and report generation.



Extensive graphics support for CGA, EGA, MCGA, VGA, and Hercules.



Macintosh Desktop Publishing compatibility.

The Software is the Instrument

LabWindows™—
for the DOS-based PC and PS/2, with Microsoft QuickBASIC or C.

NATIONAL INSTRUMENTS™

12109 Technology Boulevard
Austin, Texas 78727-6204
800/531-4742 512/250-9119

LabVIEW®—
for the Apple Macintosh

Circle 181 on Reader Service Card for LabWindows.
182 for LabVIEW.



MS-DOS, MiniFans, Math, and Mice

Hardware, software, and peripherals make the Mac a multifaceted machine

Back in November 1987, I was looking for some way to reduce the number of computers that inhabit my office and my home. If I could semi-retire a couple of them, I could reclaim some valuable table space. It was about that time that I remembered the AST Mac286 coprocessor board I had seen at the Boston MacWorld in August 1987. In demos held for the press, this board (which is really two boards cabled together that occupy two NuBus slots in a Mac II) seemed to do the job of an 8-MHz IBM PC AT.

Well, I thought, here's a chance to retire a couple of old ATs and still keep basic AT/MS-DOS functionality. So I bought a couple of these beasts, along with a couple of Apple's 5¼-inch PC-compatible floppy disk drives. Installation was fairly painless.

In less than an hour per Mac II, I had a dual-operating-system computer that ran both the Mac operating system and MS-DOS. The Mac286 even shared my existing Mac hard disks by setting up separate DOS partitions on them. Goodbye, ATs. Hello, table space!

Alas, my compact-computing joy was short-lived. I issued a `DIR` command in the Mac286 window, and something weird happened. The video scrolling became slow and jerky—practically unreadable. And that happened with the standard monochrome-emulation mode in the Mac286 window, on an Apple color monitor.

Okay, I can fix that, I thought; I'll try the Hercules-emulation mode. Same problem. Must be the monochrome emulation on a color monitor, I thought. So I tried the CGA emulation. That was even worse. I tried running Microsoft Windows 2.03 under the Hercules emulation. It was so slow, I gave up. In fact, after less than a week, I gave up on the Mac286 altogether. I couldn't get any DOS work done with them because of the severe video problems.

Out came the old ATs. Goodbye, table space.

AST acknowledged the video problems with the driver software and promised fixes. In early June, I received its first update, version 1.01.

What a difference a version number makes! The video performance of the Mac286 is dramatically improved with the 1.01 software. It's so much improved that I can now use my Mac IIs for *all* my DOS work.

Besides improving the display speed, AST polished and cleaned up other parts of the interface. MultiFinder support, which was not quite there in version 1.0, has been upgraded. You can now copy DOS screens to the Mac Clipboard by columns as well as by lines. This makes it a snap to transfer stuff from a DOS database, spreadsheet, or statistics file to a Mac application.

AST will send you the 1.01 software upgrade for free if you are a registered Mac286 owner. If you buy the Mac286 coprocessor boards now, you'll get the 1.01 software. In either case, the software update turns a clever but virtually useless Mac II hardware accessory into a useful, workable solution to running DOS on a Mac.

Skeletons in 4th Dimension

Even though the promised update to 4th Dimension (dubbed version 1.1) has been delayed, Acius has not been sitting back twiddling its corporate thumbs waiting for Laurent Ribardiere to finish it. Over the last several months, Acius has released two inexpensive, but impressive, applications written in 4D: MiniFans and TopGuys.

MiniFans is a compact version of the internal corporate correspondence, customer-tracking, and distributed-information productivity system that Acius uses every day. TopGuys is a special database that contains information on about 400 influential Macintosh specialists, such as journalists, vendors, developers, and so on. In short, it's Acius president Guy Kawasaki's personal Rolodex of MacFolk. It's a very useful tool, as well as fun to rummage through.

MiniFans and (in particular) TopGuys are excellent examples of well-behaved and well-designed 4D applications. Acius wants developers and users to see how the internals work with both; that's part of the reason they have distributed them. Kudos to Acius for a nice job.

Another Acius 4D application that should be coming out soon is called Skeleton, written by technical-support wizard Dave del'Aquila (the same guy who wrote MiniFans). I got a chance to put it through its paces when I visited the Acius headquarters in Cupertino in June.

Skeleton is a good name for this developer's tool, since it provides the framework of a typical 4D application and provides the lowest common denominator of functions that these applications require. It is also fully customizable and extensible. This "skeleton" allows a design to be undertaken in the 4D custom environment, which helps speed application prototyping. Skeleton should be a help to both experienced 4D developers and novices who need some firmer ground to stand on while learning 4D.

Mathematica on the Mac

I've been using the 1.0 release of Mathematica for the Mac II for several weeks now. Even though this release is not bug-free and the documentation is not complete (two problems that Mathematica's publisher, Wolfram Research, expects to fix before this column hits the newsstands), Mathematica is certainly an im-

continued

pressive piece of software.

Mathematica is a general software system for doing math computations. The application will eventually run on a number of computers, including large systems and shared workstations (e.g., Sun, NeXT, and IBM), but its Mac implementation is the first and perhaps the most interesting, because it works fully with the Mac's user interface.

Mathematica works like a real-time electronic whiteboard (formerly blackboards—how times change) that can solve equations. You can type in your equations using numeric forms, but you can also use more advanced symbolic forms. Mathematica's symbolic processing accounts for a good measure of its power.

You can enter simple numerical calculations in Mathematica as you would with an electronic calculator, using Mathematica's syntax. For example, In[1] := N[log [4π]] finds the value of log (4π). But you can also enter symbolic calculations directly, which is something no calculator permits. For example, the entry In[3] := $x^4/(x^{2-1})$ finds the formula for the integral

$$\int x^4/(x^2 - 1)\,dx.$$

Further, you can have Mathematica integrate this expression with the command In[4] := Integrate [%, x]. Mathematica then finds the explicit formula for the integral:

$$\text{Out[4]} = x + \frac{x^3}{3} + \frac{\text{Log}[-1 + x]}{2} - \frac{\text{Log}[1 + x]}{2}.$$

Symbolic algebra and calculus could not be done previously on computers of the Mac II's size; programs of this sort were typically found only on minicomputers or supercomputers. Overall, Mathematica does many different kinds of algebraic computations, including expansion, factoring, and polynomial and rational expression simplification. Algebraic results for some kinds of matrix operations are also possible. In addition, as my example above shows, Mathematica can do calculus, evaluating derivatives and integrals and deriving power series approximations.

Mathematica on the Mac II with an RGB monitor provides a dynamite full-color display that's especially impressive when results are graphed in two and three dimensions. The jazzy display is backed by a function library of more than 400 math functions.

Items Discussed

AST Mac286 1.01..... $1599
(Software upgrade free to registered Mac286 1.0 owners)
AST Research, Inc.
2121 Alton Ave.
Irvine, CA 92714
(714) 863-1333
Inquiry 800.

4th Dimension 1.06.....$695
MiniFans 1.0 ..... $20
Skeleton .999 ..... $20
TopGuys 1.0 ..... $20
4D run-time module $75
(MiniFans and TopGuys require 4D run-time module)
Acius, Inc.
20300 Stevens Creek Blvd.
Suite 495
Cupertino, CA 95014
(408) 252-4444
Inquiry 801.

Mathematica 1.02 Enhanced Macintosh II Edition.....$795
Mac Plus/Mac SE version ..$495
Wolfram Research, Inc.
P.O. Box 6059
Champaign, IL 61821
(217) 398-0700
Inquiry 802.

Music Mouse 1.00 for the Macintosh $60
Opcode Systems
1024 Hamilton Court
Menlo Park, CA 94025
(415) 321-8977
Inquiry 803.

Mathematica is something of a breakthrough product: It will give educators an entirely new and powerful tool in teaching mathematics. Confirmed mathphobic students may very well be drawn into Mathematica's impressive displays and its ability to solve equations quickly and display graphical results; this could enable them to absorb the algebra and calculus that seemed impossible to comprehend from a textbook.

Of Mice and Music

As good as Mathematica is, there is more to life than plotting functions or deriving a Taylor series. The publisher of Music Mouse, Opcode Systems, knows this. Music Mouse takes an approach to making music that is similar to Mathematica's approach to manipulating mathematics: Neither requires you to be an expert in the field to make good use of it.

Music Mouse is a control application that lets your Macintosh make music all by itself, or with the aid of an external speaker or stereo system, or through an external MIDI (musical instrument digital interface) synthesizer. Music Mouse also works as a stand-alone controller for MIDI synthesizers that do not have a keyboard.

It's difficult for me to explain how Music Mouse works since it's such a visceral experience. But here goes, anyway.

Once you start the application, you can control the music you're creating by moving the mouse and pressing keys on the keyboard. The Mac screen gives you an x,y grid display with two different melodic lines that are "wired" to the x-axis and y-axis movements of the mouse. The application sticks in two additional melodic lines, so you have four voices all told.

These two application-supplied lines track the ones you are creating with the mouse, and they can be varied with keyboard control (as can pitch, tempo, and so forth). The screen display gives you some visual feedback for the music created, using what Opcode calls a polyphonic cursor to show the "motion" of the music, as well as the pitch. While the effect and action are hard to describe, the results are stunning, even without hooking up a MIDI synthesizer.

The one big omission with Music Mouse is recording: As yet, it doesn't have a direct recording mode. However, you could use a macro recorder like Tempo II, AutoMac III, or the MacroMaker CDEV (supplied with System 6.0) to record a Music Mouse session. Just make sure that you use the real-time recording modes for these utilities; otherwise, your music will sound strange, indeed.

The Music Mouse can be used by first-time and professional musicians. If you're a novice, it's fun to explore some basics of music composition using this application. One caveat: It won't run properly under MultiFinder. ■

Don Crabb is the director of laboratories and a senior lecturer for the University of Chicago department of computer science. He is also a consulting editor for BYTE. He can be reached on BIX as "decrabb."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

Circle 171 on Reader Service Card →

At last, professional quality scanning... within everyone's reach!

SHIPPED IN 24 HOURS OR SHIPPING IS FREE.

VisionScan™ only $695.00





Affordable line art and halftones without sacrificing your printer.

VisionScan™ delivers quality scans in seconds without tying up your ImageWriter™ printer.
Whether you're scanning photos, graphs, charts, or other original materials for newsletters, marketing reports, layouts or other applications, VisionScan™ produces affordable halftone images and extremely high quality line art.

Scan 3-D...and at no extra cost.

VisionScan can expand your view to 3-D. The roomy overhead scanner accepts objects up to one inch in height and gives you an added vantage point—a value many higher priced scanners can't begin to offer.

FREE DeskPaint™ Software.

The DeskPaint™ Software desk accessory inspires full graphic editing without deserting your desktop publishing program.
It crops, sizes, details, lightens, darkens and embellishes plain art into professional presentations.

Scan and edit text like the pro's with an optional O.C.R. software program, only $199.00.

With the revolutionary Read-it!™ software program by Olduvai Corporation, VisionScan enables your Macintosh™ to read whole pages of text, then store and manipulate them faster than ever before.

Why buy from Mirror?

- *Buying direct saves money*
- *Full 30 day "money back" guarantee*
- *Full 90-day warranty*
- *An on-going commitment to innovation*

To order VisionScan™ and your free DeskPaint™ software package, call toll free: **1-800-654-5294**

VisionScan is a trademark of Mirror Technologies, Inc.
Macintosh and ImageWriter are trademarks of Apple Computer Company.
DeskPaint is a trademark of Zedcor Incorporated.
Read-it! is a trademark of OLDUVAI Corporation.

Prices subject to change without notice.

MIRROR TECHNOLOGIES


You'll see more from Mirror

Mirror Technologies, Inc.
2644 Patton Road
Roseville, MN 55113

VISA · MasterCard · American Express · DISCOVER

Macintosh Business Conference & Exposition
November 1-3, 1988
Anaheim, CA
See Us At Booth No. 171

UserSoft/C Means Business

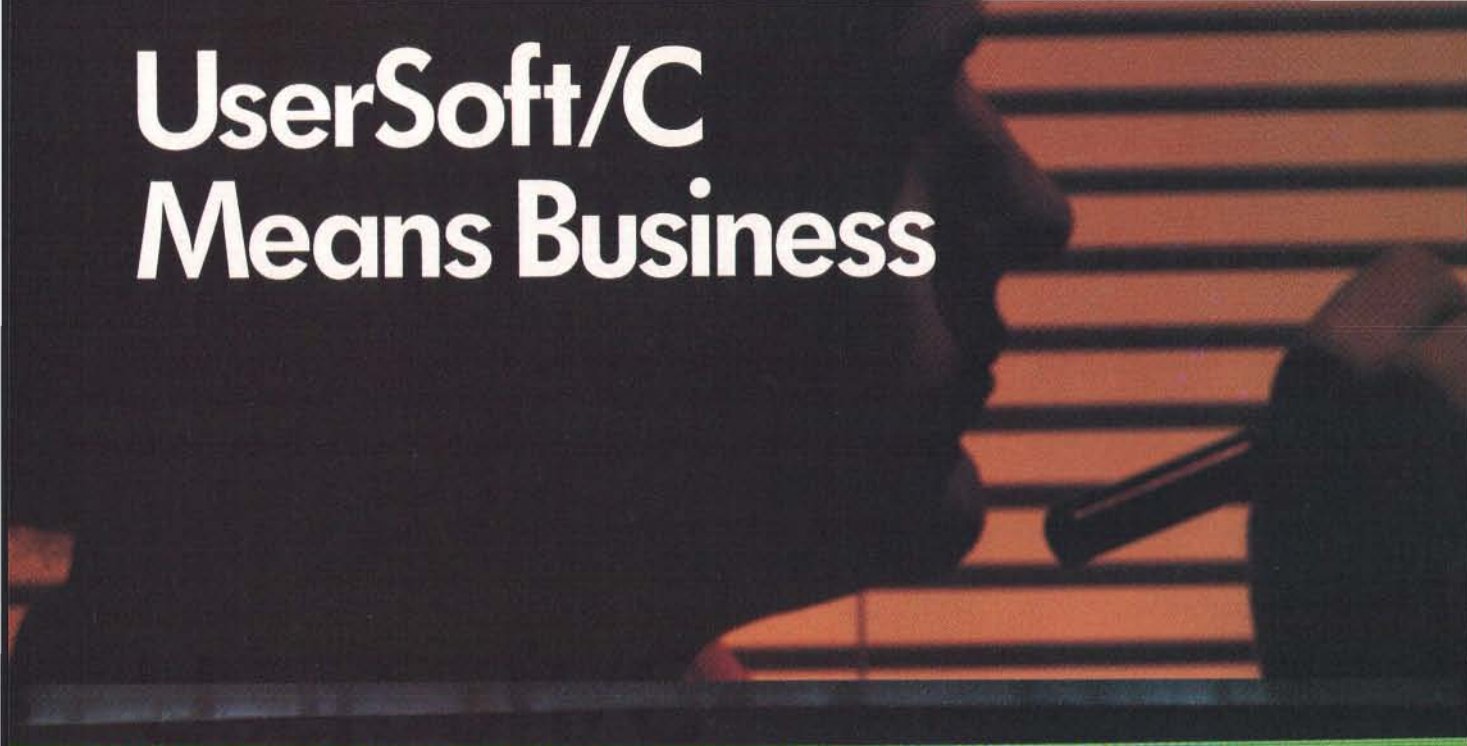

```
** Sample INPUT & OUTPUT of Business C, S/AM, SUPERIOR and SCREEN **

programmed by Mr. Smith's maiden name is Anderson .
Who are you ?Well.... I am Peter
Please enter the filename for Sales History : c:SALES
enter range of names (FROM ... TO ...) : let's start FROM Gibbens TO Maple
>> password for file[c:SALES] is **********

                -------- REPORT --------                    Novem/15 1988 - TUE

  575-83-4990 Gibbens     - sport      $44,637.00DR

  486-00-1533 Hagen       - cosme         $23.20CR

  692-54-7311 Hamilton    - retai        $191.95CR

  575-72-1638 Jackson     - retai      $3,144.06DR

  394-50-1123 Lampman     - sport         $98.63DR

  105-33-6296 MacDonald   - cosme          $2.45CR

*** END ***
```

```
#include "Usersoft.h"
#include "Business.h"      /* includes "SAM.H", "SUPERIOR.H" and "SCREEN.H"*/
main()
 {
    char * name,              * username   ,     * lastname ,
         * from_name,         * to_name    ,
         * createfilespec,    * salesfile    ;
    SAMFILE * infile                  ;                          /*      S/AM */
    char    * ssn, * salesman, division[10];
    VALUE  amount             ;
 /*-------------------- Prompt User for filename and ... ---------------------*/
 initscr() ; _clear();                                           /*     SCREEN */
 printf(
   "** Sample INPUT & OUTPUT of Business C, S/AM, SUPERIOR and SCREEN **");
 at(2,0)   ;
 name IS("Thomas W. Anderson Smith")                          ; /* Business C */
 PRINTF("programmed by &A(4) &W(,-1,1)'s maiden name is &W(L10,-2,1).\n",
                  "Mr.", name                                 name);/* SUPERIOR */
 PRINTF("Who are you ?")                                      ; /*   SUPERIOR */
 READF ("I"-1 am',  W",username)                              ; /*   SUPERIOR */
 PRINTF("\nPlease enter the filename for Sales History :");   ; /*   SUPERIOR */
 SCANF ("&W",salesfile)                                       ; /*   SUPERIOR */
 PRINTF("\nenter range of names (FROM ... TO ...) :")         ; /*   SUPERIOR */
 SCANF ("&I'-FROM' %s &I'-TO' &W",
                  from_name, to_name )                        ; /*   SUPERIOR */
 /*--------- open primary and all secondary(alternative) files -------------*\
 \*_____________Note: @1 are to be replaced by actual filenames_____________*/
 if (OPEN(infile,                                             /*      S/AM */
         REPLACE("FILENAME=@1;UPDATE;PW=PROMPT;","@1",salesfile))
   {
    PRINTF("\n\nAA(c59) &D'Mm5/dd yyyy - DAY3'\n\n",          /*   SUPERIOR */
           "--------- REPORT ---------" , jdate(1988,11,15));
    LOCATE(infile,"NAME<",from_name,NOMORE)                   ; /*      S/AM */
    READNEXT(infile,ssn,salesman,division, PTR amount)        ; /*      S/AM */
     /* read the next record in table(may be alternate) set by LOCATE()  */
    while ((! EOM(infile))
           AND (strcmp(salesman,from_name) >= 0)
           AND (strcmp(salesman,to_name  ) <= 0))
     {
      lastname = TRIM(SPRINTF("&W(,1,1)",salesman))           ; /*   SUPERIOR */
      FWRITEF(stdout,                                         /*   SUPERIOR */
              "  Q'###-##-####' W(20) - A(5)      P'$$$,$##V.99CR'\n\n",
                   ssn,      lastname, division,      amount      );
      READNEXT(infile,ssn,salesman,division, PTR amount) ; /*      S/AM */
     }
    CLOSE(infile)                                             ; /*      S/AM */
    PRINTF("**** End ****")                                   ; /*   SUPERIOR */
   }
  else
   {
    /*------------- File Spec. for creating a S/AM file ---------------------*\
    \*_____________Note: @2 are to be replaced by actual filenames_____________*/
    strcpy(createfilespec,"FILENAME=@2;   ENCRYPT= AUTO; PW='mypassword';
       &KEYPARTS=2;   PARTNAME(2)=NAME;     PN(1)=SS# ;
                      PARTTYPE(2)=A    ;     PT(1)=N   ;
                      PARTLEN(2) = VAR;      PL(1)= 9  ;
                      PARTORDER(2)=ASC;      PO(1)=ASC ;
       &DATAFIELDS=2; DATANAME(1)=DIVISION ;DATATYPE(1)=A; DATALEN(1)=10;
                      DN(2)      =AMOUNT   ;DT(2)      =$; DL(2)     =# ;");
    CREATE(REPLACE(createfilespec,"@2",salesfile))            ; /*      S/AM */
    PRINTF("... Created %s.\n",salesfile)                     ; /*   SUPERIOR */
   }
 } /*** End of MAIN ****/
```

UserSoft/C is the Business C

UserSoft Business C is the financial C compiler that makes sense to both clients and programmers. It is *not just* another C compiler.

Compare the functions:
UserSoft Business C is a superset of Power C, Microsoft C and Turbo C. It has over 1,000 standard and business development functions. The SuperIOR component of UserSoft Business C has the input/output features of COBOL, PL/1, FORTRAN and BASIC and yet can read financially formatted data (eg. $2,109.87 CR). UserSoft Business C has 36 easy-to-use matrix functions for management science (operational research), business statistics, finite element and circuit analysis.

Compare the Portablity:
UserSoft Business C supports the latest features of standard ANSI C. If you already have a C compiler (MS-DOS, UNIX, VS, VMS, MVS, etc.) our Business Development Tool package will commercialize your compiler for only **$199.95** for PCs. This package is suitable for IBM, Wang, Sun, VAX and other systems.

Compare the Documentation:
The UserSoft Business C manual provides actual programming examples for every function — over 1,000 of them.

Compare the Product:
UserSoft Business C is the capability union of C + COBOL + BASIC + PL/1 + FORTRAN + Make + SCREEN:PC version of UNIX's curses + database tools + graphic tools + IBM mainframe's VSAM + a multiple window graphic debugger and more.

Compare the Price:
It's a fraction of what you might expect — the complete UserSoft Business C package is available at the introductory price of **$249.95** while the Business Development Tool Package is available for **$199.95**.

"In our testing, none of your claims have failed. It is to our advantage to use SUPERIOR, SAM and SCREEN for our research. I strongly recommend that all professional program developers use SUPERIOR, SAM and SCREEN for artificial intelligence, scientific, engineering, industrial, financial and especially business related applications."

Dr Paul R Schroeder, PhD (MIT)
President of Maximum Storage, Inc.
Co-Founder of INMOS US
Sole Designer of Mostek 4116
Co-Designer of Mostek 4027

UserSoft Business C: The ultimate C language for business & financial applications

UserSoft Business C is a new ANSI compatible compiler that runs faster and easier than Microsoft C and has more functions than Turbo C®. It cuts coding for business and financial applications by at least 50% - 90%.

If You're Just Beginning,
Usersoft Business C makes learning C a pleasure.

If You're Programming In COBOL, BASIC or FORTRAN,
switching to UserSoft Business C will be easier than you expect. UserSoft Business C retains the best of these languages while simplifying C without loss of any standard C features.

If You're Programming in C,
you may switch to UserSoft Business C or enhance your current compiler with our Business Development Tool package. This will give you UserSoft Business C capabilities on most popular systems such as Microsoft C, Power C, Turbo C, UNIX C, and Wang VS C.

UserSoft Business C: With a new state-of-the art C debugger

UserSoft Business C debugger will reduce the time you spend debugging your C programs by at least a factor of 10. It allows you to debug graphics programs on a single monitor.


UserSoft Business C: The World's most versatile Data Manager and Database Tool

Our Structured/Access Method (S/AM) allows:

- unlimited types of key (including graphics)
- unlimited numbers of key parts
- unlimited numbers of data fields
- mixing of fixed and variable lengths for data fields or key parts
- data encryption from file level down to byte level
- unlimited devices for storing a key part or a data field
- unlimited size for any key part
- unlimited number of tables
- unlimited concurrently open files
- maximum protection on data security

S/AM is well suited for applications to finance, banking, business, imaging, artificial intelligence, knowledge-based information, science, engineeering, simultation and industrial control.

Business Development Tool Package



USERSOFT

UserSoft Systems Limited
Suite 1512, 409 Granville St
Vancouver, BC, Canada V6C 1T2
Telephone 604/681.8872

To order Call: 1-800/663-0322

60 Day Money Back Guarantee
Not Copy Protected

See us at Comdex 88 at the Tropicana Booth — T617

If within 60 days of purchase, this product does not perform in accordance with our claims, call our customer service department and we will arrange a refund.

All UserSoft products are trademarks or registered trademarks of UserSoft Systems Limited. Other brand and product names are trademarks or registered trademarks of their respective holders. Copyright© 1988 UserSoft Systems Limited

Power C is a trademark of Mix Software
MS-DOS, Microsoft C is a registered trademark of Microsoft Corporation
Turbo C is a registered trademark of Borland International
IBM, MVS and VSAM are trademarks of International Business Machine
Sun is a trademark of Sun Microsystems
DEC, VMS and VAX are trademarks of Digital Equipment Corporation
UNIX is a trademark of Bell Laboratory
VS is a trademark of WANG Laboratory

Get your work done before 1991.

The future of personal computing is clear. More powerful PCs. Easier to use PCs. With graphics and character-based programs working side by side. Talking to each other. Multitasking. Windowing. Menuing. Mousing. Getting your work done easier and faster.


Have it all now.

DESQview™ is the operating environment that gives DOS the capabilities of OS/2.™ And it lets you, with your trusty 8088, 8086, 80286, or 80386 PC, leap to the productivity of the next generation. For not much money. And without throwing out your favorite software.

Add DESQview to your PC and it quickly finds your programs and lists them on menus. So you can just point to the program, using keyboard or mouse, to start it up. DESQview knows where that program lives. And what command loads it.

For those who have trouble remembering DOS commands, it adds menus to DOS. It even lets you sort your files and mark specific files to be copied, backed-up, or deleted—all without having to leave the program you're in.

Best of all, DESQview accomplishes all this with a substantial speed advantage over any alternative environment.

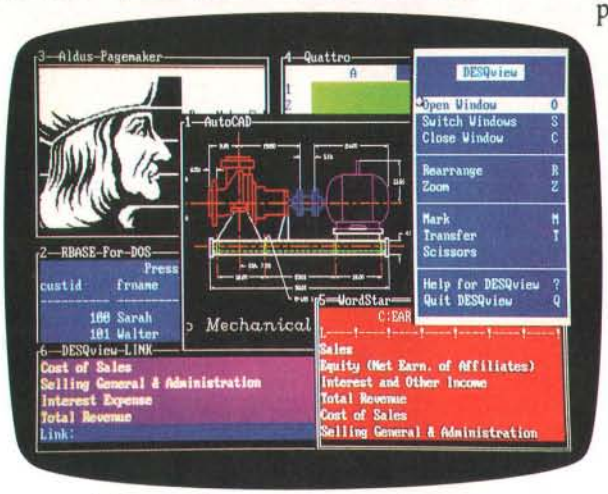

Multitask beyond 640K.

When you want to use several programs together, you don't have to leave your current program. Just open the next program. View your programs in windows or full screen. Open more programs than you have memory for. And multitask them. In 640K. Or if you own a special EMS 4.0 or EEMS memory board, or a 386 PC, DESQview lets you break through the DOS 640K barrier for multitasking. If you have other non-EMS memory expansion products like AST's Advantage or the IBM® Memory Expansion Option, we have a solution for you, too. The ALL CHARGECARD™ 'unifies' all your memory to provide up to 16 megabytes of continuous workspace. DESQview lets you use this memory to enhance your productivity. You can start 1-2-3 calculating and tell Paradox to print mailing labels while you're writing a report in Word Perfect, or laying out a newsletter in Ventura Publisher, or designing a building in AutoCAD.

DESQview even lets you transfer text, numbers, and fields of information between programs.

For programmers, DESQview's API, with its strengths in inter-task communications and multitasking, brings a quick and easy way to adapt to the future. With the API's mailboxes and shared programs, programmers are able to design programs running on DOS with capabilities like those of OS/2.

Fulfill the 386 promise.

For 80836 PC users, DESQview becomes a 386 control program when used in conjunction with Quarterdeck's Expanded Memory Manager (QEMM)-386—giving faster multitasking as well as virtual windowing support.

And when you use DESQview on an IBM PS/2™ Model 50 or 60 with QEMM-50/60 and the IBM Memory Expansion Option, DESQview gives you multitasking beyond 640K.

Experts are voting for DESQview. And over a million users, too.

If all of this sounds like promises you've been hearing for future systems, then you can understand why over a million users have chosen DESQview. And why *PC Magazine* gave DESQview its Editor's Choice Award for "The Best Alternative to OS/2," why readers of *InfoWorld* twice voted DESQview "Product of the Year" why, by popular vote at Comdex Fall for two years in a row, DESQview was voted "Best PC Environment" in *PC Tech Journal's* Systems Builder Contest.

PC MAGAZINE EDITOR'S CHOICE NOV. 24, 1987

INFO WORLD 1986 AND 1987 PRODUCT OF THE YEAR

DESQview lets you have it all now.

DESQVIEW SYSTEM REQUIREMENTS:
IBM Personal Computer and 100% compatibles (with 8086, 8088, 80286, or 80386 processors) with monochrome or color display; IBM Personal System/2• Memory: 640K recommended; for DESQview itself 0-145K• Expanded Memory (Optional): expanded memory boards compatible with the Intel AboveBoard; enhanced expanded memory boards compatible with the AST RAMpage; EMS 4.0 expanded memory boards• Disk: two diskette drives or one diskette drive and a hard disk• Graphics Card (Optional): Hercules, IBM Color/Graphics (CGA). IBM Enhanced Graphics (EGA), IBM Personal System/2 Advanced Graphics (VGA)• Mouse (Optional): Mouse Systems, Microsoft and compatibles• Modem for Auto-Dialer (Optional): Hayes or compatible• Operating System: PC-DOS 2.0-3.3; MS-DOS 2.0-3.2• Software: Most PC-DOS and MS-DOS application programs; programs specific to Microsoft Windows 1.03-2.03, GEM 1.1-3.0, IBM TopView 1.1• Media: DESQview 2.0 is available on either 5-1/4" or 3-1/2" floppy diskette.

YES! I need increased productivity now!

Qty	Product	Format	Price Each	Totals
	DESQview 2.0	❑5-1/4 ❑3-1/2	$129.95	
	QEMM-386	❑5-1/4 ❑3-1/2	$59.95	
	QEMM-50/60	❑5-1/4 ❑3-1/2	$59.95	
	ALL CHARGECARD (Special for DESQview owners)		$200.00*	
		Shipping & Handling	$5 in USA/ $10 outside USA	
		Calif Residents add 6.5%		
		Grand Total		

Name _____

Address _____

City _____ State ____ Zip _____

Payment Method ❑ Visa ❑ MasterCard Expiration ____/____

Account # ❑❑❑❑❑❑❑❑❑❑❑❑❑❑❑❑

Quarterdeck
150 Pico Boulevard, Santa Monica, CA 90405
(213) 392-9851

*This ALL CHARGECARD is designed for the IBM PC AT and PS/2 50 and 60. If you have another type of 80286-based PC, there's a version for you, too. Please call 1-(800) 387-2744 for special ordering information. Offer expires August 31, 1988. Trademarks are property of their respective holders: IBM, OS/2, PS/2, 1-2-3, Paradox, Word Perfect, Ventura Publisher, AutoCAD, Intel, Above Board, AST, RAMpage, Advantage, Hercules, Mouse Systems, Hayes, Microsoft, Windows, TopView.

Circle 221 on Reader Service Card (DEALERS: 222)

THE GOOD NEWS AND THE BAD NEWS


When it comes to performance, there's a price to pay for all those nifty OS/2 features

OS/2 is more important to an OS/2 application than DOS is to a DOS application. Given that, how does OS/2 perform relative to DOS? Rarely better, often only a wee bit worse, and sometimes a lot worse. As a multitasking platform, it performs better than expected.

How do I know? Simple—I ran some benchmarks. Benchmarks are one of life's sordid pleasures. Artists often say, "Everyone's a critic." Hardware and software designers could say, "Everyone's a benchmarker." Another reason to do benchmarks is the interesting mail you get after writing articles.

OS/2 is more important to an OS/2 application than DOS is to a DOS application because, as I said last month, OS/2 is a true operating system and DOS is not. If a DOS application needs to write to the screen, it can allow DOS services to do it, or it can write directly to the video buffer itself. Allowing DOS to put the characters on the screen ensures compatibility across machines and versions of DOS, but it sacrifices speed. A DOS application requiring snappy screens can always opt to bypass DOS. Under OS/2, an application's I/O must go through the operating system—hence the interest in OS/2's performance.

An associate and I have benchmarked OS/2 services, using a combination of simple programs and more complex systems to answer a number of questions. The questions and answers, summarized, follow. (Note: Whenever I say "OS/2," I mean "protected-mode OS/2," unless I specifically mention OS/2's DOS-compatibility box.)

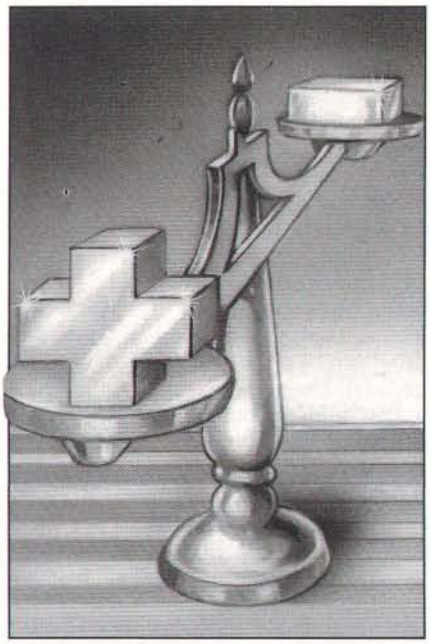

Does a program run faster under DOS or under OS/2?

OS/2 is, in general, up to 20 percent slower than DOS, except for disk I/O. Unbuffered disk I/O is about 50 percent slower under OS/2.

Does a program run faster under DOS or under the OS/2 DOS-compatibility box?

The compatibility box runs programs up to 4 percent slower than DOS, except for disk I/O. Disk I/O can be 50 percent (or more) slower under the compatibility box.

Microsoft claims improved video I/O with OS/2. Are OS/2 video writes faster?

In some cases, yes: `TYPE` writes to the screen over twice as quickly under OS/2. In other cases, the result is a toss-up.

If you run multiple programs under OS/2, how great is the multitasking overhead?

Fairly low. It appears that you pay for multitasking up front, with the 10 to 20 percent system overhead. Extra per-task overhead is fairly small, no larger than 2 percent.

How does the compatibility box affect OS/2 multitasking overhead?

Radically. By design, the compatibility box does not run at all when in the background. When the compatibility box is running a DOS program in the foreground, the background OS/2 processes slow down by a factor of 100 to 500 times.

How does the choice of processor chip affect DOS versus OS/2 comparisons?

Surprisingly, the ratios of DOS times to OS/2 times do not vary much from the 80286 chip to the 80386 chip.

How much slower or faster does a program run in OS/2 background, compared to foreground?

That depends on the `PRIORITY=` parameter. With `PRIORITY=ABSOLUTE`, there is no difference for CPU-intensive tasks. Screen writes are actually slower in the foreground than in the background, because background screen writes are made to regular memory, while foreground screen writes are made to slower video memory.

With `PRIORITY=DYNAMIC`, the background process seems to wait for the foreground process to complete before it starts. (Yes, it's strange, and I'll explain further next month.)

Now let's look in detail at the benchmarks.

To the Bench

What would a benchmark suite be without the venerable Sieve of Eratosthenes? We ran the Sieve (a general compute-bound integer program), the Savage test (a floating-point test), and three tests designed to isolate video response and disk speed.

To ensure consistency, we used Mi-

continued

ILLUSTRATION: TOM CENTOLA © 1988

Circle 122 on Reader Service Card

IEEE-Z

IOtech has the widest selection of *easy-to-use* interfaces & software for IEEE 488 (GPIB/HPIB) systems.

- Instrument & plotter controllers (internal & external) for PCs, PS/2s, & Macintosh
- Converters from IEEE to RS-232/422, digital I/O, modem, real-time clock, SCSI, & analog I/O
- IEEE bus extenders via RS-422 or fiber-optics
- 512K IEEE data buffers & expanders
- Software for IEEE control from languages & Lotus 1-2-3®
- Menu-driven graphics & analysis software
- *30 day money-back guarantee*
- *2 year warranty*
- ***Call for your FREE Technical Guide***



IOtech...the choice is easy

IOtech

(216) 439-4091 Telex 6502820864 Fax (216) 439-4093

25971 Cannon Road • Cleveland, Ohio 44146

London (0734) 86-12-87 • **Paris** (1) 34810178 • **Zurich** (01) 821 944 **Milan** 02-4120360 • **Linkoping** 013 11 01 40 • **Amsterdam** 01830-35333 **Sidney** (2) 452 3831 • **Munich**, and other European, North African, and Middle East countries not listed (089) 710020.

Table 1: *Differences in the architectures of Intel's 80x86 microprocessors have led to the development of different memory models.*

Memory model	Number of code segments	Number of data segments
Tiny	One single segment shared for code and data	
Small	1	1
Medium	1	Multiple
Compact	Multiple	1
Large	Multiple	Multiple
Huge	Multiple; data structures can be > 64K bytes	

crosoft's dual-mode C and BASIC compilers to generate both real-mode (DOS) and protected-mode (OS/2) code from the same source. Whenever possible, we just compiled and linked one program, then bound it. ("Bind" is Microsoft's term for subjecting a program to a converter that renders it able to run under DOS or OS/2.)

Absurdities in the architectures of the Intel line of processors have led to a number of "memory models" for 80x86 programs, as shown in table 1. Examples of programs in the small and medium categories include many small utility programs and, of course, benchmarking programs, but few of the large popular business applications.

The Sieve benchmark ran 1 or 2 percent slower in the compatibility box and 4 or 5 percent slower under OS/2 (see figure 1). However, with larger memory models, OS/2 was up to 44% slower on a 386 machine and 18% slower on an IBM PC AT (due, no doubt, to their different memory architectures.)

Results of the Savage test (see figure 2) were consistent; the compatibility box slowed the programs by a few percent, and OS/2 slowed them by about ten percent on the 386 and 5 percent on the AT.

We tested video I/O with a simple test designed to `TYPE` a file to the screen 100 times—first under DOS, then under OS/2. The tests were done on a 16-MHz 80386 with a Compaq VGA board.

Under DOS, the task took 60.4 seconds, while OS/2 took 27.1 seconds. Impressive. But then we created a simple program that writes lines to the screen until it runs out of time (15 seconds). The results contradicted those of the first test. In this case, DOS was able to write 2171 lines, while OS/2 wrote only 1820 lines. We wrote the program in Microsoft BASIC and compiled it for both DOS and OS/2, using the BASIC 6.0 dual-mode compiler. Obviously, OS/2 screen handling can be faster than DOS, but not always, depending on how you do it.

Disk Access

Our preliminary tests showed that OS/2 was a bit slower at disk access than DOS. The Norton Utilities provided a simple test: We ran `DISKTEST` under DOS, and then in the compatibility box. With disk caching enabled, OS/2 operated nearly as fast as DOS without a cache enabled. Without the cache, OS/2's performance was miserable: 1369.8 seconds, compared to 90.3 seconds for DOS.

OS/2's performance (relative to DOS) suffers significantly in programs that do a lot of disk input and output and for programs that use more than 64K bytes of data. While the first category may not apply to many programs, recall that large memory access was one of the principal reasons for developing OS/2 in the first place. Good disk performance is, of course, important for many applications.

As a final DOS versus OS/2 comparison, we used C code from an August 1984 BYTE article, "Benchmarking UNIX Systems" by David F. Hinnant. The results are shown in table 2. One interesting number comes up: Notice that, despite the fact that all the C programs run faster under DOS than under OS/2, the Dhrystone runs faster under OS/2! Bear in mind that there is nothing in the Dhrystone that isn't in the other tests. Could there be a "benchmark detector" in the Microsoft C 5.1 compiler?

OS/2 Tip of the Month: Making DOS and OS/2 Coexist

If you use the Microsoft Developer's Toolkit, you know that Microsoft included a neat feature whereby your program will prompt you at boot time with

```
Boot: Enter for OS/2, ESC for DOS
```

By pressing the Escape key or the Enter key, you can boot either operating system. It's called the "dual boot" feature. For some unknown reason, IBM left it out of its OS/2.

continued

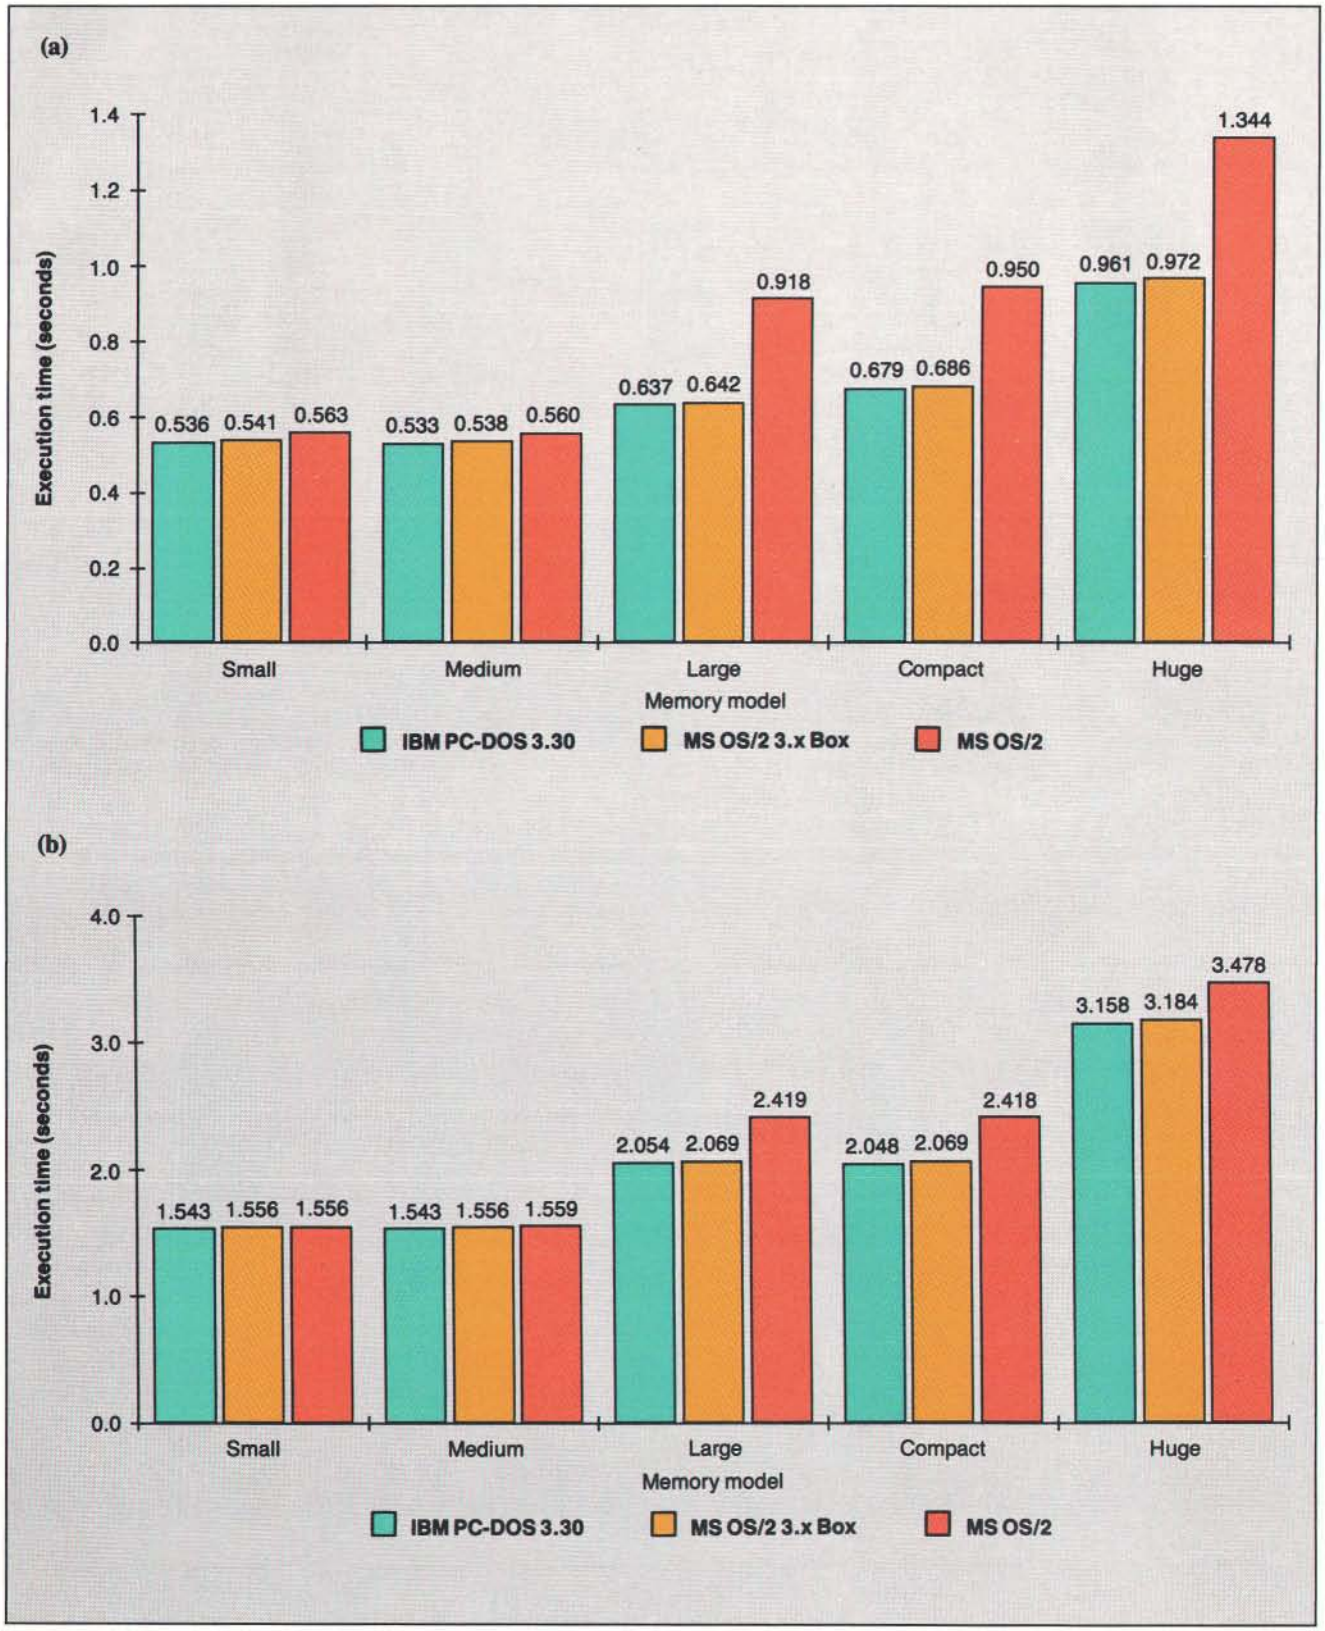


Figure 1: *According to my tests with small memory models, the Sieve of Eratosthenes took somewhat longer to run in the compatibility box and in OS/2 protected mode than in DOS. Using larger memory models, however, OS/2 took as much as 44 percent longer on a 16-MHz Trillian Power Systems 386* **(a)**, *and 18 percent longer on an 8-MHz IBM PC AT* **(b)**.

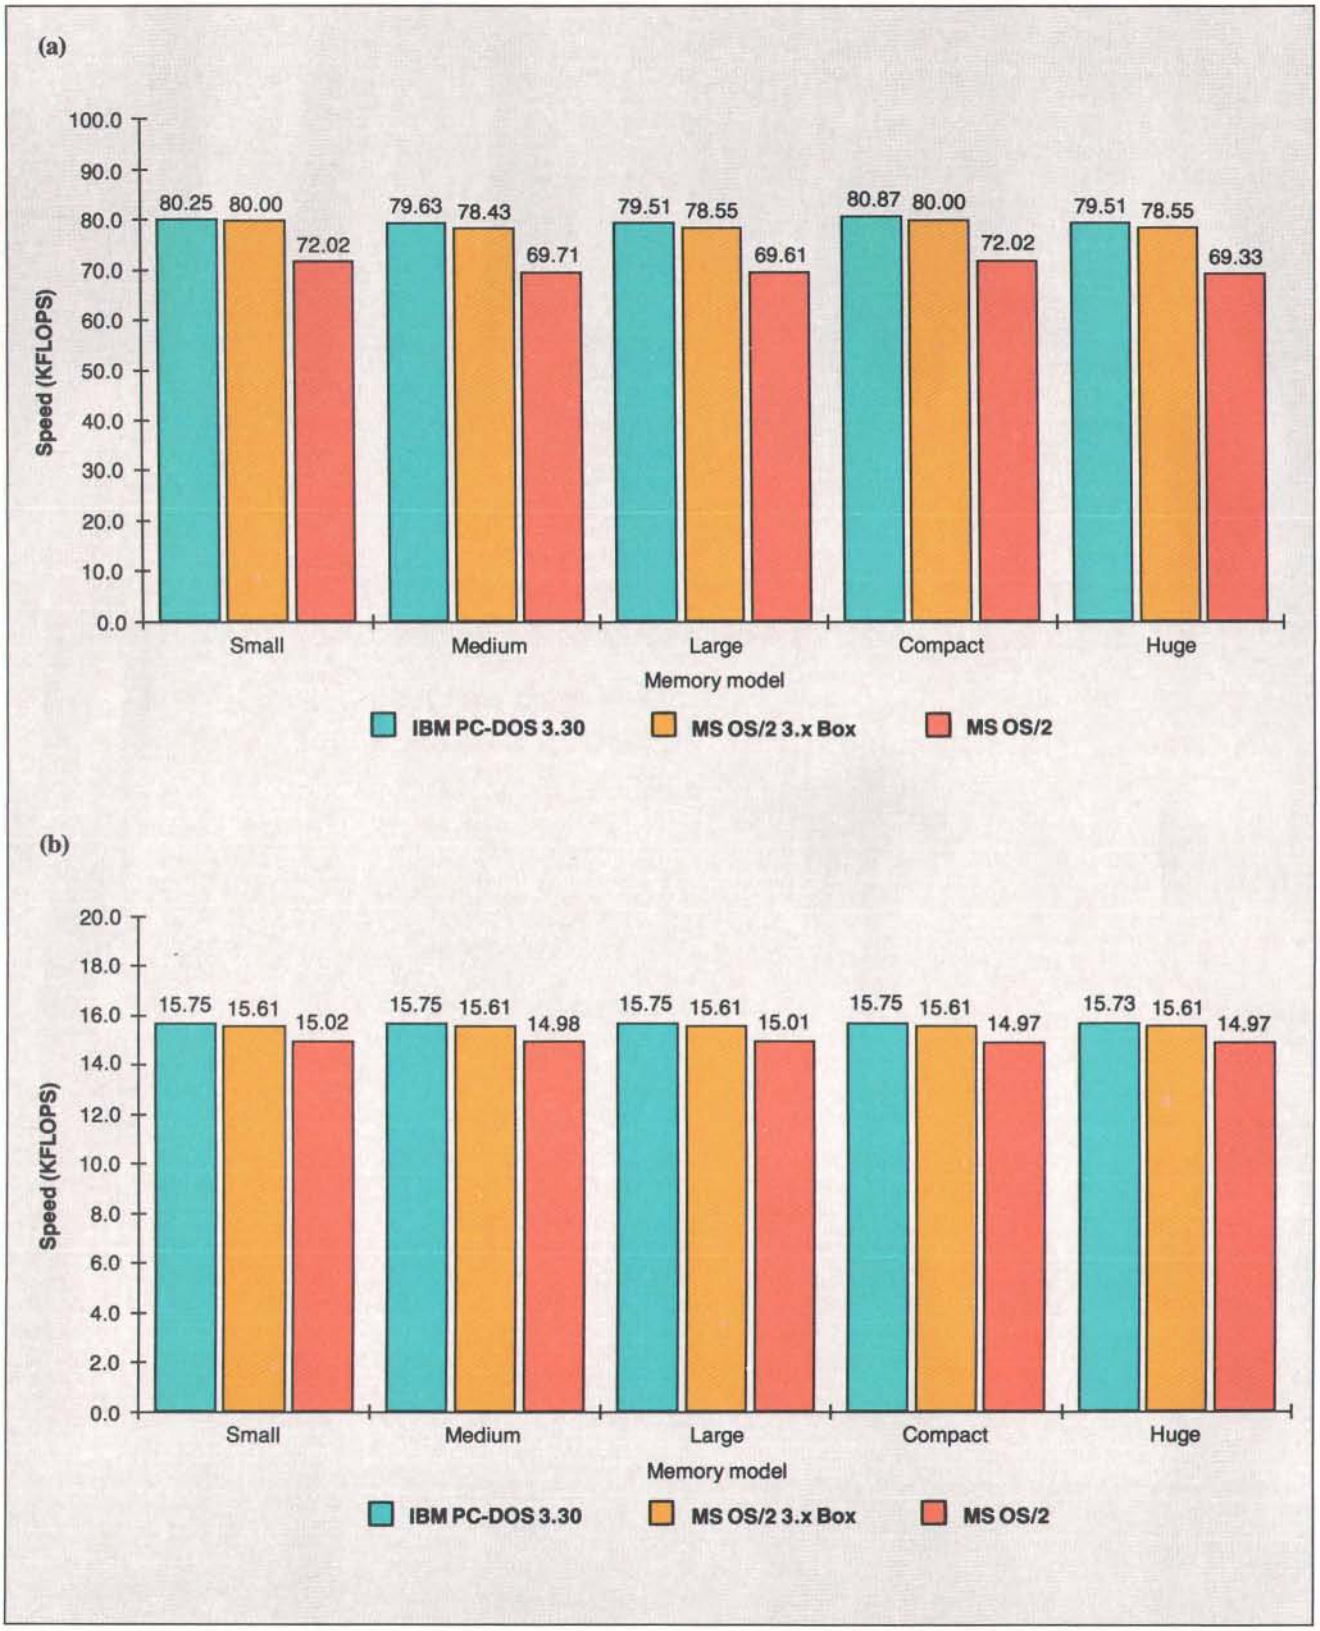


Figure 2: *Floating point rate (in kiloflops) of the Savage floating point benchmark run under DOS, the OS/2 compatibility box, and OS/2 protected mode. Note that the compatibility box slowed the programs by a few percent, while OS/2 slowed them by about 10 percent on the Trillian Power Systems 386* **(a)**, *and 5 percent on the IBM PC AT* **(b)**.

Table 2: *Results of UNIX benchmarks run under DOS, the OS/2 compatibility box, OS/2 protected mode, and OS/2 with an editor running in the compatibility box in the foreground. (Times normalized to 1.00 for DOS 3.3.)*

Test name	DOS 3.3	Compat. box	Pure OS/2	OS/2 w/editor in compat. box
Copy char array	1.00	1.02	1.06	N/A
Copy char array using pointers	1.00	1.01	1.05	111.11
Loop using auto int indexes	1.00	1.01	1.05	111.11
Loop using static int indexes	1.00	1.01	1.05	111.11
Loop using 2 register variables	1.00	1.01	1.06	104.17
Loop using 5 register variables	1.00	1.01	1.05	108.87
Int arithmetic	1.00	1.01	1.05	100.00
Long int arithmetic	1.00	1.00	1.05	90.91
Float arithmetic	1.00	1.03	1.16	100.00
Double arithmetic	1.00	1.06	1.14	142.86
Address arithmetic w/char ptr	1.00	1.01	1.05	111.11
Address arithmetic w/struct ptr	1.00	1.01	1.05	90.91
User C function call overhead	1.00	1.00	1.04	90.91
System call overhead (getpid)	1.00	1.01	24.39	N/A
Library string length function	1.00	1.01	1.09	90.91
Library string copy function	1.00	1.01	1.08	100.00
Library string compare function	1.00	1.01	1.06	100.00
Savage floating-point test	1.00	1.01	1.10	111.11
Dhrystone general benchmark	1.00	1.01	0.88	90.91
Copy file, buffered stream I/O	1.00	1.22	1.10	111.11
Copy file, unbuff low-level I/O	1.00	1.88	1.34	N/A
Copy file, buff stream blocks	1.00	1.01	1.05	142.86
Copy file, unbuff low-lvl blocks	1.00	1.01	1.14	111.11
Seek/read in file, buf stream	1.00	1.33	1.11	200.00
Seek/read in file, unbuf low-lvl	1.00	1.54	1.23	500.00
Dummy report with qsort	1.00	1.37	1.37	22.73
Dummy report with shellshort	1.00	2.07	1.95	N/A

N/A refers to timer overflow or lack of comparability.

Why return to DOS, when we have the compatibility box? Well, I'll take the matter up entirely in a later column, but basically because the compatibility box is only about 80 percent compatible with DOS, and because it severely restricts your working space (maximum available memory is not 640K bytes, but about 530K bytes). Take my advice: Don't burn the DOS manual yet.

The answer: Partition your hard disk drive into C and D drives, using the DOS `FDISK` command. Format the separate drives. Put your DOS data on drive D, and set up OS/2 to boot from drive C. There is no way to `FORMAT D:/S` under DOS, but the next best thing is to create a separate boot floppy disk. Just put your usual `AUTOEXEC.BAT` file on it, then add the lines

```
set comspec=d:\command.com
```

and you're all set. Then write IBM a letter demanding the dual boot feature in the next release of OS/2.

Next month, I'll take a look at multitasking benchmarks: benchmarking OS/2 against *itself*. ■


Mark Minasi is a managing partner at Moulton, Minasi & Company, a Columbia, Maryland, firm specializing in technical seminars. He can be reached on BIX as "mjminasi."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

Circle 119 on Reader Service Card

Integrand's new Chassis/System is not another IBM mechanical and electrical clone. An entirely fresh packaging design approach has been taken using modular construction. At present, over 40 optional *stock* modules allow you to customize our standard chassis to nearly any requirement. Integrand offers high quality, advanced design hardware along with applications and technical support *all at prices competitive with imports.* Why settle for less?

Rack & Desk PC/AT Chassis

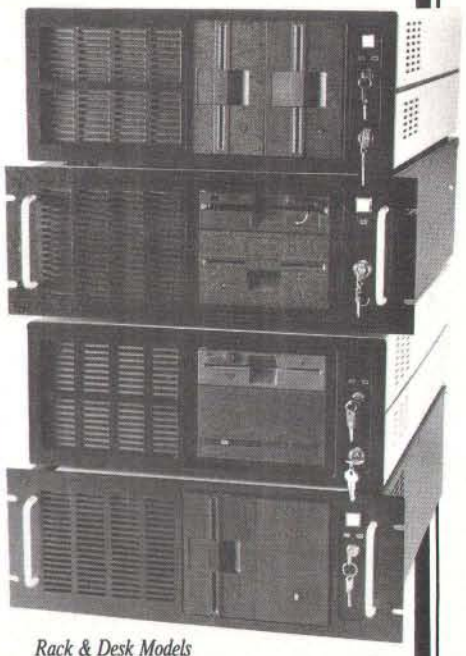


Rack & Desk Models
Accepts PC, XT, AT Motherboards and Passive Backplanes
Doesn't Look Like IBM
Rugged, Modular Construction
Excellent Air Flow & Cooling
Optional Card Cage Fan
Designed to meet FCC
204 Watt Supply, UL Recognized
145W & 85W also available
Reasonably Priced

INTEGRAND
RESEARCH CORP.

Call or write for descriptive brochure and prices:
8620 Roosevelt Ave. • Visalia, CA 93291
209/651-1203
TELEX 5106012830 (INTEGRAND UD)
EZLINK 62926572
We accept BankAmericard/VISA and MasterCard

IBM, PC, XT, AT trademarks of International Business Machines. Drives and computer boards not included.

Intel announces

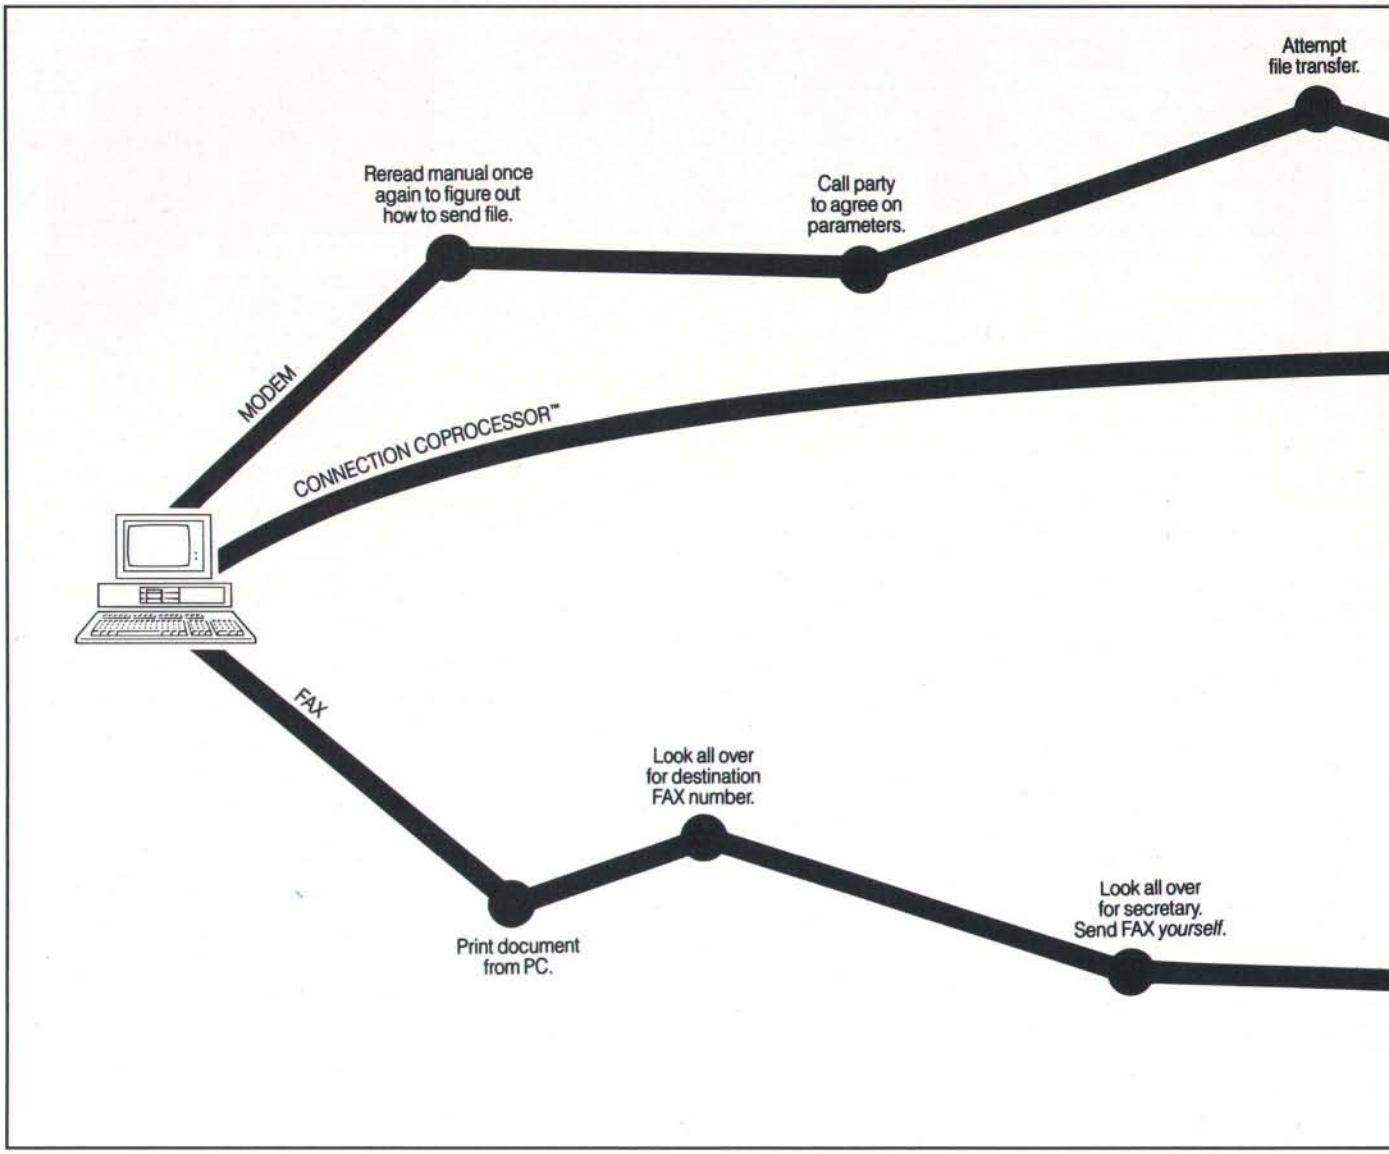

Announcing the first non-stop communications route between businesses anywhere in the world.

Intel's Connection CoProcessor.™

It's a whole new way to send and receive programs, files, text, graphics and electronic messages. Not just between PCs, but with fax machines as well.

The Intel Connection is a new communications coprocessing board that frees your PC from the task of communicating.

Which means you can work on your computer non-stop—even while sending a document as big as the New York phone book.

Now your faxes or files can fly cross country. And you can still be zooming around in your flight simulator. Or writing that letter to your biggest account. Or recalculating your spreadsheets for tomorrow's meeting. Without interruption or downtime.




And when you fax, there are no more stopovers at the printer, or cooling your heels in line at the fax machine. Because Connection lets you do everything without leaving your PC.

And when you send files directly to

©1988 Intel Corporation. Connection CoProcessor is a trademark of Intel Corporation. WordPerfect is a registered trademark of WordPerfect Corp. Ashton-Tate is a registered trademark of Ashton-Tate Corporation. Borland is a registered Microsoft is a registered trademark of Microsoft Corporation. *CAS (DCA/Intel Communicating Application Specification.)

non-stop flights.

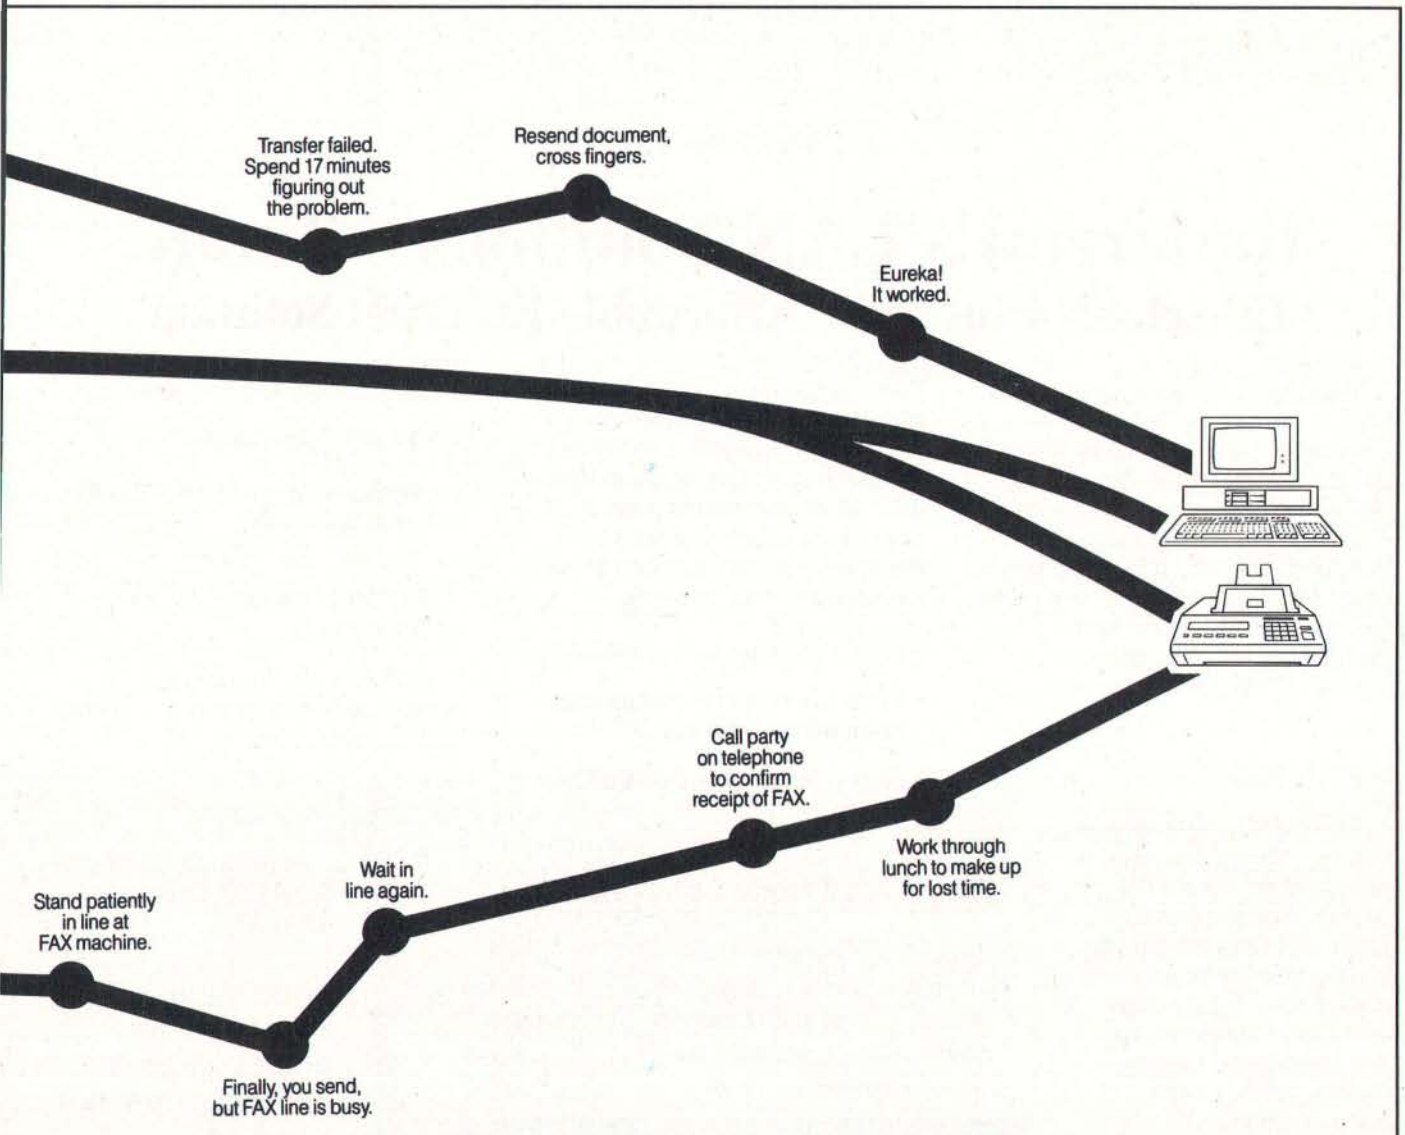

another Connection-equipped PC, you won't have to fiddle around with modem parameters or protocols. Because the Connection CoProcessor sets them for you. At 9600 bps.

Best of all, Connection supports CAS,* a new communication standard that is supported by major software and hardware developers like Ashton-Tate,® Borland,® DCA,® Microsoft,® and WordPerfect.® Which means you can send, for example, a word processing file to your London office, without ever exiting your WordPerfect program.


You just send the document directly from your application. That's it. There isn't any complicated communications software to learn.

And everything is backed by toll-free technical support and a five-year warranty from Intel.

So what are you waiting for? Call 800-538-3373 now for a free demo disk.

Because with Intel's Connection CoProcessor, communication is really going to take off.

intel®

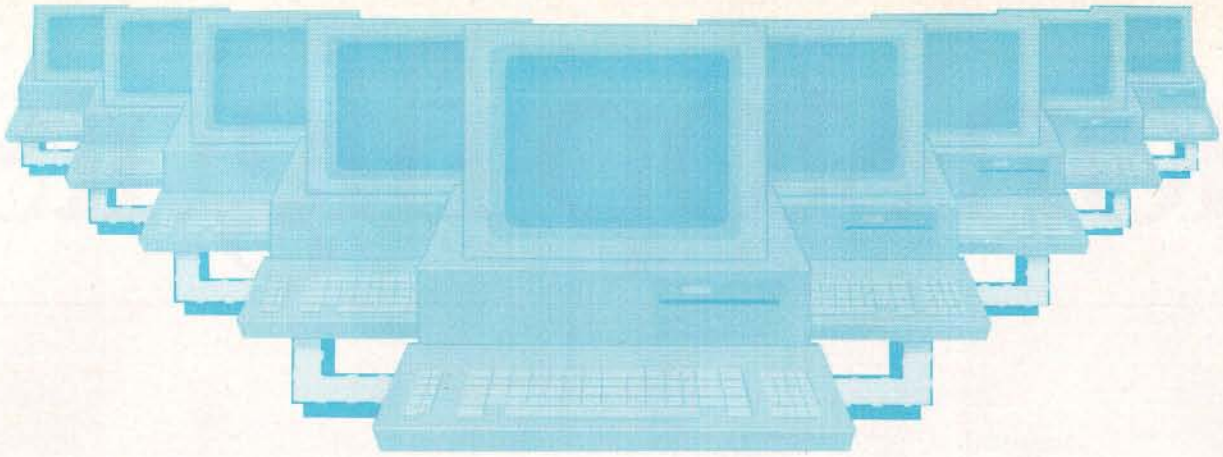

Tomorrow's LAN Solutions – Today.

EtherLAN Plus™/The Affordable Ethernet Solution

In today's LAN world, every new LAN manufacturer seems to have a new idea of what a network should be. Standards for the industry are few and far between, but are there if you want to pay for them. Wouldn't it be nice if for once you could buy a LAN system, at a price you can afford, and be fully compatible with the ethernet standard? Well now you can!

Turn Key Ethernet

EtherLAN is here to give you everything you need to set up an ethernet LAN system. You'll receive the EtherLAN network adapter, 25 feet of thinwire ethernet coax cable, T connector and easy to understand Installation and User's Guides, all for one low price. In addition to this, you'll also receive complete software needed to get your new EtherLAN system up and running quickly. You'll get NETBIOS software and also a complete network operating system to make using your new EtherLAN system even easier.

SimpleWARE™ Makes EtherLAN Unbeatable

The operating system you'll get works as a shell above DOS, so all your normal DOS programs will run on EtherLAN as well as locally.

Even better yet, you can use standard DOS commands to control your network, so you are not stuck spending hours to learn a new set of commands. The operating system functions transparently, so you won't even know you're on a network.

Features You Can Rely On.

- Fully ethernet and cheapernet compatible (IEEE 802.3).
- Fast — a full 10,000,000 bit per second.
- NO dedicated servers are required.
- Transparent operation —operates as a shell above DOS.
- Easy to use DOS type commands or pop up menus.
- Share disks, subdirectories, printers and plotters.
- DOS file and record locking.
- Up to 5 printers per server.
- Time and Date sharing.
- Electronic Message System.
- Low memory requirements.
- NETBIOS compatible.
- Everything you need is included at one low price.

The best news of all is the price.

At only $699.95 per node, you get all hardware, software, cabling and manuals needed.

Introductory Offer

Four Node Kit for only $2499.00. Save over $300.00.

EtherLAN 6 Node Comparison

500 Kbytes	Read and Write	Retail
EtherLAN	11 and 10 seconds	$4199
3Com®	14 and 12 seconds	$5670*
Novell SFT®	10 and 9 seconds	$8265*

*Figures from PC Magazine.

With features like these, and an affordable price per node, how can you lose?

Call Toll Free
1-800-262-8010
1-714-529-8850 (in CA)

VISA, M/C, COD, or Prepaid orders accepted.

See us at COMDEX Booth #B1540


Simple Net Systems, Inc.
545 W. Lambert Rd., Suite A
Brea, CA 92621
FAX: (714) 529-2413

Requires IBM PC/XT/AT or compatible, running DOS 3.10 or higher. EtherLAN is a registered trademark of Simple Net Systems, Inc. Other brand and product names are trademarks of their respective holders.

Circle 239 on Reader Service Card (DEALERS: 240)

BACK TO THE FUTURE AGAIN

Will Prodigy, the latest incarnation of computer conferencing for the masses, bring information services to a home near you?

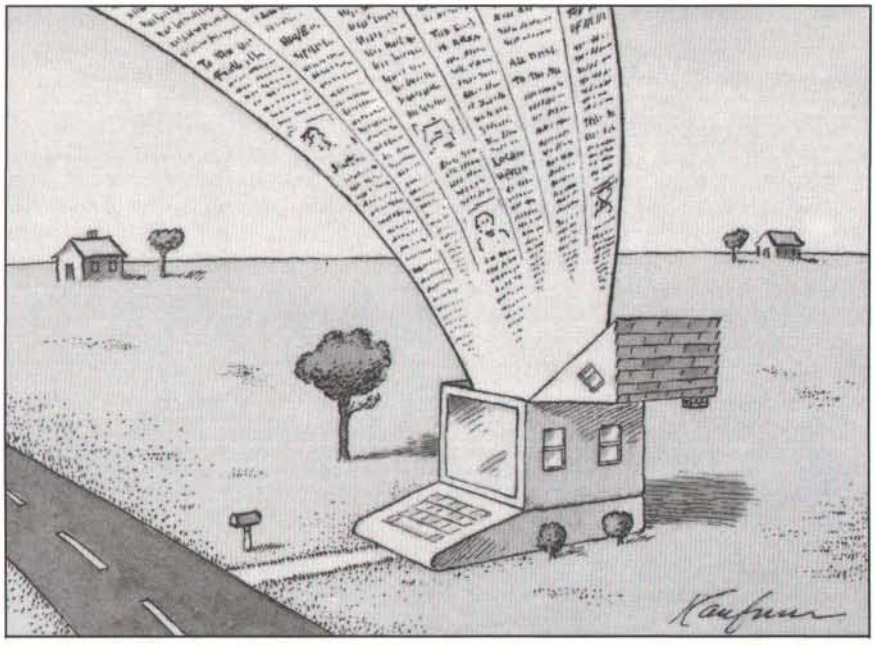

In the 1950s, futurists claimed that people in the 1980s would be commuting from their rooftops via personal helicopters, filing flight plans instead of fighting freeways. In 1959, U.S. Postmaster General Arthur E. Summerfield predicted, "Before man reaches the moon, your mail will be delivered from New York to California, to India, or to Australia by guided missiles. We stand on the verge of rocket mail."

History ultimately betrayed these predictions. Certainly in today's high-tech, ultrahip global village, such outlandish predictions would not be foisted on the public, would they? Don't believe it at all. Let's go back to the future for a minute.

It's early in the 1980s, and the burgeoning information age is being hyped by two videotex systems: Times Mirror's Gateway and Knight-Ridder's Viewtron. A perfect marriage, or so it seemed. The parent companies dealt in delivering information. They thrived on it. So now they sought to launch the next wave in information delivery: news and assorted esoteric services delivered via your TV.

However, both services flamed out. They were victims of high operating costs, perplexing user interfaces, and—most of all—flaccid consumer response. These companies should have known better than to make the American family choose between reading the day's headlines and watching *M*A*S*H* (reruns notwithstanding). *M*A*S*H* won hands down.

Back to the Drawing Board

Still, the idea of electronically delivered services, accessible from the comfort of your home, is a good idea. And a good idea has a way of hanging around until the time is right. Say hello to a good idea: Prodigy, the information-age equivalent of personal helicopters (easing daily tasks) and rocket mail (offering effective and inexpensive communications).

"We see our major competition being the traditional way people go about doing their everyday tasks," says Robert Caviglia, Prodigy's branch sales manager in the San Francisco area. There is a small catch. Prodigy's success is directly linked to the infiltration of microcomputers into the American home. By industry estimates, there are roughly 13 million of them in homes today, with slightly over 1 million of those hooked to a modem. Prodigy believes the American home is just now beginning to realize that having a microcomputer is more than a novelty.

"People aren't afraid of the PC anymore," says Dave Waks, Prodigy's director of technology and a charter member of its development team. "We are a service for people who want to use the PC to accomplish things, to make their lives easier, use their time better, gratify themselves, educate themselves."

Making the Future Work

With a work force of some 750 people, the Prodigy team has cleared extensive technical hurdles (like building its own network to carry Prodigy services) and is now working on attracting the paying customer. Three initial markets were chosen in June: San Francisco, Atlanta, and Hartford, Connecticut.

There are two prime factors in Prodigy's success equation: price and performance. Pricewise, a flat fee of $9.95 per month allows you unlimited access to the service. This "all you can eat" fee may be Prodigy's savior. Other on-line ser-

continued

ILLUSTRATION: ROBERT KAUFMAN © 1988

vices charge on a per hour basis. If you use Prodigy just for its electronic mail, you'll more than make up the $9.95.

And for that flat fee, you get up to six accounts. That means six different people can use the system for the same price. Each account has a different ID number.

Prodigy's ability to offer a low rate stems from two factors. First, its low rate is largely subsidized by more than 80 national companies, each paying upward of $20,000 for the privilege of advertising to Prodigy users. It's a captive market: When you shift to a different screen, a new inescapable ad pops up along the bottom six lines of your screen.

Some critics decry these ads as a violation of personal screen space, as if screen space were sacrosanct. Prodigy executives offer no apology. Part of their role, they say, in helping to make people's lives easier and more efficient is the offering of services or products tailored to an individual's interests. The extent of this ad tailoring depends on the user.

When first using Prodigy, you are given the option of filling in a detailed interest summary. The more specific you get, the better Prodigy is able to tailor what kind of ads show up on your screen. This tailoring raises the specter of privacy violations. Will Prodigy be able to track my individual purchasing habits? Will my interest survey be sold to hundreds of commercial companies trolling for new customers? "No," says Brian Ek. "The surveys are completely confidential and will not be used for anything beyond gathering statistics to show to potential advertisers. No names are used, no personal information released."

Should an ad pique your interest, you can instantly get more information simply by pressing the *L* key and diving into a window that further explains the product. This is a handier way of gaining more information on a product than filling out one of those ad cards found in magazines. Besides, filling out those cards usually lands your name on *someone's* mailing list, and who needs their name on another mailing list? And if you find you really like the product you're looking at, you can order it right on the spot.

The second factor in Prodigy's low price is how it approaches performance. Rather than depending on a dumb terminal, where the user is a slave to the remote system, Prodigy makes the PC the master; the system is the slave.

Prodigy's design takes full advantage of the intelligence built into the PC. (Currently, Prodigy is available only for the IBM PC and compatibles. Apple II owners will have access later this year, and Mac owners early in 1989.) All the information needed to navigate and retrieve information from Prodigy is stored in the PC.

If you're doing something on Prodigy and the information to perform that task isn't stored on your PC, only then does it query a remote computer, usually the local Prodigy site. "Your computer grabs the information it needs and stores it for future use," says Waks. In this sense, the system actually *gains* performance the more you use it. If the local site doesn't have the information you need, it then queries the main database in White Plains, New York.

"But the nice thing about the local host accessing the White Plains computer is that it stores the information you've asked for and can deliver it on demand to

continued

Travel With A Fast Crowd.



Wherever your business takes you, take along the WorldPort 2400™ Portable Modem. Leaving the office doesn't have to mean leaving behind the world of high-speed, 2400 bps communications. Worldwide, in virtually every situation, including hotel rooms and phone booths, your ability to communicate clearly and efficiently remains intact.

Representing the cutting edge of modem technology, the WorldPort line of portable modems combine a broad range of features that bring you the best value in modems today. Features that go far beyond costly internal units, such as Bell and CCITT standards, direct connect and acoustic interface (300 and 1200 bps), battery power, shirt pocket size, and a tiny price.


In fact, the WorldPort modems are the ultimate for both portable and desktop applications. And the WorldPort 2400 comes with Carbon Copy PLUS™ communications software, for even greater value.

If you want a modem that works where you do, put the WorldPort Series to work for you. In the office. On the road. Or at home. For more information about our full line of WorldPort modems, or the name of your nearest dealer, call us at 800-541-0345. (In New York, 516-261-0423.)

Touchbase Systems, Inc.
160 Laurel Avenue
Northport, NY 11768
(516) 261-0423
TELEX: 6502848020
FAX: (516) 754-3491

WorldPort 2400 is a trademark of Touchbase Systems, Inc. Carbon Copy PLUS is a trademark of Meridian Technology, Inc.

Circle 266 on Reader Service Card

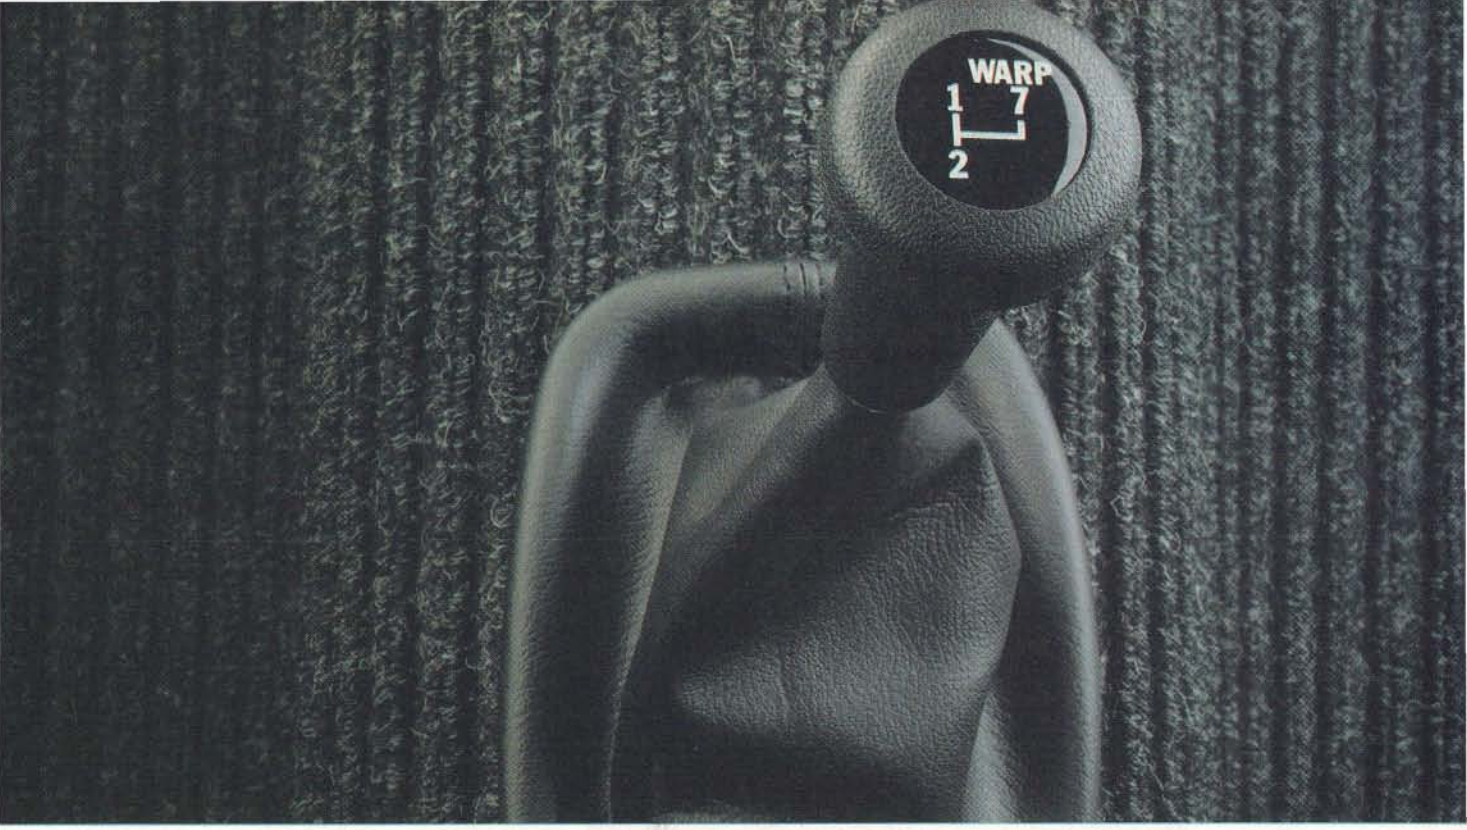

NO OTHER DESKTOP PUBLISHING SYSTEM OFFERS THIS FEATURE.

With the new Mannesmann Tally® Universal™ Publishing System, you can practically fly.

Thanks to a Raster Image Processor board that plugs directly into your PC or compatible, you'll process your pages at a speed limited only by the speed of your computer. Not—as is typical—at the speed of the printer. And you'll transfer ready-to-print data directly to the printer through a video interface at an incredible 3-million bits per second.

So when you're using the PostScript® compatible interpreter, you'll produce a printed page almost twice as fast as most other systems. But that's just ground speed.

If you use Aldus® PageMaker or Ventura Publisher,® you'll really take off. Because when you select DDL instead of the PostScript compatible interpreter, you'll double that speed again. And with full page bitmap graphics, you can get printed output up to 17 times as fast.



- Systems:
  1. Universal Publishing System (includes a PostScript compatible interpreter and Document Description Language (DDL))
  2. DDL Publishing System (DDL only).
- Resolution: 300 x 300 dpi.
- Emulations: Both systems include HP® LaserJet.
- Memory: 2 Mg.
- Typefaces: UPS includes 35 typefaces, DDL System includes 22 typefaces.
- Speed: 10 pages-per-minute.
- Dual paper cassettes standard, 250 sheets each.
- Dual output bins standard, 250 sheets each.
- Manual feed handles single sheets, envelopes, transparencies, and labels.
- Workload: 10,000 pages-per-month.

So call the number below for the name of your nearest dealer and log in your time on the New Mannesmann Tally Universal Publishing System. A pilot's license is not required.

MANNESMANN *TALLY*

1-800-843-1347 Ext. 162

In Washington state, call:
206-251-5524 Ext. 162

Test results available upon request. PostScript is a registered trademark of Adobe Systems, Inc. DDL is a registered trademark of Imagen Corp. Ventura Publisher is a registered trademark of Ventura Corp. Pagemaker is a registered trademark of Aldus Corp.

Circle 150 on Reader Service Card (DEALERS: 151)

You'll never have to wait for a mainframe again.



Microsoft just eliminated a 3000-pound headache for mainframe programmers. With Microsoft® COBOL Optimizing Compiler 3.0.

Now instead of endlessly waiting for mainframe time, you can bring your COBOL programs right down to the PC on your desk. Suddenly you've got control unknown in other platforms, as well as serious speed and power.

You've got full MS® OS/2 support to let you break the 640K memory barrier.

You've got fast execution because Microsoft COBOL is now a native code compiler.

You've got a rich development environment thanks to the Microsoft COBOL Animator source level debugger, Microsoft Editor and other powerful utilities.

One final assurance. Because Microsoft COBOL 3.0 is now mainframe COBOL compatible, you'll enjoy a seamless flow of source code between mainframe and PC environments.

Feel free to also enjoy the highly technical information in the adjacent column. Then call us at 800-541-1261 for more information and the dealer nearest you.

The mainframe wait is over with Microsoft COBOL 3.0. Appearing soon on a PC near you.



Microsoft®

© 1988 Microsoft Corporation. Microsoft, the Microsoft logo, MS and MS-DOS are registered trademarks of Microsoft Corporation. Microsoft COBOL Optimizing Compiler version 3.0 is based on COBOL/2 from Micro Focus.

Microsoft COBOL Optimizing Compiler Version 3.0 for MS OS/2 and MS-DOS®

Complete COBOL Solution for Application Maintenance and Development on the PC.

- Develop and port large mainframe applications on the PC
- Break the 640K barrier with OS/2 support including dynamic link libraries and multi-thread support. NEW!
- Develop programs that run in both MS-DOS and OS/2. NEW!
- Compatible with several different COBOL dialects. (IBM® VS COBOL II,™ IBM OS/VS™ COBOL, IBM SAA, Data General, and others.)
- Call Microsoft C and Macro Assembler routines. NEW!
- HUGE memory model allows data items to be greater than 64K. NEW!
- Full network support with record and file locking including Novell. NEW!

Powerful COBOL Development Environment

- Animator source level debugger. NEW!
  Trace execution, backtracking, breakpoint DO statements, and periodic breakpoints.
- Microsoft Editor, the programmer's editor for both MS OS/2 and MS-DOS. NEW!
  Reconfigurable and extendable editor that even lets you run your programs from within it.
- Incremental linker for MS OS/2 performs partial links up to 20 times faster than a full link – only changed modules are relinked. NEW!

ANSI 85 COBOL support. NEW!

- Certified HIGH by National Bureau of Standards.
- Structured language enhancements:
  Scope delimiters
  In-line PERFORM statement
  CALL BY CONTENT statement
  EVALUATE statement
  Negated conditions
  Global variables
  Reference modifications
  Nested programs

Native Code compiler with fast execution. NEW!

- 10x faster computations than MS COBOL 2.2.
- 30% faster I/O than MS COBOL 2.2

another user," Waks adds.

The demonstration I was given performed flawlessly, and the full-color graphics screens were quick, even at 1200 bits per second.

What's Here

Prodigy has been branded with the title "Stodigy," apparently because it offers no innovation and less in the way of useful services. Nothing could be further from the truth.

True, I found the user interface too splashy for my tastes and, yes, a bit simplistic. But the system was designed to attract a mass market—to augment people's lives, not turn them into computer experts.

Will on-line veterans find any use for Prodigy? Of course. Its E-mail feature alone is worth the monthly price. And when Prodigy brings its conferencing capability on-line, in the form of specialized bulletin board–type services, the system just might attract more than a few power users.

Prodigy's mnemonic menu system (M for menu, H for help) is a welcome sight. If you don't want to deal with a menu, you can use a jump command and bypass a lot of on-screen real estate. In addition, you can set up a self-directed personal path that leads you sequentially through the system, visiting only areas of interest to you. Navigating your personal path entails only hitting the Enter key.

The system contains all the information that you'd expect on such a service: news, weather, and special information, like material from *Consumer Reports*. (An interesting side note: No advertising screens are visible while accessing *Consumer Reports*. As in the hard-copy publication, it is devoid of all ads. This tells me that Prodigy is likely to deal with future information providers concerned about what types of ads people are subjected to while accessing their particular database. Nice touch.)

Travel information is available. And soon you'll be able to order airline tickets, too.

There's a panel of 40 experts writing daily columns, from Howard Cosell on anything to Jane Fonda on fitness to Robert Novak on politics. And you can send E-mail to any of these experts, with a promised personal reply within 72 hours.

I was all set to really slam these columns as superficial until I read Novak's column. Novak wrote about the selection of a keynote speaker for the Democratic national convention. He outlined a fiery controversy over the choice. Good stuff. Tightly written in just over 80 words. But the biggest surprise: I read the same information, almost verbatim, in his syndicated newspaper column 3 days later. By using Prodigy, I had, in fact, scooped millions of newspaper readers.

You can access stock quotes on a 15-minute delay, as per SEC requirements. You can also buy and sell stocks via Prodigy and track your portfolio by using a type of personal path system for setting up a series of stock symbols.

And there's much more coming down the pike—grocery delivery, for one thing. You can imagine how welcome it will be for a San Francisco couple to simply type in a shopping list and have the order delivered at a predetermined time. No hassling with lines; no scheduling one's time around the supermarket.

There's also a wide variety of entertainment and educational services. One particularly intriguing game called GEO puts you in charge of a fictitious corporation. Over the course of a few weeks, you drive the company, making decisions about mergers, product development, and capital investment. You play against several other Prodigy users, and at the end of the game, your position is ranked with the others. It's a cutthroat game that any corporate barracuda will love.

Will It Work?


Prodigy does have its problems. The most perplexing one is that distribution of software and documentation has been terribly inadequate. People have waited months to receive their materials. Prodigy officials say this is "demand outstripping supply," but insiders cop to the real reasons: poor planning and poor choice of distributor. As of this writing the problems still exist, but word has it that Prodigy is aware of the hassle and is doing what it can to fix the mess.

Success is often a matter of definition. If Prodigy succeeds only in educating the American market to the fact that on-line electronic services are available and easy to use, it will be a success.

As for its fate vis-à-vis personal helicopters and rocket mail? Well, I suppose that's left for a columnist to write about sometime well into the twenty-first century. ■

Brock N. Meeks is a San Diego–based freelance writer who specializes in high technology. You can reach him on BIX as "brock."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

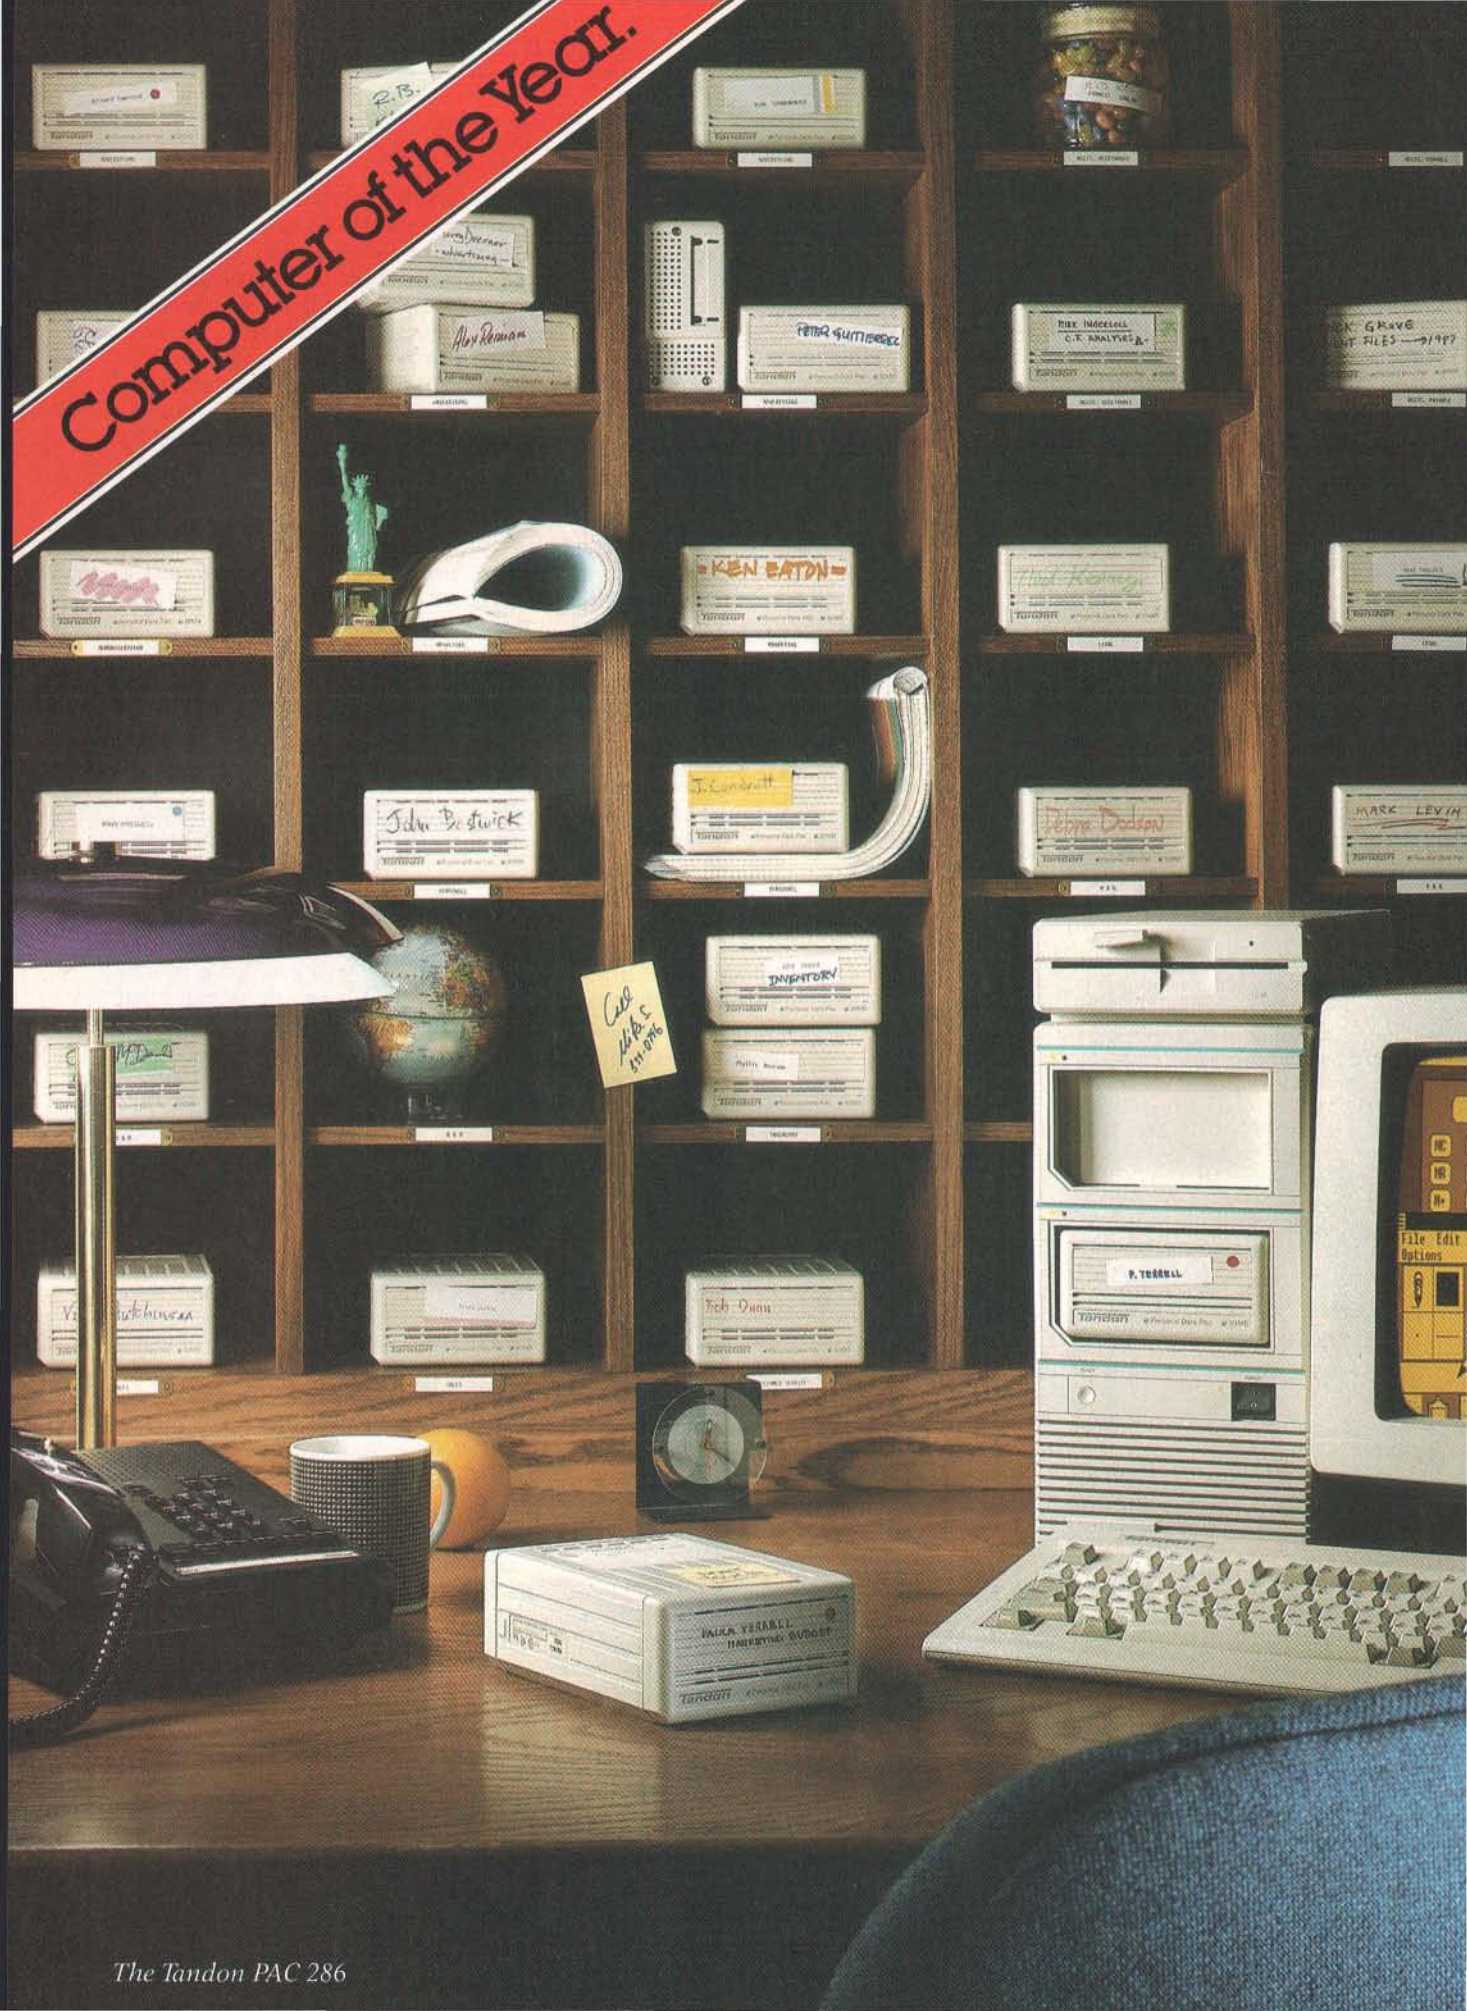

The Tandon PAC 286

"Shareable."

shar'a•bl, a. [A.Sax. scearu, a portion]: ***The ability to let everyone in your company have their own personal computing environment without having to buy hundreds of PCs.***

The dramatic improvement in personal productivity through the use of personal computers hasn't come without a substantial price tag. Buying and maintaining a PC for every user can make a real dent in the data processing budget.

But the simple fact is, the typical business PC is used less than 3 hours a day.

Now there's a simple, economical way to get the most out of your existing PCs and give every user the personal computing environment they want. It's called Personal Data Pac technology. From Tandon.

This innovative technology consists of a portable 30MB Winchester disk pack that is both small and rugged, called the Personal Data Pac, and an external drive receptacle called the Ad-PAC. The total package will cost you less than $1,000.00.

Provide your users with Data Pac technology and several can share a single system. And still keep their personal data personal. PCs could even be configured differently for different applications. Users would simply work at the system that fits their needs.

Installing an Ad-PAC is as simple as plugging the controller card into an expansion slot of any AT-compatible personal computer and connecting the cable. The Personal Data Pac inserts into the Ad-PAC as easily as a VCR cassette.



The Tandon Ad-PAC

The Personal Data Pac provides the performance of a fixed Winchester: With an effective access time of less than 40 milliseconds, it has the fastest data throughput of any removable mass storage in recent tests.

And removability doesn't mean loss of reliability. The Data Pac can withstand up to 250G of shock—twice as much as other removable Winchesters—thanks to Tandon's patented clamping mechanism which locks the heads away from the disk surface.

If you still need additional processing power after all your PCs are Ad-PAC equipped, Tandon has the answer. The Tandon PAC 286...a powerful AT-compatible unit with two built-in Data Pac receptacles.


Find out how your PCs can become more shareable. See your Tandon dealer today or call us at **1-800-556-1234,** Ext. 171 (In California **1-800-441-2345,** Ext. 171).

Tandon

We're redefining personal computing.

GSA# GSOOK87AGS6049 OPT1

Pricing and information correct at presstime. Tandon reserves the right to vary prices and specifications at any time without notice. Tandon is a trademark of Tandon Corporation.

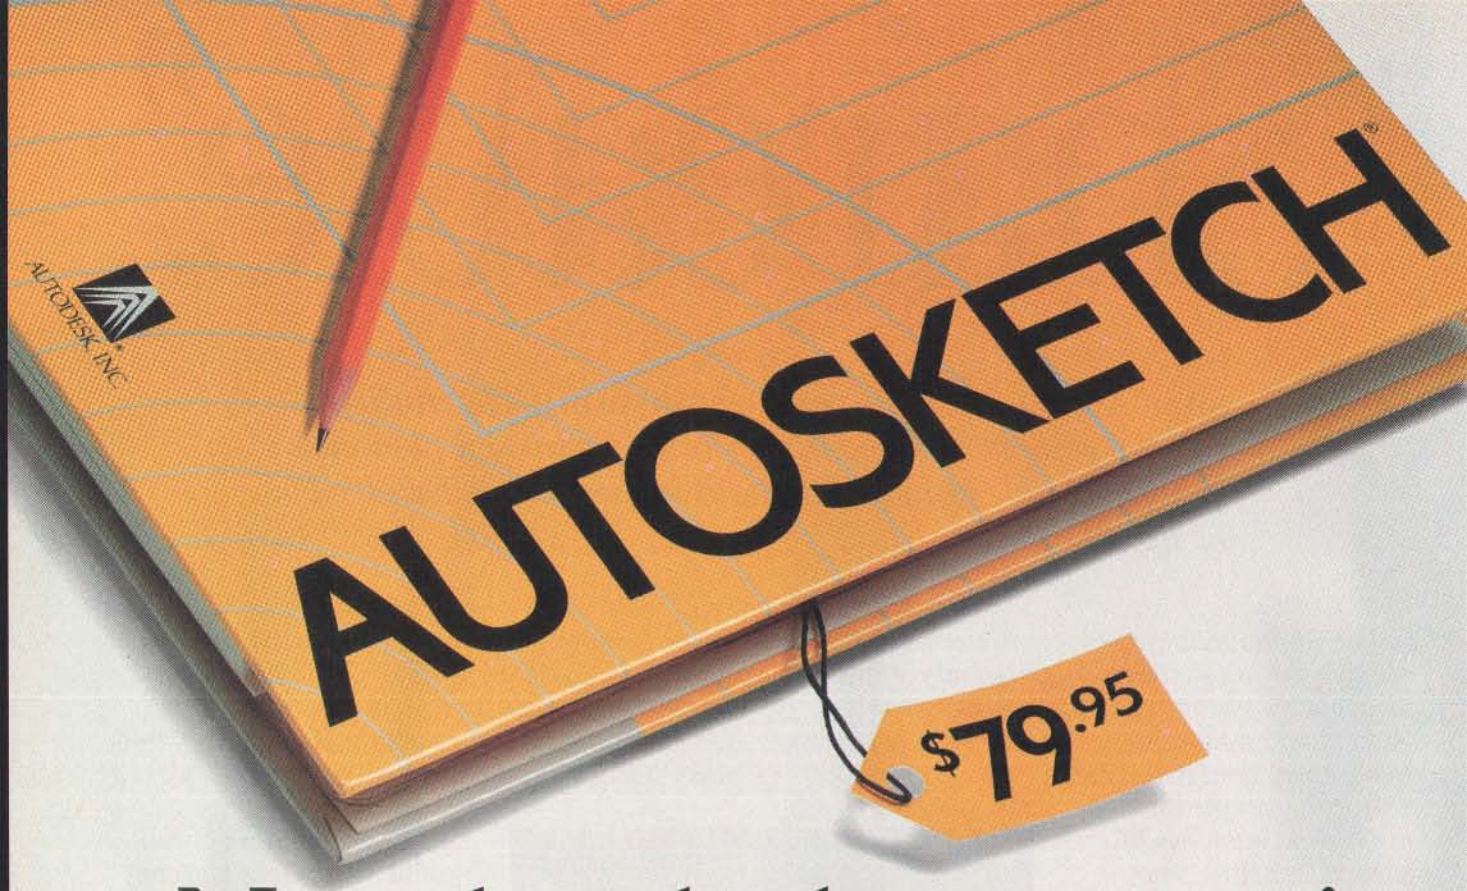

Now that the best name in CAD is this affordable, why settle for a generic brand?

What's in a name? When it comes to the Autodesk name, a lot. In fact, it's the best-selling, most well-respected name in the CAD business. There simply is not another company with the credentials to make that claim.


That's why you shouldn't settle for anything less than AutoSketch,® the best way to get started in CAD. AutoSketch is the precision drawing tool from the Autodesk family of products. Not only is AutoSketch priced at just $79.95,* but unlike some entry-level CAD products, you don't have to keep spending more to add the features AutoSketch already has. Standard features like boxes, circles, stretching, mirroring and rotating—to mathematical precision. And advanced CAD capabilities like dynamic PAN and ZOOM and automatic dimensioning and scaling, in up to 10 working layers.

Of course, if you do want to move up from AutoSketch at some point, your files can easily be uploaded into AutoCAD.®

AutoSketch runs on IBM® PC/XT™/AT®and 100% compatible computers, and supports IBM's PS/2.™

So if you're ready for CAD, why not go with the name that rates highest among both critics and users? Anything else is, well, second-rate.

To order AutoSketch call 1-800-223-2521. For the name of your nearest AutoSketch Dealer or for more information, call 1-800-445-5415 Ext. 1 or write to AutoSketch, 2320 Marinship Way, Sausalito, CA 94965.



AUTODESK, INC.

Circle 26 on Reader Service Card

*A speed-enhanced version (9 times faster), requiring a math coprocessor, is available for $99.95.

AutoSketch and AutoCAD are registered in the U.S. Patent and Trademark Office by Autodesk, Inc. IBM and Personal Computer AT are registered trademarks of International Business Machines Corporation. Personal Computer XT and PS/2 are trademarks of International Business Machines Corporation.

Borland Beefs Up Its Languages

Turbo C and Turbo Pascal get upgrades, but the big news is an assembler and a debugger

Borland International is well known for its low-cost line of development languages: Pascal, Basic, Prolog, and C. But up to now, if you really needed to get down close to the silicon by using assembly language or debugging your wayward masterpiece of code when it sporadically crashed, you had to look elsewhere. No longer: Borland has closed this breach by introducing a high-speed assembler and a powerful stand-alone debugger. If that isn't enough, the company has upgraded its premier development languages—Turbo Pascal and Turbo C—with built-in source-level debuggers.

The Turbo Assembler and Turbo Debugger are entirely new. Being a lowly assembler, TASM operates more or less in a line-oriented environment; happily, it operates noticeably faster than other assemblers. The Turbo Debugger is possibly Borland's best release of this group. Like TASM, the debugger boasts support for the complete line of 80x86 processors and 80x87 coprocessors.

Turbo C 2.0 and Turbo Pascal 5.0 feature their usual integrated development environment, which consists of the compiler itself, a WordStar-style program editor, and source code debugging capabilities. Both compilers make use of expanded memory, provide faster floating-point emulation, have in-line assembly language support, and support the new stand-alone debugger. If you shun this integrated environment in favor of a program editor that you're comfortable with, each Turbo language also provides a command-line-interface version. Sound familiar? Yes, Microsoft's Quick languages give you the same option.

Turbo C 2.0

Turbo C 2.0, like its predecessor, supports every conceivable memory model: tiny, small, medium, compact, large, and huge. It now supports the `long double` data type and adds new `raise` and `signal` functions. The `raise` function signals a hardware exception, and the `signal` function lets you respond to the exception, either by two predefined handlers or by your own handler. The edit buffer makes use of the Expanded Memory Specification (EMS), freeing an additional 64K bytes of RAM to compile and debug a program. An `asm` keyword lets you add assembly language statements directly into your C code. To use this feature, though, you'll need TASM, since Turbo C generates an assembly language file rather than a linkable object code file when you use this option.

Turbo C 2.0 comes on six 360K-byte 5¼-inch floppy disks and requires 448K bytes of RAM and MS-DOS 2.0 or higher. It sells for $149.95. (Contact Borland International, 1800 Green Hills Rd., P.O. Box 660001, Scotts Valley, CA 95066, (800) 543-7543 or (408) 438-8400.) We installed a beta version of the 2.0 compiler on an Epson Equity II+ with a 10-MHz 80286 processor, 640K bytes of RAM, and a 30-megabyte hard disk drive. Turbo C has no installation program: You copy the contents of the floppies to your hard disk, or just the libraries you need. Borland also sells Turbo C Professional, a $250 package with Turbo C 2.0 and the new assembler and debugger.

When you start Turbo C, it looks a lot like Microsoft's QuickC: It has a menu bar, and you can access the menus and menu items with one or two keystrokes. The most immediate difference between version 2.0 and version 1.0 is the new Break/Watch menu, which is quite similar to QuickC's Debug menu. It lets you set and clear breakpoints as well as set "watches." A watch is a display of a variable's contents, and the display is dynamically updated as the program runs.

The built-in debugging facilities, which operate identically for both Turbo C and Turbo Pascal, are easy to use and powerful (see photo 1). Pressing F7 single-steps you through the program source code, line by line. On a color monitor, a bright bar of color highlights the statement being executed. You can set a breakpoint by stepping the program to the statement of interest and selecting Toggle Breakpoint from the Break/Watch menu. The source code statement thus selected is highlighted in a color different from that of the other statements, a nice touch if you're plodding through a lengthy trace. Or, you can move the editor cursor to the target statement and select Go to Cursor from the Run menu.

With the Break/Watch menu, you can also examine the contents of arrays and structures by means of a watch. The contents of the target variable are displayed and are updated as their contents change. You can have the watch variables displayed in a particular format, such as hexadecimal, decimal integer, real, character, Boolean, and pointer.

We used BYTE's C compiler benchmark to compare the performances of Turbo C 1.0 and 2.0. This benchmark is the source code to XLisp and consists of 24 files. It's compiled with the large model option. Turbo C lets you define and build "projects" that reference multiple source code files, so we set up an `XLISP.PRJ` file. Turbo C 2.0 compiled the project in 2 minutes, 5 seconds, versus the 2 minutes, 40 seconds required by Turbo C 1.0. The preliminary documents for version 2.0 claim that it's about 10 percent to 30 percent faster than its predecessor. The BYTE benchmark pegs it at 21 percent. We also compiled the source code for the Sieve, Sort, and Fibonacci benchmarks that were used to

continued

evaluate Microsoft C 5.1 (see "Microsoft Languages Update," April BYTE). We were pleased to see that Turbo C accepted the processor-specific `int86x()` function, used to extract elapsed machine time, as coded for Microsoft C. The version 2.0 benchmarks ran as fast as those for 1.0, except for the Fibonacci, which ran 2 seconds slower.

Turbo Pascal 5.0

Like Turbo C 2.0, the Turbo Pascal 5.0 editor can make use of EMS memory. It features the ability to generate programs larger than 64K bytes; has new built-in procedures such as `Inc()` and `Dec`; and supports several new data types, including `longint`, `shortint`, `word`, and the IEEE floating-point formats. It also offers compatibility with Turbo Pascal 3.0 and 4.0. An `inline` statement has been expanded: Formerly you could insert inline assembly language statements within Pascal source code using this keyword, but now you can declare entire procedures or functions to be of type `inline`. These functions then act like macro expansions: Every time the procedure/function name is encountered, all the assembly code within it will be directly inserted into the Pascal program.

Priced at $149.95, Turbo Pascal 5.0 comes on either three 360K-byte 5¼-inch disks or two 720K-byte 3½-inch disks. The package requires MS-DOS 2.0 or higher, one floppy disk drive, and 448K bytes of RAM for the integrated environment or 256K bytes for the command-line interface. We installed a beta version of Turbo Pascal 5.0 on the same Epson Equity II+ that we used to test Turbo C. Turbo Pascal does come with an installation program that asks you several questions and then prompts you for the disks. The compiler's source-level debugger is the same as Turbo C's. The $150 Turbo Pascal Professional version, with the assembler and debugger, is also available.

For performance measurements, we compiled the source code for the Pascal/S compiler. For comparison, we did the same using Turbo Pascal 4.0. This also tested the claimed compatibility to older versions of Turbo Pascal, since the MS-DOS implementation of Pascal/S includes a `Turbo3` unit. Both 5.0 and 4.0 compiled the 2074-line program without errors in about the same time: 4.8 seconds. Next we compiled the p-code interpreter for the Pascal/S program and used the newly created Pascal/S compiler to compile two example programs. We then ran the resulting p-code with the interpreter program. Both the interpreter and the programs ran without problems.

TASM 1.0

One of TASM's high points is support for the 80x86 processor family, namely the 8088/8086, 80186, 80286, and 80386. (For the 80386, though, it has no protected-mode environment similar to the one that's provided by Phar Lap's RUN386.) TASM also recognizes coprocessor op codes for the 8087, 80287, and 80387. TASM runs on IBM PC compatibles with MS-DOS 2.0 or higher and 256K bytes of RAM. The assembler is sold in a single package with the new debugger for $149.95.

If you activate the `/JJUMPS` command-line option (or use the `JUMPS` directive), TASM performs automatic jump sizing. This means that when the assembler encounters a conditional jump whose target is out of range, the assembler will recode the jump as a conditional branch around a nonconditional full-segment jump. So, if you have automatic jump sizing activated and TASM encounters `JNZ TARG` and determines that `TARG` is out of the jump range, it will emit

```
JZ $+5
JMP TARG
```

since the destination of an unconditional `JMP` instruction can be anywhere within a 64K-byte segment.

TASM is equipped with the `STRUCT` and `RECORD` directives, mechanisms for defining complex data structures. These directives are available in the Microsoft Macro Assembler (MASM) as well, but TASM adds the `UNION` directive for defining a single location as having multi-typed access (this is similar to C's `union`). For example, the definition

```
WORDORBYTE UNION
BYBYTE     DB          ?
BYWORD     DW          ?
WORDORBYTE ENDS

LOCATION   WORDORBYTE  <?,?>
```

lets you reference `LOCATION` as either a word or a byte. So, you could use `MOV [LOCATION.BYBYTE],255` as well as `MOV [LOCATION.BYWORD],30000` to store a value into `LOCATION`.

Perhaps TASM's biggest feature is the information contained in its 580-page user's manual. In these pages you'll find—among other things—a helpful tutorial on the pitfalls of programming in assembly language. The tips range from the absurdly simple (e.g., forgetting to return to DOS), to the mistakes we all make when we've worked late into the night (e.g., reversing operands, such as entering `MOV DX,AX` when you *really* meant `MOV AX,DX`), and on up to the fiendishly subtle (e.g., forgetting that,



Photo 1: *Turbo C's built-in debugging facilities highlight the statement being executed. At the bottom, you can see variables that are being "watched" and their contents. You can examine the contents of an array row, or an individual cell in the array. Also note that you can specify the output format of the displayed data.*

after a string-manipulation instruction using a REP prefix, the SI and DI registers are left pointing one element away from the last address processed).

We were also impressed by the chapters on interfacing assembly language to Borland's Turbo C, Turbo Pascal, Turbo Basic, and Turbo Prolog. Each section covers parameter-passing conventions, register-passing conventions, and coping with processor segmentation.

We tested a beta version of TASM using the source code for the 8088 version of BYTE Small-C, which consists of four files ranging in size from 28K bytes to 65K bytes. Table 1 shows how TASM fared against MASM 5.0. As you can see, TASM is an average of 2.5 times faster than MASM.

We also used the Turbo Linker, TLINK, to create the executable code for the Small-C compiler. This required that we link the TASM-generated object files together with the run-time library file, which we had created some time ago with Microsoft's library manager. TLINK readily accepted the run-time file, and we had a running version of BYTE Small-C in much less time than it had taken before.

Turbo Debugger

Now that you have all these languages so you can grind out code to your heart's content, the next requirement is obvious: a debugger to fix all the mistakes you're sure you won't make.

The Turbo Debugger proudly continues the tradition of Borland windows that we've seen in the company's other language products. The debugger defines two kinds of menus: pull-down menus for activating major functions whose contents are typically static, and pop-up menus for entering information. (Macintosh programmers will see the similarity with the Mac's pull-down menus and dialog boxes.) Although the Turbo Debugger does not have a built-in editor, you can configure it to fire up your favorite editor from a pop-up menu when you're in the midst of a debugging frenzy.

Another powerful feature of the debugger is that it's polyglot; it lets you perform source-level debugging on Turbo C, Turbo Pascal, and TASM programs. Borland says that support for Turbo Basic will be added in a future release. The capabilities of the debugger in source mode are quite extensive, particularly in that you can perform expression evaluation operations in the high-level languages from within the debugger. If you're working on a Turbo C program, you can enter complete C expressions (including functions), even while debugging within an assembly language routine that your C program has called. This is powerful stuff, since you can view the contents of a memory location cast as you might use it in a C expression. For example, (long far *) 0x4000::14 lets you view the contents of memory location 14 in segment 4000 hexadecimal as though it were a far pointer.

For Turbo Pascal, the debugger can evaluate the language's full syntax with the exception of string concatenation and set operators. Finally, Turbo Debugger can evaluate the complete assembler syntax when you're debugging TASM programs. You can even modify executables created by Microsoft LINK to work with Turbo Debugger.

To run Turbo Debugger, you need DOS 2.0 or higher, 384K bytes of RAM, and an 80-character screen. Borland recommends that you have a hard disk drive, though the company says that a dual-floppy system works fine. If you want to use Turbo Debugger on one of Borland's other language products, you'll need the following versions: Turbo Pascal 5.0, Turbo C 2.0, or TASM 1.0.

When you activate Turbo Debugger, it loads the program to be debugged, opens the module window, and positions a pointer to the start of the file. From here you can move around in the source code, set breakpoints and watchpoints, and do much of what you can in the integrated source-level debuggers described already. What's new is that you can open Turbo Debugger's CPU window and step down a level into the real insides of the system.

The CPU window is made up of five components, called "panes." The code pane shows assembly language instructions intermixed with their generating high-level expressions (if you're debugging the output of a high-level language).

continued

Table 1: *Test results show that TASM easily outperforms Microsoft's MASM on the benchmarks. All times are in seconds.*

Filename	TASM 1.0	Microsoft MASM 5.0	Source file (bytes)
CC1.ASM	7.24	18.53	65,128
CC2.ASM	5.34	13.17	44,318
CC3.ASM	7.03	18.93	65,323
CC4.ASM	4.33	9.42	28,043

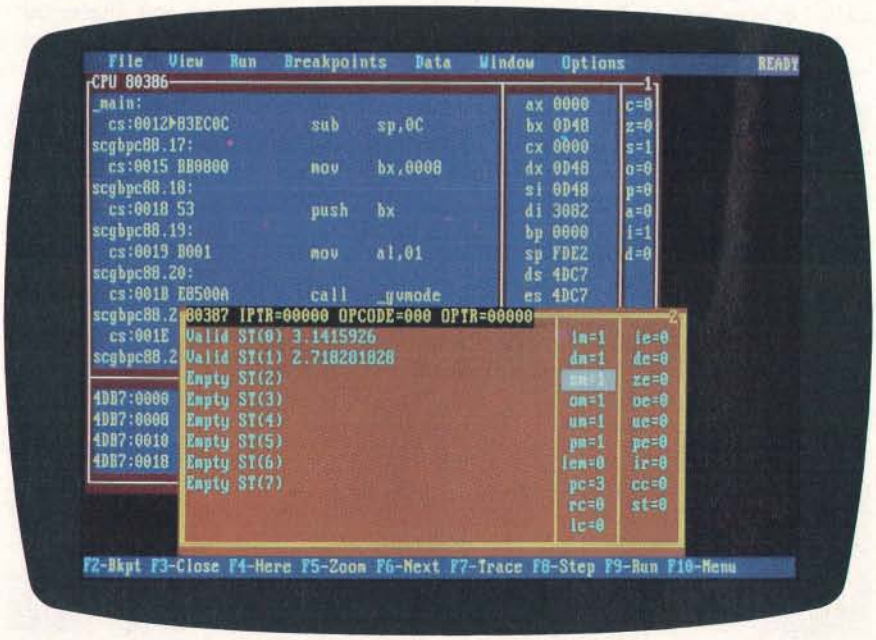


Photo 2: *Turbo Debugger's numeric coprocessor window lets you dive into your system's floating-point unit (in this case, an 80387). Notice that you can enter numbers directly into the coprocessor's registers.*

Inside the stack pane you can see the contents of the word at the current stack pointer, as well as one word above and below.

The data pane displays a hexadecimal dump of a selected region of memory. Typically, you use the data pane to watch blocks of memory in your data segment for activity, but you can set this pane to view anywhere in system memory. You can also alter the data pane's display format to be hexadecimal bytes, hexadecimal words, long hexadecimal integers (the C `long` data type and the Pascal `longint` type), 8-byte decimal integers (the Pascal `comp` type), short floating-point numbers (scientific notation), 6-byte `real` numbers, 8-byte `double` numbers, or 10-byte extended floating-point numbers.

The registers pane provides a continuously updated display of the CPU registers, while the flags pane shows the state of each of the CPU's flags. And yes, if you select either the registers or flags pane, you can muck around with the processor's internals all you want.

Each pane has its own pop-up local menu. For example, in the code pane's local menu, you can select the `FOLLOW` command to see where a jump instruction will go if the jump is taken. You might also be debugging inside a subroutine and want to know what function called that subroutine; use the `CALLER` command.

If you've got a math coprocessor installed in your system, Turbo Debugger will sense its presence and let you activate a numeric coprocessor window (see photo 2). This window is similar to the CPU window in that it lets you probe the internals of the floating-point unit; you can examine and interactively modify the floating-point registers, as well as the coprocessor's status and control flags. This feature is unique among debuggers.

For anyone with an 80386 system with at least 700K bytes of extended memory, Turbo Debugger can operate in "virtual debugging mode." In this arrangement, the debugger loads itself into extended memory and operates your program from protected mode—which means that whatever you're debugging has free run of the lower 640K bytes. It also means that you can't run a virtual debugging session with software that uses the 80386's virtual or protected modes (such as DESQview, Windows/386, and Compaq's EMS simulator).

The Turbo Debugger's main attraction is its remote debugging (see photo 3). Anyone who has used CodeView to debug a graphics program and gone dazzle-happy while it flipped the screen from mode to mode will appreciate remote debugging. Simply put, you hook two machines together via serial ports. One is the debugging station, from which you execute Turbo Debugger as you normally would. The other is the remote target, on which the program under question executes, shepherded by a small program (about 20K bytes long) named `TDREMOTE` that communicates with the debugging station. In this way, the program's keyboard input and display output take place on the target, circumventing the annoying interleave of debugger I/O with the debuggee I/O. This is also handy if you're developing a software monster that's too big to crowd into memory with Turbo Debugger running stand-alone.

The remote link can operate at three data transfer rates: 9600 bits per second, 40,000 bps, and 115,000 bps. With a beta version of the debugger, we ran a quick remote session between a 4.77-MHz IBM PC XT clone and a 10-MHz PC AT clone and were surprised to see that they operated flawlessly at the highest data transfer rate. Borland also provides a remote file-manipulation program, `TDRF`, that you can operate from the debugging station to copy files between the machines, delete files on the target, create subdirectories on the target, and more.

Faster Development through Better Debugging

A lot of program development is not so much how fast you can write code, but how fast you can get it converted into machine code. To that end, compiler writers have boosted the throughput of their compilers wherever possible. However, what's overlooked at times is that a significant part of developing a program is making sure the code you wrote works. It's no good having a fast compiler if you spend most of your time tracking down a bug rather than writing useful code.

The Turbo C and Turbo Pascal upgrades are significant as good debugging tools. As far as compilation speed goes, the improvements are minor. However, now you can single-step through source code statements with a keystroke and display a variable's contents in any format. With that type of debugging ability, the performance of these development languages has improved indeed.

The only surprise to TASM is that it took Borland this long to create it. It has everything you'd expect in an assembler, and it's faster than MASM. The documentation is loaded with interfacing details and probably makes the purchase price worth it.

On the other hand, the Turbo Debugger is a pleasure to use. Its ability to connect seamlessly with other Borland languages, along with its chameleon-like countenance—the capability to operate stand-alone, in virtual 80386 mode, or remotely—should put it high on any programmer's shopping list. ■



Photo 3: *Remote debugging with Turbo Debugger. The machine on the left is executing the BYTE low-level graphics benchmark program, controlled via a serial connection with the machine on the right running the debugger.*

Rick Grehan and Tom Thompson are BYTE senior technical editors at large. You can reach them on BIX as "rick_g" and "tom_thompson."

VGAWONDER™ 1024X768

plus: VGA EGA MDA HERCULES on: STANDARD MULTISYNC monitors

Yes! the Phenomenal VGAWONDER does it all at IBM Hardware level compatibility with automatic monitor detect and no dip switches or jumpers to set. A HOT CARD for the 286/386 POWER USER with AUTO BUS DETECT for 8 or 16 bit slots, running with a 16 bit datapath with 1:1 interleave. 100% IBM HARDWARE LEVEL COMPATIBILITY means that ALL software and operating systems designed for IBM systems will run. 1024 WILL BE DISPLAYED IN COLOR ON STANDARD MULTIFREQUENCY MONITORS.

Although these features are expected from ATI they are NOT AVAILABLE from other manufacturers. EGA on all monitors including RGB & TTL means a perfect card for networks. MOUSE ON BOARD! ATI built the mouse right in to this one, why not? No extra charge! 16-bit datapath for those FAST speeds required at high resolutions. VGAWONDER is available in both 512K and 256K Versions. Ask your dealer for more information.

See us at COMDEX/Fall '88
November 14–18, 1988
Las Vegas Hilton Hotel
Las Vegas, Nevada
Booth 7050

SUGGESTED LIST PRICE
$499.00
VGA WONDER with 256K Video Memory



NOW SHIPPING

Software		
	RESOLUTION	COLOR/SHADE SPECTRUM
ATI HI-RESOLUTION DRIVERS SUPPLIED	1024x768 960x720	16/256 K
ATI HI-RESOLUTION DRIVERS SUPPLIED	800x600 * 640x480	256/256 K
VGA	320x20 ALL 17 MODES	256/256 K
EGA	640x350	16/64
CGA	320x200	16/64
MDA	720x348 640x400	
LINES OF TEXT	132x44	132x25

	132x44	132x25	132x44	132x60	132x60	132x60	132x60
	TTL	RGB	EGA	MULTISYNC ANALOG	IBM 8503/12/13	MULTISYNC XL/PLUS	IBM 8514
Monitor	DIGITAL			ANALOG			

*800x600 CANNOT BE DISPLAYED ON 8503-12-13

ATI TECHNOLOGIES INC.
Technology you can Trust.

ATI Technologies Inc.
3761 Victoria Park Ave., Scarborough,
Ontario, Canada M1W 3S2
Telex: 06-966640 (ATI TOR) Tel.: (416) 756-0718
Fax: (416) 756-0720

Trademarks: ATI, VGA WONDER, EGA WONDER – ATI Technologies Inc.; Multisync – NEC Home Electronics Inc.; AUTOCAD – Autodesk Inc.; WINDOWS – Microsoft Inc.; GEM – Digital Research Inc.; VENTURA – Xerox Corp.; AUTOSHADE – Autodesk Inc.; IBM, VGA, EGA, CGA – International Business Machines Corp.

Circle 23 on Reader Service Card



QNX vs. OS/2 UNIX

QNX®: Bend it, shape it, any way you want it.

ARCHITECTURE If the micro world were not so varied, QNX would not be so successful. After all, it is the operating system which enhances or limits the potential capabilities of applications. QNX owes its success (over 60,000 systems sold since 1982) to the tremendous power and flexibility provided by its modular architecture.

Based on message-passing, QNX is radically more innovative than UNIX or OS/2. Written by a small team of dedicated designers, it provides a fully integrated multi-user, multi-tasking, networked operating system in a lean 148K. By comparison, both OS/2 and UNIX, written by many hands, are huge and cumbersome. Both are examples of a monolithic operating system design fashionable over 20 years ago.

MULTI-USER OS/2 is multi-tasking but NOT multi-user. For OS/2, this inherent deficiency is a serious handicap for terminal and remote access. QNX is both multi-tasking AND multi-user, allowing up to 32 terminals and modems to connect to any computer.

INTEGRATED NETWORKING Neither UNIX nor OS/2 can provide integrated networking. With truly distributed processing and resource sharing, QNX makes all resources (processors, disks, printers and modems anywhere on the network) available to any user. Systems may be single computers, or, by simply adding micros without changes to user software, they can grow to large transparent multiprocessor environments. QNX is the mainframe you build micro by micro.

PC's, AT's and PS/2's OS/2 and UNIX severely restrict hardware that can be used: you must replace all your PC's with AT's. In contrast, QNX runs superbly on PC's and literally soars on AT's and PS/2's. You can run your unmodified QNX applications on any mix of machines, either standalone or in a QNX local area network, in real mode on PC's or in protected mode on AT's. Only QNX lets you run multi-user/multi-tasking with networking on all classes of machines.

REAL TIME QNX real-time performance leaves both OS/2 and UNIX wallowing at the gate. In fact, QNX is in use at thousands of real-time sites, right now.

DOS SUPPORT QNX allows you to run PC-DOS applications as single-user tasks, for both PC's and AT's in real or protected mode. With OS/2, 128K of the DOS memory is consumed to enable this facility. Within QNX protected mode, a full 640K can be used for PC-DOS.

ANY WAY YOU WANT IT QNX has the power and flexibility you need. Call for details and a demo disk.

THE ONLY MULTI-USER, MULTI-TASKING, NETWORKING, REAL-TIME OPERATING SYSTEM FOR THE IBM PC, AT, PS/2, THE HP VECTRA, AND COMPATIBLES.

Multi-User	10 (32) serial terminals per PC (AT).	**C Compiler**	Standard Kernighan and Ritchie.
Multi-Tasking	64 (150) tasks per PC (AT).	**Flexibility**	Single PC, networked PC's, single PC with terminals, networked PC's with terminals. No central servers. Full sharing of disks, devices and CPU's.
Networking	2.5 Megabit token passing. 255 PC's and/or AT's per network. 10,000 tasks per network. Thousands of users per network.		
Real Time	3,200 task switches/sec (AT).	**PC-DOS**	PC-DOS runs as a QNX task.
Message Passing	Fast intertask communication between tasks on any machine.	**Cost**	From US $450. Runtime pricing available.

QNX

For further information or a free demonstration diskette, please telephone (613) 591-0931.

Quantum Software Systems Ltd. • Kanata South Business Park • 175 Terrence Matthews Crescent • Kanata, Ontario, Canada • K2M 1W8

Circle 218 on Reader Service Card

QNX is a registered trademark of Quantum Software Systems Ltd.

UNIX is a registered trademark of AT & T Bell Labs. IBM, PC, AT, XT and PS/2, PC-DOS and OS/2 are trademarks of International Business Machines. HP and Vectra are registered trademarks of Hewlett-Packard Company.

Presentation Manager and LAN Manager

A graphical interface and network support carry OS/2 well beyond the traditional DOS environment

All the pieces are starting to fall into place for OS/2, and the nearly completed system is beginning to look pretty impressive. In addition to the primary benefits of multitasking and seemingly limitless program memory, the Standard and Extended Edition 1.1 versions of OS/2 offer features that enhance usability, add functionality, and even point to a new standard for both user and programmer interfaces.

One of the most eagerly awaited features of DOS's heir apparent is the Presentation Manager, a graphical user interface scheduled to be included with Standard Edition 1.1 and released this month.

The LAN Manager, slated for release with Extended Edition 1.1, adds network support to the communications and database management capability of the current Extended Edition.

Together, the two programs represent a new direction in operating-system design: tight integration of a consistent user interface with functions currently found only in applications packages.

Presentation Manager

The phrase most often used to describe the Presentation Manager is "Windows-like," but the comparison is understated. From the user's point of view, the Presentation Manager *is* Windows, except now you're working on the system level and can access both applications programs and the operating system itself. Users familiar with either Windows or the Macintosh should have no trouble getting up to speed with the Presentation Manager's point-and-click interface.

The Presentation Manager is actually a shell program that can be enabled or disabled using the `PROTSHELL` command in the OS/2 `CONFIG.SYS` file. With Standard Edition 1.1, you have the option of using either the standard OS/2 interface or the Presentation Manager.

At boot-up, you're presented with two windows: the Task Manager and the Start Programs window. These are special operating-system windows that control the session and cannot be removed. Together, these windows replace the Session Manager found in the original incarnation of OS/2, although that is something of an oversimplification—the Start Programs window allows you to begin new tasks, and the Task Manager allows you to switch between them.

Within the Start Programs window is a list of tasks that can be started by pointing and double-clicking with the mouse or by choosing Start from the Program submenu on the menu bar. Two task choices are always in the main list: OS/2 Command Prompt and OS/2 Windowed Command Prompt. Selecting these lets you enter commands at the DOS-like `[C:]` prompt, either in full-screen mode or within a window.

You can also select DOS Command Prompt to work in the DOS compatibility mode, but, as always, you are limited to one real-mode session. Adding programs to the list in the window is as easy as bringing up a dialog box and specifying a name and a path to an OS/2 executable file. Tasks can be grouped in the Start Programs window, and you can switch easily from group to group.

The task list also contains two system control programs: The PM Control Panel and the PM Filing System. The Control Panel gives the user control over system parameters, such as port configurations, screen colors, fonts, and country information (such as currency, date formatting, and numbering conventions). Choosing the Filing System brings up a powerful file-management facility: It allows you to navigate through a directory tree, moving, copying, and deleting files—and subdirectories—using just the mouse. You can group files by association, change file attributes (read-only protection, archive status), and sort files using the Filing System.

The Task Manager contains only tasks that are currently running. Switching between active tasks can be done through this window or by selecting the task window with the mouse. You can also close or terminate active-task windows. The menu bar for the Task Manager offers other commands that can be used to shut down the system or to arrange windows on the screen. The shut-down choice can be used to save currently active tasks so that they will restart on boot-up. The file information is simply saved in `STARTUP.CMD`.

The Role of the API

Using applications in the Presentation Manager may be simple and intuitive, but writing them is a very different story. Programmers with Windows experience, like users, will feel much more at home than those used to the plain vanilla DOS environment. Even application developers just getting comfortable with OS/2 kernel programming will have to throw out much of what they know to work within the Presentation Manager shell. Of course, programs using the OS/2 kernel functions for I/O (functions beginning with the VIO, KBD, and MOU prefixes) should run from a windowed command prompt with no adjustments, but they will not take advantage of the Presentation Manager's consistent graphical interface.

Application programs are insulated from direct contact with users by the Presentation Manager's Application Pro-

continued



Presentation Manager's graphical interface provides user-friendly multitasking.

gram Interface. The API is the underside of the Presentation Manager, providing all applications with a consistent interface in the same way that the topside provides a consistent interface to the user. From the program's point of view, there are only three kinds of output and one kind of input. The application can write either text, graphics, or dialogue information to a presentation space. The presentation space can be associated with devices (screen, printers, etc.) by the application. Input to the program comes from one source only: a message queue where the API posts messages to the program about user actions.

Four different types of devices can be associated with a presentation space. There are screen, memory, metafile, and device contexts, which allow you to access output hardware without resorting to application-specific device drivers. Of course, the screen is used for almost all program output, but sending data to a printer can be done using the same screen-display code; the application merely needs to associate the presentation space with a different device context. While graphics and text can be written to any device, dialogue information (which creates an interactive dialog box) can be written only to the screen display.

All program input comes through the message queue. Each window on the screen has its own queue, which contains information specific to that window. For example, when the user resizes a window using the mouse, the Presentation Manager posts a message in the window's queue letting it know that its frame has been resized and it must update its display. Similar messages are posted when the window is moved, minimized (reduced to a bit-map icon), or terminated. Messages are processed by the application in sequential order. Windows can also send messages to each other; a good example is a scroll-bar window relaying user-selection information to the window containing the text to be scrolled.

The message-based software architecture makes writing Presentation Manager applications very much like writing applications for Windows. A Presentation Manager application must begin by registering a window class and drawing a window. Next, it must create a message queue for itself. Most of the application's time is spent in a simple message-processing loop like the following:

```
while (WinGetMsg(hab,msg,
  filter,first,last))
WinDispatchMsg (hab,msg);
```

A quit message in the queue causes `WinGetMsg` to return a value of 0, dropping the program out of the loop. Any other message is processed by a window procedure, the real meat of the application. The window procedure is generally built around a structure like the C `switch` statement, where each message is handled by its own section of code.

What allows these programs to be written in a high-level language at all is a huge assortment of standard functions and definitions, provided only (for now) by Microsoft's Software Development Kit. The functions, though readily identified (`WinEnableWindowUpdate`) will take any non-Windows programmer a while to become comfortable with. The header files and the window-handling routines also add a high overhead to any program; the source code for a Presentation Manager "Hello World" program can be 3.2K bytes long, and even a carefully linked "Hello" executable can be over 11K bytes.

LAN Manager: The Missing Link

Certainly, the release of the Presentation Manager is a major step in the development of IBM's Systems Application Architecture (SAA). The ultimate goal is a standardized interface for both user and programmer, from application to application and from machine to machine. Helping to reach that goal are powerful operating-system utilities that behave toward the user like any other application. The latest of these is the LAN Manager, another key piece to the OS/2 puzzle.

While the Presentation Manager links OS/2 to the user, the LAN Manager aspires to a loftier goal: to link users to each other. Touting the promise of multitasking and transparent resource sharing, OS/2 stalks a domain once considered the exclusive province of powerful mainframe computers. Personal computers already pack the hardware punch necessary to meet the challenge; only the software gap holds them back. For the most part, the computer community shares the OS/2 vision. We only disagree on which standard will emerge. Now, finally, Microsoft lays its cards on the table.

The LAN Manager offers an interface much like the Presentation Manager's, with a system of hierarchical menus forming the user interface and the underlying API interfacing with OS/2. The user interface breaks down into four parts: the View menu, the Message menu, the Config menu, and the Status menu. The administrator can also access a fifth menu for system maintenance. A separate interface for console servers uses the same menu structure with options limited to sending messages and monitoring activity.

The user can also drive the LAN Manager directly from the command line. This not only allows batch files to automate command sequences, but it also ensures compatibility with other PC networking products such as PC-NET and

MS-NET. Microsoft, again, tries not to leave DOS behind in its grand scheme of connectivity. The LAN Manager runs in protected mode when linking to shared resources. But once connected, it can switch to the DOS environment to run MS-DOS applications.

While the user clicks through the friendly menus, the API churns away beneath the surface. In fact, many times the user won't even realize just how hard the API works. The API persistently strives for the dual goal of smooth operation and total transparency. If the user tries to send a message before loading the messenger module, the API loads it. Or suppose the user tries to access a remote disk without first connecting to the server. The LAN Manager will automatically start a session to the server, issue a Net Use command to access the shared disk, validate user-access level by submitting the user name and password specified at network start time, and then proceed with the user's original request. The user, meanwhile, sees only the response to the original request, completely oblivious to the API's work. The API will even try to reestablish a disconnected session if the user issues a command after losing the link.

DOS workstations also benefit from this intuitive interface. Workstations running Microsoft Networks version 1 or 2 cannot specify a user name or a group name—a necessary input to the LAN Manager servers running in user-level security mode. However, when the server receives the request from a DOS workstation, it automatically issues a *guest* user account, complete with permissions and passwords. If this account conforms to the access level requested, the LAN Manager makes the connection.



LAN Manager's menu structure makes it easy to set system parameters.

Share and Share Alike

Whether it be messages or files or physical devices, a LAN's principle purpose is to let users share common resources. As a LAN Manager administrator, you decide who shares which resources, as well as when and how they are shared. Using the Add Share command button from within the View menu, the administrator can select the resource to be shared, assign a share name, designate a drive and path if necessary, limit the amount of users who can access the resource, issue a password, and determine how the resource can be used.

In the case of shared printers or communications devices, the LAN Manager establishes a queue to route requests through the network. The administrator can add, delete, and reconfigure the queue, thereby retaining complete control over system requests and device access. The administrator can also establish pools of devices and route jobs to the first available device in the pool. The LAN Manager further enhances device access and priority routing by permitting more than one queue to send requests to a particular device or device pool. A series of queues, each assigned a different priority level, waits for an available device. Priority levels allow time-critical jobs to take precedence over those jobs assigned to a lower priority. Jobs with identical priority levels are processed FIFO (first in, first out). Requests within a queue can be scheduled for a specified time or date.

The network also shares disk space. The administrator can designate entire directories (to include subdirectories) for sharing or limit access to specific files. For added security, the administrator can determine which functions each user can perform. Even though a number of users may be able to access a directory on the shared disk, some of them may only be able to write files to the directory while others can delete files or change file attributes.

In addition to reading and writing files, the user, with proper permission from the administrator, can execute remote programs in server memory. In one swoop, the user shares a disk, a program, and even memory from the server. Updated files are left in the shared directory for other users in a group to access or modify.

The LAN Manager also includes a messenger service so users can send and receive messages across the network. The administrator can send messages to a group of users or to every user on the network. Each workstation is assigned a message name, and messages are usually routed via the message name, although you may also tag a message for a specific workstation or server by designating its computer name. A Pop Up option enables immediate display of a received message. The message will flash in the message box at the receiving workstation. Although the LAN Manager does not currently include a text editor for message composition, the message service will transmit files as well as short notes, so the user can compose a message on any word processor and relay the file across the network. If you wish, you can have your messages automatically stored in your message log.

Although further enhancements to the LAN Manager and the Presentation Manager will surely follow, the basic pieces of OS/2 are in place. The concept is grand, the structure inclusive, but the verdict is in the hands of the users, who must see if these final pieces of OS/2 fit into the real world. ■

Steve Apiki and Stanford Diehl are BYTE Lab testing editors. They can be reached on BIX as "apiki" and "sdiehl," respectively.

There are sure to be some who won't applaud our new range.



(The competition.)

So why won't our rivals be celebrating?

Well, to complement Dell's strong System 200 and 300 machines, we have introduced a 20MHz 386 and a 20MHz 286 – the very first to be launched in this country.

Add to that the fact that Dell's growing reputation is built not only on powerful and high performance products, but excellent quality and compatibility, and the competition's concern is understandable.

It's becoming widely known that Dell's direct manufacturer to customer relationship gives customers what they are looking for when considering buying a personal computer; an exceptional product, at the best price, together with excellent support and service.

We feel our approach makes sound business sense and perhaps explains how we have managed, in less than four years, to become the 7th largest supplier of PC's in the US . . . And why, over here, companies of the standing of BP Oil International are already standardising with Dell.

Because we design, manufacture and support our machines ourselves, Dell maintains total control over all aspects of quality. We even configure each machine to your specific requirements and fully test it at our UK headquarters.

New Models – 20 MHz power in 80286 and 80386 machines.

The System 220 achieves its powerful performance by use of state-of-the-art technology, such as the 80286 running at 20MHz, one Megabyte of paged interleave dynamic RAM, memory access lower than one wait state, and high speed, high capacity hard disks. The highly integrated main logic board – which includes built-in output ports, disk controller and VGA adaptor – enables us to fit all this power into a very small footprint.

This means that the Dell System 220 is the highest performing desktop computer currently available.

The Dell System 310 represents the ultimate in 80386 performance. The 20MHz 80386 microprocessor, together with its cache controller, 35ns Cache Static RAM, and its high speed 1:1 interleaved 600MB Disk capability, ensure that the Dell System 310 is suitable for the most demanding of users. In addition, support is provided for a 20MHz 80387 co-processor, essential for numerically intensive applications such as CAD/CAM and Artificial Intelligence.



Plus a Support Package Designed with You in Mind.

When you decide on Dell it means you work directly with the people who design and manufacture your machine. Nobody knows your system better.

The Dell Technical Hotline gives you access to an expert who has a full history of your purchase and the in-depth know-how you need to solve any problems instantly.

12 months' free on site service, and should your hardware need attention that can't be solved with a Hotline phone-call, a fully-trained engineer will be with you before the end of the next working day.

Our 30-day satisfaction Guarantee is exactly that – if you're not happy with your Dell computer we'll refund your money in full.

And of course there's a one year limited warranty covering parts and labour. So you can see why it makes sense doing business with Dell.

Talk Direct to Dell. Now.

There's so much more we'd like to tell you about Dell and why it's not just individuals and small companies but organisations like BP Oil International who are deciding on Dell.

Send the coupon freepost for our information pack. Or call, free, on 0800 414535 and discuss your computer requirements with an expert who'll be able to advise the best configuration for your needs and cost it.

DELL SYSTEM 220

The fastest 80286 PC-AT compatible computer on the market.
Utilising an 80286 microprocessor running at 20MHz, the System 220 is available with either 40MB or 100MB of hard disk storage. The small footprint (approximately 15" x 15" x 4") is achieved by use of a highly integrated main logic board. The main board supports one parallel port, two serial ports, VGA adaptor, disk controller, up to 8MB of RAM, and still has three full size slots available for user expansion. The system also features fast video/fast bios operation (utilising 384K of system RAM) for maximum throughput.
Probably the most versatile computer available today. Ideal for use either as a LAN workstation or as a LAN server, and applications such as simple wordprocessing or demanding CAD/CAM.
Sample configuration prices:

VGA MONOCHROME SYSTEMS

40MB hard drive **£2,099** 100MB hard drive **£2,699**

VGA COLOUR SYSTEMS

40MB hard drive **£2,399** 100MB hard drive **£2,999**

INCLUDED IN THE PRICE AS STANDARD: 80286 microprocessor at 20MHz, with socket for 80287. 1MB of system RAM. Support for LIM 4-0 expanded memory. Enhanced 102 key keyboard. Two serial and one parallel ports. Floppy drive (5.5" 1.44MB). Hard Disk drive. VGA colour monitor. Full Dell support package. Dell system analyser.

DELL SYSTEM 200

Utilising an 80286 microprocessor running at 12.5MHz, the System 200 is configured with 640Kb RAM, and can support up to 640Mb Hard Disks inside the system cabinet.
This high performance, attractively priced system is suitable for all general purpose computing applications; from use as a general workstation, to use as a LAN server.
Memory expansion to 4.6MB on the main logic board makes the system the perfect partner for the new Dell MS-OS/2.
Sample configuration prices:

MONOCHROME SYSTEMS

20MB hard drive **£1,299** 320MB hard drive **£3,399**

EGA COLOUR SYSTEMS

20MB hard drive **£1,599** 320MB hard drive **£3,699**

VGA COLOUR SYSTEMS

20MB hard drive **£1,799** 320MB hard drive **£3,899**

Other prices available for 40MB and 150MB on all systems.
INCLUDED IN THE PRICE AS STANDARD: 80286 processor at 12.5MHz, with socket for 80287. 640KB RAM (expandable to 16MB max). Enhanced 102 key keyboard. Two serial and one parallel ports. Floppy drive (either 3.5" or 5.25"). Hard Disk drive. Monitor and adaptor. Full Dell support package. Dell system analyser.

DELL SYSTEM 310

The premium Dell computer system, featuring a 80386 microprocessor running at 20MHz. The premium performance is achieved by use of the Intel Cache Controller chip (82385), high speed (35ns) cache memory, support of 80587 co-processor, support of high capacity-high speed (1:1 Interleave) ESDI disk drives (up to 640MB), and the ability to plug up to 16MB of the DRAM into the main logic board. The system also features fast video/fast bios operation (utilising 384K of system RAM) for maximum throughput. Suitable for demanding applications such as CAD/CAM and DTP, or for use as a powerful LAN server.
Sample configuration prices:

MONOCHROME SYSTEMS

40MB hard drive **£2,799** 320MB hard drive **£4,599**

EGA COLOUR SYSTEMS

90MB hard drive **£3,699** 320MB hard drive **£4,899**

VGA COLOUR SYSTEMS

90MB hard drive **£3,899** 640MB hard drive **£7,899**

Other prices available for 90MB/150MB and 640MB on all systems.
INCLUDED IN THE PRICE AS STANDARD: 80386 microprocessor at 20MHz, with socket for 80387. 1MB of system RAM. Enhanced 102 key keyboard. Two serial and one parallel ports. Floppy drive (either 5.5" or 5.25"). Hard Disk drive. Monitor and adaptor. Full Dell support package. Dell system analyser.

DELL
COMPUTER
CORPORATION

DELL COMPUTER CORPORATION, COOKHAM ROAD, BRACKNELL, BERKSHIRE RG12 1RD. TEL: 0344 860456.

HMSO Public sector purchasers may buy at different terms through HMSO. Call (0603) 695257 for details.

0800 414535

Send for more information B10/88

I'd like to know more about Dell Computers. Please send me your latest information pack. Return this coupon to Dell Computer Corporation, FREEPOST (RG 1462), Bracknell, Berkshire RG12 1BR, or fax us on 0344 860187.

Name _____

Position _____

Company _____

Address _____

_____

_____ Postcode _____

Telephone No. _____

Microsoft and MS-OS/2 are registered trade marks of their operating company. All system prices and specifications are subject to change without notice. All orders are subject to Dell's standard terms and conditions of sale which are available upon request. VAT and delivery are extra. MS-DOS is not included in the pricing.

Buy with

Confidence



In an effort to make your telephone purchasing a more successful and pleasurable activity, The Microcomputer Marketing Council of the Direct Marketing Association, Inc. offers this advice, "A knowledgeable buyer will be a successful buyer." These are specific facts you should know about the prospective seller before placing an order:

Ask These Important Questions

- *How long has the company been in business?*
- *Does the company offer technical assistance?*
- *Is there a service facility?*
- *Are manufacturer's warranties handled through the company?*
- *Does the seller have formal return and refund policies?*
- *Is there an additional charge for use of credit cards?*
- *Are credit card charges held until time of shipment?*
- *What are shipping costs for items ordered?*

Reputable computer dealers will answer all these questions to your satisfaction. Don't settle for less when buying your computer hardware, software, peripherals and supplies.

Purchasing Guidelines


- *State as completely and accurately as you can what merchandise you want including brand name, model number, catalog number.*
- *Establish that the item is in stock and confirm shipping date.*
- *Confirm that the price is as advertised.*
- *Obtain an order number and identification of the sales representative.*
- *Make a record of your order, noting exact price including shipping, date of order, promised shipping date and order number.*

If you ever have a problem, remember to deal first with the seller. If you cannot resolve the problem, write to MAIL ORDER ACTION LINE, c/o DMA, 6 E. 43rd St., New York, NY 10017.

This message is brought to you by:

the MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.
6 E. 43rd St.,
New York, NY 10017


MMC
MICROCOMPUTER MARKETING COUNCIL
of the Direct Marketing Association, Inc.

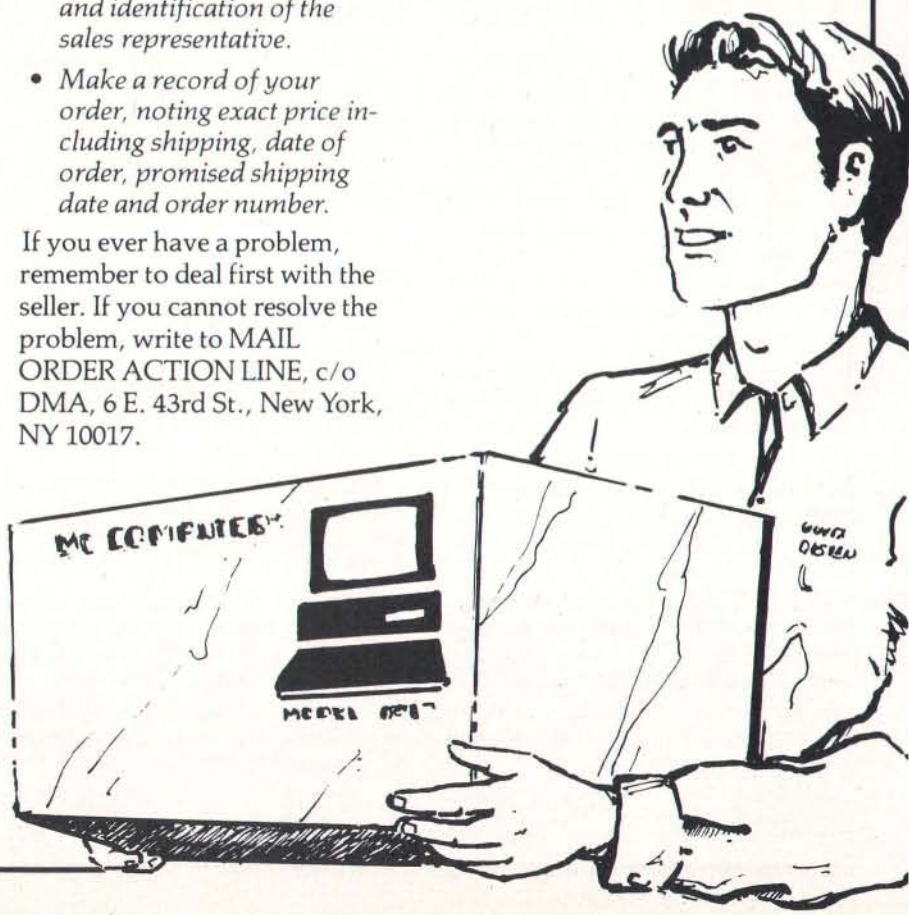

© Direct Marketing Association, Inc. 1988


BYTE Limited Editions

#E $55

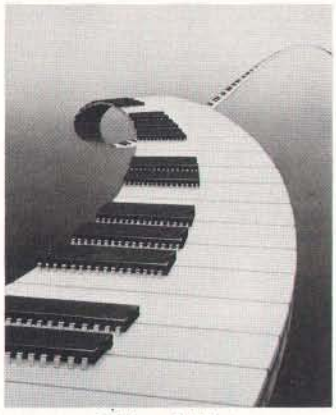

Chips of Note

#F $55

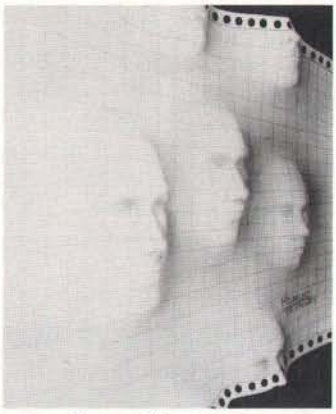

Human Dimensions

Striking 16″ × 20″ Limited Edition Prints from the pages of Byte. Each print is signed and numbered by the artist, Robert Tinney.

Limited Edition Classics

You've seen them on the cover of Byte — now enjoy these delightful images as stunning limited edition prints! Each print pictured here is published in an edition strictly limited to only 1000 signed and numbered prints, and each is accompanied by its own Certificate of Authenticity.

These gorgeous reproductions are printed on select 100% cotton fiber stock; this is a museum grade acid-free paper, highly resistant to yellowing and cracking. You will be assured of a print which will retain its color and beauty for generations.

Price and Shipping


The price of Byte Limited Editions, which depends on the number of unsold prints in each edition, is shown above each print pictured here. In addition, a 15% discount is available if you order two or more prints.

Your prints will be shipped flat, usually within a week of our receipt of the order. Shipping is via UPS Blue Label.

Guarantee

Ship your prints back to us within 30 days of your order, and you will be given a complete, no-questions-asked refund.

#A $60



Intelligent Reflections

#B $55




Storage Space

#C $55



Technological Breakthrough

#D $55



Number Crunching

Yes! Send me the following Byte Limited Editions.

QTY.	#	TITLE	AMOUNT
			$
			$
			$
			$
			$
			$
		Deduct 15% if ordering two or more prints.	$
		Shipping: $4 ($20 overseas).	$
		TOTAL	$

☐ Please send your COLOR brochure

☐ I have enclosed U.S. check or money order.
☐ C.O.D. (via UPS—stateside orders only)
☐ VISA ☐ MasterCard ☐ American Express

Card #: _____

Expires: _____ Signature: _____

Ship my Print(s) to:

Name: _____

(Business): _____

Address: _____

City: _____

State: _____ Zip: _____

mail this coupon to:
Robert Tinney Graphics
1864 North Pamela Dr.
Baton Rouge, Louisiana
70815

For VISA, MasterCard or American Express orders, or for more information

Call 1-504-272-7266



80386s for the Masses

Twenty 80386-based clones that offer a revolutionary new feature—affordability

Steve Apiki and Stanford Diehl



Intel's introduction of the 80386 chip in 1986 set the DOS world on its ear. It ushered in a new age, where multitasking, greater memory access, and ever-increasing processing speed blurred the distinction between mainframes and microcomputers. This chip put dazzling power at the fingertips of every user willing to shell out $5000 to $15,000 for a Compaq Deskpro 386 or an IBM PS/2 Model 80.

Over the last year, however, the 80386 system market has grown from these elite few to look much more like the market for IBM PC AT clones, with offshore vendors assembling systems and sparing every expense. Most of these new entrants are the same ones who have been selling AT clones for years, and many of them offer fantastic savings.

Don't let these unfamiliar names and logos fool you: These are real 80386s, capable (with enough memory) of running OS/2 or Windows/386, and of reaching more memory than an AT ever dreamed of. They can be hooked up to networks and configured as multiuser systems or used as Unix workstations. Bargain systems they may be, but even at these bare-bones prices, an 80386 machine is hardly a commodity item. Every system deserves close inspection, something not easy to do when dealing with a mail-order house.

For this month's Product Focus, we chose a group of systems selling in usable configurations for under $3000 (see table 1). Our minimum requirement was that they include a clock speed of at least 16 MHz, 1 megabyte of memory, a 40-megabyte hard disk drive, a 1.2-megabyte floppy disk drive, a hard disk drive and floppy disk drive controller, a monochrome graphics card and monitor, a 101-key keyboard, a power supply, and both serial and parallel ports. In other words, the systems we tested had to be fully equipped.

What surprised us was not only the sheer number of systems meeting this requirement, but also the many optional features available. Some companies were able to throw in an extra megabyte of memory, for example, or upgrade from the usual 16-MHz system to 20 MHz. Of course, almost all the manufacturers offer upgrades of these base systems, if high performance is a must (see the text box "Upgrading from Entry Level" on page 168).

None of these machines are built around Intel's 80386SX, which is expected to unleash a flood of low-cost systems later this year. The 80386SX is a midrange processor, offering 32-bit capability, but with a slower 16-bit data bus. These review systems are true 32-bit systems, inside and out, and they rely on mass production and low-cost compo-



Photo 1: *Two affordable 80386 machines that perform remarkably well—the Micro Express ME 386 (left) and the Gateway 386 (right).*

nents to cut costs. All were evaluated using the new 80386 versions of our standard system benchmarks (see the text box "80386 Benchmarks" on page 172).

Heart and Soul

When we sat down and started using these systems, we got used to seeing many of the same things: the same beige AT case, the same amber monochrome display, the same keyboard, and even the same motherboard. Most of these machines are assembled by resellers who simply take the components and put them in a box. The result is a hodgepodge of drives, power supplies, and system boards, where the only way to differentiate the systems is to take note of their choice of subsystems.

In such an environment, the best barometer of performance is the motherboard itself—the heart and soul of the machine—which simply becomes another component. Manufacturers can and do, however, make modifications to the same motherboard that can result in dramatic performance differences. They can adjust the memory speed and amount or change the clock frequency. What's more, some of these resold motherboard designs are clearly superior to others.

Unlocking the power of the 80386 requires complex memory interfacing. Its 32 data lines require 32-bit memory and a 32-bit path to reach it; its 32 address lines can theoretically access 4 gigabytes, but DOS limits program space to 640K bytes. Taken together, these factors impose restrictions on both the system designer and the user.

All these systems have 32-bit data paths on the system board, but you can fit only so much memory in the limited physical space. The only place to add more memory becomes the expansion slot, where you don't always get the full data path. Three of the systems—the Pacesetter 386, the Uniq 386, and the GCH EasyData 386—rely on stuffing the board with single in-line memory modules (SIMMs) to conserve real estate. Others—like the six units that share the Micronics 08-002-201 motherboard—do away with on-board memory entirely and simply have expansion cards on 32-bit slots.

The rest feature conventional memory on-board and an option for expansion using memory cards. Only 13 of the 20 systems tested, however, feature 32-bit expansion slots (see table 2); for the rest, you must fall back on 16-bit memory.

Going to a 16-bit slot halves the performance of the 80386, because it is forced to get the first word and then the second rather than making the 32-bit fetch it's capable of. At that point, your high-priced 80386 is acting like an 8086. Other memory performance hits occur when a CPU makes sequential access to the same memory bank. While the Micronics-based systems and a few others employ static RAM (SRAM), most systems make use of bank-switched dynamic RAM, where the CPU accesses one bank while the other bank of DRAM is refreshed. If a read or write operation

continued

Table 1: *For less than $3000, all these systems offer at least a 16-MHz CPU and 1 megabyte of RAM, with a variety of memory configurations and expansion options (● = yes; ○ = no).*

Computer	Price	CPU										Motherboard
		Speed	Waits	Speed select (MHz) 4.77	6	8	10	12	16	20	FPU slot	
Blackship 386	$2813	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/B
Bus 386	$2800	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/B
Club 386	$2724	16 MHz	0/1	○	○	●	○	○	●	○	287	Everex EV-3000A
CompuAdd Standard-386	$2705	16 MHz	0	●	●	●	○	○	●	○	287	FS-101
DataWorld 386	$2744	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/B
Fortron 386	$3000	20 MHz	0	○	○	○	●	○	○	●	287	Cache Comp 386-1001-002
Gateway 386	$2995	20 MHz	0	○	●	●	●	●	○	●	287/387	Gene 386
GCH EasyData 386	$2994	16 MHz	0/1	○	○	●	○	○	●	○	287/387	GCH PCB-386-AT-16
Hertz 386	$2995	16 MHz	1	○	○	●	○	○	●	○	387	Intel iSBC 386-AT
Micro Express ME 386	$2954	20 MHz	0/1	○	○	●	○	○	○	●	287	AMI-386
Micro 1 Power 386/20	$2995	20 MHz	0	●	●	●	○	○	○	●	387	Micronics 08-011-201
PC Network THE PC 386	$2854	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/A
Pacesetter 386	$2995	20 MHz	0/1	○	○	●	●	○	○	●	287/387	CompuSystems ver 1.0
Spear Mono-386A	$2500	16 MHz	0/1	○	○	●	○	○	●	○	287	Everex EV-3000A
Suntronics-386	$2785	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/A
Uniq 386	$2675	16 MHz	0	○	○	●	○	○	●	○	287	2M 810-04
Value 386	$2831	16 MHz	0	●	●	●	○	○	●	○	287	Micronics 08-002-201/B
VIPC Micro 386	$2999	20 MHz	0/1	○	○	●	○	○	○	●	287/387	AMR Micro 386
Whole Earth 386	$2995	16 MHz	0/1	○	●	○	○	○	●	○	287	AMI/Mylex 386
Zeos 386 Tower	$2995	16 MHz	0/1	○	●	○	○	○	●	○	287	AMI-386

[1] Memory-access times may vary with machine purchase.
[2] Requires motherboard modification; otherwise, 1 megabyte.
[3] S = static; D = dynamic.

is attempted twice consecutively on the same bank, a delay is imposed on these systems. This performance problem lies in wait for any DRAM-based system; only faster RAM can help.

One system feature that can do wonders for processing speed is a memory cache. Six of these systems use a RAM cache to boost their processing power: the Micro Express ME 386, the Zeos 386 Tower, and the Whole Earth 386, with the AMI motherboard; Spear's Mono-386-A and the Club 386, with motherboards much like the AMI; and the Micro 1 Power 386/20. The cache is, in all but one case, 64K bytes of 32-bit SRAM, with short access times (40 to 45 nanoseconds). The Micro 1 features a 32K-byte RAM cache. The power of this feature was demonstrated in our benchmarks (see the graphs on page 173), where the top finisher overall and the top finisher in the 16-MHz group both had memory caches.

Most of these systems use the 384K bytes of RAM between 640K bytes and 1 megabyte—which DOS can't directly address—to relocate BIOS or video BIOS from slow ROM (sometimes referred to as shadow RAM). This feature did not make a significant difference on our benchmarks, but software that makes frequent BIOS calls should see significant improvement.

Raw CPU and memory speed are, of course, important factors that can't be overlooked. All these systems use the 80386 double sigma, the standard chip with 32-bit address and data lines. While six systems run a 20-MHz clock, only four actually use the 80386-20. The other two, the Gateway 386 and the VIPC Micro 386, use the same 80386-16 as every other system and simply run it at higher than its rated speed. Both machines turned in good benchmark performances, but constantly running any piece of equipment out of spec is a risky proposition at best.

Gateway added to the performance of its machine by including 60-ns RAM, which placed it well within the true 20-

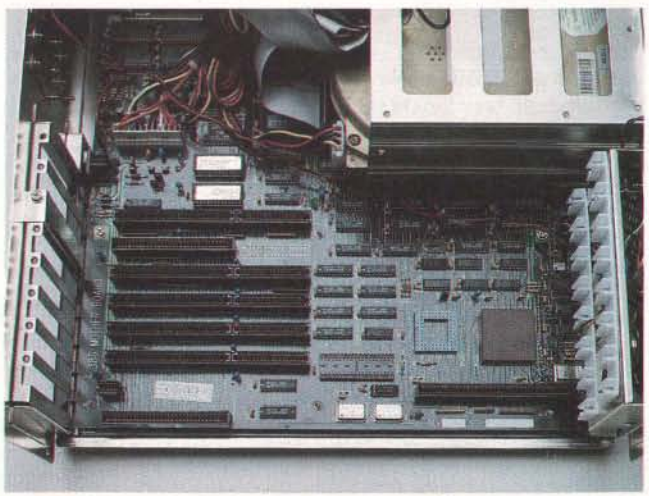


Photo 2: *Inside the Gateway 386: a 20-MHz clock, dual 80287/80387 support, and a 32-bit expansion slot provide power and room for growth.*

RAM						ROM BIOS	Runs OS/2 as configured	Power supply
On-board memory	Type[3]	Access time	Extended memory	Max. 32-bit memory	Cache			
1 M	S	80 ns	0	10 M	None	Phoenix 386 BIOS 1.10.B2	○	220 W
1 M	S	80 ns	0	10 M	None	Phoenix 3.07	○	200 W
1 M	D	120 ns[1]	0	4 M[2]	64K	AMI 386 BIOS	○	192 W
1 M	S	100 ns	0	10 M	None	Phoenix 386 BIOS 1.10.B1	○	200 W
1 M	S	80 ns[1]	0	10 M	None	Phoenix 386 BIOS 1.10.B2	○	230 W
1 M	S	80 ns	0	10 M	None	Award 386 BIOS c3.03	○	200 W
1 M	D	60 ns	0	12 M	None	Award 386 BIOS c3.03	○	200 W
2 M	D	100 ns	1 M	16 M	None	Phoenix 1.00 03	●	200 W
2.5 M	D	120 ns	2 M	16 M	None	Phoenix 386 BIOS 1.00.00	●	220 W
1 M	D	100 ns	0	4 M[2]	64K	AMI 386 BIOS	○	220 W
1 M	S	80 ns	0	10 M	32K	Phoenix 386 BIOS 1.10.B2	○	200 W
1 M	S	80 ns	0	16 M	None	Phoenix 386 BIOS 1.10.B2	○	200 W
1 M	D	100 ns	0	8 M	None	Phoenix 386 BIOS 1.01.02	○	200 W
1 M	D	80 ns	0	4 M[2]	64K	AMI 386 BIOS	○	200 W
1 M	S	80 ns	0	10 M	None	Award 386 BIOS c3.03	○	200 W
1 M	D	120 ns	0	8 M	None	AMI 386 BIOS	○	200 W
1 M	S	80 ns	0	10 M	None	Phoenix 386 BIOS 1.10.B2	○	220 W
2 M	D	100 ns	1 M	10 M	None	Quadtel BIOS	●	200 W
1 M	D	120 ns	0	4 M[2]	64K	AMI 386 BIOS	○	200 W
1 M	D	120 ns	0	4 M[2]	64K	AMI 386 BIOS	○	200 W

MHz category on our index. While memory speed played a role in all machines' success on our tests, the effect was outweighed by caching and clock speed more often than not.

Each reviewed machine has provisions for changing the CPU clock speed. Most are constantly running at a bus speed of 8 MHz to maintain compatibility with other devices. Several have multiple crystals on-board and are able to switch to four different speeds.

You should consider more than speed when evaluating a motherboard. A key point is expandability—though 32-bit slots are important for memory expansion, 8-bit and 16-bit slots are just as vital for everyday cards like disk drive controllers and graphics adapters. The systems all have between four and six 16-bit expansion slots. On-board memory capacity must also be considered, because the price of a chip set is far less than the price of an expansion card. All machines also include battery-backed clock chips.

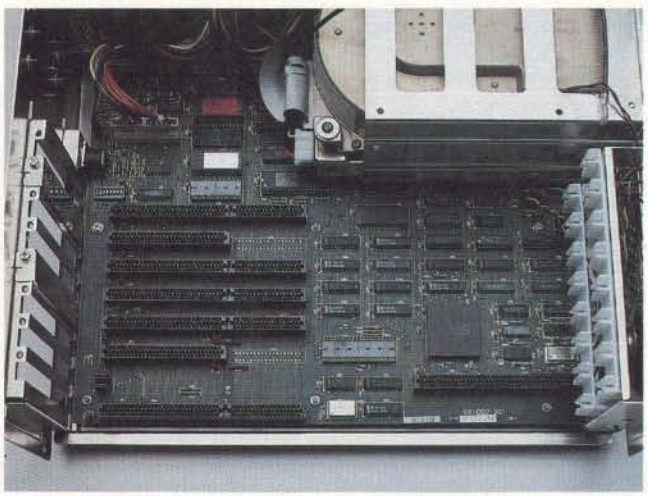


Photo 3: *The popular Micronics 08-002-201 motherboard found in 6 of the 20 review machines (the Blackship 386 is shown here).*

While the AMI motherboard mentioned earlier may well be the fastest, the most unusual is easily the AMR Micro 386 on the VIPC Micro 386. The VIPC, a proprietary design, includes everything but the disk drive controller on the motherboard, leaving all but one 16-bit slot available for future expansion. A serial port, a parallel port, and EGA circuitry are built in. This saves a considerable amount of money when configuring an EGA system, but you wind up paying for EGA even if you don't need it. The VIPC suffered on our benchmarks because monochrome EGA is several times slower than Hercules graphics.

The Difference a Drive Makes

As July's roundup of hard disk drives pointed out, only system clock speed affects your computer's performance more than drive access times. A slow disk drive can seriously thwart the impressive processing speed of the 80386 chip. You cannot simply drop the chip into a system and expect breathtaking performance.

continued

Upgrading from Entry Level

Just because you've decided on an entry-level 80386 system doesn't mean you have to live with it forever. Choosing a versatile system initially can lead to a wealth of performance-enhancing options down the road. As with any computer purchase, the number one criterion in selecting an upgrade path must be its utility in performing your primary application.

The best upgrade for calculation-intensive applications is a floating-point unit. An 80287 or 80387 can, in some cases, double your processing speed. We ran the 16-MHz Compaq Deskpro 386 through our benchmarks—with and without an 80287—and the difference was striking: a score of 10.38 on our application index versus 8.81, and that's taking into account applications that don't access the FPU at all.

There is also a marked difference between running an 80287 and running an 80387. Not only does the 80387 allow for direct 32-bit communication with the 80386, but its special hardware-implemented transcendental functions let it calculate sines and exponentials with ease.

To test the effect of a fast 80387 on overall system speed, we ran the benchmark suite on a 20-MHz Deskpro 386/20. The results: 17.93 when including the coprocessor, and 14.25 when leaving it out. Again, the numbers factor in applications like word processing and databases, which perform the same with or without the FPU.

Coprocessors let you compile and run programs specifically made to take advantage of 8087 code. Most FORTRAN and C compilers include library routines for this purpose; the alternative, using emulator code, is not nearly as good as the real thing. As an example, consider the numbers earned by these machines on our Livermore Loops and LINPACK tests. All of them, using the test compiled with emulation routines, scored significantly lower than the 80287-equipped IBM PC AT. The AT scores 0.0237 million floating-point operations per second on the Livermore Loops and takes 1010.22 seconds to execute the LINPACK; compare these with the benchmark results on page 172.

Adding memory is another way to increase performance without wasting any of your initial investment. The real multitasking power of an 80386 can be put to use only if you have enough space to use it in. Adding memory above the 1-megabyte level will let you use OS/2, which requires 1.5 megabytes. Memory must be at the same speed throughout the system, and it must be added in full-bank increments.

Unlike the standard 8-bit PC slot and the standard 16-bit AT slot, there is no standard for 32-bit expansion boards. You will often need to purchase memory boards from the same source as your system board, and your ability to upgrade memory may be only as good as the longevity of your system's manufacturer. Dynamic RAMs are not cheap, and more and more memory is not always the answer. If you plan to use your 80386 more as a fast AT than as a multitasking system, better upgrade choices are available.

One of the best choices is adding a faster hard disk drive. Drive-access time contributes to delays no matter what applications you run. There is a difference, however, between adding memory or a coprocessor and upgrading your drive: The upgrade makes your current hard disk drive obsolete. If you have additional drive bays, you can continue to use your old drive, of course, but chances are you won't use it often enough to justify its original cost.

Nevertheless, the drive will probably be the slowest subsystem on your 80386, and a natural target for replacement. When you choose to do so, you can choose those with new high-speed small-computer-system-interface or enhanced-small-device-interface controllers that can cut average seek times from 28 milliseconds to 10 ms. These will really accelerate the performance of your system, but be prepared to pay dearly for them.

Other upgrade options will, like additional memory, affect your capability more dramatically than they will affect your performance. Color graphics, for example, will let you use the speed and power of the 80386 for CAD applications. With a sufficiently versatile system, the possibilities for improvement are almost endless.

Vendors, in an effort to stake a claim in the inexpensive 80386 market, must cut corners wherever possible by weighing the trade-off between low price and lost performance. Nowhere is that delicate balance more critical than in the choosing of a hard disk drive. That's because vendors can save considerable money by installing a bargain drive, and they can fatally hobble their system in the process.

Four of the systems employ the Seagate ST251-1 40-megabyte hard disk drive (see table 2), and for good reason: The company and the drive enjoy an excellent reputation. The drive's price is one of the lowest on the market, and it's a solid, dependable product. Six others opted for the original ST251, a slower drive, and the move turned out to be particularly bad for the PC Network THE PC 386, which finished last on our disk benchmarks.

Zeos, on the other hand, opted for the Seagate ST277R, and our benchmarks reveal that the choice was a good one. In addition to excellent performance, the ST277R delivers over 50 percent more storage space, packing in 64 megabytes of data. Despite a slow access time of 40 milliseconds, the ST277R achieves its performance boost by employing run-length-limited (RLL) encoding at 7.5 megabits per second. The ST251-1 uses the same ST412 interface as the ST277R, but it uses modified-frequency-modulation (MFM) encoding at 5.0 megabits per second. The original ST251 uses the old ST506 interface.

While Zeos made a good choice, other vendors did not. Uniq Technology should have heeded our July warning. That month's Product Focus placed the Microscience HH-1050 at the bottom of the benchmark results. Unfortunately, Uniq placed that same drive into its system and paid the price of poor performance. Those vendors selecting the Seagate ST4053 (VIPC, Blackship, and Value) also suffered the consequences, as all three systems placed in the bottom half of our drive benchmarks and our overall rating. Micro Express went with the Priam V150, and that drive certainly did not hamper the system's top-of-the-heap performance.

Disk drive controllers also play an important role. Since these systems are best thought of as entry machines on which to build, the controller should conform to that philosophy by offering ready expansion. All the systems tested support two

continued



UNLOCK ITS FULL 386 POWER WITH SCO XENIX 386 – NOW!

Under DOS, the COMPAQ DESKPRO 386/20™ is a powerful single-tasking, single-user system that can run thousands of DOS applications. In 16-bit, 8086 mode.

One at a time.

When OS/2™ software becomes available, this computer can become a multitasking, single-user system running in 16-bit, 286 mode that can also single-task those DOS applications under OS/2.

One at a time.

With DOS or OS/2, it will support one user—for the cost of the entire system.

Under SCO™ XENIX® 386, however, the COMPAQ DESKPRO 386/20 becomes a powerful multitasking, multiuser system that can run thousands of proven XENIX applications. In full-tilt, 32-bit, 386 mode.

Many at a time.

Using SCO VP/ix,™ it can multitask all the same DOS applications under SCO XENIX.

Many at a time.



With SCO XENIX 386, this powerful computer can support multiuser configurations of 16, 32, or even more workstations with such blazing performance that individual users will believe they have the whole system to themselves—at an unbelievably low cost per user.

And the best news is that you can unlock the full power of the COMPAQ DESKPRO 386/20 today because you can get SCO XENIX 386—now!

SCO XENIX System V and the SCO XENIX family of software solutions is available for all industry-standard 8086-, 80286-, and 80386-based computers, and the IBM® Personal System/2™ Models 50, 60, and 80.

SCO
THE SANTA CRUZ OPERATION

(800) 626-UNIX (626-8649)
(408) 425-7222
FAX: (408) 458-4227
TWX: 910-598-4510 SCO SACZ
uucp:...decvax!microsoft!sco!info

Circle 234 on Reader Service Card

IBM is a registered trademark and Personal System/2 and OS/2 are trademarks of International Business Marchines Corporation. • COMPAQ DESKPRO 386/20 is a trademark of Compaq Computer Corporation. • SCO is a trademark of The Santa Cruz Operation, Inc. • XENIX is a registered trademark of Microsoft Corporation. • VP/ix is a trademark of INTERACTIVE Systems Corporation. 11/87
©1987 The Santa Cruz Operation, Inc., 400 Encinal Street, P.O. Box 1900, Santa Cruz, CA 95061
The Santa Cruz Operation, Ltd., 18 Noel Street, P.O. Box 4YN, London W1A 4YN United Kingdom, +44 1 439 2911, (FAX): +44 1 637 9381, TELEX: 917372 SCO UDN

Table 2: *The systems use a wide variety of disk drives, which differ substantially in performance.*

Computer	Controller	Floppy	Hard disk		
			Type	Access	Capacity
Blackship 386	WDC WD1003-WA2	1.2 M	ST4053	28 ms	44 M
Bus 386	LCS-6620TX	1.2 M	ST251	40 ms	42 M
Club 386	Everex EV-332	1.2 M	Micropolis 1333A	28 ms	44 M
CompuAdd Standard-386	WDC WD1003-WA2	1.2 M	MiniScribe 6053-II	25 ms	44 M
DataWorld 386	WD-1006-WAH/WD-1002 FDC	1.2 M	ST251	40 ms	42 M
Fortron 386	Ntl. Computer Ltd. NDC5425	1.2 M	ST251-1	28 ms	42 M
Gateway 386	WD-1006-WAH/WD-1002 FDC	1.2/1.44 M	ST251-1	28 ms	42 M
GCH EasyData 386	Data Technology 5280CRA	1.2 M	ST251	40 ms	42 M
Hertz 386	WDC WD1003-WA2	1.2 M	Micropolis 1323A	28 ms	44 M
Micro Express ME 386	Ntl. Computer Ltd. NDC5425	1.2 M	Priam V150	28 ms	44 M
Micro 1 Power 386/20	WDC WD1003-WA2	1.2 M	Toshiba MK-134FA	25 ms	44 M
PC Network THE PC 386	WDC WD1003-WA2	1.2 M	ST251	40 ms	42 M
Pacesetter 386	WDC WD1003-WA2	1.2 M	ST251-1	28 ms	42 M
Spear Mono-386A	Everex EV-332	1.2 M	ST251	40 ms	42 M
Suntronics-386	WDC WA2-16	1.2 M	ST251	40 ms	42 M
Uniq 386	WDC WD1003-WA2	1.2 M	Microscience HH-1050	28 ms	44 M
Value 386	WDC WD1003-WA2	1.2 M	ST4053	28 ms	44 M
VIPC Micro 386	WDC WD1003-WA2	1.2 M	ST4053	28 ms	44 M
Whole Earth 386	WDC WD1003-WA2	1.2 M	ST251-1	28 ms	42 M
Zeos 386 Tower	Adaptec 2372	1.2 M	ST277R	40 ms	64 M

Software key: a) Setup/diagnostics
b) Disk utilities/disk management
c) Video utilities
d) I/O utilities
e) 386 utilities
f) Memory management
g) MS-DOS 3.30 w/GWBASIC

hard disk drives and two floppy disk drives. Most vendors selected the Western Digital controller (WD1003-WA2) for the same reason that many selected the ST251-1 hard disk drive.

The Adaptec 2372 controller boosts the performance of RLL-encoded drives, but using MFM encoding lets you upgrade without buying a new controller.

National Computer Limited's NDC5425, the controller of choice in two of the three top performers, also proved a worthy product, delivering functionality, expandability, and 2-to-1 interleave.

DataWorld and Gateway reverted to a dedicated hard disk drive controller paired with a separate floppy disk drive controller. The 1-to-1 interleave of this combination enabled these two machines to finish second and third on our drive benchmarks, just behind the Adaptec 2372/ST277R-equipped Zeos.

The Flesh and Bones

With so much emphasis being placed on the nitty-gritty system components—CPU, memory, and hard disk drive—the nuts-and-bolts features that bring it all together are often overlooked. Most users don't put much thought into the selection of things like monitors, keyboards, and cables. Sure, they are necessary, but as long as they perform the basic functions, you're covered.

But think about that. The keyboard and the monitor are your direct interface with the computer. That's where the rubber hits the road. Though a blurry monitor or a defective keyboard might not affect basic system performance, it most certainly will affect your productivity, your enjoyment while working on the computer, and, in the long run, your overall evaluation of the product.

All the systems include monochrome graphics cards, except for the VIPC, which comes with an EGA on the motherboard. With the exception of the Bus 386's monochrome card, all the graphics cards also include an additional printer port. Each card supports 720- by 348-pixel resolution and packs a 64K-byte video buffer. The graphics cards in the Fortron 386 and the Gateway 386 performed the best in our video benchmarks.

The monitors also share the same basic specifications, although several vendors offer a 14-inch display rather than the standard 12-inch model. However, it was the shape of the screen, rather than the size, that made the biggest difference. The new flat display screens with square corners definitely presented a crisper image with less glare. While GCH, Hertz, CompuAdd, and Suntronics ship flat screens, we especially liked the EverVision 14-inch flat display atop the Club and Spear machines.

Like art and pizza combinations, the satisfactory feel of a computer keyboard is a matter of personal taste. In general, though, most people prefer a keyboard with positive tactile response and firm recoil. All these systems include either a 101-key or 102-key layout in the Enhanced IBM AT style.

The feel of the keyboards covered a wide range, from very subtle differences to basic design differences. The Blackship, Suntronics, and PC Network keyboards all lacked that comforting feel of positive tactile response: It's hard to tell when you've made true contact with the keys. Fortron's keyboard had miniature Control and Alt keys, and it also suffered from excessive recoil. On the other hand, the DataWorld, Hertz, Pacesetter, Value, Whole Earth, and Zeos key-

Video			Expansion slots			Ports			Software Included
Board	Monitor	Size	8-bit	16-bit	32-bit	Printer	Serial	Game	
DTK	Quimax	14"	2	5	1	2	2	1	a,f
MGC	Panasonic	12"	2	5	1	1	1	1	a,d
Everex	EverVision	14"	2	6	0	1	1	0	b,c,d
MG-150	Samsung	12"	2	5	1	1	0	0	a,c
Graphicsmith MGP	Samsung	12"	2	5	1	2	1	1	a,f
MGP Monochrome	Samsung	12"	2	5	1	2	2	0	a,b,f
TOP MGP	Samsung	12"	2	5	1	2	2	1	a,f,g
MGP Adaptor	X-TRON	14"	2	5	1	2	1	0	a,b
Everex	Hertz	14"	2	4	2	2	1	0	a
Turbo MGP	VM-1400	14"	2	6	0	2	1	0	a
MG-132	Samsung	12"	2	5	1	2	1	1	a,b,c,d,f
6046 MGP	Samsung	12"	2	5	1	2	2	1	a,b,f
Twinhead	Packard Bell	12"	2	6	0	2	1	0	a,e
Everex	EverVision	14"	2	6	0	2	1	0	a,b,c,d,g
MGP	Mitsuba	14"	2	5	1	2	1	1	a
MG-150	Samsung	12"	4	4	0	2	1	1	a,c
Hercules	Samsung	12"	2	5	1	2	1	1	b,e,f
Motherboard	Quimax	14"	1	6	1	2	2	0	a,c
C&F Herc Comp	Packard Bell	12"	2	6	0	1	1	0	b,c
CT-6040T	Packard Bell	12"	2	6	0	2	1	1	b,c

boards all had the IBM-like true-click feel.

Almost all these systems use cables with a basic design flaw: They're just too darn short. This problem rears up most flagrantly with the Zeos system because of its "tower" configuration. This setup lets you free desk space by placing the unit on the floor beneath you, but the cables were so short that we still had to put the Zeos on the table with its monitor and keyboard. Kind of defeats the purpose of the "tower" design, doesn't it? CompuAdd's Standard-386 commits a worse oversight by omitting a COM1 port. You can expect an immediate upgrade if you go with this unit.

Another oft-overlooked item is documentation, and with these systems, clear documentation is not a given. Most of the vendors simply ship the manuals provided by the component manufacturers. This includes the woefully inadequate hard disk drive installation manual for those systems packing Seagate drives. We found confusing jumper settings on the Gateway machine, and the motherboard documentation did little to help. The motherboard manual shipped with the Uniq system was so poorly written that it was often incoherent.

In fact, a lack of clear and useful documentation plagued all these systems, although the Spear Operations Manual and the Club User's Manual were more comprehensive than most, and the Pacesetter's Technical Reference Guide displayed impressive depth.

The Price of Paying Less

While these systems offer attractive price breaks, most of the companies are unknown quantities in the 80386 market. Most haven't yet built a strong track record. If you end up spending saved money on repair bills, enhancements, or perhaps even another computer before the expected life has expired, you end up losing in the long run.

Major vendors, on the other hand, usually have a proven track record. Good or bad, that track record is something to go on. It's often a key to such factors as durability, reliability, and customer satisfaction. These vendors usually have established a network of customer support that few minor vendors can match. Though the minor vendors often have a technical-support department, staffing is usually inadequate.

Remember, also, that these vendors had to cut costs somewhere. Just make sure you know where the cuts were made and what the trade-offs are. For example, a couple of the vendors, Gateway and VIPC, shipped 20-MHz crystals with 16-MHz chips. The chips will run at 20 MHz, but the manufacturer will not guarantee performance at that rate. So it's a gamble. You have to decide if that kind of risk is worth taking.

Given the piecemeal structure of these systems and their low price, you'd expect to run into a few problems now and again. We expected to run into a few during this review, but it went far beyond our expectations. Fully 6 of these 20 machines had problems when we first received them, problems that ranged from nuisances to complete system failures. And these are demonstration units, which should be the cream of the crop.

Problems included BIOS fatal errors, erratic disk failures, a nonfunctioning serial card, and the especially annoying keyboard with the *T* key not working. Some systems were shipped with mechanical problems, like a full-height disk drive jammed into a drive bay at a 45 de-

continued

Computer	Conventional benchmark results			BYTE Benchmark Indexes: Low-level			Application-level					
	LINPACK	Lvrmore	Dhry	CPU	Disk	Video	Wp	Sprd	Db	Sci/ eng	Complr	Cum. appl*
Micro Express ME 386	1698.51	0.0125	5952	3.30	1.47	2.58	3.46	2.73	1.73	1.31	2.32	11.54
Gateway 386	2000.61	0.0107	5149	2.77	1.55	2.80	3.16	2.25	2.39	1.14	2.27	11.21
Fortron 386	2001.60	0.0102	5086	2.77	1.33	2.84	3.15	2.78	1.54	1.12	2.15	10.74
Zeos 386 Tower	2140.23	0.0094	4098	2.61	1.97	2.25	3.08	2.67	1.54	1.05	2.30	10.64
DataWorld 386	2513.00	0.0081	4061	2.20	1.52	1.64	2.76	2.34	2.15	0.90	2.14	10.29
Spear Mono-386A	2141.21	0.0095	4724	2.61	1.38	2.28	3.01	2.66	1.45	1.05	1.92	10.09
Micro 1 Power 386/20	2366.35	0.0087	4336	2.54	1.44	1.86	2.90	2.39	1.69	0.98	2.07	10.03
Club 386	2141.21	0.0099	4716	2.62	1.39	2.28	2.91	2.17	1.56	1.05	2.06	9.76
Whole Earth 386	2140.17	0.0099	4743	2.75	1.30	2.25	2.92	2.16	1.50	1.05	2.05	9.68
VIPC Micro 386	2118.10	0.0100	4766	2.91	1.33	1.90	2.72	2.46	1.54	1.07	1.90	9.68
CompuAdd Standard-386	2513.00	0.0081	4065	2.20	1.43	1.66	2.64	2.34	1.50	0.88	1.91	9.27
Pacesetter 386	2211.96	0.0097	4081	2.36	1.43	2.06	2.60	2.15	1.48	0.97	1.88	9.08
Suntronics-386	2514.00	0.0081	4065	2.20	1.23	2.33	2.62	2.15	1.44	0.90	1.83	8.93
Blackship 386	2519.38	0.0085	4045	2.43	1.33	1.48	2.74	2.01	1.43	0.89	1.81	8.88
Bus 386	2513.33	0.0081	4065	2.20	1.04	1.63	2.57	2.14	1.51	0.89	1.70	8.81
Value 386	2513.34	0.0085	4065	2.20	1.22	1.65	2.66	2.00	1.32	0.90	1.85	8.74
GCH EasyData 386	2569.08	0.0083	4065	2.42	1.34	1.84	2.45	2.00	1.50	0.90	1.90	8.74
PC Network THE PC 386	2513.00	0.0085	4065	2.20	0.93	1.63	2.54	1.97	1.43	0.91	1.83	8.67
Uniq 386	2544.00	0.0074	4115	1.87	1.26	1.50	2.47	1.91	1.45	0.82	1.78	8.44
Hertz 386	2898.97	0.0075	3396	2.03	1.32	1.57	2.09	1.61	1.32	0.82	1.75	7.59

*Cumulative application index. Graphs at right are based on indexes and show relative performance.
Indexes show relative performance; for all indexes, an 8-MHz IBM PC AT=1.
All low-level benchmarks were generated using the 80386 version (1.1) of Small-C (32-bit integers).
For the Livermore Loops and Dhrystone tests only, higher numbers mean faster performance.
For a full description of all the benchmarks, see "Introducing the New BYTE Benchmarks," June BYTE.

80386 Benchmarks

Rick Grehan

BYTE is taking this opportunity—the first roundup of affordable 80386 systems—to introduce our 80386-specific low-level benchmarks. I've modified the code-generation portion of BYTE Small-C for MS-DOS to emit 80386 code compatible with Phar Lap's 386|ASM, 386|LINK, and RUN386 combo package. The most important addition? It's 32-bit integers, of course. As you peruse the benchmark results, be aware that the Sieve, Sort, and Matrix programs, calculated into the CPU indexes, are now manipulating 32-bit integers, pointers, adds, subtracts, multiplies, and divides, and an addressing capability that cracks the 64K-byte barrier.

We're also generating two additional figures with the String Move benchmark: doubleword-odd and doubleword-even. Recall that String Move clocks the time required to move blocks of data from one memory location to another, and that it moves the bytes one at a time (byte-wide) and two at a time (word-wide). The new version reports the additional figure for 4 bytes at a time (doubleword-wide). Also, depending on the processor's data bus width and the system's memory hardware, moving a word from odd address to odd address can turn in a significantly different time (usually a worse result) than moving a word from even address to even address. The same holds true for doubleword moves.

Though none of these systems include a floating-point unit, I've modified the floating-point coprocessor library—which originally assumed only an 8087 coprocessor—to take advantage of new instructions within the 80387. (We've also developed an 80287 library that we'll bring on-line soon.) You'll see the most noteworthy performance boosts in the benchmarks involving transcendental functions. Specifically, the 80387 has a single instruction for calculating the sine (on the 8087, you had to derive the sine from the tangent), and calculating the exponent requires fewer instructions than for the 8087 and the 80287.

We'll be using the 80386 version of the benchmarks for all upcoming 80386 machines. As usual, we'll be making the source code for the 80386 version of Small-C and the updated benchmark programs available in the public domain (see page 3 for details). If you have any suggestions or comments, we'd like to hear them.

Rick Grehan is a BYTE senior technical editor at large. He can be reached on BIX as "rick_g."

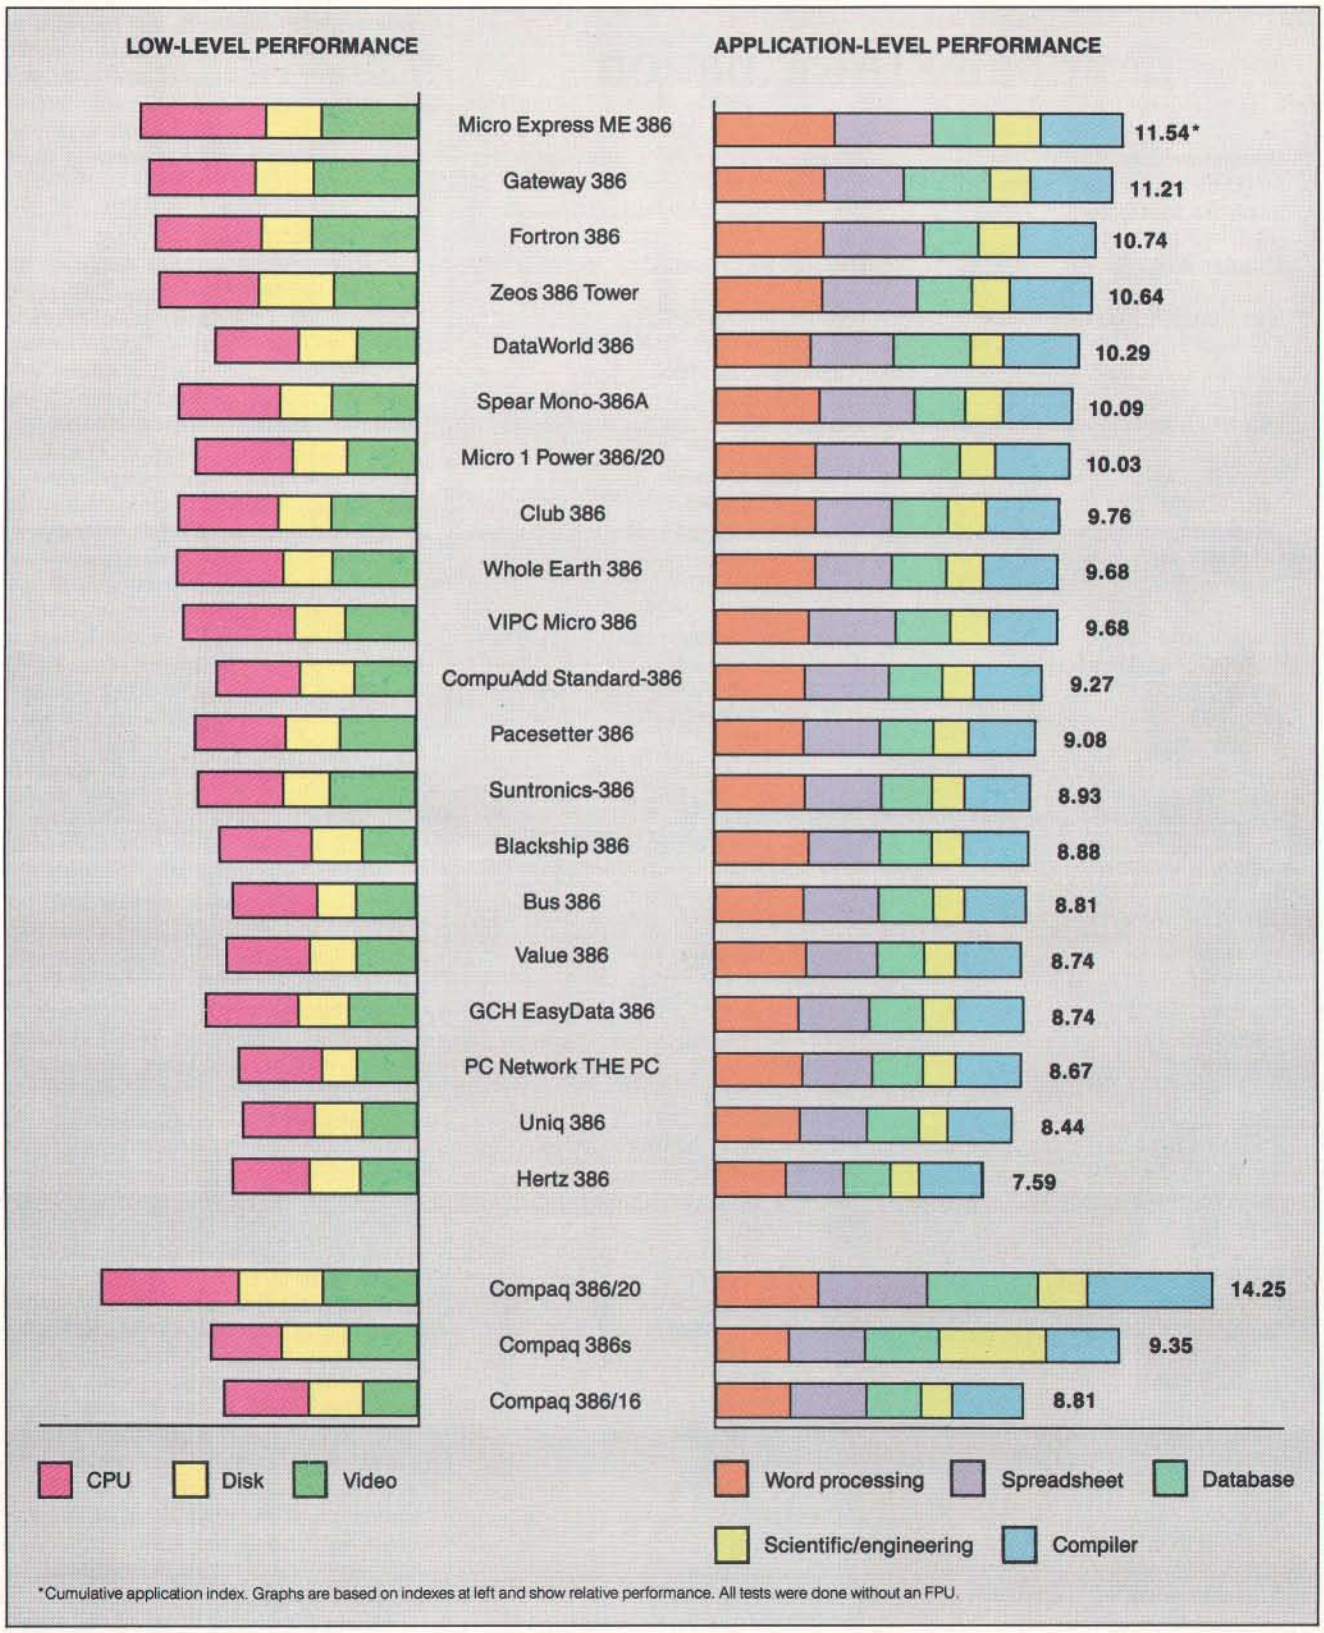


Figure 1: *The Micro Express ME 386 and the Gateway 386, with 20-MHz 80386s, finished tops. Of systems with 16-MHz 80386s, the Zeos 386 Tower and the DataWorld 386 are on top. Fourteen systems finished higher on the benchmarks than a 16-MHz Compaq Deskpro. Compared to the Compaq 386s, all had a higher CPU index, and half had a higher application index.*

Company Information

Blackship Trading Co.
385 Oyster Point Blvd., Suite #10
South San Francisco, CA 94080
(415) 952-1994
Inquiry 898.

Bus Computer Systems
135 West 26th St.
New York, NY 10001
(212) 627-4485
Inquiry 899.

Club AT, Inc.
3401 West Warren Ave.
Fremont, CA 94589
(415) 683-6600
Inquiry 900.

CompuAdd Corp.
12303-G Technology Blvd.
Austin, TX 78727
(800) 627-1967
Inquiry 901.

DataWorld, Inc.
3733 San Gabriel River Pkwy.
Pico Rivera, CA 90660
(213) 695-3777
Inquiry 902.

Fortron Corp.
2380 Qume Dr., Suite F
San Jose, CA 95131
(408) 432-1191
Inquiry 903.

Gateway 2000
P.O. Box 2414
Sioux City, IA 51107
(800) 233-8472
Inquiry 904.

GCH Systems, Inc.
845 West Maude Ave.
Sunnyvale, CA 94086
(408) 733-2131
Inquiry 905.

Hertz Computer Corp.
325 Fifth Ave.
New York, NY 10016
(212) 684-4141
Inquiry 906.

Micro Express
2114 South Grand Ave.
Santa Ana, CA 92705
(714) 662-1973
Inquiry 907.

Micro 1
557 Howard St.
San Francisco, CA 94105
(415) 974-5439
Inquiry 908.

New PC Network
625 Academy Dr.
Northbrook, IL 60062
(312) 205-1300
Inquiry 909.

Pacesetter Systems
7130 Fire Lane Rd.
Columbia, SC 29233
(803) 736-0673
Inquiry 910.

Spear Technology, Inc.
710A Landwehr Rd.
Northbrook, IL 60062
(312) 480-7300
Inquiry 911.

Suntronics Co., Inc.
12603 Crenshaw Blvd.
Hawthorne, CA 90250
(213) 644-1140
Inquiry 912.

Uniq Technology, Inc.
1120 Stewart Ct., Suite G
Sunnyvale, CA 94086
(408) 736-7440
Inquiry 913.

Value Plus Distributing
900 Larkspur Landing Cir., #165
Larkspur, CA 94939
(415) 461-0811
Inquiry 914.

VIPC Computers
384 Jackson St., Suite #1
Hayward, CA 94544
(415) 881-1772
Inquiry 915.

Whole Earth Electronics
2990 Seventh St.
Berkeley, CA 94608
(415) 653-7758
Inquiry 916.

Zeos International
530 Fifth Ave. NW, Suite 1000
St. Paul, MN 55112
(612) 633-4591
Inquiry 917.

gree angle, or motherboards installed so close to the edge of the case that the flange on the expansion cards wouldn't fit in the slot. Not all terribly serious problems, but they do indicate a general lack of quality control in some of these systems.

The Best for Less

Looking at these systems made us remember the true meaning of the word "clone." At first look, none of them stood out from the rest. With so many common components and identical features, we thought picking the best would be impossible. Luckily, a few of the systems shucked the "cheap" label and displayed an admirable mix of performance and quality. A couple of the systems went a step further, emerging as truly exceptional buys.

It's one thing to compare these systems to one another and find outstanding performance; it's quite another to look at them in reference to the rest of the 80386 arena and find the same thing. The systems we've rated highly here give good account of themselves, even against Compaq's big guns. In fact, all but six of these machines finished higher on our benchmarks than a similarly equipped 16-MHz Deskpro.


While none were able to touch the overall performance of the Deskpro 386/20—with its high-speed enhanced-small-device-interface disk drive controller and dedicated cache controller—the top finishers were able to come much closer than their prices would indicate. And what of the 386s, Compaq's 80386SX-based machine? Every last one of these review machines earned a better CPU index than the 1.86 assigned to the 386s.

Superior subsystems also became apparent. Our benchmarks demonstrate the superiority of the AMI-type motherboard: The three AMI systems and the two very similar EV-3000A-equipped systems made up half of the top 10, regardless of the other system parameters. The AMI does, however, have significant drawbacks: A low memory ceiling and a lack of 80387 support will hamper future upgrades. On the other side of the coin, the common Micronics 08-002-201 motherboard was installed in systems accounting for 6 of the bottom 10. For a full accounting of the performance indexes, see page 173.

Often, the choice in memories comes down to a trade-off between size and speed. The Hertz 386, though very slow, does come with 2.5 megabytes of mem-

continued

Insist On The Best 386 Micronics Motherboards

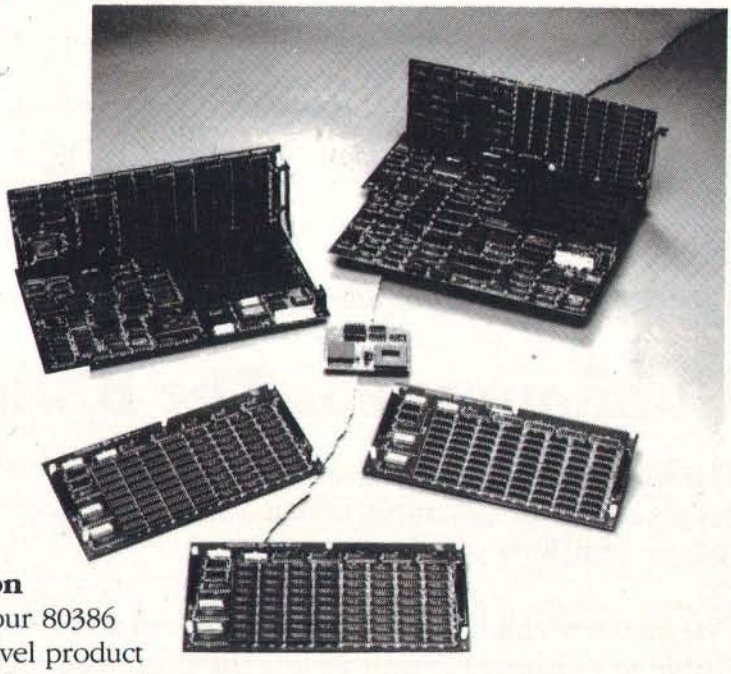

Quality, **Performance** and **Innovation** best describe our 80386 based board level product line. Now with both **AT** and **Baby size** and high speed **CACHE** memory. Micronics is the leading supplier to **OEMs, VARs** and Systems Integrators that require the **best in 80386 technology.**

For a distributor near you, call **800 / 234-4386.**

Innovation and Performance

MICRONICS COMPUTERS INC.

© Copyright 1988 Micronics Computers, Inc.

ory. The Hertz was able to run memory-hungry OS/2 as configured, a trait shared only by the EasyData 386 and the VIPC Micro 386. Our test for OS/2 compatibility was a simple one, running three simultaneous processes from Microsoft's OS/2 demonstration disk. No times were recorded. We did have some video problems when running OS/2 on the VIPC, and we could not get it to run successfully using the on-board EGA. The company assured us that it had no problems running OS/2 on similar units, and we did get it to work using an external Hercules card.

All manufacturers claim Windows/386 compatibility. We were unable to test this, though, because Windows/386 version 2.0 does not include a Hercules driver, and version 2.1 was not shipping as of press time.

Beyond the raw benchmark results, we looked at many factors when evaluating these systems. We considered the apparent quality of the overall product, the performance of the subsystems, the general look and feel, and the reliability of operations. Even so, it is hard to ignore the impressive performance of the Micro Express ME 386 on our benchmarks. It not only excelled on our low-level tests, especially the CPU index, but it also blazed by the other machines when converting that low-level capability to practical applications. Churning along at 20 MHz, it posted an application index of 11.54, good enough for top honors.

However, when evaluating the whole package, the Gateway 386 surpasses all the others. Coming in a close second on our application index, the Gateway delivers speed without sacrificing features: a 16-MHz chip running at 20 MHz, 60-ns RAM, a 1.44-megabyte 3½-inch floppy disk drive to accompany the standard 1.2-megabyte 5¼-inch floppy disk drive, an extra serial port and a game port, DOS 3.30 with GWBASIC, and sockets for both the 80287 and the 80387 coprocessors. The system ran without a glitch, although we would prefer to see a true 20-MHz chip under the hood. We were truly surprised to see a system of this caliber selling for less than $3000.

It's a testament to the state of the 80386 market. You don't have to wait for the unveiling of the 80486 or for prices to drop on the hybrid 80386SX to get an 80386 at a reasonable price. The shakeout has arrived. The clones are here. And they can get the job done. ■

Steve Apiki and Stanford Diehl are testing editors for the BYTE Lab. They can be reached on BIX as "apiki" and "sdiehl."

WHY TRUST OUTSIDERS WITH THE INSIDE OF YOUR NEC COMPUTER OR PRINTER.



NEC Customer Engineering and its authorized dealers offer you the highest quality service because we know your NEC equipment best. NEC has a wide range of service options, high quality parts, and comprehensive maintenance contracts. Call us, and find out about the many ways NEC Information Systems takes care of its own.

Service Excellence Through People, Pride and Professionalism℠

1-800-325-5500

NEC

C&C Computers and Communications

Computers For The Blind

Talking computers give blind and visually impaired people access to electronic information. The question is how and how much?

The answers can be found in "The Second Beginner's Guide to Personal Computers for the Blind and Visually Impaired" published by the National Braille Press. This comprehensive book contains a Buyer's Guide to talking microcomputers and large print display processors. More importantly it includes reviews, written by blind users, of software that works with speech.

Send orders to:

National Braille Press Inc., 88 St. Stephen Street Boston, MA 02115, (617) 266-6160

NBP is a nonprofit braille printing and publishing house.



EPSON
(w/Nation-Wide Protection Plan)

EQUITY I+
- 360K Floppy
- 20 Meg Hard Disk
- 640K Ram
- Serial/Parallel Port
- Monochrome Card
- Monochrome Monitor
- MS DOS
- GW Basic

$1295

EQUITY II PLUS
- 1.2 Meg Floppy
- 40 Meg Hard Disk
- 640K Ram
- Serial/Parallel/C/C
- 80286 CPU
- Monochrome Monitor
- Graphic Card
- MS DOS
- GW Basic

EQUITY III+
- 80286 CPU 6-8 12 MHz
- 1.2 MEG Floppy
- 40 MEG Hard Disk
- DOS 3.2 Mono Monitor & Graphic Card

$2195

In order to provide the best service, EPSON EQUITY is exclusively sold on location.

LOW PRICE LEADER

SINCE 1983

Everex
Step 286 - 12 & 16 MHz
1 Meg RAM
Set up utility in ROM
S/P, C/C
Enhanced keyboard
1.2 MB floppy
DOS/BASIC

$Call for your configuration

Everex
Step 386-20 MHz & 16 MHz
256K cache of very high speed RAM
2 Meg RAM, expandable to 16 Meg
S/P, C/C
Enhanced keyboard
1.2 MB floppy
DOS/BASIC

$Call

COMPAQ

386 130 meg/20 MHz	6495
286 40 meg	2395
386 40 meg/16 MHz	4195
386 60 meg/20 MHz	5650
Portable III 40 meg/12 MHz	4195

CARD & MONITOR EXTRA

IBM

PS/2 model 30/20 meg	1775
PS/2 model 50/20 meg	2595
PS/2 model 60/40 meg	3395
PS/2 model 60/71 meg	4100
PS/2 model 80/40 meg	4595

MONITOR EXTRA

LAP-TOP

Toshiba 3200-40	3695
Toshiba 3100-20	Call
Toshiba 1000	Call
NEC Multispeed	1395
NEC Multispeed EL	1595
EPSON LT	Call

WE STOCK

CITIZEN, OKIDATA, EVEREX, TOSHIBA, NEC, WYSE, HITACHI, PRINCETON GRAPHICS, SONY, ACER, HOUSTON INSTRUMENTS, AMDEK, HAYES, SAMSUNG, CALCOMP, PC MOUSE, MICROSOFT MICE, LOGITECH, MITSUBISHI, IRWIN & ARCHIVE TAPE BACK, TAXAN

Macintosh

Mac-SE/20 Meg	2595
Mac-II/40 Meg	3795

ARCHE RIVAL 386
10/20 MHz, 1.2 floppy, 2 MB RAM
Monochrome $2995

SOFTWARE

Microsoft Word	239
Word Perfect 5.0	249
Lotus 1-2-3	297
dBase III +	385

AND MANY, MANY MORE!

SPECIALS of the Month

Microsoft Mouse	$109
Microsoft Excel	$309
Aldus Pagemaker	$479

AST

AST 386 model 340	4395
AST 286 model 80	1695
AST 286 model 120	Call
AST 286 model 140	2695

CARD & MONITOR EXTRA

EPSON® PRINTERS

Epson FX850/1050	$379/535
Epson LQ850/1050	$559/785
Epson LQ500/2500	$359/895
Epson LX800/EX800	$199/445
Epson LQ2550	$970

CITIZEN PRINTER

180D/15E	$179/385
MSP40/45	$299/439
MSP50/55	$399/509
Tribute 124/224	$529/679
Overture Lazer	$1459
HP LASER Jet II	**$1750**

WE ACCEPT LC, CASHIER CHECKS, MONEY ORDERS, VISA, MC, AmEx
3% charge on VISA, MC & 5% on American Express

COMPUTER LANE

HOURS:
M-S 9-6

1-800-526-3482 (Outside CA)
(818) 884-8644 (In CA)
(818) 884-8253 (FAX)

22107 ROSCOE BLVD.
CANOGA PARK
½ BLOCK W. OF TOPANGA
CA 91304

CORPORATE ACCOUNTS WELCOME
CALL FOR VOLUME DISCOUNTS
CONSULTANTS CALL FOR PRICING

Prices subject to change without notice

Compaq is a Registered Trademark of Compaq
IBM is a Registered Trademark of International Business Machines

SCSystems 1-800-669-9933

Serving Computer Buyers For Eight Years

Para Asistirle En Espanol Llame Al Tel 1-800-842-1777

PANASONIC KXP1091I Printer
$199

SAMSUNG 12" Flat Amber Monitor
$82

LOGITECH C7 Mouse W/Plus Software
$68

HARDWARE

ACCESSORIES

CopyIIPC Brd Deluxe	$ 99
Masterpiece +	95

COMPUTERS

SCSystems Series 88 XT Computer

Slide Case Top w/upfront keylock, turbo button/led, reset button. 150 watt power supply, 360K drive, 477-10MHz, 640K. Phoenix Bios, AT style keyboard, Limited one year warranty.

$565

AST Premium/286	
Model 120	$2279
Model 80	1629
Model 140X	2479

BOARDS

AST Adv Prem 1mb	$ Call
AST 6Pac Prem 1mb	525
AST Sixpac	115
Hercules Grph +	182

EGA BOARDS

ATI EGAWonder	$ 175
Genoa SuperHiRes+	195
Orchid Designer	Call
Paradise 480	Call
Paradise VGA +XT	Call
Paradise VGA Prof	385
Vega VGA	269

EGA MONITORS

Princeton U/Sync	$ 529
NEC Multisync 2	589
Samsung	359

HARD DRIVES

Seagate 125 w/cont	$ 321
Seagate 138 w/cont	411
Seagate 30MB w/cont	294
Seagate 20MB w/cont	269

MICE

Logitech	$ 68
MS Bus Mouse	99

MODEMS

Hayes 1200	$ Call
Hayes 1200B	Call
Incomm RPC1200	62
Incomm RPC2400	147
Incomm T1200	76
Incomm T2400	167
Incomm T2400EC	224

MONITORS

Amdek 410	$ 145
Princeton MAX15	Call
Samsung RGB	215
Samsung Amber	82

3COM

3C503 ELink II	$345
3C523 ELink/MC	432

PRINTERS

Citizen	
120D	$ Call
180D	199
MSP-15E	319
MSP-40	285
C.Itoh	
ProWriter C715	925
NEC	
P2200	Call
Okidata	
Call on all models.	
Panasonic	
1080I/M2	164
1091I/M2	199
1092I	Call
Star	
NX-1000	179
NX-1000 Color	234
NX-15	Call
Toshiba	
321SL	500
341SL	674
351SX	1005

SOFTWARE

ACCOUNTING

DacEasy 3.0	$ 54
DacEasy Bonus 3.0	110
Dollars & Sense	95
Managing Your $	117

COMMUNICATION

Carbon Copy Plus	$ 106
CrossTalk XVI	89
CrossTalk MK 4	115
PC Anywhere 3	98
SmartCom II	82

DATABASE

Clipper	$ Call
Data Perfect	282
DBase III	375
DBXL Diamond	109
Fox Base +	190
Paradox 2.0	430
Q and A	188
Relate & Report	100

DESKTOP PUBLISHERS

Pagemaker 3.0	$ Call
PFS First Pub. 2.0	70
Ventura	495

GRAPHICS

Chartmaster	$ 199
Generic Cad 3.0	51
Harvard Graphics	272
Printshop	33
Signmaster	Call

INTEGRATED

Ability Plus	$ 139
First Choice	87

LANGUAGES

MS QuickBasic	$ 60
MS Quick C	60
Turbo Basic	59
Turbo C	59
Turbo Prolog 2.0	89

SPREADSHEETS

Lotus 123	$ Call
Quattro	Call
Surpass	329
VP Planner Plus	87

UTILITIES

CopyIIPC	$ 18
Desqview	71
Duet	48
Fastback Plus	88
Formtool	52
Mace	48
Norton Advanced	72
Norton Commander 2.0	43
PC Tools Deluxe	36
Sidekick Plus	117
Sideways Print	39

WORD PROCESSING

Rightwriter	$ 49
Sprint	117
Word Perfect 5.0	219
Wordstar 2000	Call
XY III Plus	275

No Charge for Mastercard or Visa

MasterCard VISA

Call For Items Not Listed

SCSystems

205 S. 29th St., Phoenix, AZ 85034

Order Line 800-669-9933 Espanol 800-842-1777

Status Line 602-275-1395 FAX No. 602-273-0043

Order Line for Europe & Mexico 602-275-1395

TERMS: No charge for Visa or Mastercard. We do not charge your card UNTIL WE SHIP your order. Manufacturers warranty applies in all cases, all warranties are handled by the manufacturers. We accept Purchase Orders from authorized companies only, for 3.5% above cash price. No COD orders. No refund on opened software. All prices are subject to change. Allow 14 days for personal/company checks. Arizona orders add 6.7% tax. Add 2% for shipping plus $2.00 for handling ($4.00 minimum). Please call for shipping charges on all Canada and International orders. We do not guarantee compatibility. All returns are subject to a 20% restocking fee.

Circle 255 on Reader Service Card

Bucking the System



Dell's System 310 proves that top-notch performance doesn't have to come at top-shelf prices

John Unger

Making a 20-MHz 80386-based microcomputer run at its maximum potential requires more than a 20-MHz CPU: The entire suite of hardware components has to interact efficiently. Such optimized performance was obviously a prime consideration when Dell's engineers designed the System 310.

The System 310 is a solid, high-performance 80386 computer that's a prime contender for the title of fastest 20-MHz 80386 machine. But that's not all; the machine's excellent performance comes at a price that's well below that of comparable systems.

The System 310 is available in a variety of models that share the same basic hardware. Each has a 20-MHz CPU, 1 megabyte of RAM, a 1.2-megabyte 5¼-inch floppy disk drive, and a VGA card. The entry-level model also includes a VGA monochrome monitor and a 28-millisecond 40-megabyte hard disk drive for $4099. My review unit included 2 megabytes of RAM, a 20-MHz 80387 coprocessor, a 1.44-megabyte 3½-inch floppy disk drive, a 90-megabyte enhanced-small-device-interface (ESDI) hard disk drive, and a high-resolution VGA color monitor. This brought the grand total for my system to $7000.

Performance Credentials

A Chips & Technologies 20-MHz 80386 chip set underlies the System 310's basic design. These components, integrated with a concurrent bus architecture and high-speed cache and main memory, form the framework of the Dell System 310. You can set the 20-MHz 80386 CPU to switch to 8 or 4.77 MHz when you press the Control, Alt, and backslash keys. The system's expansion bus runs independently of the CPU's clock speed at a consistent 8 MHz. The motherboard also has one 32-bit memory slot, six 16-bit AT slots, two 8-bit PC slots, and a socket for a 20-MHz 80387 math coprocessor.

Memory access has been optimized in two ways. The system's concurrent bus architecture allows the system bus to be effectively decoupled from the processor bus. The CPU can then execute instructions while the system bus is running direct memory access (DMA) cycles, thereby speeding up operations such as disk and memory data transfers. The System 310 also incorporates an Intel 82385 cache memory controller and 32K bytes of high-speed, 35-nanosecond static RAM (SRAM), like the Compaq Deskpro 386/20, the ALR FlexCache 20386, and other high-performance 80386 machines.

The main purpose of the cache is to provide a fast access buffer of SRAM between the processor and the slower, normal dynamic RAM that makes up the computer's main memory. The cache

continued

Dell System 310

Company
Dell Computer Corp.
9505 Arboretum Blvd.
Austin, TX 78759
(800) 426-5150

Components
Processor: 20-MHz 32-bit Intel 80386 with zero wait states, switchable to 8 or 4.77 MHz; socket for 20-MHz 80387 coprocessor
Memory: 1 megabyte of 80-ns RAM, expandable to 2 megabytes on system board (maximum system memory is 16 megabytes); Intel 82385 cache controller with 32K bytes of 35-ns SRAM; Phoenix 80386 ROM BIOS Plus, version 1.10 09
Mass storage: One 1.2-megabyte 5¼-inch floppy disk drive; 40-megabyte AT-type or 90-, 150-, or 322-megabyte ESDI hard disk drive
Display: Monochrome, EGA, VGA color, VGA Plus color, or VGA monochrome monitor
Keyboard: 101-key IBM Enhanced-style keyboard
I/O interfaces: Two RS-232C serial ports with DB-9 connectors; DB-25 parallel port; one 32-bit memory-expansion slot, six 16-bit slots, and two 8-bit slots

Size
6¼ x 21⅛ x 17½ inches; 45 pounds

Software
Microsoft MS-DOS 3.30 and custom utilities; Microsoft GWBASIC 3.22; Microsoft Windows/386

Options
1-megabyte SIMM upgrade: $899.95
Dell memory-expansion board with 2 megabytes: $1799.99
20-MHz 80387 math coprocessor: $799.95
40-megabyte internal tape backup unit: $399.95
1.44-megabyte 3½-inch floppy disk drive: $199.95

Documentation
167-page System 310 Owner's Manual; 77-page MS-DOS 3.30 Enhancement Guide; 475-page MS-DOS 3.30 User's Reference; 425-page Microsoft GWBASIC Interpreter User's Reference

Price
Base system (with one 1.2-megabyte 5¼-inch floppy disk drive, 40-megabyte hard disk drive, and VGA monochrome display): $4099
System with 322-megabyte ESDI hard disk drive and VGA Plus color display: $7699
System as reviewed: $7000

Inquiry 883.

controller holds what it thinks are the next 32K bytes of instructions and/or data the CPU needs and lets the CPU run with no wait states. The chip does more than simply control the high-speed SRAM cache, though. It also figures out when to load new data into the cache, and it determines which parts of RAM are mapped directly to the video display and shouldn't be put into the cache.

I don't want to give the impression that the System 310's main memory is slow; it's not. Dell uses 80-ns RAM chips on the motherboard, which has eight connectors for special single in-line memory modules (SIMMs) that each hold 256K bytes of RAM. (The system comes with 1 megabyte of RAM that takes up four of these slots.) You can also add memory to the system by mounting a Dell memory card fitted with 80-ns memory chips into a proprietary 32-bit expansion bus. Finally, you can use standard AT-type memory cards in the 16-bit expansion slots. If you decide to add RAM to the system by using the Dell bus, however, you won't have enough room to add a full-length expansion card in the 8-bit slot at the left-hand edge of the computer. The maximum configuration for system memory is 16 megabytes.

To make the most of the increased memory-access performance that the system's interleaved memory provides, you have to install an additional 1 megabyte of RAM on the system board. Also, if you install a proprietary 32-bit memory-expansion card, you must add another megabyte to the standard 1 megabyte to achieve the full benefits of interleaved memory. After adding 4 megabytes of RAM to the motherboard and the 32-bit bus, you can install an additional 12 megabytes of RAM by using Lotus/Intel/Microsoft Expanded Memory Specification memory cards in the 16-bit AT-compatible expansion slots.

You also have the option of copying the system BIOS from ROM to a special write-protected area of RAM located above the 640K-byte partition. The BIOS ROM and RAM have identical memory addresses. A similar option for the BIOS of an EGA or VGA speeds system and video display performance. You can make these options part of the system's setup program so that they take effect when you boot the system. This feature may be incompatible with future releases of DOS or OS/2, however, so Dell made it an option in the setup program.

Speaking of Speed

There's only one way to describe the performance of a microcomputer like the System 310: It flies. The machine has all the hardware and design potential to make it as fast as or faster than any other 20-MHz 80386 system that BYTE has tested. The Dell machine has a slight edge over the Compaq 386/20 in that it uses 80-ns RAM for its interleaved memory while the Compaq uses 100-ns chips, and the Dell can store the instructions from its operating-system BIOS and video ROM chips in RAM for faster access.

The System 310 outperforms the IBM PS/2 Model 80 in all BYTE's benchmarks. It enjoys a slight advantage over the Compaq 386/20 in most of the tests and is in a dead heat with the ALR FlexCache 20386. The comparative benchmark tests show little difference between these three computers in terms of overall performance, so other factors such as price, service, or expandability may be the distinguishing factors.

Sometimes increased performance comes at the expense of software incompatibility. However, I had no trouble running WordPerfect 4.2 and 5.0; BRIEF 2.1; Turbo C 1.5; Quattro 1.0; Dan BricKLin's Demo II 1.0; and Microsoft C 5.1. The system also ran through the application benchmark suite without a hitch.

While my review machine had an 8-bit VGA board, Dell says that the System 310 will be shipping with 16-bit boards by the time you read this. This is likely to change the video- and graphics-oriented benchmarks.

Expansion Options

Physically, the System 310 closely resembles other large MS-DOS microcomputers. It has a 200-watt power supply, and the front right corner has room for three half-height drives. Only the top two spaces are suitable for floppy disk drives or a tape backup unit, though; the bottom space is suitable only for a hard disk drive because the front case covers most of it. My system's Mitsubishi 1.2-megabyte 5¼-inch floppy disk drive and Sony 1.44-megabyte 3½-inch floppy disk drive fit into the top two slots.

To the left of these slots is another storage bay that can accommodate either two half-height hard disk drives or a single full-height hard disk drive. The front case completely covers these slots. The review system's Control Data Corp. half-height 90-megabyte ESDI hard disk drive was mounted in the bottom of this storage bay.

The system includes eight expansion slots. Six of them use the 16-bit IBM PC

continued

Dell System 310

APPLICATION-LEVEL PERFORMANCE

WORD PROCESSING	Medium	Large
XyWrite III+ 3.52		
Load (large)	N/A	:10
Word count	:02	:16
Search/replace	:04	:18
End of document	:01	:10
Block moves	:08	:08
Spelling check	:07	:47
Microsoft Word 4.0		
Forward delete	:10	
Aldus PageMaker 1.0a		
Load document	:07	
Change/Bold	:19	
Align right	:15	
Cut 10 pages	:13	
Place graphic	:04	
Print to file	1:31	
Index:	**3.45**	


SPREADSHEET	
Lotus 1-2-3 2.01	
Block copy	:02
Recalc	:01
Load Monte Carlo	:09
Recalc Monte Carlo	:04
Load rlarge3	:02
Recalc rlarge3	:01
Recalc Goal-seek	:02
Microsoft Excel 2.0	
Fill right	:04
Undo fill	1:28
Recalc	:02
Load rlarge3	:17
Recalc rlarge3	:01
Index:	**3.56**

DATABASE	
dBASE III+ 1.1	
Copy	:49
Index	:05
List	1:03
Append	1:32
Delete	:01
Pack	1:18
Count	:03
Sort	:51
Index:	**2.84**

SCIENTIFIC/ENGINEERING	
AutoCAD 2.52	
Load SoftWest	:34
Regen SoftWest	:27
Load StPauls	:07
Regen StPauls	:05
Hide/redraw	8:37
STATA 1.5	
Graphics	:16
ANOVA	:10
MathCAD 2.0	
IFS 800 pts.	:11
FFT/IFFT 1024 pts.	:11
Index:	**4.98**

COMPILERS	
Microsoft C 5.0	
XLisp compile	3:04
Turbo Pascal 4.0	
Pascal S compile	:03
Index:	**3.41**

All times are in minutes:seconds. Indexes show relative performance; for all indexes, an 8-MHz IBM PC AT=1.

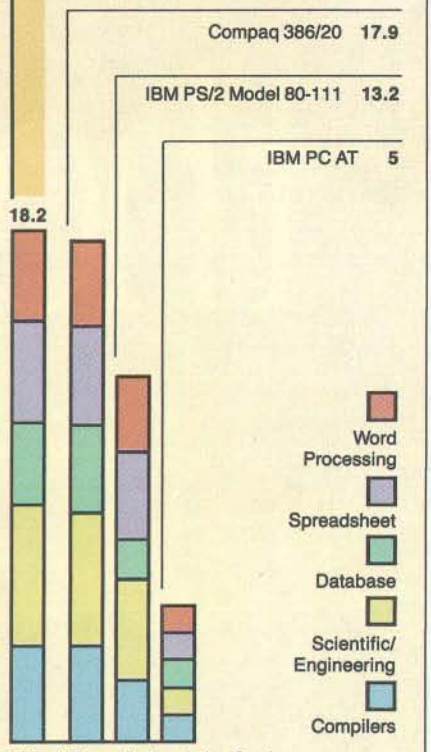

*Cumulative applications index. Graphs are based on indexes at left and show relative performance.

LOW-LEVEL PERFORMANCE[1]

CPU	
Matrix	3.30
String Move	
Byte-wide	21.48
Word-wide	
Odd-bnd.	29.10
Even-bnd.	10.75
Doubleword-wide	
Odd-bnd.	21.03
Even-bnd.	5.38
Sieve	17.78
Sort	13.34
Index:	**3.91**


FLOATING POINT	
Math	6.08
Error[2]	0.00E+00
Sine(x)	2.01
Error	2.00E–09
e^x	2.23
Error	1.00E–09
Index:	**8.38**

DISK I/O	
Hard Seek[3]	
Outer track	3.33
Inner track	3.33
Half platter	6.67
Full platter	9.96
Average	5.82
DOS Seek	
1-sector	7.42
32-sector	19.25
File I/O[4]	
Seek	0.09
Read	0.05
Write	0.80
1-megabyte	
Write	3.09
Read	2.94
Index:	**3.21**

VIDEO	
Text	
Mode 0	3.92
Mode 1	3.90
Mode 2	3.77
Mode 3	3.75
Mode 7	N/A
Graphics	
CGA:	
Mode 4	1.46
Mode 5	1.49
Mode 6	1.54
EGA:	
Mode 13	3.42
Mode 14	3.68
Mode 15	N/A
Mode 16	3.68
VGA:	
Mode 18	3.81
Mode 19	1.50
Hercules	N/A
Index:	**2.45**

CONVENTIONAL BENCHMARKS	
LINPACK	170.27
Livermore Loops[5] (MFLOPS)	0.16
Dhrystone (MS C 5.0) (Dhry/sec)	6596.00

N/A=Not supported by graphics adapter.
[1] All times are in seconds. Figures were generated using the 8088/8086 and 80386 version (1.1) of Small-C.
[2] The errors for the floating-point benchmarks indicate the difference between expected and actual values, correct to 10 digits or rounded to 2 digits.
[3] Times reported by the Hard Seek and DOS Seek are for multiple seek operations (number of seeks performed currently set to 100).
[4] Read and write times for the File I/O benchmarks are in seconds per 64K bytes.
[5] For the Livermore Loops and Dhrystone tests only, higher numbers mean faster performance.

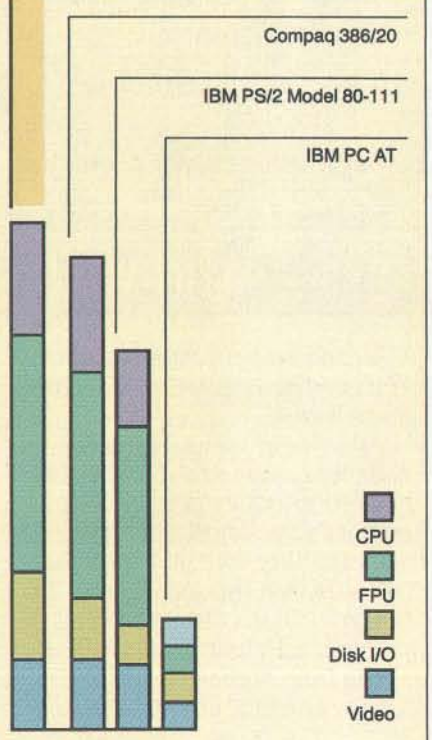

For a full description of all the benchmarks, see "Introducing the New BYTE Benchmarks," June BYTE.

Spot the Top Dot.



Epson® LQ-2500

Toshiba P351SX

AMT Accel-500™

And we'll ship it to you FREE for 30 days.

The bad news is, this is a quiz. The good news is, we're going to make it easy.

All three of these 24-pin dot matrix printers are versatile, rugged office-quality printers. They all provide a variety of type styles and compatibility with most popular software. But there's only one Top Dot. And all the clues you need to find it are right here in this ad.

Top Dot's high performance features include combined letter-quality text and graphics, color printing, and a sizzling 480 cps draft speed.



SelectDial puts total printer control at your fingertips.

A unique Select-Dial™ feature gives Top Dot effortless, fingertip control. And plug-in Intelli-Cards™ provide instant software upgrades.

Top Dot's $1085 price is a remarkable $400 below comparable printers. Even more remarkably, it includes toll-free hotline support, a 2-year warranty, an unheard-of full year of on-site service, and for $25, a Quick-Start kit packed with $150 worth of supplies, software, documentation and more.

Epson is a registered trademark of Seiko Epson Corporation. Accel-500, Select-Dial and Intelli-Card are trademarks of Advanced Matrix Technology, Inc. ©1988 Advanced Matrix Technology, Inc.

Circle 269 on Reader Service Card

AT–type bus, and the other two use the 8-bit IBM PC bus. The half-length VGA card on my machine occupied one 8-bit slot, and a Western Digital 1007 ESDI controller disk resided in one 16-bit slot. The latter uses a 1-to-1 interleave and has a data transfer rate of 651K bytes per second. It includes cabling for two floppy disk drives and two hard disk drives and has power supply connectors for four disk drives.

The System 310 has three standard display options: VGA monochrome, standard VGA, and VGA Plus. All use the same VGA card and differ only in the type of monitor included. Monochrome and EGA displays are also available.

Paradise makes the principal very-large-scale-integration chip on the VGA display adapter. My review unit came with a 14-inch Mitsubishi VGA Plus monitor, which has a 0.31-millimeter dot pitch. This adapter/monitor combination gives crisp color graphics at up to 640 by 480 pixels in 16 colors and provides high-quality text. By contrast, the standard VGA color monitor offers similar resolution, but at a dot pitch of 0.42 mm. The monochrome monitor displays 16 shades of gray at 640 by 480 pixels. Unlike IBM's PS/2 computers, the System 310's display chips are on expansion boards, not on the motherboard.

My one complaint about the Dell System 310's hardware is that it's noisy. The cooling fan was louder than that in any other system I've seen, and a high-pitched tone emanated from somewhere within the depths of the hardware.

My machine worked fine during my evaluation, but it failed to boot during testing in the BYTE Lab. Calls to Dell revealed that the machine had a defective ROM BIOS (version 1.10 08). Two new ROM chips (version 1.10 09) failed to solve the problem, however. Dell then sent a new motherboard with the new BIOS installed, and the System 310 worked fine. The company says that all machines it has shipped to customers have the newer BIOS chips.

Finishing Touches

In addition to MS-DOS 3.30, Dell includes 15 enhanced utility programs that make the operating system easier to manage.

The utilities are more useful and easier to use than a handful of similar public domain or even commercial software programs because of the uniformity in command-line argument syntax and the similarity of their help screens.

The System 310 includes Microsoft MS-DOS and GWBASIC manuals and an owner's manual that gives clear, liberally illustrated instructions on setting up the system. Dell also bundles Microsoft's Windows/386 software with the System 310.

Dell sells its computers by mail order only and has a toll-free number for technical assistance. The support technicians I spoke with were knowledgeable and responded to my questions quickly. As part of Dell's 1-year warranty, Honeywell Bull provides on-site service for customers who live within 100 miles of one of Honeywell's 180 customer-service dispatch offices, and you can extend the service contract for up to 4 years.

A Dollar Saved

Compared to the Compaq Deskpro 386/20 and the ALR FlexCache 20386, the System 310 is a better value. My review unit, at $7000, is about $6000 less than a comparably configured 386/20. Substitute a 150-megabyte ESDI hard disk drive and, at $7598, the System 310 is some $2000 less than a similarly equipped FlexCache.

The only drawbacks to the System 310 were its noisy fan and the limitations on its expansion bay configuration. You can access only two of the five expansion bays from the front of the case, so you can't install two floppy drives and an internal tape backup unit, for example.

Do you need the kind of performance this computer delivers? For many users, the answer will be no. A zero-wait-state 80286 machine with a 12- or 16-MHz CPU will give you most of the qualitative "feel" of speed and instant response that the System 310 gives when running applications such as a word processor or spreadsheet.

But others need to stay at the leading edge of hardware and software development. A high-performance 80386 is a necessity if you want to be able to move quickly into all the generations of OS/2 as they develop or to run Unix on a microcomputer that's powerful enough to let this operating system work as it should.

For such users, the System 310 has much to recommend it. It exhibits flawless high performance, its hardware design and components are among the best available, and it's priced right. For my money, the System 310 is the system to beat. ■

John Unger is a geophysicist for the U.S. government and lives in Hamilton, Virginia. He writes graphics software and uses computers to study the earth's crust. He can be reached on BIX as "junger."

And only Top Dot is available in your choice of finish: Executive Black or traditional Ivory.

You have to visit a dealer to buy two of the printers on this page. But you can get Top Dot delivered to your door by UPS.®

Just call 1-800-637-7878, correctly identify the Top Dot, and

COMPARISON CHART

	AMT Accel-500	Epson LQ-2500	Toshiba P351SX
Print speed (12cpi)			
Draft Mode	480 cps	324 cps	300 cps
Memo Mode	200 cps	N/A	N/A
LQ Mode	80 cps	90 cps	100 cps
Plug-in fonts	card	card	cartridge
Color printing	standard	N/A	optional†
Warranty	24 mo	18 mo	18 mo
On-site service	1 yr	N/A	N/A
Price	$1085	$1449††	$1499††
Starter Kit	$25	N/A	N/A

$239 ††manufacturer's suggested list price

we'll ship it to you. FREE.* If after 30 days, the Top Dot hasn't become indispensable to your office, just send it back. Otherwise, do nothing. We'll charge $1085 to your credit card or bill you against your purchase order. That's all there is to it.

And if you're still not sure of the answer, don't worry. Our operators will give you three chances to get it right.



Quick-Start Kit contains supplies, cable, software, documentation—even transparency materials. A $150 value for only $25 with Top Dot.

ACCEL-500™

1-800-637-7878

MasterCard VISA

Ventura Peripherals
100 Rancho Road, Suite 27
Thousand Oaks, California 91362

**Offer subject to availability and credit approval.*

HARD DRIVES

Seagate

40Mb ST251

Includes drive, AT mounting hardware & "Disk Manager" partitioning software

$319

Also available for XT

40Mb ST251 PC/XT KIT $369

Includes drive, controller, cables, How-To manual, mounting hardware & partitioning software.

30 Day "Worry-Free" Guarantee

If for any reason, you are not completely satisfied with any product, simply return it for a prompt and courteous refund!

20Mb ST225 KIT

Complete PC/XT KIT includes drive, controller, cables, How-To manual & mounting hardware.

$244

Seagate 150Mb KIT

$788

Complete kit includes drive, cables, Perstor ADRT controller, How-To Manual, mounting hardware and "Disk Manager" partitioning software. Full Height. 28ms access time.

30Mb Complete PC/XT KIT

Complete PC/XT KIT includes drive, controller, cables, How-To manual & mounting hardware.

$269

Drives and Kits are available for **All PS/2** models!

We carry the entire **Seagate** product line including 3.5" drives

Macintosh Drives

Internal drive kits are now available for Macintosh SE and II as well as external kits for Macintosh Plus!

Call for pricing!

Card Drive™

Hard Cards

Card Drive 20S	40ms	$319
Card Drive 30S	40ms	$349
Card Drive 50S	40ms	$499

-- Features --

- Available for most Tandy models
- Quality engineered for reliability
- Super easy installation & setup
- ONE YEAR Warranty
- Auto park heads

These Card Drives use quality Seagate Hard Drives

65Mb ST277R

40ms access • Half Height
Autoparking heads
This drive requires an RLL controller

$379

Includes drive, mounting hardware & "Disk Manager" partitioning software

High Speed 40Mb

Seagate ST251-1

28ms access • Half height • Auto parking heads
Also available for XT

$409

Includes drive, AT mounting hardware & "Disk Manager" partitioning software



Help is just a phone call away with our Technical Assistance Department!

No Surcharge for Visa or MasterCard Orders

Hours: 8am to 7pm Monday - Friday, 12pm to 5pm Sat. MST

International Orders call: (602) 784-1038

HARD DRIVES *International*
An IDN Company

(800) 234-DISK

VISA MasterCard American Express Card

1208 E. Broadway Road #110 • Tempe, AZ 85282

Toll Free Customer Service: (800) 541-8387

(602) 784-1038 **FAX:** (602) 829-9193

Prices and availability subject to change without notice. All items are NEW with manufacturer's warranty. 5% surcharge for American Express and COD orders. P.O.'s accepted NET 10 - subject to 9% surcharge. Add $10 shipping for APO/FPO orders. 30 Day Guarantee conditions: shipping & handling charge is not refundable; product must be in original condition. BYT1088

Circle 109 on Reader Service Card (DEALERS: 110)

The Odd Couple



The Amstrad PPC640 and Epson Equity LT portables have little in common

Wayne Rash Jr.

The Amstrad PPC640 (left) and Epson Equity LT (right).

There could hardly be a greater contrast between the Amstrad PPC640 and the Epson Equity LT. The PPC640 is so large that it will fit on no lap of which I'm aware, and it has dual floppy disk drives. The Equity LT, which will fit on a lap, has a floppy disk drive and a 20-megabyte hard disk drive.

The Equity LT is by far the more traditional of the two machines. It closely resembles other laptops, such as the NEC MultiSpeed HD (June BYTE). The Equity LT features a V30 CMOS processor running at 10 MHz and 640K bytes of RAM. My review unit of the Epson Equity LT had a 9⅝- by 4½-inch backlit, supertwist, liquid crystal display (LCD) screen with blue characters on a silver background. It also had an internal 20-megabyte hard disk drive and a 720K-byte 3½-inch floppy disk drive. The review unit also came with an internal 1200-bit-per-second modem. As outfitted, this machine costs $3767.

The Amstrad PPC640, designed in the U.K., is hardly traditional. It features an unusual case design. It has a full-width, IBM PC AT Enhanced–style keyboard and a 6⅜- by 4¾-inch supertwist LCD screen, and it runs on 10 C-cell batteries. The system has an 8086 CPU running at 8 MHz, 640K bytes of RAM, dual 720K-byte 3½-inch floppy disk drives, and an internal 2400-bps modem. This is a large machine, too wide and too long to fit on a lap—and even if it would fit, the keyboard is hinged in such a way as to make laptop use impossible. It is primarily designed as a portable for desktop use. This computer will run you $1199.

There are some similarities between the two machines, though. Both are compatible with the IBM PC XT. They both use 3½-inch floppy disk drives. Finally, they both let you use an external monitor so that you can avoid eyestrain in the office.

The Epson Equity LT

If you're planning to use a computer while traveling, the Equity LT's design makes it a good choice. With the backlit LCD screen and the hard disk drive, it's convenient to use on an airplane or in an office. The relatively light weight and slim profile make it easy to carry.

The Equity LT's screen swings up to reveal a modified version of the AT's Enhanced keyboard. The Caps Lock key is located next to the *A*, and the Control keys are on the lower corners of the keyboard. Across the top of the keyboard is a string of 10 function keys, rather than the 12 found on other versions of the Enhanced keyboard.

A full numeric keypad is just to the right of the alphabetic keys. Above that are a bank of LEDs and a tiny door that covers a group of switches. The LEDs monitor such things as battery condition

continued

Amstrad PPC640

Company
Amstrad, Inc.
1915 Westridge Dr.
Irving, TX 75038
(800) 237-3116
(214) 518-0668

Components
Processor: 8086 running at 8 MHz; socket for optional 8087-2 math coprocessor
Memory: 640K bytes of RAM
Mass storage: Two 720K-byte 3½-inch floppy disk drives
Display: CGA or monochrome on internal LCD or external monitor
Keyboard: 101-key full-size Enhanced-style layout
I/O interfaces: One parallel port; one serial port; RGB video connector
Other: 2400-bps Hayes-compatible modem

Size
19½ × 16½ × 4 inches (open); 12 pounds

Software
MS-DOS 3.3; SoftKlone Mirror II; PPC Organizer

Options
None

Documentation
354-page Amstrad Portable PPC; 29-page PPC Organizer Software

Price
PPC512 (with 512K bytes of RAM and one floppy disk drive): $899
PPC512 (with 512K bytes of RAM and two floppy disk drives): $999
PPC640 (with 640K bytes of RAM, two floppy disk drives, and a 2400-bps modem): $1199

Inquiry 884.

Epson Equity LT

Company
Epson America, Inc.
2780 Lomita Blvd.
Torrance, CA 90505
(800) 922-8911

Components
Processor: NEC V30 running at 4.77 or 10 MHz
Memory: 640K bytes of RAM
Mass storage: 720K-byte 3½-inch floppy disk drive; 20-megabyte 3½-inch hard disk drive
Display: CGA on internal backlit LCD or external monitor
Keyboard: 85-key modified Enhanced-style layout
I/O interfaces: One serial port; one parallel port (configurable as external floppy disk drive port); RGB video connector; proprietary expansion bus for modem card or memory expansion

Size
13½ × 12¼ × 3¼ inches; 14⅕ pounds

Software
MS-DOS 3.2; GWBASIC 3.2; `Xtree` disk management utility

Options
Supertwist LCD screen: $299
Backlit LCD screen: $499
1200-bps modem: $299
Carrying case: $49
Cigarette lighter adapter: $29

Documentation
140-page Equity LT User's Guide; 376-page Equity LT MS-DOS 3.20; 404-page Equity LT GWBASIC 3.20

Price
Equity LT with dual floppy disk drives: $1899
Equity LT with 20-megabyte hard disk drive and 720K-byte floppy disk drive: $2999
System as reviewed: $3767

Inquiry 885.

and the disk drive activity, as well as the current condition of Num Lock, Caps Lock, and Scroll Lock. The switches beneath the door control the appearance of the screen, the CPU clock speed, and whether the machine uses the built-in screen or an external monitor.

On the right side of the machine is the 720K-byte 3½-inch floppy disk drive. On the dual-floppy disk version, there is a companion drive on the left side; in my review unit, the hard disk drive resided on the left side. In the rear are connectors for a serial port and a parallel port, a CGA monitor, and a power connector. There are also a power switch and a series of DIP switches that select the assignment of the parallel and serial ports. One switch allows the parallel port to double as a connector for an external floppy disk drive. If you choose that option, however, you lose the ability to use a parallel printer.

The carrying handle slides out from beneath the front edge of the keyboard. This is a handy location for carrying the computer, but it results in a ridge directly in front of the space bar on the keyboard. This ridge interfered with my typing.

The Equity LT can use a reflective or backlit LCD screen. You can remove the LCD screen and set it aside, which makes using an external monitor easier. If you have an external monitor, you could use this machine as your only computer.

Epson includes a reference disk that makes the Equity LT more convenient to set up and also provides sophisticated diagnostics should something go wrong. For daily use, Epson has provided the convenient `Xtree` disk management utility. `Xtree` supports several of the more common MS-DOS functions through a menu system. The Equity user's guide is well organized and illustrated.

Power User

The Equity LT can run on AC or internal battery power. The AC adapter recharges the batteries when the computer is off. A complete recharge of the batteries, which are composed of eight nickel-cadmium cells, takes 12 hours.

Epson designed the screen so that the backlighting will turn off after a user-selected period of minutes to help save battery power. In addition, you can turn the internal modem and hard disk drive on and off as required. Since modems and hard disk drives are heavy users of power, keeping them turned off can do a lot to extend battery life.

In spite of all this, the batteries, when fully charged, can run the machine only for slightly less than 2 hours, and the low-battery light begins flashing after 1½ hours. These times are based on my use of the computer with very little hard disk activity and with the screen backlighting turned off about 80 percent of the time.

Amstrad's PPC640

The PPC640 seems an eccentric machine in some ways. Its most noticeable characteristic is its layout. It does not look like any other computer in the marketplace. In large part, this is due to the full-size Enhanced keyboard that graces the machine. It is also partly due to the small screen located on the left side of the machine's top surface.

The PPC640 makes a strong impression from the first time you open the case and look at it. It's wide. Counting the comfortable plastic handle on the right side, it's 19½ inches wide, as compared to the Equity LT's 13½-inch width.

The keyboard folds out from the top toward you. This is a full-size 101-key, AT Enhanced-style keyboard, with

continued

Amstrad PPC640, Epson Equity LT

APPLICATION-LEVEL PERFORMANCE

WORD PROCESSING	Amstrad Med./Lrg.	Epson Med./Lrg.
XyWrite III+ 3.52		
Load (large)	:27	:24
Word count	:10/:74	:08/:57
Search/replace	:18/:58	:14/:45
End of document	:05/:33	:04/:24
Block moves	:31/:30	:20/:19
Spelling check	:43/4:39	:26/3:12
Microsoft Word 4.0		
Forward delete	1:23	:56
Aldus PageMaker 1.0a*		
Load document	N/A	:25
Change/Bold	N/A	:76
Align right	N/A	:59
Cut 10 pages	N/A	:50
Place graphic	N/A	:13
Print to file	N/A	5:35
Index:	**N/A**	**1.02**

SPREADSHEET	Amstrad	Epson
Lotus 1-2-3 2.01		
Block copy	:23	:10
Recalc	:06	:04
Load Monte Carlo	2:55	:51
Recalc Monte Carlo	:26	:20
Load rlarge3	:42	:12
Recalc rlarge3	:04	:03
Recalc Goal-seek	:12	:10
Microsoft Excel 2.0*		
Fill right	N/A	:14
Undo fill	N/A	6:28
Recalc	N/A	:05
Load rlarge3	N/A	1:12
Recalc rlarge3	N/A	:05
Index:	**N/A**	**0.86**


DATABASE	Amstrad	Epson
dBASE III+ 1.1*		
Copy	N/A	2:49
Index	N/A	:29
List	N/A	:28
Append	N/A	5:02
Delete	N/A	:05
Pack	N/A	3:12
Count	N/A	:24
Sort	N/A	2:31
Index:	**N/A**	**0.92**

SCIENTIFIC/ENGINEERING	Amstrad	Epson
AutoCAD 2.52*		
Load SoftWest	N/A	6:56
Regen SoftWest	N/A	6:40
Load StPauls	N/A	1:55
Regen StPauls	N/A	1:47
Hide/redraw	N/A	1:26:25
STATA 1.5		
Graphics	3:31	2:41
ANOVA	2:23	1:53
MathCAD 2.0		
IFS 800 pts.	4:32	3:34
FFT/IFFT 1024 pts.	5:31	4:13
Index:	**N/A**	**0.34**

COMPILERS	Amstrad	Epson
Microsoft C 5.0*		
XLisp compile	N/A	12:5
Turbo Pascal 4.0		
Pascal S compile	:43	:14
Index:	**N/A**	**0.81**

All times are in hours:minutes:seconds. Indexes show relative performance; for all indexes, an 8-MHz IBM PC AT=1.

*Not run on the Amstrad PPC640. The PPC640 is limited to 720K-byte floppy disks and could not run tests where the program and files exceeded 720K bytes. We were unable to compute an application index for the Amstrad PPC640.

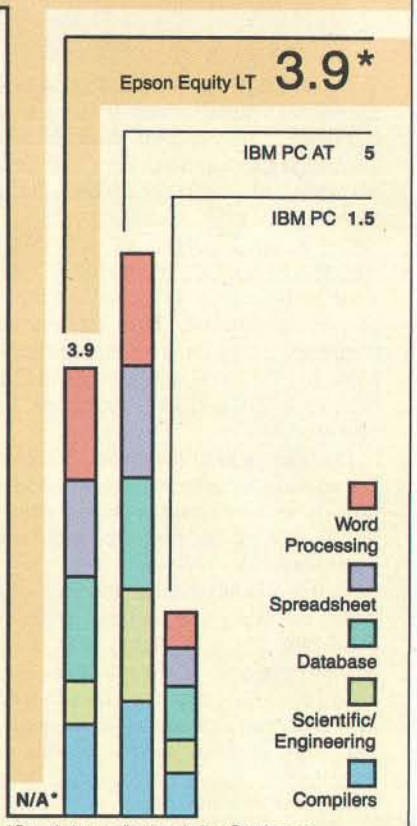

*Cumulative applications index. Graphs are based on indexes at left and show relative performance.

LOW-LEVEL PERFORMANCE[1]

Amstrad PPC640


CPU	Amstrad	Epson
Matrix	20.16	15.76
String Move		
Byte-wide	113.37	87.17
Word-wide:		
Odd-bnd.	113.37	87.16
Even-bnd.	56.74	43.61
Sieve	109.41	84.25
Sort	86.61	67.23
Index:	**0.72**	**0.93**

FLOATING-POINT[2]	Amstrad	Epson
Math	N/A	N/A
Error	N/A	N/A
Sine(x)	N/A	N/A
Error	N/A	N/A
e^x	N/A	N/A
Error	N/A	N/A
Index:	**N/A**	**N/A**

DISK I/O	Amstrad	Epson
Hard Seek		
Outer track	N/A	9.20
Inner track	N/A	9.24
Half platter	N/A	23.05
Full platter	N/A	27.65
Average	N/A	17.28
DOS Seek[3,4]		
1-sector	77.55	39.18
32-sector	432.14	107.46
File I/O[5]		
Seek	0.59	0.41
Read	13.22	2.12
Write	12.92	2.08
1-megabyte		
Write	N/A	N/A
Read	N/A	N/A
Index:	**N/A**	**0.57**

VIDEO	Amstrad	Epson
Text		
Mode 0	18.18	13.79
Mode 1	18.18	13.81
Mode 2	15.71	14.96
Mode 3	15.71	14.96
Mode 7	N/A	N/A
Graphics		
CGA:		
Mode 4	7.76	6.08
Mode 5	7.80	6.08
Mode 6	8.13	6.36
EGA:		
Mode 13	N/A	N/A
Mode 14	N/A	N/A
Mode 16	N/A	N/A
Index:	**0.66**	**0.82**

CONVENTIONAL BENCHMARKS	Amstrad	Epson
LINPACK	9307.62	7189.36
Livermore Loops[6] (MFLOPS)	2.30E-03	3.00E-03
Dhrystone (MS C 5.0) (Dhry/sec)	1103.00	1438.00

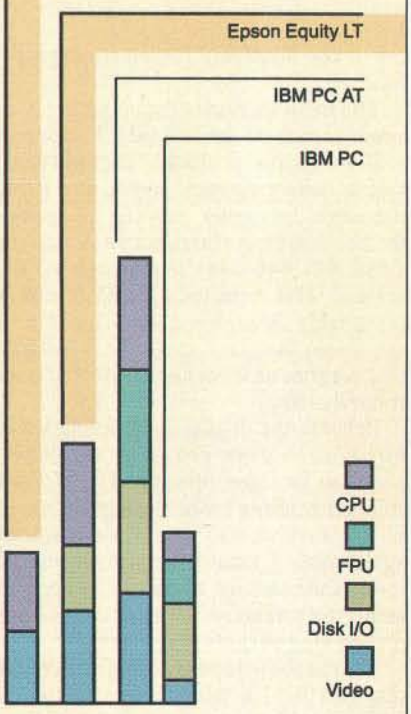

[1] All times are in seconds. All figures were generated using the 8088/8086 version (1.1) of Small-C (16-bit integers).
[2] Floating-Point benchmarks were not performed because the Epson Equity LT and Amstrad PPC640 did not have a math coprocessor chip.
[3] The Amstrad PPC640 did not have a hard disk drive; all times are for floppy disk drives.
[4] DOS Seek times for the Epson Equity LT are for multiple seek operations (number of seeks performed currently set to 100).
[5] Read and write times for the File I/O benchmarks are in seconds per 64K bytes.
[6] For the Livermore Loops and Dhrystone tests only, higher numbers mean faster performance. Tests were performed in emulation mode.

For a full description of all the benchmarks, see "Introducing the New BYTE Benchmarks," June BYTE.

Not Really a Laptop

In addition to the other laptops in this review, I also looked at the Laser Compact XT (available from Video Technology Computers, Inc., 550 East Main St., Lake Zurich, IL 60047, (312) 540-8086).

The Laser Compact XT is a dual-speed (4.77- and 10-MHz) IBM PC XT clone with no expansion slots and meager documentation. This minimalist computer is sold for a minimal price—$599 for the base model with 512K bytes of RAM, and $699 for the 640K-byte model.

The idea behind the Laser Compact XT appears to be to provide a full-featured clone for as small a price as possible. In this its designer seems to have succeeded.

This machine is about the size of a laptop computer that contains its single 360K-byte 5¼-inch floppy disk drive on the right side of the machine. It is equipped with 1.6 megabytes of memory, CGA and Hercules graphics, a parallel port, a serial port, a joystick or mouse port, and an external disk drive connector for the optional external 360K-byte floppy disk drive. It comes with RAM disk software, so the lack of a second floppy disk drive is not a big problem. Finally, it weighs less than 12 pounds and has a handle that folds out



from underneath so you can carry it around.

Using the Laser Compact XT

Getting the Laser Compact XT set up is a chore. The documentation is both slim and vague. When I tried to set the video board to handle a CGA monitor, I found the documentation so confusing that I had to call the manufacturer's technical hot line to get the proper instructions.

Once I got the Laser Compact XT set up, it performed adequately. It supported CGA when I had the switches set properly, although the character set was smeared and hard to read. The machine was shipped with MS-DOS 3.21 and GWBASIC. Unfortunately, the RAM disk drivers were shipped on a boot disk with MS-DOS 3.20; I had to jockey the disks around until I could get the newer version of DOS onto the memory driver boot disk. This could be a problem for a new user.

There seemed to be no problem with compatibility for the software I tried, which included WordStar 4.0, Lotus 1-2-3 version 2.01, and some games, such as Tetris. There were no problems with copy protection at high speed when I used Lotus 1-2-3.

The keyboard occasionally doubled characters, and it was hard to use unless the rear of the machine was propped up on its carrying handle. Once oriented like this, the keyboard was farther off the tabletop than is the case with a detached keyboard on an IBM clone.

The Occasional Computer

This is a machine for people who sometimes want to work at home or who sometimes need an IBM compatible. It is quite portable, although you will need a monitor where you are going—unless you plan to carry that, too.

The Laser Compact XT is not dependable enough to be a primary computer. It does what it advertises, but you can't add expansion cards. If one floppy disk drive and a RAM drive are what you need, then this might make an acceptable secondary machine.

every key faithfully placed in its proper location.

The main section of the computer has a small screen on the left side. The screen will tilt to any position, from perfectly flat to nearly upright, so you can adjust the angle for better viewing. Adjusting the angle is important, because the Amstrad PPC640 uses a reflective LCD screen. The supertwist LCD screen is reasonably clear, but it's much harder to see than a backlit display. This machine needs either an external monitor or good room lighting.

Beneath the display are cooling vents; for them to work properly, the display needs to be tilted upward. The PPC640 stopped running twice during the course of this review, and each time it started again after I raised the screen and allowed the machine to cool. The area beneath the screen gets warm, but not hot, during long periods of operation.

Next to the screen is a small cubbyhole that can hold a telephone cord for the built-in 2400-bps modem. Below that are controls for screen contrast and speaker volume, and a series of LEDs that show disk drive activity, whether the CRT is enabled, and whether the power is on. Below the LEDs is a switch that controls the power source.

Power in the Amstrad PPC640 comes from 10 C-cell alkaline batteries or from an AC adapter. The user's manual advises against using rechargeable batteries. Amstrad also provides a 12-volt car adapter that you can plug into your cigarette lighter. The C-cell batteries lasted about 3 hours before the battery alarm sounded; during that time, the PPC640 ran the BYTE benchmarks twice.

On the right side of the PPC640 is a square plastic handle that protrudes from the carrying case so you can carry the computer securely. Next to the handle is a pair of 720K-byte 3½-inch floppy disk drives. An internal hard disk drive is not available. On the rear of the machine is a door that swings open to reveal a serial port, a parallel port, a DIN connector for power, a coaxial DC power connector, an RGB monitor connector, and a pair of RJ-11 connectors for the modem.

Hands on the PPC640

Once you get past the size, you'll find that Amstrad has added some software that makes the PPC640 easy to use. An integrated package called the PPC Organizer includes text retrieval, an appointment book, a card file, a word processor, and a calculator. It's a convenient package, and it supports a color monitor if you have one attached. Mirror II, a communications package, is also bundled with the system.

The PPC640 is extremely quiet. Since it does not have a hard disk drive, there's none of the whirring and whining that goes with one. The floppy disk drives are quiet and trouble-free.

Since the PPC640 has a full-size keyboard, it was easier to get used to than any other laptop I've reviewed. The keyboard is just like those on larger machines. If you do a lot of word process-

continued



It looks good on paper.

You expect excellent letter-quality print from a 24-pin printer. And Citizen's new precision-built Tribute™ 124 delivers.

With razor-sharp letter definition at 66 cps. Attractive correspondence quality at 132 cps. As well as crisp, impressive draft printing at 200 cps.

You might be surprised, however, to find that the versatile Tribute 124 offers quite a bit more. Like a built-in push or pull tractor with top, rear or bottom feed. Automatic paper loading. Outstanding compatibility. Push-button convenience of a front control panel. Even optional color printing.

It also provides a wide selection of typestyles via available font cards. And produces striking high-resolution graphics.

With all these value-added features and an exceptional 12-month warranty, the Tribute 124 is very affordable. So, not only does it look good on paper, it looks good for less paper.

For the Citizen printer dealer nearest you, call 1-800-556-1234, Ext. 34. In California, call 1-800-441-2345, Ext. 34.

©1988 Citizen America Corporation. Citizen, the Citizen logo and Tribute are trademarks of Citizen Watch Co., Ltd.

CITIZEN™

Printers that run like clockwork.

Circle 53 on Reader Service Card

ing, this keyboard will fit right in.

The PPC640's documentation was adequate. The user's manual contained instructions for not only the computer but also MS-DOS and the Mirror II communications software.

Spotty Benchmarks

The BYTE Lab couldn't run the full suite of system benchmarks on these machines. The PPC640 lacked a hard disk drive, so running some software, such as Aldus PageMaker and dBASE III Plus, was impossible. Neither machine had a math coprocessor chip, thus eliminating the FPU tests.

In the tests that the BYTE Lab could run, both laptops were adequate in benchmark performance. Even though both used 8086-level technology, they performed well when compared to the IBM PC XT; in many tests, both of them ran two to three times faster than the XT. Even when compared to the 80286-based AT, they put in a respectable showing.

The Equity LT consistently performed at 80 percent to 90 percent of the speed of the AT. In one test—the word-processing application benchmark—the Equity LT actually beat the AT by a small margin. Overall, this machine shows exceptional speed. There is one area, the Scientific and Engineering tests, where the processor's limitations (and lack of a math coprocessor) show up; I think it's unlikely, however, that this machine would be purchased for a heavy user of AutoCAD.

The PPC640 was also reasonably fast, especially for an 8086-based machine costing under $1200 and running on flashlight batteries. It turned out a respectable half to two-thirds of the speed of the AT. Since this machine is designed to be a clone of the old XT, its benchmark performance was certainly adequate. The PPC640 could not run all the application benchmarks, but those it could handle indicate that it maintains its speed relative to the AT.

Interestingly, in sorting operations, the PPC640 was virtually as fast as the AT; this is probably due to the 16-bit data path the 8086 shares with the 80286.

Stick with Others

The Epson Equity LT is similar in style and price to portable computers available from other manufacturers, such as NEC or Toshiba. But the NEC MultiSpeed HD's keyboard is slightly easier to use, and the Equity LT's carrying handle causes an awkward ridge in front of the keyboard, making typing difficult. The Equity LT is basically a sound machine at a reasonable price, but in terms of overall convenience, I still prefer the NEC or Toshiba computers.

The Amstrad PPC640 is unique. It has no hard disk drive and no backlit display, but it has the best keyboard available on a portable. This makes typing easy, but it reduces the machine's portability. The PPC640 is similar in price to other machines, such as the Toshiba T1000, but it has dual floppy disk drives.

Neither machine, though, succeeds in breaking new ground. If I were buying a laptop portable, I would stick with the NEC MultiSpeed HD, Toshiba T1000, or Zenith SupersPort. ■

Wayne Rash Jr. is a consulting editor for BYTE and a member of the professional staff of American Management Systems in Arlington, Virginia. He consults with the federal government on microcomputers and communications. You can reach him on BIX as "waynerash."

California FREEWARE

ONLY $2.99 per disk! ONLY $2.99 per disk! ONLY $2.99 per disk!

Public Domain and Shareware for IBM™ and Compatibles, DOS™ 2.1 or higher.
Programs and Utilities to meet all your computing needs.

BUSINESS

☐ EZ-FORMS Rev. D15 (66) - Menu driven, misc. forms.
☐ EASY PROJECT V2.5 (440) - Complete project management system. Excellent.
☐ REAL ESTATE ANALYST (63) - Menu driven, mortgages, interest, etc.
☐ IN CONTROL (174 & 175) - (2 disk set) The ultimate prospect/client/customer tracking system. Hard drive req. Great.
☐ BUSINESS LETTERS (303 & 304) - (2 disk set) 650 business letters to fit all your needs. Edit w/ any word processor.
☐ LEGAL LETTERS (611) - 100 legal letters to fit all your needs. Edit w/ any word processor.
☐ MR. BILL V3.2 (311 & 312) - (2 disk set) Time & billing package; costs, credits, reports, audit trail, etc.
☐ LANDLORD V2.01 (585) - Fast & friendly rental property mgmt. Hard drive.
☐ FINANCE MANAGER V4.0 (77) - Accounting package for business or personal finances. Double entry system.
☐ PRO PC-ACCT SYSTEM (536) - Fully integrated G/L, A/P, A/R system. Menu driven, on-screen help, cross posting, unlimited accounts, & much more.

COMMUNICATIONS

☐ QMODEM V3.1 (293 & 294) - (2 disk set) Full featured modem program. 200 number dialing directory, etc.
☐ PROCOMM V2.42 (53 & 54) (2 disk set) Menu driven modem program, excellent documentation; still one of the best.
☐ PC-TALK III (468) - Modem program by Jim Button.

DATABASE

☐ FILE EXPRESS V4.18 (33 & 34) - (2 disk set) Menu driven, easy to use database for beginners to experienced.
☐ PC-FILE + V3.0 (493 - 495) - (3 disk set) Full-featured database; help screens, menus, macros. One of the best. J Button

EDUCATION

☐ COMPOSER (3) - Create, save, edit, play, & print your music.
☐ LETTERFALL V1.1 (119) - Improve your touch typing skills; 16 levels.
☐ THE WORLD 3D (127) - Display maps of the world. CGA required.
☐ FUNNELS & BUCKETS V2.0 (130) - Great learning game; add, subtract, multiply, & divide. Ages 5 - 10.
☐ MATH-WHIZ (188) - Teaches various math operations. Ages 5 and up. You choose the level. Basic required.
☐ SAN MATEO EDUCATION (136) - Teaches math, chemistry & geography. Ages 8 - 16. CGA required.
☐ POLYGLOT V6.01 (139) - Vocabulary builder. Grades 7 - college. Excellent.
☐ ANIMAL MATH/MOSAIC (181) - Count objects & graphic learning tool. Ages 4 & up. CGA required.

GAMES

☐ SLEUTH V4.1 (89) - Murder mystery game similar to the board game "CLUE".
☐ BLACKJACK (95) - Advanced blackjack game with tutor, multiple players. Best one yet. CGA or Hercules.
☐ MONOPOLY V6.7 (106) - Just like the board game. 2 to 4 players. CGA req.
☐ DND V1.1 (205) The classic dungeon game. Can you survive?
☐ LAS VEGAS (116) - Craps, Roullete, Poker, & more. CGA req., Basic on some.
☐ 3D CHESS V1.01 (215) - Excellent chess game. Switch between 2D & 3D.
☐ SUPER PINBALL (212) - 5 different games. CGA required.
☐ WORDPLAY (367) - Wheel of Fortune clone. You provide the prizes. CGA req.
☐ MINIATURE GOLF (505) - 18 hole golf course with graphics. CGA req.

GRAPHICS

☐ FINGERPAINT V3.0 (282) - Paint program; 6 fonts, 61 sizes.
☐ LIGHTING PRESS (266) - Printmaster Plus clone, flyers, greeting cards, etc.
☐ PRINTMASTER GRAPHICS (319) - 3 libraries of graphics. Printmaster Plus req.
☐ PRINTSHOP GRAPHICS (320) - 3 libraries of graphics. Printshop req.
☐ PC-KEY-DRAW (534-536) - (3 disk set) - Combination CAD & paint program for power & flexibility.
☐ DANCAD 3D V2.08 (424 & 425) - (2 disk set) Advanced 2D/3D drafting program. 640k req.
☐ FLODRAW V1.00 (542 & 543) - Produces flowcharts, organizational charts, system diagrams, etc. CGA required.

NOVELTY

☐ STRESS & SHRINK (74) - Stress - stress test. Shrink - personality analysis.
☐ FASTBUCKS (191) - Menu-driven home finance package. Easy to use.
☐ RECIPES V1.0 (445) - Over 125 recipes, adjust serving sizes from 1-99.
☐ LITTLE BLACK BOOK (441) - Creates pocket sized address book. Prints mini-alphabetized pages.
☐ HOMEBASE V2.5 (528-530) - (3 disk set) Great desktop organizer; linear database, editor/word processor, calendar appt. book, cut/paste operations, etc.

PRINTER UTILITIES

☐ LQ V2.1 (509) - Produces high quality text on dot matrix printers. Multiple fonts with print spooler.
☐ PRINTPRO V1.2 (468) - Change printer operation from within ANY application at ANY time.
☐ BRADFORD (551) - Print any file with higher quality in a large variety of fonts.

SPREADSHEET

☐ PC CALC + V 1.0 (537-539) - (3 disk set) - Complete program. Buttonware.
☐ LOTUS PROGRAMS (28 - 32) - (5 disk set) Contains as many applications and utilities that we could find. Lotus 123 req.
☐ AS EASY AS V3.0 (302) - Lotus clone. 52 column sheet, graphing, supports functions of 123, "WKS" files, etc.
☐ LOTUS LEARNING SYSTEM (458) - A tutorial that covers overview, applications, etc. Lotus NOT required.

UTILITIES

☐ DISK COMMANDO V2.0 (218 & 219) - (2 disk set) Norton Advanced Utilities clone. Too many features.
☐ SIM-CGA (220) - Great for most programs that need color (CGA) to run.
☐ DOS HELP (255) - Help screen for DOS commands, functions & batch files at your fingertips. For DOS 3.XX.
☐ DOS TUTORIAL V4.2 (256) - Menu driven, learn to use your computer.
☐ LIST V6.2A (274) - Best utility for viewing documentation or any ASCII file.
☐ AUTOMENU V4.01 (280) - Access programs, batch files, commands, etc.
☐ VACCINE (541) - Various programs to fight against the "VIRUS" & "TROJAN HORSE" programs. A MUST FOR ALL...

WORD PROCESSING

☐ PC-WRITE V2.71 (9 & 10) - (2 disk set) Full featured word processor; all the features of the expensive one's.
☐ GALAXY V2.3 (11) - Easy to use word processor; menus & quick keyboard commands. Lots of features.

WHAT'S NEW?

☐ WORDPERFECT MACROS (189) - Over 80 macros for Wordperfect V5.0.
☐ ON-SIDE (560) - Sideways printing program.
☐ PDS QUOTE V3.14 (573) - Quickly prepare quotes for any project.
☐ ALGEBRA TUTOR (577) - By professor Welesman, teaches all operations.
☐ WEIGHT CONTROL (586) - Programs designed to get rid of unwanted inches.
☐ BILLPOWER V3.9 (601) - A timekeeping, billing & bookkeeping program for small firms. Req. 450K & hard drive.
☐ MGMT TOOLS (643) - 10 programs for management & supervisors. Great!

ORDER FORM

NAME
ADDRESS
CITY ST ZIP
PHONE ( )

Multiple disk sets count as the # of disks in a set @ $2.99 each.
3.5" media - $3.99 ea
of 5.25" disks @$2.99=
CA Res. Sales Tax (6.5%) =
Shipping & Handling = 3.00
Orders shipped UPS ground
TOTAL = $


International orders add $10.00 for S/H & payment must be in US funds.
Mail order form & check or money order to:

California FREEWARE
1466 Springline Dr. Dept A
Palmdale, CA 93550
(805) 273-0300
Hours: M-F 8am - 5pm

Call or write for a free catalog containing over 700 disks of quality software.
Phone orders placed before 12pm PST sent same day.
Yes - We accept VISA/MC Orders.
Please call for warranty information.
BYTE1088

Circle 197 on Reader Service Card

An inside look at the best 386 value around.

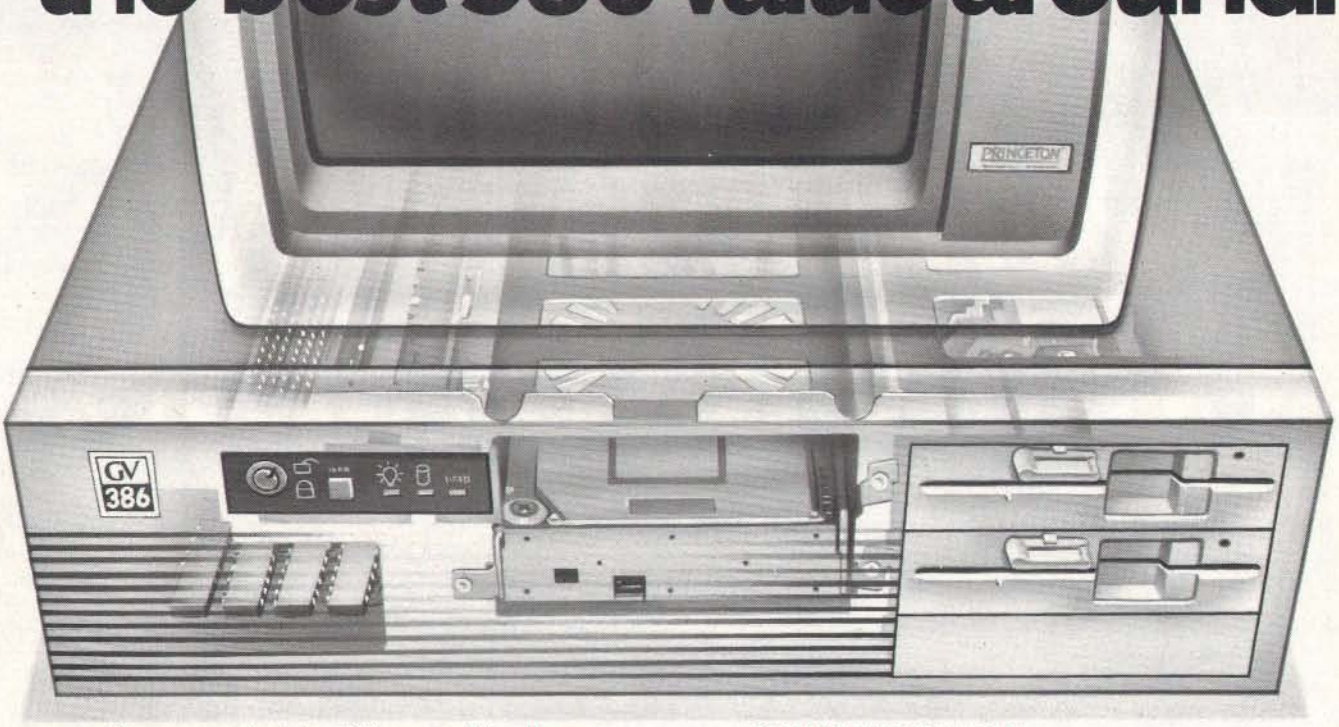

The more you look into 386 compatibles, the more you realize that well thought-out design innovations (that really work) are few and far between.

That's why our engineers set out to design the GV-386. They realized they could unlock more of the chip's potential, if only they could speed up data retrieval, without affecting system reliability.

INNER POWER

Here's how they did it: a high-speed RAM cache circuit—a full 64K of superfast memory—that puts your most frequently accessed data right at your fingertips. If you're ever involved in processing complex databases, long spreadsheets, or detailed engineering drawings, you'll see the value of this innovation in a second...literally.

Best of all, the cache circuit actually makes the GV-386 more reliable than other high-speed machines, by sparing integrated circuits from harsh overloading.

QUALITY THROUGHOUT

Of course, our most important criterion when designing our super compatible wasn't speed—it was quality. Take a look inside the GV-386 and you'll see it everywhere: from the highest quality components available to the intelligent use of special CMOS RAM to store system set-up information. On the outside, the fit and finish of the GV-386 would make Big Blue green. Even the user's manual has impressed users and reviewers alike.

We'd like to tell you more about what went into the GV-386. Give us a call and we'll give you the whole story. We'll also tell you about our exclusive 30-Day Compatibility Guarantee, our full One-Year Warranty and our toll-free support service.

The GV-386 from PC Designs. With design innovations this advanced, at this price, it's an open and shut case.

GV-386 Specifications

- ❑ Available with 16MHz or 20MHz CPU
- ❑ Zero Wait States
- ❑ 64K Cache (keyboard enabled)
- ❑ 1 MB RAM on-board, expandable to 4MB
- ❑ Socketed for 80287 or 80387
- ❑ I/O Bus runs at 8MHz for hardware compatibility
- ❑ Six 16-bit slots; Two 8-bit slots
- ❑ Price: 20MHz systems start at $2,750; 16MHz systems as low as $2,375

PC Designs

Call us now at 1-800-32-BIT PC
(800-322-4872)

2500 N. Hemlock Circle, Broken Arrow, OK 74012
• 918-251-5550 (Fax: 918-251-7057)

19 Rector Street, Suite 2705, New York, NY 10006
• 212-514-7280 (Fax: 212-797-3973)

Our BBS is on-line 24 hours.
Call The Soft Stop at 918-252-9137.

Prices subject to change.

Circle 195 on Reader Service Card

PRESENTING AMERICA'S HOTTEST NEW CORPORATE JETS.

FIVESTAR'S fleet of powerful business computers have really taken off in the last three years. That's because they're built for corporations that want to get where they're going in a hurry.

We build a full line of high-powered performers that not only provide *total* PC compatibility and advanced business capabilities, but also offer American-made ingenuity, quality and value.

In fact, when you *really* compare, you'll find that FIVESTAR Computers leave the competition far behind.

FIVESTAR 286's.
The performance to fly through heavy workloads.

FIVESTAR 286's provide the features and performance aggressive companies need to reach higher corporate goals. In fact, they're designed to run future as well as current operating systems.

The 286/10 is powered by an Intel 80286 microprocessor that operates at a fast 10 MHz, with zero wait states. With 640KB memory and 1.2MB floppy disk drive, you'll soar through today's popular business applications. Serial, parallel and game ports, and an enhanced 101-key keyboard, provide in-flight convenience.

The 286/14 is also powered by an Intel 80286 CPU, but operates at 14 MHz (with zero wait states) for even faster performance. It, too, comes equipped with 1024KB memory, 1.2MB floppy disk drive, serial/parallel/game ports and a 101-key keyboard. No doubt about it — it's a hot machine and a dream to fly!

FIVESTAR 386's.
Don't forget to fasten your seat belt.

The incredible speed and power of FIVESTAR 386's have made them a leading choice of corporations across America for multitasking and sophisticated applications, including CAD. In fact, there's so much performance and value built into our 386's, it can take your breath away.

The 386/16 is fast. Very fast. That's because it features an Intel 80386 CPU operating at 16 MHz, with zero wait states. And its 1024KB memory and 1.2MB floppy disk drive will keep you airborne for long distances. Serial/parallel/game ports and a smooth performing 101-key keyboard are standard equipment.

Prices:
The 286/10 – from $1099.
The 286/14 – from $1499.



The 386/20. It's made for those who want to fly to the outer limits. With an Intel 80386 microprocessor operating at 20 MHz (with zero wait states) it'll move through the most complex applications with astounding ease. And you won't have to worry about running low on memory either. It not only features 1024KB of RAM and a 1.2MB floppy disk drive, it also has a 64KB cache memory. Naturally, it comes equipped with serial/parallel/game ports and a 101-key keyboard, too.

Customize your FIVESTAR to meet your own specifications.

All FIVESTAR 286 and 386 Computers are available with hard drives, from 20 to 320 MB, as well as a choice of monochrome, EGA, VGA or super-high resolution paper-white monitors. Whatever the requirement, FIVESTAR can meet it.

Prices:
The 386/16 – from $1999.
The 386/20 – from $2999.

Unmatched reliability. Unbeatable ground support.

Because every FIVESTAR Computer is tested and certified to meet the highest standards of quality, you can count on years of reliable performance.

Once you've purchased your FIVESTAR computer, you'll get all the support you'll need. Just call our highly-trained service department *toll-free*. Most difficulties can be resolved within minutes.

For companies with critical applications, a comprehensive on-site service contract is available for just $99. In most cases, service calls are made within 24 hours.

Order by phone today. And move your company to higher levels of performance.

To order a FIVESTAR 286 or 386 Computer, or for more information about our full line of high-powered computers, call us TOLL FREE. We'll have your hot new corporate jet parked in your hanger in no time!

1-800-752-5555

FIVESTAR
COMPUTERS

America's hottest new corporate jets.

All prices and specifications are subject to change without notice.

FIVESTAR and Intel are registered trademarks.

13108

Circle 294 on Reader Service Card



Bringing the Outside World

Five low-cost scanners for capturing images or text

Laurence H. Loeb

Without a doubt, the Macintosh's built-in graphics capability gives it uses that its designers never thought of. Desktop publishing is a good example of this: It requires a machine that can freely mix graphics and text, organize them, and then display them consistently—something that the Mac does very well. This ability to freely use graphical information to illustrate or amplify text has spawned many a newsletter that might have never been produced otherwise.

However, these capabilities don't solve a fundamental problem for many people who wish to use them. Simply put, not everyone can draw the images they want.

This is where the scanner as graphics tool comes into the picture. A scanner is a piece of hardware that copies an image and converts it to an electronically usable form, either as an image in the Mac's RAM or as a file on disk. Once you get an image from, say, a book or magazine or snapshot into the Mac, you can then manipulate it with any of an army of Mac applications. You can import the image to an application either via the Clipboard or by opening the file.

Another use of scanners is in optical character recognition (OCR). With the right application, the Mac can analyze an image to recognize the presence of characters. This allows rapid data entry from paper documents and eliminates typing it in by hand, which is time-consuming and error-prone.

I took a look at five scanners designed for use with the Macintosh: ThunderWare's ThunderScan ($249), Mirror Technology's VisionScan ($695), Microtek Lab's MSF-300C scanner ($1795 with small-computer-system-interface connector and cable), Datacopy's Model 730 ($2495 with SCSI connector kit), and New Image Technology's MacScan ($1995). I chose a price ceiling of about $2500. This range by no means covers the entire Mac scanner market, but it should give a good picture of what's available at the low end and what the price/performance trade-offs are.

The least expensive scanners (ThunderScan and VisionScan) use the Mac serial port to convey data. The most costly scanners (the MSF-300C, Model 730, and MacScan) are flatbed devices that resemble small photocopiers and use the SCSI port to communicate with the Mac. The SCSI port allows faster data transfer rates between the Mac and the scanner than you get through the serial ports. All scanners except the VisionScan can save gray-scale information with an image.

To obtain some realistic, quantitative results, I scanned the same image with each scanner. The image was BYTE's standard test sheet (see figure 1). All scanned files were saved as bit maps—that is, with no gray-scale information. All that can be shown on a Mac display (except for that of the Mac II) is bit-map information, so the scans all looked the same on-screen. For consistent results when saving the image to disk, I saved all the scans as 1-bit-per-pixel Tag Image File Format (TIFF) files. I used a Mac Plus with 2.5 megabytes of RAM using MultiFinder 6.0 with System 6.0.

Using What You've Got: ThunderScan

The ThunderScan uses your Imagewriter printer as the scanning mechanism (see photo 1); it replaces the ribbon assembly on the Imagewriter with an infrared scanning device. Software on the Mac controls the Imagewriter, using its carriage to advance the paper with the image on it up past the print head and moving the print head with the attached scanning device back and forth across the image. It scans by measuring the infrared reflection point-by-point as the scanning device moves across the paper.


The ThunderScan system is an ingenious way to use all the hardware of a typical Mac system to get scanning capability, since Mac users usually have a printer. But what if you have a LaserWriter? Sorry, you're out of luck. What if you've got a book, rather than a photo or magazine page? If it can't fit into the Imagewriter carriage, again you're out of luck.

The scanning device feeds data to the control software via either serial port. ThunderScan draws 5 volts from the Mac for its power. In its original design, it obtained this power from the DB-9 serial ports on 128K-byte and 512K-byte Macs. But on the Mac Plus and SE, the DB-9 connectors have been replaced with mini DIN-8 connectors, and a 5-V source is not available. ThunderWare built a special PowerPort adapter, supplied with the scanner, that makes these machines electrically and cable-compatible to the original design.

The PowerPort adapter fits over the external floppy disk drive connector and draws the 5 V from it. A duplicate connector lets you attach an external drive to your Mac. The adapter also has a DIN-8 connector for the Mac's printer port, and these signals are provided on a DB-9 connector to the scanning device. Mac II users have to obtain a special PowerPort adapter since it doesn't have an external floppy disk drive connector.

Setup is amazingly simple. You remove the printer ribbon from your Imagewriter or Imagewriter II printer and clip the scanning device into its place. Then you attach the PowerPort adapter to the external floppy disk drive connector. Next, you attach the scanning

into a Macintosh

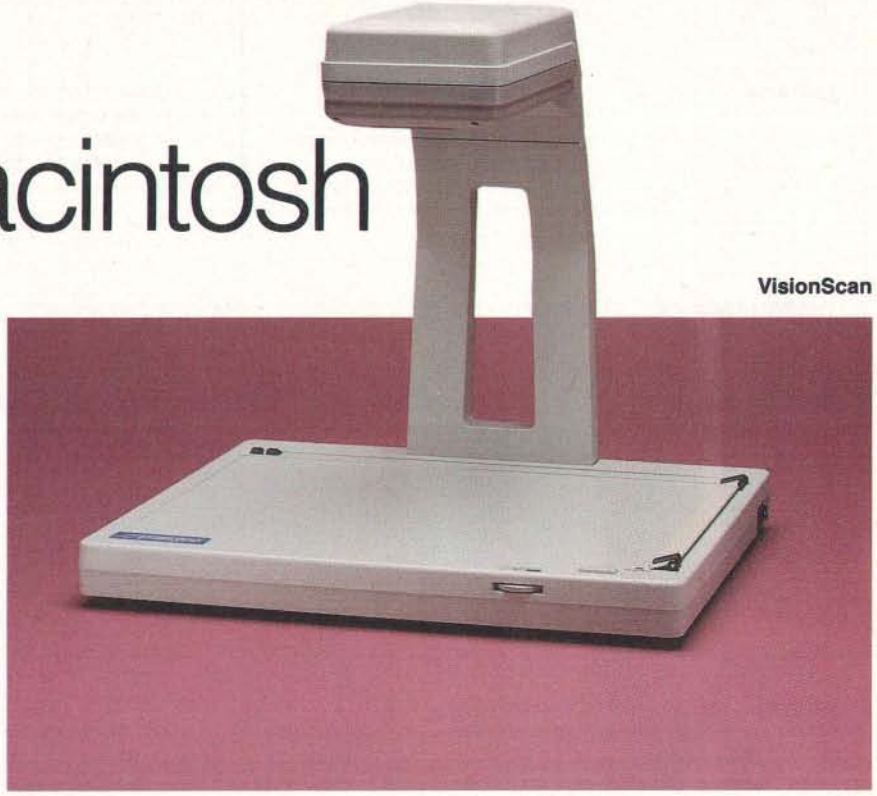

VisionScan

device's cable to the provided junction box, and the Imagewriter's printer cable to another connector on this box. Then you hook the junction box to the PowerPort connector. Finally, you copy the software to your start-up disk. Although this operation sounds involved, in just under 10 minutes I was ready to do my first scan.

The ThunderScan 4.0 software lets you select a specific area of the page to be scanned. You cannot directly set the dots per inch of the scan, but you can set magnifications from the standard 75-dpi scan (from 50 percent to 300 percent) to change the resolution. The software checks the amount of memory required for the scan before it takes place; if not enough memory is present, the ThunderScan application will not allow the scan to proceed. This application also includes an editor that allows a FatBits level of picture editing and the use of the MacPaint-like lasso, select, pencil, eraser, and scrolling hand tools.

The scanner can store 32 levels of gray-scale information for the image in memory. You can also edit the gray scales of the scanned image with a gray-level map editor and then save it to disk. You can save an image as a bit-mapped MacPaint document (up to a maximum of 32K bytes in size) or as a MacDraw PICT file; you can save the image's gray-scale information as a ThunderScan file, an Encapsulated PostScript File (EPSF), or a TIFF file from within the ThunderScan application. TIFF files are saved in either a 1-bit "vanilla" format or a 4-bit compressed format. Due to the wide latitude that the TIFF specification allows in its implementation, ThunderScan TIFF files might not be compatible with certain applications, such as Zedcor DeskPaint. However, PageMaker and Quark XPress accept the TIFF format.

Because of the nature of its scanning mechanism, the ThunderScan takes the longest of the devices tested to do a scan (see table 1). However, if you can spare the time, ThunderScan gets you into the game inexpensively.

No Moving Parts: VisionScan

The next step up the scanning ladder is the VisionScan from Mirror Technology. The VisionScan unit is a Chinon flatbed scanner with no moving parts except for an internal mirror in the head (see photo above). It has a maximum resolution of 200 dpi. You place the image to be scanned on a flat base underneath an arm that extends up and over the base holding the image. The bottom of this overhead arm is clear, and it contains the charge-coupled device and optics that do the scanning. The image is illuminated by room light—the scanner adjusts for ambient level when you power it on. Depending on how a room is lit, the arm may cast a shadow on the document; it will show up as a darkening of the scanned image in the shadowed area. This happened to me during testing, and I found that supplemental fill lighting from a small high-intensity lamp is necessary for best results.

Like the ThunderScan, the flatbed scanner's data goes to either of the Mac's serial ports. An adapter cable provides the connection between the VisionScan's DB-25 serial port and the Mac's DIN-8 port. A Centronics-style parallel port is present on the scanner, but, at least with the setup I had, there's no software or cabling to make use of it. An external power supply plugs into a wall outlet, similar to the power supplies found on some calculators and modems.

You can set up this scanner pretty quickly. Place the scanner on a flat surface, and connect it to the Mac using the adapter cable. Next, connect the power cord to the scanner, and then plug the power supply into a wall outlet. Check the position of several DIP switches on the scanner, then turn the scanner on. Copy and install the software onto your start-up disk, and you're done.

You control scanning with either the VisionScan 1.0 application program or a supplied VisionScan desk accessory 1.0. Scans can be made at 100-, 120-, 150-, and 200-dpi resolutions. You can't edit the image from within either of these programs. Zedcor's DeskPaint DA 1.05, supplied with the VisionScan, is a full-featured editor that provides the necessary functions.

This scanner has three methods of determining what portion of the image is to

continued

	ThunderScan	VisionScan	MSF-300C
Type	Imagewriter scanner	Flatbed scanner	SCSI flatbed scanner
Company	ThunderWare 21 Orinda Way Orinda, CA 94563 (415) 254-6581	Mirror Technology 2644 Patton Rd. Roseville, MN 55113 (612) 633-3255	Microtek Lab, Inc. 16901 South Western Ave. Gardenia, CA 90247 (800) 654-4160 (213) 321-2121
Features	300-dpi scanning cartridge with detachable adapter box; ThunderScan 4.0 software; user's guide; all necessary cabling; external drive PowerPort connector for use in connecting to Macintosh Plus or SE	200-dpi Chinon scanner; 15-V external power supply; VisionScan 1.0 software; user's guide; Zedcor's DeskPaint software; DB-25-to-Apple DIN-8 serial port connector	300-dpi MSF-300C scanner; interface box with 5-V power supply and tabletop mounting brackets; scanner-to-interface box connector; spare scanning lamp; VersaScan Plus 1.05 graphics software with user's guide; scanner-to-Apple DIN-8 connector for serial port use
Hardware Needed	Macintosh 512K, 512KE, Plus, SE, or II	Macintosh Plus, SE, or II	Macintosh 512KE, Plus, SE, or II; DB-25-to-50-pin SCSI converter cable (for Mac Plus, SE, or II)
Software Needed	System 3.2/Finder 5.3 or higher (System 4.2 or higher for Mac SE/II)	System 4.2/Finder 6.0 or higher	System 4.2/Finder 6.0 or higher
Options	Mac II power supply: $49	None	None
Price	$249	$695	$1595 Bundled with SCSI connector and cable: $1795
	Inquiry 893.	**Inquiry 894.**	**Inquiry 895.**

be scanned. As with most of the scanning software, you can specify the scan area with a click and drag of a rectangle outline over a template that represents the scanner bed. You can also scan the area of intersection determined by the position of adjustable horizontal and vertical sliders on the scanner base. This ends the need to measure an image to find where to set the scan, because you can specify it directly with the image itself. Or, you can place the provided small v-shaped markers on the image itself. These markers indicate to the scanner the top right and bottom left corners of the image area you wish scanned. This is much more intuitive than having to select an area from within a application on a Mac screen.

You can save images as MacPaint (again, only to a 32K-byte file limit), PICT, Compressed TIFF (unrecognized by DeskPaint), Uncompressed TIFF (recognized by DeskPaint), and Clipboard formats (to get around the 32K-byte MacPaint limit but not the Clipboard's 1024-pixel width limit).

Scans at all dpi ranges from 100 to 200 dpi took about the same time, and the scanner was easy to use. The scanner-control DA was a convenient and useful tool, and I could do most necessary touch-ups with the DeskPaint DA. The scanner was light enough to transport





◀ **Photo 1:** *The ThunderScan (left) uses an Imagewriter or Imagewriter II print head.*
Photo 2: *The Datacopy Model 730 and SCSI adapter unit.*

Model 730	MacScan
SCSI flatbed scanner	SCSI flatbed scanner
Datacopy Corp. 1215 Terra Bella Ave. Mountain View, CA 94043 (415) 965-7900	New Image Technology, Inc. 9701 Philadelphia Court Lanham, MD 20706 (301) 731-2000
300-dpi Model 730 flatbed scanner with AC power cord; installation and maintenance guide; SCSI unit needing no external power supply; scanner-to-SCSI unit connectors; MacImage 2.01 graphics software with user's guide	300-dpi Canon IX-12 scanner; AC power cord; SCSI unit with external 5-V power supply; scanner-to-interface unit cable; Mac SCSI port-to-interface unit cable; MacScan 1.38 software; instruction manual
Macintosh Plus, SE, or II; DB-25-to-50-pin SCSI converter cable	Macintosh Plus, SE, or II
System 4.2/Finder 6.0 or higher	System 4.2/Finder 6.0 or higher
MacImage Kit with SCSI connector: $695	Textscan OCR software: $395
$1800 Bundled with MacImage Kit: $2495	$1995
Inquiry 896.	**Inquiry 897.**

easily and was compact enough to fit well on my cluttered desk. The only potentially serious flaw I found was the need to provide supplemental lighting so the overhead arm would not cast a shadow.

It is harder to scan a book on this scanner than on the flatbed ones because there's no easy way to hold the book flat. The scan output may be distorted over the bowed surface. However, single flat sheets scan rather nicely.

Short a Cable: The MSF-300C

The first SCSI flatbed scanner I evaluated was the Microtek MSF-300C. It consists of the flatbed scanning unit itself, an interface unit, an adapter cable to connect the scanner to the interface unit, a brick-size power supply for the interface unit, and the VersaScan Plus 1.05 software for the Mac. [Editor's note: *As we went to press, Microtek introduced its MSF-300Q scanner, which can record 64 gray levels. It costs $2495.*]

The Microtek interface unit is a wide metal box that comes with support brackets used to mount it vertically on the desk next to the scanner. This unit sits electrically between the scanner and the Mac's SCSI port. The unit has a single DB-25 connector for the scanner cable, and two 50-pin SCSI connectors. The two SCSI connectors let you daisy chain other SCSI devices or use a SCSI terminator block to terminate the bus. A relatively thick DB-25–to–DB-25 cable connects the unit to the scanner. The scanner itself is a flat, bulky metal box with its own power cord and switch.

Right away, while hooking up the scanner, I ran into a problem: A needed cable was not supplied with the unit. This cable, made by Apple, converts a 50-pin standard SCSI socket to Apple's DB-25 SCSI connector. Unfortunately, the cable is not standard issue from Apple. You must order it, and Microtek assumes you already own one. You'll save yourself some embarrassment if you have this cable handy when the box comes.

The VersaScan Plus 1.05 application that comes with the scanner will be familiar to anyone who has used similar software with AST Research scanners. It combines paint-like tools for editing a scanned image and the control functions necessary to operate the scanner. A dialog box lets you set the scan's resolution (75, 100, 150, 180, 200, or 300 dpi) and the area of the image to be digitized. The dialog box also displays the amount of memory available for a scan. You can even bypass the SCSI port and communicate with the scanner at 9600, 19,200, or 57,600 bits per second through the Mac's serial port. This feature should be of use to 512KE Mac users whose machine lacks a SCSI port.

The time to scan an image was the same (14 seconds) regardless of the format I saved it in. (Available formats include the VersaScan native format, MacPaint, TIFF, gray TIFF, PostScript, and gray PostScript). As long as you have sufficient RAM to store the image, you can edit it right away. I ran VersaScan under MultiFinder with other applications taking up available RAM to simulate out-of-memory conditions, and the error handling was graceful, without loss of work. The TIFF files the MSF-300C saved, though, were huge compared to those saved at the same dpi by the other scanners. I can find no reason for these excessive file sizes.

Table 1: *The scanners compared. I scanned an 8- by 6-inch image at 150 dpi and noted the elapsed time. The image was saved as a 1-bit-per-pixel TIFF file. Times are in minutes:seconds.*

	Time	File size (K bytes)
ThunderScan	25:37	117
VisionScan	1:14	192
MSF-300C	0:14	501
Model 730	0:15	249
MacScan	0:12	122

Slick Hardware, Mediocre Software: Datacopy Model 730

The Datacopy scanner package consists of a flatbed scanner (I looked at the Model 730), a small SCSI unit, an adapter cable to connect the interface unit to the scanner, and the MacImage 2.01 software. The Datacopy is the only SCSI scanner whose interface box did not require an external 5-V power supply; its installation was much neater, without excess cabling. The front panel of the scanner, with its scanner status lights, has a slick "instrument" look to it.

Setup is fairly quick and simple. However, I ran into the same problem I had with the Microtek scanner: a missing SCSI adapter cable. To be fair, Datacopy's SCSI adapter kit does include a DB-50–to–DB-50 SCSI cable that you can hook to an external SCSI hard disk with a second SCSI connector. However, if you own a Mac SE or Mac II with an internal hard disk, you need that Apple adapter cable.

The supplied MacImage 2.01 application, like the scanner, had some nice touches. The image setup dialog box uses pop-up menus for selecting scanning parameters. You can scan images at resolutions of 75, 100, 120, 150, 180, 200, 240, and 300 dpi and with 16 gray levels. The application has excellent control

continued

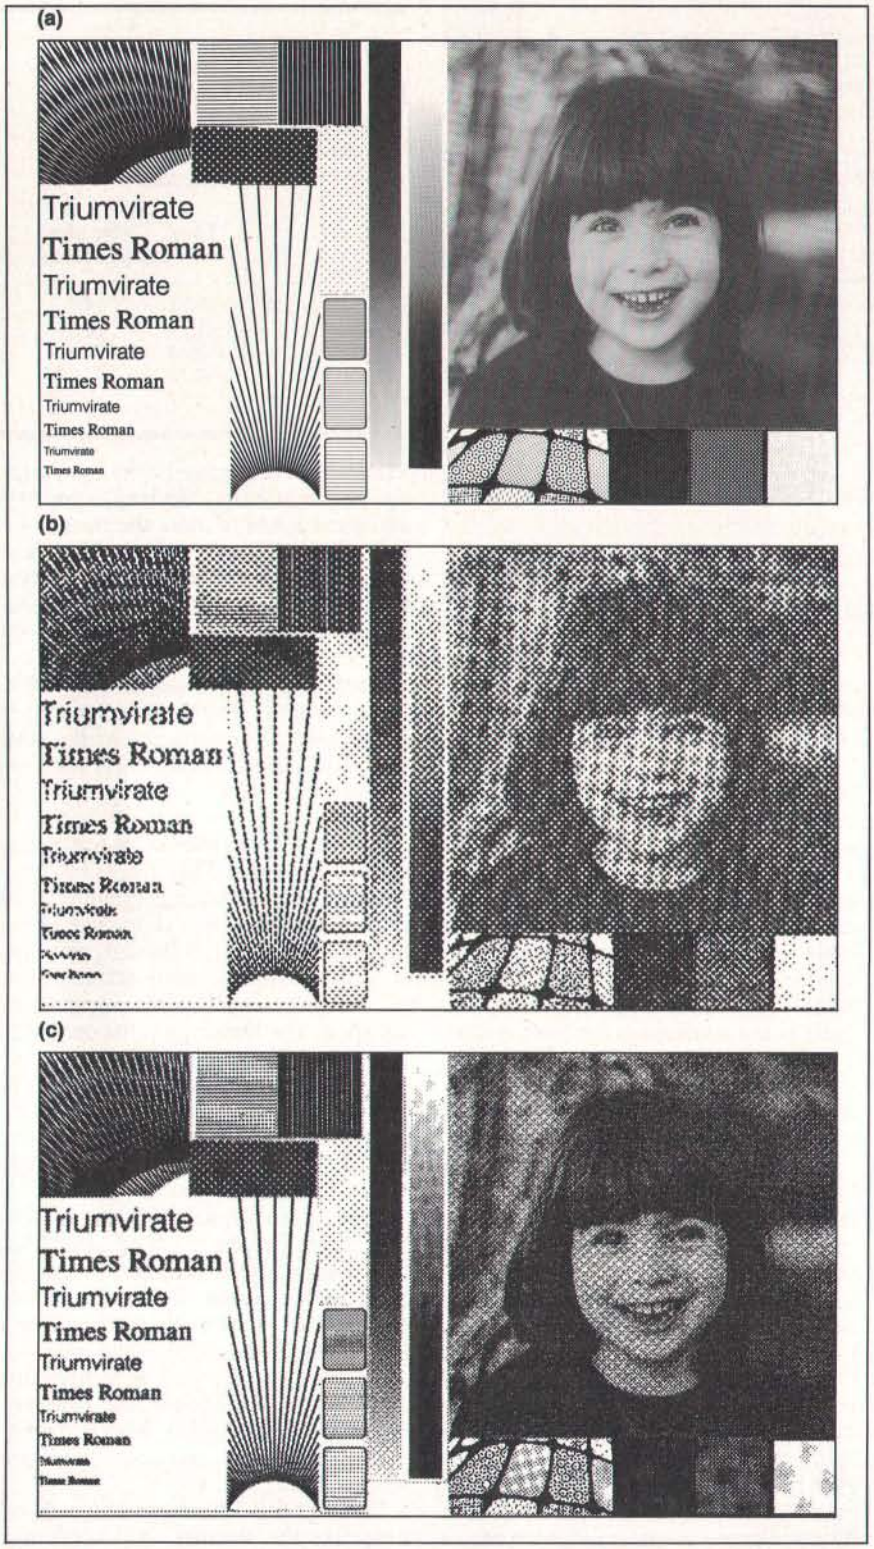


Figure 1: (a) *BYTE's test pattern for scanner quality.* (b) *The test pattern scanned at 150 dpi. The Microtek scanner was adjusted for halftone scanning to accommodate the halftone image. When the scanner was adjusted for line art, the lines and patterns looked considerably better, but the halftone's quality suffered.* (c) *The test pattern scanned at 300 dpi, halftone setting. Notice the improvement in the lines and patterns as well as in the halftone image. All images are actual size.*

functions, such as a halftone data editor that allows use of custom halftone patterns, and a gamma value editor that lets you use custom gray levels. A rich variety of useful formats is available for storing images, including scaled and clipped MacPaint, a proprietary Datacopy format (compressed and uncompressed), compressed and uncompressed TIFF, PICT, PostScript, EPSF, Raster Image File Format (used by Image Studio), and SuperPaint.

Another useful and unique feature of the software is the Auto-Configure command. This allows the system to find the correct SCSI address of the scanner, as well as confirm the hardware model used, since the MacImage application is designed to run with several models of Datacopy scanners. Highly useful for the novice, it eliminates the possibility of setting the SCSI address to the wrong value.

Still, the software needs to be revised. After completing a 300-dpi scan in 15 seconds, the MacImage program took almost 5 minutes to spool the 994K-byte uncompressed TIFF file to disk and return control to the user. Once the image was available on-screen, the only editing tool available was a FatBits pencil. Loading and converting files not saved in the Datacopy format also takes too long, compared to other programs doing the same thing. These waits, and the lack of a suitable image editor, mar an otherwise nicely done product.

No Complaint: MacScan

New Image Technology's MacScan uses the Canon IX-12 flatbed scanner, which is also sold as the Princeton Graphic Systems' LS-300F. The MacScan did not need any additional SCSI cables. The supplied ribbon cable connects the Mac's DB-25 SCSI port to the DB-25 SCSI connector on the scanner's interface unit. The cable also has an extra connector so that it can be connected as male-to-female or male-to-male. It is so handy for connecting Mac SCSI devices in general that I may forget to pack it back into the box when I return the unit. The interface unit requires an external power supply.

The supplied MacScan 1.21 software (the company says the version now being shipped is 1.38) did a good job of controlling and editing scans. You set the scan region by clicking and dragging on a template on the Mac's screen. Many MacPaint-like tools are available for editing, and the image is loaded into memory rather than spooled to disk. You can select, manipulate, print, and save subareas of the image separately from the

main image. A full-page scan took 12 seconds regardless of the resolution (75, 150, 200, or 300 dpi) of the scan. You can save files as TIFF (uncompressed, compressed, and gray-scale), EPSF (standard or Macintosh format), MacPaint, SuperPaint, PICT, and PageMaker 1.2 formats. Gray-scale information is limited to 4 bits (16 levels) and can only be saved in the TIFF format.

I liked this unit best of all the SCSI scanners because the hardware occupied the smallest volume and because the software is loaded with features. It also gave the best results at 300 dpi.

Reading What's Scanned: OCR

I used Read-It! 1.06 by Olduvai Software to do some OCR tests. This application can drive the Microtek scanners or MacScan and can even read a bit-mapped image to extract character information as ASCII text. It costs $395 for any scanner but ThunderScan (this version costs $149). Olduvai also supplies type tables containing 200-dpi information that allows the application to make character decisions with the data. I tried Read-It! with two of the five scanners: the Mirror Technology VisionScan, because of its aggressive price/performance ratio, and the New Image MacScan, because Read-It! can control the MacScan unit.

I had Read-It! load a type table very similar to the type of the document I was using. Since the application learns from its mistakes, I went through one recognize/learn cycle with it to make sure that my type choice was reasonable.

The VisionScan produced good results on the first pass: Only 3 out of 880 characters were not recognized. The MacScan worked well at 200 dpi, but the performance with the program's supplied 200-dpi type tables degraded significantly when I did a 300-dpi scan. The increased sensitivity of the 300-dpi scan introduced errors in recognition.

What Scanning Is Worth

All the scanners produced good results. Scanning at a higher resolution improves the overall image, but since the Mac display is limited to 75 dpi, the images look the same on the screen. Where the higher resolution pays off is when you print the image to a device that can support it (see figures 1b and 1c). Of course, higher-resolution scans require more memory and more disk space.


If it were my money, I'd buy the Mirror Technology VisionScan. Its price/performance ratio is unequaled. Performance was fine for my personal use. It's smaller than the other units, and setup is fast. Since it uses the serial port, turning the Mac off is not necessary, as it is when connecting a device to the Mac SCSI port. I also liked the flexibility of having the scanner software as a DA. It made the scanner available whenever I wanted it, without the need to launch a separate control program.

But if you need 300-dpi resolution for LaserWriter output, I recommend the New Image MacScan. The hardware and software are complete, the $1995 price is reasonable for a SCSI flatbed scanner, and the company promises a gray-level upgrade for those who need it by the time this article sees print. Your scanner will not be obsolete should you wish to upgrade. ■

Laurence H. Loeb is an electrical-engineer-turned-dental-surgeon in Wallingford, Connecticut. He is comoderator of the macintosh conference on BIX. He can be reached on BIX as "lloeb."

WHY DESIGN YOUR PRODUCT AROUND A COMPUTER?

Design the computer in.

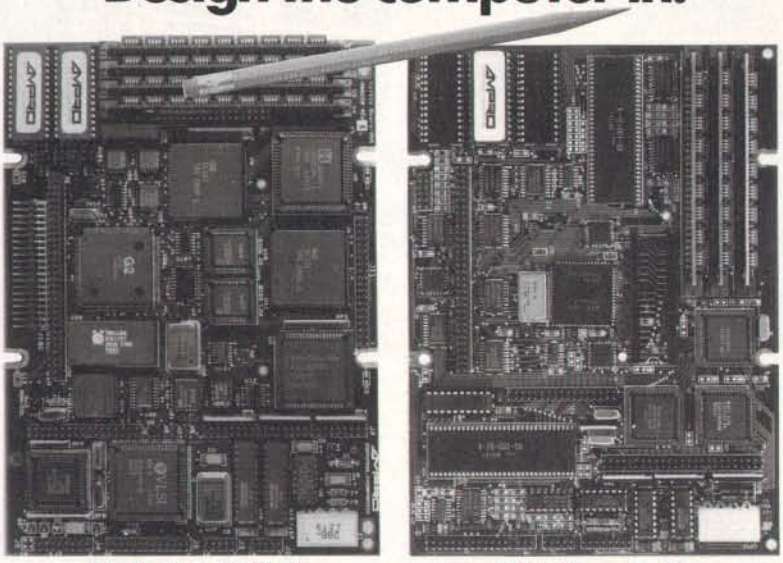

Little Board™/286

Built-in vs. built-around. External systems mean boxes, boards, backplanes, cables, and reliability problems. Ampro's Little Boards give you a complete system on a single board you can build right into your product.

Small size. Big power. Eliminate the bulk and constraints of multi-board, backplane-based systems. Embed a Little Board that requires just 2/3rds the power and volume of a 5¼" floppy drive. But with the full power of a PC or AT®.

Fully compatible. Little Board/286 and Little Board/PC are functionally identical to multi-board PCs and ATs. They run PC-DOS™ 2.0 to 3.X. They run DOS languages, compilers and applications. You'll be standing on a proven foundation of hardware and software.

Ampro's Single Board Systems. It's all there. Up to a Megabyte of RAM. RS-232C and Parallel ports. AT/PC-compatible controllers and bus expansion. EGA/CGA/MDA and Hercules™-compatible video

Little Board/PC

options. Even optional solid-state disk. Plus SCSI support for hard disk, tape, optical drives, bubble drives ... you name it. And, low power consumption (+5VDC, less than 8W) and a wide operating temperature range (0 to 60°C). Perfect for standalone operation and harsh environments. Anywhere that reliability is a critical consideration.

Available worldwide. For information and the name of your nearest U.S. or international Ampro representative, call us at the number below. Or write for Little Board Product information.

408-734-2800

Fax: 408-734-2939 TLX: 4940302

AMPRO


COMPUTERS, INCORPORATED

1130 Mountain View/Alviso Road
Sunnyvale, CA 94089

Reps: Australia—61 3 720-3298; Austria—43-222/45 45 01; Canada—(604) 438-0028; Denmark—45 3 66 20 20; Finland—358 0 585-322; France—331 4502-1800; Germany, West—49 89 611-6151; Israel—972 3 49-16-95; Italy—39 6 811-9406; Japan—81 3 257-2630; Netherlands—010-411 85 20; Spain—M34 3 204-2099; Sweden—46 8 55-00-65; Switzerland—41 1 740-41-05; United Kingdom—44 2 964-35511; USA—contact AMPRO

Trademarks: IBM, AT—IBM Corp.; Hercules—Hercules Computer Technology, Inc.; MS-DOS—Microsoft Corp.; LittleBoard - Ampro Computers, Inc.

CLEO is your SNA, BSC and Coax Gateway

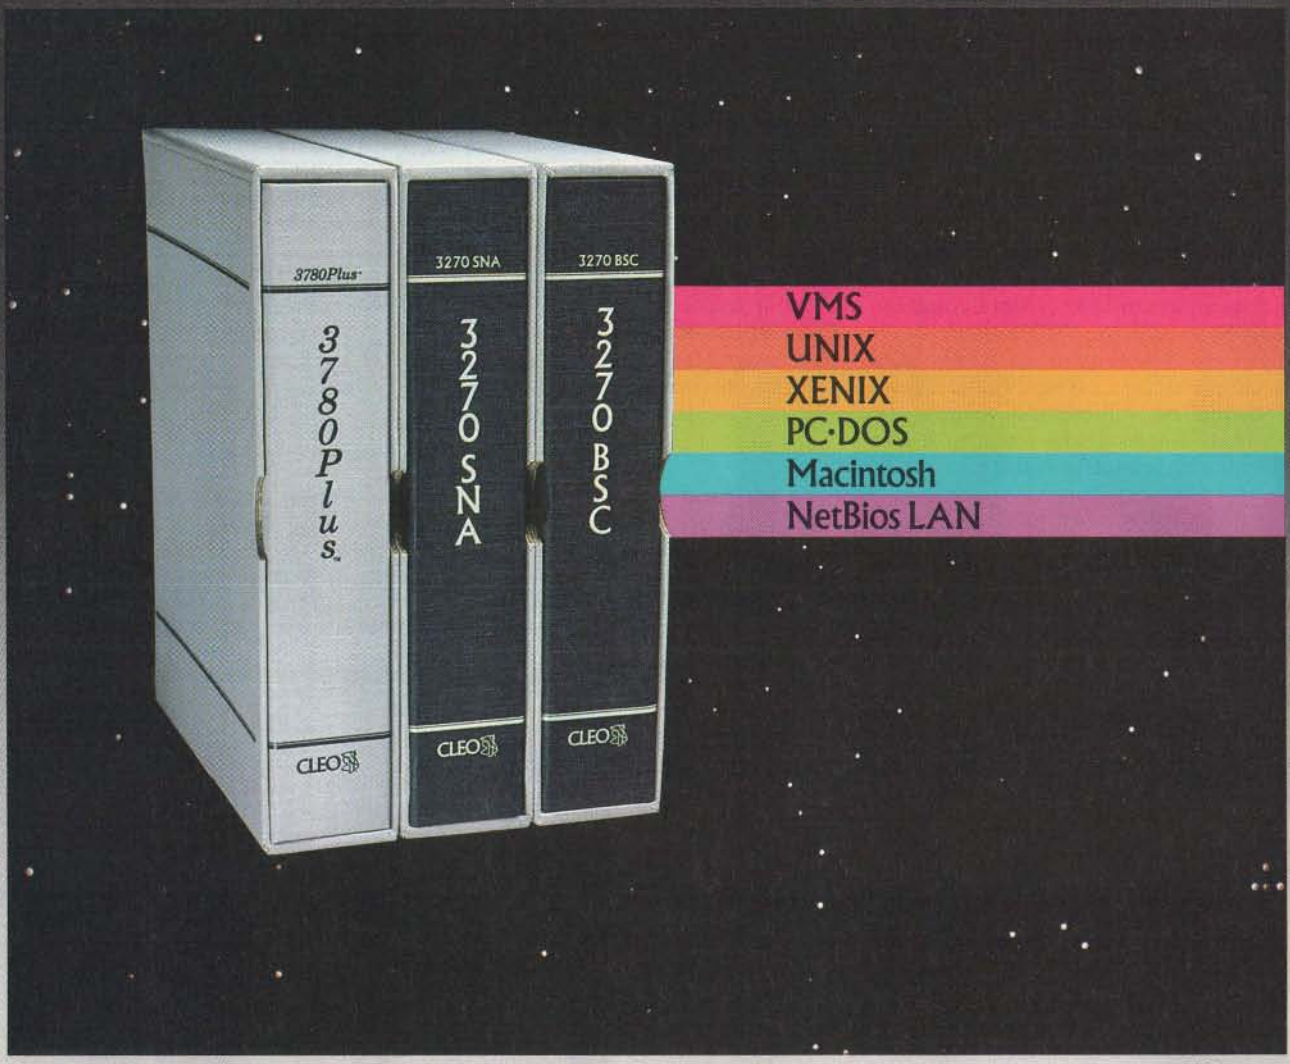

Sharing Information

Whatever your industry, your computers need to share information with your mainframe. Or, they need to exchange data with other computers. In either case, you need a total communications solution. You need software, hardware interfaces and modems that all work together smoothly. You need CLEO!

CLEO software products allow your computer to communicate with mini-computers and mainframes, and to emulate their workstations. Since 1981, CLEO has provided communications between micros, minis, and mainframes for the automotive, insurance, medical and banking industries. Today over 78,000 CLEO users worldwide are running on all major computer brands. The greatest number of these users run CLEO software on IBM Personal Computers and NETBIOS LANs.

Complete Software/Hardware Package

Every CLEO package contains all the software and hardware accessories you'll need. Your selected CLEO SNA, BSC, or Coax software is packaged with 1) an internal modem card for dial-up applications, or 2) an interface card and cable for use with your existing modem, or 3) a Coax card for local connectivity. There's no waiting for non-CLEO add-ons. And, you get prompt, single-source service.



Package prices range from $795.00 for most stand-alone packages, up to $1,995.00 for the 32-user SNA gateway.

Call us today to discuss your application.

CLEO Software
1639 North Alpine Rd.
Rockford, IL 61107
Telex 703639
FAX 815/397-6535


Headquarters:
USA: **1-800/233-2536**
Illinois: 1-800/422-2536
International: 815/397-8110

Sales and Distribution:
Benelux: 31 (0) 33-948888
Canada, East: 800/361-3185
Canada, West: 800/361-1210
Canada, Montreal: 514/737-3631
Colombia, S.A.: 12172266
Denmark: 02 94 81 19
England: (0993) 776543
France: 146861136
Italy: (0331) 634 562
Mexico City: 596-5539
Sweden: 468311780

CLEO®

CLEO and 3780Plus are registered trademarks of CLEO Software. IBM is a registered trademark of International Business Machines Corporation.

Smalltalk à la C

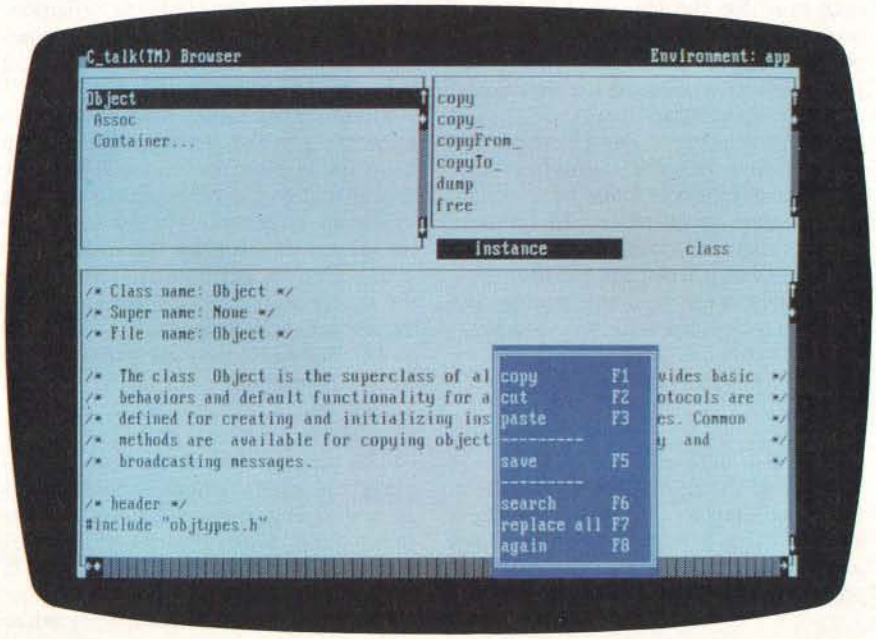

C_talk provides object extensions to C in a Smalltalk-like environment

Namir Clement Shammas

Developers who program in C are always in need of a better way to handle objects. C_talk 1.0, an object-oriented language from CNS, may be the answer. It gives the C programmer object-oriented programming and a Smalltalk-like environment. C_talk extends the C language with elements of an object-oriented language, such as classes, objects, methods, messages, inheritance, and dynamic bonding. And, in certain respects, C_talk rivals C++.

For data, C_talk implements classes and methods. The identifier `id` is used to define any object class. The C declaration of `id` is

```
typedef long id;
```

The `id` type is used to store the memory address for the definition of an object class.

Also available are both class and instance variables. *Class* variables are shared by all the instances of that class. *Instance* variables are the private variables (or record fields, if you like) associated with each instance of the object class. Every time an instance (equivalent to a variable in structured languages) is created, a new set of instance variables are also allocated. By contrast, only one set of class variables exists at any time.

C_talk comes with a set of defined "foundation classes," with the "object" class as the parent of all classes. The foundation classes include the popular data structures, such as `Buffer`, `Stream`, `ByteArray`, `Collection`, and so forth. You can inspect and even alter the C_talk code for any of these methods.

The second object-oriented aspect that C_talk supports is inheritance. Inheritance is a powerful aspect of object-oriented programming that lets you bypass having to rewrite similar code for every new subclass. This means that both the class and instance methods of a class object are automatically inherited by all subclasses. C_talk supports linear inheritance, where a subclass can inherit from only one parent class (also called a superclass). You can override inherited methods by simply defining new ones with the same name for a subclass.

The third object-oriented component of C_talk is messaging that activates various objects and lets them interact with other objects. Here C_talk introduces its own new syntax. A C_talk message, like that of Smalltalk, is made up of a receiver (i.e., the object receiving the message), the selector (which is very similar to a function or procedure in structured languages), and optional arguments. The general syntax for a C_talk message is

```
@receiver selector <list of
  optional arguments>@;
```

Receivers can be either classes or instances. The most frequently used messages associated with classes are those that create new instances, such as

```
id CalculatorStack; /* assign id
to instance */
.....
@Stack new_ &CalculatorStack@;
```

This example informs the stack object class to invoke the `new_` selector and create a new stack. `CalculatorStack` points to the dynamically allocated in-

continued

C_talk 1.0

Type
Object-oriented language

Company
CNS, Inc.
Software Products Dept.
7090 Shady Oak Rd.
Eden Prairie, MN 55344
(612) 944-0170

Format
Two 5¼-inch floppy disks

Hardware Needed
IBM PC or compatible with 512K bytes of RAM and a hard disk drive; a mouse is recommended

Software Needed
Microsoft C, Turbo C, Lattice C, or C86

Language
C

Documentation
152-page user's manual

Price
$149.95

Inquiry 892.

stance of `Stack`. All instances of object classes are declared dynamically. Once created, the instances of the classes can receive their own messages to store, recall, and manipulate data. For example, the following message clears the contents of the stack `CalculatorStack`:

```
@CalculatorStack clear@;
```

Or a message could push a new value in the stack:

```
@CalculatorStack push_
 newValue@;
```

Messages in C_talk have optional arguments. C_talk employs a scheme where each argument is preceded by a keyword. A keyword is an identifier ending with an underscore. The complete name of the selector is the concatenation of all the keywords involved. For example,

```
@room putLen_ len width_ wide
  height_ high@;
```

assigns the three dimensions of a room object. The selector is `putLen_width_height_`, and the arguments are `len`, `wide`, and `high`.

And like C functions, C_talk permits messages to return data:

```
getVolume
/* get the volume of a room
   assuming that room has the
   following instance variables:
   double length, width, height;
*/
{
return (self->length * self->width
* self->height);
}
```

C_talk does not require you to define a data type for the message. You must, however, type message arguments. The manual suggests the Kernighan and Ritchie convention of listing the arguments' data type on separate lines.

Also, notice in the above example that C_talk supports the identifier self, which enables you to make references to the variables of an object. In addition, C_talk also implements the identifier super so that you can refer to the superclass. You can use the above message as a function to assign a value to a variable:

```
volume = @room getVolume@;
```

C_talk also supports an interesting feature that adds a lot of flexibility in messaging: the ability to use variables to represent selectors. You place the actual selector name in backward single quotes and assign it to a variable. Then the variable is used in the message:

```
int selector;
...
selector = 'getVolume';
....
volume = @room selector@;
```

Generally, I found the object-oriented syntax and constructs of C_talk easy to learn. However, I recommend that most C programmers become familiar with the rules of object-oriented languages first and then begin using C_talk. The learning effort for C_talk is far less than that for, say, Smalltalk. Getting into the world of object-oriented programming is made even easier with the C_talk environment (see the text box "Object-Oriented Programming Basics" on page 203).

The C_talk Environment

There are three main components that make up C_talk's package: the browser, the preprocessor, and the `make` utility. The C_talk browser manages the window-based environment that you use to enter, view, and edit C_talk applications. The C_talk preprocessor converts C_talk files, which contain hybrid C and C_talk code, into pure C source code. You use the C_talk `make` utility to intelligently preprocess and compile updated files and then relink the application's object code files. It yields applications compiled with either Microsoft C, Turbo C, Lattice C, or C86.

The C_talk browser brings a slick Smalltalk-like environment to C programmers. Using a mouse is highly recommended, but it is not mandatory. The browser contains five windows, of which three can display scrollable information. The windows consist of the following: title, classes, method type, methods, and contents (a text editor window).

I used the two-button Microsoft Mouse to work with the system. Pressing the right button while the rectangular cursor is in a window causes an associated menu to pop up. In general, you can select any option by positioning the mouse and clicking on its left button. If you move the mouse away from the pop-up menu, the menu simply disappears. I found this to be a graceful way of removing the menu. In the absence of a mouse, you can use the cursor-control keys to select options and move around in the browser.

The title window in the browser displays the environment filename. Its accompanying pop-up menu lets you perform basic management of the environment: exiting, invoking the DOS shell, invoking a DOS command, editing a file, setting up the Make specification, and saving the entire contents of the environment.

The Make setup option leads to another pop-up window. The latter window permits you to specify the C compiler's command line, a list of auxiliary files in use, the linker's command line, and the list of `.OBJ` and `.LIB` files to be included in the linking process. You can easily examine and alter these specifications outside the C_talk browser by using a text editor to edit the environment file.

The classes window displays the various class identifiers that are associated with the environment examined by the browser. To illustrate how classes inherit properties from their superclasses, the browser displays classes indented according to the inheritance level. Beyond a certain level, classes are not initially displayed. You can use an option in the associated pop-up menu to display the invisible classes. This is helpful when concentrating on a particular subtree of classes. Other options in the class menu let you load, save, delete, swap, and add

Object-Oriented Programming Basics

Object-oriented languages work by issuing commands to data objects, telling them to perform certain procedures or functions. For example, to calculate the square root of a number in an object-oriented language (OOL), you must send a message to the object (in this case, the number) telling it to return its square root. The general syntax is

```
object selector [arguments]
```

The selector is the method invoked and is equivalent to a procedure or function in structured languages. An OOL has a set of methods (i.e., routines) that are declared to work with it. Thus, an OOL combines the what (the object) with the how (the method).

An important departure from traditional structured programming in an OOL is the way the data types are handled. In object-oriented milieus, data types are called classes and are also considered to be objects. While this may seem very odd for veterans of structured languages, classes have their own methods that, for example, empower the creation of dynamically allocated variables, called instances. Instances are also objects with their own set of methods and hidden data structures. Accessing the data structure of an instance requires methods that authorize you to do so. Also, methods can permit access to specific parts of an instance. Thus, object-oriented programming fosters data hiding to implement robust software applications.

Inheritance is a powerful concept used by OOLs based on the ability to define subclasses derived from parent classes. Subclasses are able to automatically inherit the data structures and methods of the parent classes. Consequently, less coding is needed if the inherited method is valid for a subclass. But a subclass can also define its own data structure (i.e., add to the inherited structure) or its own methods. Linear inheritance is the typical scheme of inheritance where a subclass inherits from a single-parent class. Some OOLs implement nonlinear inheritance, which allows a subclass to inherit from two or more parent classes.

The hierarchy of classes has an interesting impact on message handling. When an object receives a message, the message is first searched in the catalog of methods directly associated with that object. If none matches the incoming message, the methods of the parent class are searched, and so on. The search either finds a matching method along the path of ancestor classes or fails.

classes. Since C_talk maintains the exact hierarchy of classes, loading a deeply nested class causes the program to load all its superclasses not already in the browser. When you select a class, the contents window displays the substance of the header file (in C) associated with the class.

The appealing part of the C_talk environment is that it lets you access the information related to a class. The method types window permits you to select properties that are related to either a class or an instance. When either is selected, the C_talk environment automatically updates the methods and contents windows. Initially, these windows reveal variables and methods related to the selected class or its instance. When a method is selected, the contents window then displays the detailed listing of that method.

Since the contents window is a text editor, you can modify the method of a class, the method of an instance, the variables of a class, or the variables of an instance. The contents window's pop-up menu supports copying, cutting, and pasting text; saving the substance of the contents window; and performing text search or translation. When using a mouse, the contents window displays both an underscore text cursor and a mouse block-type cursor. I found that editing text was confusing when the system shifted from the text cursor to the mouse cursor. Backspacing and moving the cursor often required me to click on the mouse or press the Insert key to reposition the text cursor.

Processing Files

The C_talk application environment is stored into an ASCII text file with an

continued

Subscription Problems?



We want to help!

If you have a problem with your BYTE subscription, write us with the details. We'll do our best to set it right. But we **must** *have the name, address, and* **zip** *of the subscription (new and old address, if it's a change of address). If the problem involves a payment, be sure to include copies of the credit card statement, or front and back of cancelled checks. Include a "business hours" phone number if possible.*

BYTE
Subscriber Service
P.O. Box 7643
Teaneck, NJ 07666-9866

.ENV extension name. The default environment filename is APP.ENV, and it contains a list of the object classes, followed by a list of auxiliary C files. Any related .OBJ or .LIB files are listed next, followed by the sequence of commands to invoke the C compiler and the linker. Thus, you can edit .ENV files with text editors to alter the compiler and linker sequences. Originally, APP.ENV contained commands to invoke the Microsoft C 4.0 compiler. I edited the .ENV file to invoke the Microsoft C 5.1 compiler installed on my hard disk drive.

Each application should reside in a separate DOS directory. Each object class in an application is stored in a separate text file with the .PRE extension name. These .PRE files contain all the information relevant to a class. The C_talk browser uses an exclamation character as a special delimiter, allowing it to parse the various declarations when reading a .PRE file. You can alter a .PRE file with your favorite text editor provided that you do not tamper with exclamation characters.

The C_talk preprocessor is a utility that you invoke separately from the DOS command line. You can invoke the preprocessor for any object class without going through an entire sequence of checking related superclasses. The C_talk preprocessor reads a .PRE file and yields a .C file containing C code. The preprocessor is able to detect inconsistencies and flags them for additional editing.

You also invoke the C_talk make utility as a separate program from DOS. The make utility's role is to invoke the C_talk preprocessor, C compiler, and linker. Only the .PRE files that belong to updated object classes are run through the preprocessor. The corresponding C files and all altered auxiliary C files are recompiled, and the linker is invoked to relink the entire set of object files.

Writing a C_talk application is relatively easy, though there are a few rules to watch out for. The first is that the main() function should be placed after a dummy method, using the following general method:

```
main/* dummy C_talk method */
{
}
main() /* the actual main function */
{
<declarations>
_init_classes();
<other code lines, I/O, etc.>
}
```

In addition, the main() function must include a call to the _init_classes() function, found in the file CLASSES.C. The C_talk browser updates CLASSES.C to include the declaration of new object classes and calls to initialize them. If CLASSES.C is not properly updated, you may get a linker-error message, putting a halt to the production of the application's executable file.

Overall, C_talk provides a very practical and smart route to object-oriented programming. Its Smalltalk-like environment is easy to use, and its object-oriented extensions to C are powerful. Clearly, C_talk is a worthwhile product for any programmer interested in getting into object-oriented programming. ■

Namir Clement Shammas is a columnist for several computer magazines and a freelance writer living in Glen Allen, Virginia. He can be reached on BIX as "nshammas."

C_talk™ The Practical Union of C and Smalltalk


Add a new dimension to your C compiler.

From C:
- Ease of application delivery – portability
- Performance – speed and efficiency of C
- Familiarity of C – use all your existing C code

From Smalltalk:
- Data abstraction – data hiding/encapsulation
- Full object inheritance
- Polymorphism – message sending with dynamic binding

Boost Your Productivity! *C_talk's practical approach to object-oriented programming in C allows you to realize substantial productivity gains using these tools:*

- C_talk's *Browser* – a powerful Smalltalk-like browser for building software objects
- An automatic *Make* utility – for building applications
- A *Preprocessor* – for converting objects into C source code.
- A set of *Foundation Classes* – to use as basic building blocks.



$149.95

Why C_talk?

C_talk has been proven successful in delivering several large-scale systems in demanding realtime environments. It's concise, easy to learn and use. It is programming in C (not a new language), while adhering to the Smalltalk paradigm.

C_talk is the practical, and affordable, union.

C_talk is designed to operate with MSDOS on IBM or compatible computers. At least 512K of memory, a hard disk and mouse are recommended.

Order today!

Call or write:
CNS, Inc.
Software Products Dept.
7090 Shady Oak Rd.
Eden Prairie, MN 55344
Tel: (612) 944-0170
Fax: (612) 944-0923

Add for shipping $5 US, $25 Int'l.
(30-day money-back guarantee)

CNS® *...providing and advancing object-oriented methodology.*

C_talk is a trademark of CNS

CNS is a registered trademark of CNS, Inc.

Circle 296 on Reader Service Card (DEALERS: 297)



Unretouched Screen Images

Buy The One On The Left And You'll Have To Put It Where The Sun Don't Shine.

The monitor on the right, however, can be placed anywhere you like. Even in direct sunlight. It's the new *Flat Technology Monitor* from Zenith Data Systems—winner of *PC Magazine's* coveted "Technical Excellence Award" in the hardware category for 1987.

You Have To See Zenith To Believe It

So clear. So precise. So lifelike. It's the only monitor with a completely flat screen. A breakthrough that has redefined monitor quality forever. Industry experts are already convinced. And once you see it in person, you'll be a believer, too.

Bigger, Brighter, Glare-Free

Our Flat Technology Monitor has an impressive 14-inch display. And even though it's bigger, it's 50% brighter than conventional CRT's and it has 70% greater contrast. So you get colors with greater depth and definition that make your reports, charts and graphs come alive like never before.

The Flat Technology Monitor is virtually glare-free. So you can work longer without the usual headaches and eyestrain. And that means greater productivity. But to get the whole picture, you have to see it with your own eyes.

Backward And Forward Compatibility

You also get full compatibility with the high resolution VGA Video generated by IBM's new PS/2® computers. And with Zenith's Z-449 or other VGA-class video cards, you can enjoy CGA, MDA, Hercules and EGA graphics as well.

Experience Zenith's Latest Technology Breakthrough

Obviously, a mere picture can't do justice to our new Flat Technology Monitor. It demands a face-to-face evaluation. For a hands-on demonstration, call today for the name of your nearest authorized Zenith Data Systems dealer—the Flat Technology Monitor is available in quantities right now.


1-800-553-0305


ZENITH | data systems

THE QUALITY GOES IN BEFORE THE NAME GOES ON®


© 1988, Zenith Data Systems

Personal System/2 and PS/2 are registered trademarks of IBM Corp.



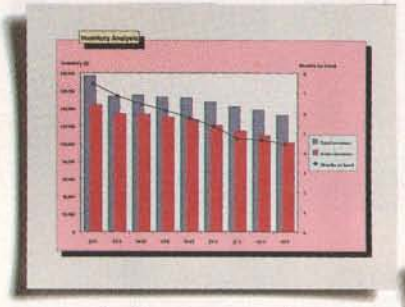

Don't waste any more time, or paper. Preview your ideas before you print them out.





As you can see, Microsoft can make all kinds of HP printers and plotters look their best.





Personalize your LaserJet Series II Printer with HP fonts and memory boards.


These documents were brought to you by Microsoft Excel, Microsoft Windows, and the HP LaserJet Series II, PaintJet and DeskJet printers.

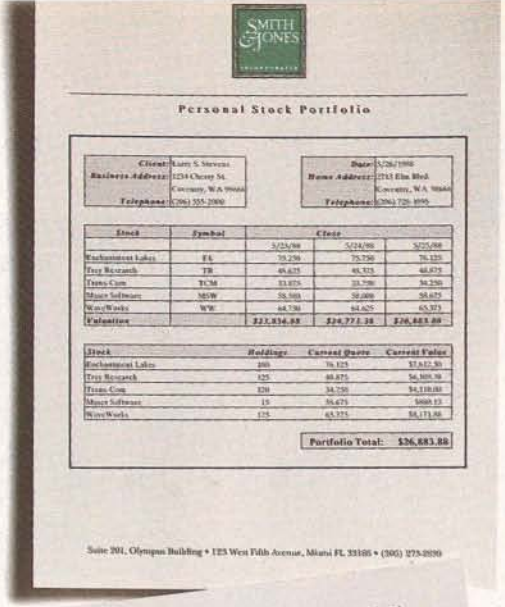


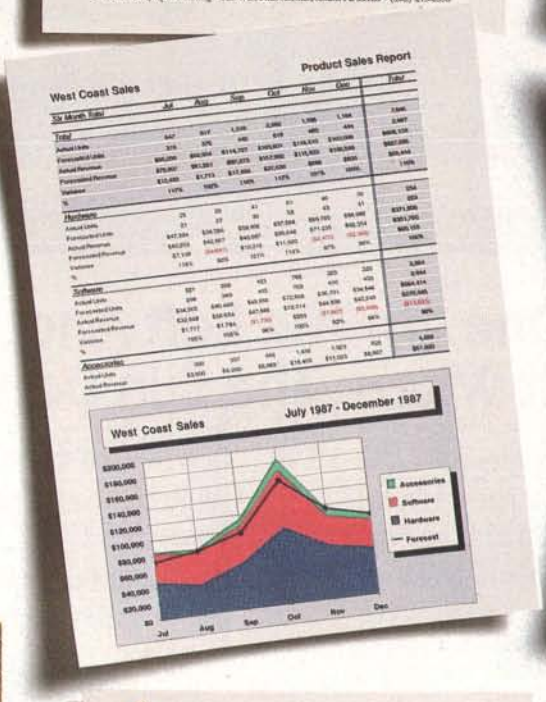


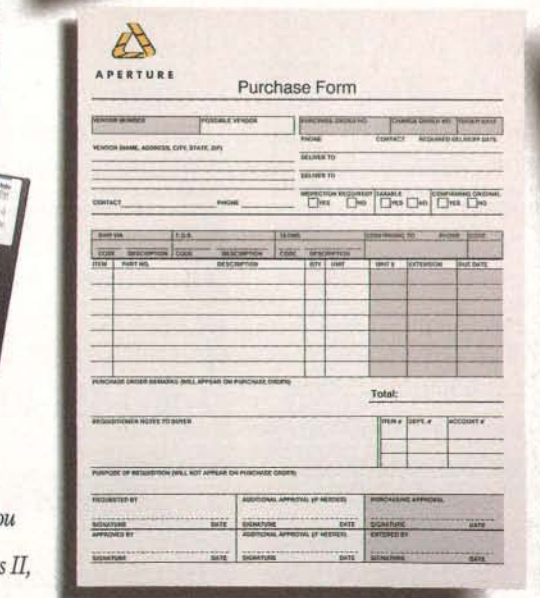


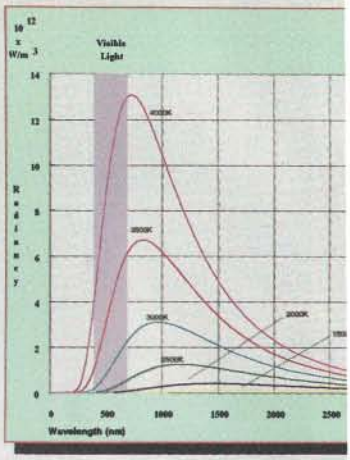


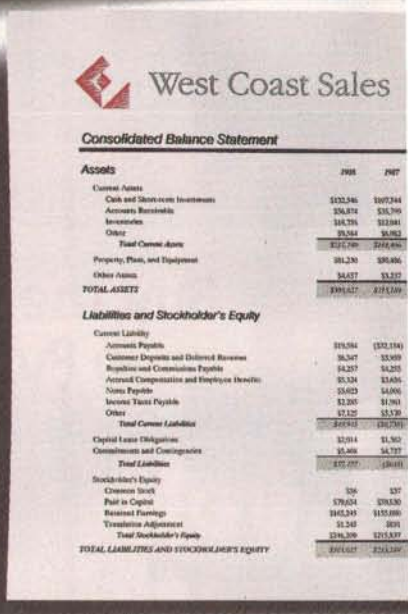

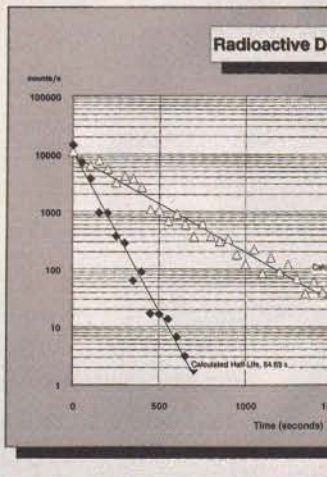



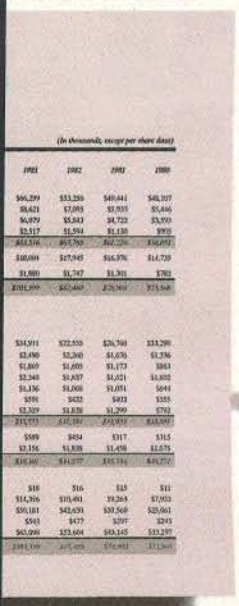



Two world leaders develop highly explosive material.

Hewlett-Packard and Microsoft just took the simple act of communication and turned it into something a bit more powerful.



Illumination.

Because to us, anything worth presenting in a spreadsheet is worth presenting more clearly, more concisely, and more forcefully. Which is exactly what Microsoft® Excel and the Hewlett-Packard® LaserJet Series II® printer let you do.

With this powerful combination of software and printer, now it's easier to take common data and make it look anything but common. With incredibly flexible font styles, font sizes, borders and shading. Incorporated into spreadsheets, charts, tables and forms that instantly make your data say more. Your numbers add up to more. Your facts, figures and ideas mean more.

And of course, HP® desktop plotters and printers, from the ColorPro® plotter to the PaintJet,® DeskJet™ and LaserJet Series II printers, can unleash the potential power inside every box of Microsoft Excel. And vice versa.

To witness a whole new world of spreadsheet output, call us at (800) 541-1261, Dept. I56 for a free copy of our booklet, "Of Power And Printers." Or simply go to your dealer. And see firsthand what happens when two explosive elements get together.

And the chemistry's just right.





HP LaserJet Series II Printer









Microsoft®

© 1988 Microsoft Corporation. Microsoft and the Microsoft logo are registered trademarks of the Microsoft Corporation. Hewlett-Packard, ColorPro, PaintJet and LaserJet Series II are registered trademarks, and DeskJet is a trademark of Hewlett-Packard Company. Customers in Canada call 1-416-673-9811, outside of North America, 1-206-882-8661. Offer good in United States only.

Systat. Because other statistics and graphics packages are not enough.

Systat now offers more statistical graphics than any other PC or mainframe package. And we still give you less bulk with more statistics.

Statistics Basic statistics, frequencies, t-tests, post-hoc tests Multiway crosstabs with log-linear modeling, association coefficients, PRE statistics, Mantel-Haenszel, asymptotic standard errors Nonparametric statistics (sign, Runs, Wilcoxon, Kruskal-Wallis, Friedman two-way ANOVA, Mann-Whitney U, Kolmogorov-Smirnov, Lilliefors, Kendall coefficient of concordance) Pairwise/listwise missing value correlation, SSCP, covariance, Spearman, Gamma, Kendall Tau, Euclidean distances, binary similarities Linear, polynomial, multiple, stepwise, weighted regression with extended diagnostics Multivariate general linear model includes multi-way ANOVA, ANOCOVA, MANOVA, repeated measures, canonical correlation Principal components, factor analysis, rotations, components scores Multidimensional scaling Multiple and canonical discriminant analysis, Bayesian classification Cluster analysis (hierarchical, single, average, complete, median, centroid linkage, k-means, cases, variables Time series (smoothers, exponential smoothing, seasonal and nonseasonal ARIMA, ACF, PACF, CCF, transformations, Fourier analysis Nonlinear estimation (nonlinear regression, maximum likelihood estimation, and more).

Graphics Overlay plots Drivers for most graphics devices *Two dimensional:* Error Bars Scatterplots Line and Vector Graphs Vector, Dot, Bubble and Quantile Plots Bar Graphs (single, multiple, stacked, range) Box plots (single and grouped) Stem-and-leaf diagrams Linear, quadratic, step, spline, polynomial, LOWESS, exponential smoothing Confidence Intervals and ellipsoids (any alpha value) Smooth mathematical functions Rectangular or polar coordinates Log and power scales ANOVA interaction plots Histograms (regular, cumulative, fuzzy) Stripe and jitter plots Gaussian histogram smoothing Scatterplot matrices Voronoi Tesselations Minimum spanning tree Maps with geographic projections (U.S. state boundary file included) Chernoff faces Star plots Fourier plots Pie charts Contour plots on regularly and irregularly spaced points Control charts and limits *Three dimensional:* Data plots Smooth function plots Vector plots Linear, quadratic, spline, least squares surface smoothing Three-dimensional type fonts.

Data Management Import/export Lotus, dBase, and DIF files Full screen data editor Full screen text editor Unlimited cases Missing data, arrays, character variables Process hierarchical, rectangular or triangular files, irregular length records Character, numeric, and nested sorts Merge and append large files Unlimited numeric and character variable transformations Subgroup processing with SELECT and BY Value labels and RECODE Statements Macro processor with programming language, screen control, file manipulation, applications generation, and report writing.

SYSTAT™

Systat operates on IBM PCs and compatibles, MS-DOS and CP/M machines, several UNIX minicomputers, and the VAX/Microvax. Menu/windowed Macintosh version also available. Single copy price $795 USA and Canada, $895 Foreign. Site licenses, quantity prices and training seminars available. No fees for technical support. Statistics and graphics available separately.


For more information, call 312 864.5670 or write Systat Inc., 1800 Sherman Avenue, Evanston, IL 60201.

The following are registered trademarks: CP/M of Digital Research, Inc., IBM PC of IBM, Inc., MS-DOS of Microsoft, Inc., Macintosh of Apple Computer Inc., UNIX of AT&T and VAX of Digital Equipment Corporation.

Systat. Intelligent software.

Circle 252 on Reader Service Card (DEALERS: 253)

Turbo Prolog Revisited

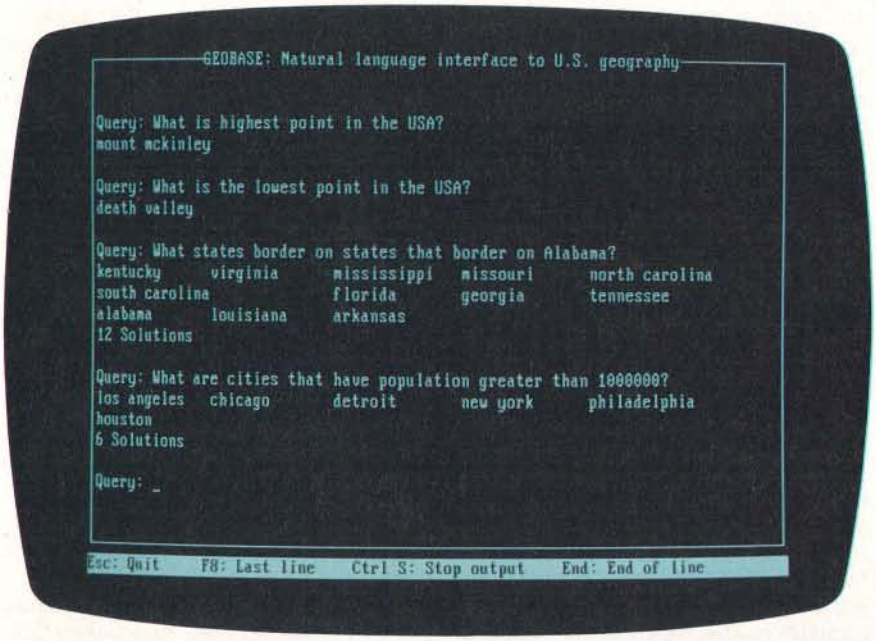

Version 2.0 offers enhanced database and graphics features

Alex Lane

Programming languages and their implementations fuel endless debates within the microcomputing community. Should an implementation provide precisely those features set forth in the language's definition, or should it alter that definition for the convenience of the implementer and the user? Borland International's language products—mentioned often in such debates—fall into the latter camp, and its Prologs are no exception to the rule. Turbo Prolog 2.0 stretches the language even more than did the original Turbo Prolog 1.0 (September 1986 BYTE).

Borland's Prologs enforce strong typing of objects and relations (Edinburgh Prolog, the de facto standard, doesn't) and limit the assert and retract mechanism to facts alone (Edinburgh supports dynamic modification of facts, predicates that define relations, and rules involving those predicates).

Despite these impurities, Turbo Prolog has found a following. Users appreciate features like fast compilation, linkage to stand-alone .EXE, foreign-language compatibility, integrated edit and debug facilities, and the rich assortment of built-in predicates that work with numbers, strings, files, windows, the Prolog database, and the DOS environment. Turbo Prolog 2.0 upgrades these capabilities and breaks significant new ground in two areas—graphics and the database system.

Though straightforward, the installation process isn't completely intuitive. For example, to install it on a hard disk you must make the hard disk drive, not the floppy disk drive, your default drive; in my opinion, that detail should be transparent to the installation routine. Once begun, installation of Turbo Prolog is a mindless, disk-swapping affair. Many of the files are bundled into archives; the installation program spends most of its time unarchiving them. At the end, it reminds you to insert the commands FILES=20 and BUFFERS=40 into the CONFIG.SYS file.

You'll need just under 1.5 megabytes of free space on your hard disk to install all the files that come with Turbo Prolog 2.0. A root directory contains the compiler, the core library PROLOG.LIB, the librarian, and the linker. Five subdirectories contain Borland Graphics Interface (BGI) drivers and font files; all the sample code shown in the documentation; answers to tutorial problems; model Prolog applications like Geobase (a geographical database that supports natural-language queries) and the Prolog Inference Engine (PIE), an Edinburgh-style Prolog interpreter written in Turbo Prolog; and reference examples comparing the use of the old and new standard predicates.

To use Turbo Prolog 2.0, you'll need an IBM PC, XT, AT, PS/2, or true compatible, PC-DOS or MS-DOS 2.0 or higher, and a minimum of two floppy disk drives and 384K bytes of memory. Such a system would be barely usable (the installed Turbo Prolog would be spread out over five disks), so I wholeheartedly agree with Borland's minimum recommended system—a hard disk drive and 640K bytes of RAM. I evaluated the package on a 16-MHz ARC 386i equipped with a multiscan monitor, a hard disk drive, and 512K bytes of RAM, and also on a 4.77-MHz IBM XT equipped with a CGA, a hard disk drive,

continued

Turbo Prolog 2.0

Type
Prolog programming language

Company
Borland International
1800 Green Hills Rd.
P.O. Box 660001
Scotts Valley, CA 95066
(800) 543-7543
(408) 438-8400

Format
Four 5¼-inch floppy disks

Language
C

Hardware Needed
IBM PC, XT, AT, PS/2, or true compatible; 384K bytes of RAM (640K bytes of RAM recommended); dual floppy disk drives (hard disk drive recommended)

Documentation
480-page user's guide
462-page reference guide

Price
$149.95

Inquiry 888.

an 8087 math coprocessor, and 640K bytes of RAM.

General Improvements

Most Turbo Prolog 1.x programs will compile unchanged. Those that won't are ones that refer across module boundaries to domains, databases, or predicates; you must now explicitly declare these elements to be global. Also, version 2.0 assumes that global predicates are deterministic (i.e., not expected to generate multiple solutions). That assumption enables the compiler to emit more efficient nonbacktracking code in situations that don't require backtracking. You must qualify a global predicate with the keyword `nondeterm` to make it nondeterministic.

The files domain now supports `stdin`, `stdout`, and `stderr`. These names, familiar to C programmers, enable Turbo Prolog programs to communicate with other programs by means of DOS pipes. C programmers will also appreciate new directives for conditional compilation (`ifdef`, `ifndef`) and the capability to define constant expressions.

You can log the debugger's output directly to a file or printer; this feature really helps when you're trying to track down strange program behavior in the middle of a trace. You can enable or disable run-time checks for integer and stack overflow, and you can control the size of the heap available to a compiled Prolog program.

TLIB, the librarian, stores predicate object modules in library files. I use it to reduce disk clutter; by archiving source code on floppy disks and storing the corresponding object code in a library, I minimize the number of `.PRO` files in my Prolog environment.

Several command-line parameters are now available with Turbo Prolog. The `-e` flag loads a specified file into the editor; by default, it loads `WORK.PRO`. The `-s` flag loads a setup (`.SYS`) file. You can enable or disable snow-checking with `-c`. And the `-x` flag enables Turbo Prolog's high-resolution text modes (43 or 50 rows by 90, 120, or 132 columns).

The syntax of the language has been changed in ways that move it closer to traditional Prologs. Comments, which in version 1.x programs required the C idiom `/*...*/`, can appear as the remainder of any line that begins with a percent sign. Predicates can now have multiple arities. For example, a predicate called `sales_contact` might have two forms, one describing a name and address relation and another describing a name, address, and phone-number relation. In documentation, you'd write `sales_contact/2` and `sales_contact/3`; in code, you'd write `sales_contact` and let the compiler choose, based on the number of arguments supplied.

Many of the standard predicates now have multiple arities. The `makewindow` predicate, for example, has two forms; `makewindow/8` does the basic job, and `makewindow/11` adds control over the style of the frame and position of the title. Some new standard predicates are `bios/4`, which returns the status of flags; `edit/13`, an upgraded version of the original `edit/2` facility that gives Prolog programs access to the Turbo Prolog editor for complex I/O; and `exit/1`, which sets the DOS `errorlevel`.

Database Support

The database portion of Turbo Prolog has been almost completely redesigned. In the old scheme, a single internal database served as the repository for facts. You filled it from three sources: database predicates in source code; database predicates stored in a separate file and accessed by means of `consult`; or `assert` predicates contained in clauses or a goal. The `retract` predicate deleted a fact, and `save` wrote the contents of the database to an external file. Available RAM limited the size of the run-time database. Although the 1.x documentation hinted at a way to virtualize the database, it was disk-intensive and involved a laborious indexing scheme.

Version 2.0 preserves and extends the internal database facility. Now you can name multiple internal databases, and you can `consult` or `save` each separately. New versions of `consult`, `save`, `assert`, and `retract` work with these named internal databases. To use a database across module boundaries, you must declare it in the global database section and declare its predicates in the global predicates section. As before, the amount of RAM limits the size of internal databases.

The new external database implements a virtual store of facts. You can put an external database in RAM or expanded memory, if there's room, or you can put it on a disk file. An external database is made up of one or more chains (linked lists) of terms and, for each chain, an associated B+ tree is used to index it. New predicates analogous to `save`, `consult`, `assert`, and `retract` work with external databases. The specialized accessors `db_chains` and `chain_terms` bind entire chains or individual terms to Prolog variables during backtracking. You can use the `bt_` (B+ tree) predicates to sort chains and gain fast keyed access to terms.

The internal and external databases aren't compatible with one another. You can't use `assert` or `retract` with an external database, nor can you chain internal predicates. But that's logical, since terms belonging to an internal database are actually part of a Prolog program, while terms belonging to an external database are data manipulated by that program. This arrangement isn't unique to Turbo Prolog 2.0. Arity/Prolog 4.0 implements something quite similar. The Turbo Prolog 2.0 documentation devotes a full chapter to external databases. Sample programs clearly illustrate how to scan, update, restructure, protect, and display them.

Borland Graphics Interface

If you've had a chance to play with Turbo Pascal 4.0, you're probably familiar with the BGI. The BGI comes with Turbo Prolog 2.0 as well. It supports CGA, MCGA, EGA, VGA, Hercules, AT&T 400-line, 3270 PC, and IBM 8514 graphics adapters. Turbo Prolog 2.0 offers more than 70 new standard predicates; they create and manage viewports

(graphics windows), draw shapes such as circles and rectangles, and define patterns used to fill shapes. All these new features get a workout in the sample program GRDEMO.PRO. Though at first graphics and Prolog might seem an odd mixture, I can think of some interesting applications combining the two. A system of artificial intelligence–based controls for a water treatment plant could graphically represent water levels and flow patterns. A circuit-board troubleshooter could illustrate where to put logic probes, or could display waveforms.

There are two ways to package code that uses the BGI. The easiest way is to compile and link the Prolog program, then run the resulting .EXE file in the presence of the drivers (.BGI files) and fonts (.CHR files). The disadvantage here is that the program has to be able to locate these files. Alternatively, you can use the new bgidriver and bgifont compiler directives, which specify the drivers and fonts you want to attach to your program. This approach consolidates your application into a single file. But that file is substantially bigger—a program that incorporates all the drivers supplied with the package grows by almost 30K bytes.

Table 1: *Turbo Prolog 2.0 lags behind version 1.1 on number-crunching tasks but betters its predecessor in symbolic computation.*

	Source file	.EXE file		Memory compile		Compile/ link		Run time	
	(bytes)	(bytes)		(seconds)		(minutes:seconds)			
Test		1.1	2.0	1.1	2.0	1.1	2.0	1.1	2.0
Floating point	635	35,503	32,436	2	2	0:15	0:18	0:30	0:36
List reversal	908	35,854	29,923	2	2	0:15	0:18	0:23	0:11
Sieve	973	35,790	26,323	2	2	0:15	0:18	0:03	0:03
Math	1456	38,526	33,251	5	4	0:17	0:21		
sqrt								0:05	0:06
ln								0:14	0:14
exp								0:24	0:24
atan								0:15	0:16
sine								0:16	0:16
Factorial	656	35,546	37,055	2	2	0:14	0:17	0:21	0:31
Towers of Hanoi	677	35,478	29,067	2	2	0:14	0:17		
10 rings								0:85	0:16*/0:34**
7 rings								0:11	0:02*/0:04**
5 rings								0:03	0:01*/0:01**
Disk write	605	36,425	27,854	2	2	0:14	0:17	0:29	0:29
Disk read	470	36,444	30,625	2	2	0:14	0:17	0:16	0:16

* Snow-checking off.
** Snow-checking on.

Foreign Languages

Though version 1.x could link Prolog programs with external routines written in foreign languages, the feature never worked to my satisfaction. Happily, version 2.0 is fully compatible with Borland's Turbo C. You can write C routines that support Prolog predicates, as before. You can even call Prolog predicates from C; the catch here is that the main program must be implemented in Prolog, so Prolog can control the stack and heap.

Not having a current version of Turbo C close at hand, I linked a simple C routine compiled under Microsoft C (version 5.0) with a program written in Turbo Prolog 2.0. Despite a few complaints from the linker about undefined symbols, I could call the routine successfully from Prolog. Despite all this, I remain skeptical about the usefulness of the language interface. In theory, it's a great way to subcontract computing tasks that Prolog doesn't handle well, like numerical analysis and sophisticated string handling. In practice, you have to own another Borland language product, and you need more than a passing acquaintance with concepts like memory models.

Sample Programs

Turbo Prolog 2.0 comes with a wealth of sample programs. These serve two purposes: They teach Turbo Prolog by example, and more generally, they motivate the study of some classic problems that Prolog helps to solve. Borland, as always, provides source code for these applications so you can study and try to modify them. In a welcome change from version 1.x, the documentation describes these applications.

Geobase is a database that contains information about the geography of the United States and a natural-language query facility that lets you ask questions like "What is the largest city in Mississippi?" The documentation tells how to compile and link the program, outlines its architecture, and suggests how to extend it to other domains. SEN_AN, a sentence analyzer, uses a context-free grammar to parse simple English sentences. GENI, an expert-system shell, comes with a small knowledge base containing definitions of various kinds of animals. In consultation with GENI, you specify an animal's attributes (e.g., "has feathers," "doesn't have long legs"), and the program seeks to identify the animal in question. GENI has an update mode, too. When it can't identify the animal you have in mind, the program can help you add it to the knowledge base. The documentation, again, suggests ways for you to extend the application into other domains.

The PIE impressed me most of all. PIE is a small but powerful Prolog interpreter that, unlike Turbo Prolog itself, permits the user to assert and retract both facts and rules. The appendix that describes PIE is dense and, at times, patronizing of traditional Prolog implementations, but nonetheless it's an education in the esoteric art of Prolog interpretation. The program does have its bugs. I noticed that when goals are resatisfied during backtracking, the trace window displays the old instantiated variables rather than anonymous variables. In addition, I had to reboot my XT with a DOS-only disk in order to compile PIE with the trace mode enabled. Nevertheless, I was able to load and run an unmodified copy of the Prolog chestnut QUEENS4.PRO.

Nearly 1000 pages of high-quality documentation accompany the software. That's a great improvement over the version 1.x manual in terms of both quantity and quality. The new documentation set divides into two hefty tomes: a 480-page user's guide and a 462-page reference guide. The user's guide explains how to install the package on your computer, how to set up the environment, and how to get started with the editor. Then it dives into Prolog. Topics include backtracking, unification, lists, recursion, strings, windows, files, graphics, databases, and debugging.

Most of the reference guide is devoted to the description of version 2.0's stan-

continued

dard predicates. The rest of the book features a programmer's guide, a list of error messages, and a series of appendixes describing the applications that come with Turbo Prolog 2.0.

Better Performance?

For testing purposes, I used a 4.77-MHz IBM PC XT with a hard disk drive, an 8087 coprocessor, and 640K bytes of memory. I tested versions 1.1 and 2.0 using the same benchmarks that were used for the BYTE review of version 1.0. There's one minor change—I modified the floating-point test so that it passes intermediate results on recursive calls.

The floating-point tests measure the time required for 5000 iterations of a set of floating-point multiply and divide operations. The list-reversal test, adapted from a Lisp benchmark, clocks 30 reversals of a list of 50 integers. The Sieve of Eratosthenes finds all the prime numbers between 1 and 100, 10 times. The math benchmark performs 1000 calculations each of square root, natural logarithm, exponential, arctangent, and sine functions. The factorial test computes 10! 1000 times. The Towers of Hanoi benchmark writes a narrative description of the solution to that puzzle for 5, 7, and 10 rings. Finally, the disk read and write benchmarks write a 64K-byte file to a floppy disk drive and read it back.

Version 2.0 produced code that was 20 percent to 30 percent smaller than that produced by version 1.1 (see table 1). Somewhat surprisingly, 1.1 outperformed 2.0 on the math-intensive benchmarks. That result doesn't particularly concern me, however; Prolog isn't a number-crunching language. If you need those capabilities in a Prolog context, consider linking appropriate routines written in assembly language or C. Prolog's strength is symbolic computation, and on those benchmarks—the list-reversal test and the Towers of Hanoi—2.0 significantly outperformed 1.1. The results for the Towers of Hanoi with and without snow-checking, by the way, show the rate of text output to the screen to be an important limiting factor.

A Mature Environment

Like its predecessor, Turbo Prolog 2.0 isn't a traditional Prolog; the language is strongly typed and doesn't let you dynamically assert and retract rules. But logic programmers aren't necessarily complaining. Many, for example, support Turbo Prolog's strong typing. In any case, as Prolog implementations proliferate, it's getting harder to point to a definitive standard.

Turbo Prolog 1.0 was a useful and popular implementation of Prolog. Borland International has raised Turbo Prolog 2.0 a cut above that. The external database puts serious knowledge-crunching capability into the hands of Turbo Prolog programmers, and the BGI features should yield some interesting graphical applications. Traditional it may not be, but Turbo Prolog has certainly become a mature environment for logic programming.

Editor's note: *The Prolog source code for the benchmarks is available in a variety of formats. See page 3 for details.* ■

Alex Lane is a knowledge engineer for Technology Applications, Inc., and lives in Jacksonville, Florida. He can be reached on BIX as "a.lane," where he is the moderator of the prolog conference.

All the Power of A 25 MHz 386
At Half the Price of Compaq or IBM

Omega 386/25 $3295 386/16 **$2985**

Complete High Quality 386/25/20/16 Systems

Omega 386/25/20/16 Motherboard
Hard/Floppy Controller 1:1 Interleave
I/O Card (Parallel, Serial, Game Ports)
Two 32 Bit, Four 16 Bit, & Two 8 Bit slots
Monochrome Graphics/Printer Adapter
1 Mb 80ns Memory (expandible up to 16 Mb)
* Ram Cache 386 soon available

Toshiba 40Mb 25ms Hard Drive
Teac 1.2Mb Floppy drive
101 Key Enhanced Keyboard
230 Watt Power Supply
AT Case Turbo/Leds, 5 Drive Slots
Packard Bell TTL Amber Monitor
* Tower Case available

All systems are custom assembled and burned in by OMI technical personnel and come with a 1 year warranty on parts & labor. All Prices Subject to Change without notice. IBM & Compaq are Trademarks of their respective Corporations.

Test Results	
386/25	286/20
Norton SI Ver 4.0	
28.2	27.3
Landmark Ver .99	
33.6	26.7
Power Meter Ver 1.20	
4.25 Mips	3.64 Mips

The Fastest 286 Available
286/20/16/12 System Specs

Omega 286/20/16/12 Mother Board
Award BIOS
Hard/Floppy Controller 1:1 Interleave
I/O Card (Parallel, Serial, Game Ports)
Six 16 Bit Slots & Two 8 Bit Slots
1 Mb Memory Installed

Teac 1.2Mb Floppy Drive
101 Key Enhanced Keyboard
230 Watt Power Supply
AT Case Turbo/Leds, 5 Drive Slots
Monochrome Graphics/Printer Adapter
Packard Bell TTL Amber Monitor

286/20 $1895
286/16 $1795
286/12 $1495

Omega 88/10 XT Compatible
10MHz XT Motherboard (Phoenix BIOS)
Teac 360K Floppy Drive
Packard Bell TTL Amber Monitor
Floppy I/O Controller (2F,CLK,PP, SP, GP)
150 Watt Power Supply
AT Jr Case Turbo/Leds
Keytronics 101 Key Keyboard
Monochrome Graphics/Printer Adapter
8 Expansion Slots
640K Memory Installed **$795.00**

Printers

Panasonic	
1080i	$181
1091	$222
1092	$361
1592	$400
1595	$473

Modems

1200I	$57
1200E	$95
2400I	$103
2400E	$162

Hard Drives

Toshiba	
40Mb 25ms	$543
70Mb 25ms	$895
Micropolis	
72Mb 28ms	$610
Miniscribe	
8425 20Mb 65ms	$281
8438 20Mb 65ms	$287
3053 40Mb 25ms	$618
3085 72Mb 28ms	$720
6085 72Mb 28ms	$966
6128 100Mb 28ms	$850

Floppy Drives

Teac	
720k 3.5"	$115
1.44M 3.5"	$125
360k 5.25"	$89
1.2M 5.25"	$104

SMS Omti

5527 XT RLL	$83
8240 AT MFM	$144
510 SCSI	$65
512 SCSI	$80

Monitors

Samsung White Mono	$100
Packard Bell Mono	$80
Thomson Mono	$110
Princeton MAX12	$158
Thomson CGA	$240
Mitsubishi CGA	$269
Packard Bell EGA	$375
Samsung EGA	$386
Mitsubishi EGA	$408
Mitsubishi Multi	$528
Technica Multi	$443
Tatung VGA	$582

Other product lines offered:
Video Seven
Keytronics
Northgate
Archive
Novell
AutoDesk
Epson
Western Digital
DTC
Sharp
And Many More!

Call For More Information Including Complete Product Catalogue
OMEGA MICROSYSTEMS INC.
1029 Franklin Road Suite 4-C Marietta, Georgia 30067

Toll Free (800) 346-6527
In Georgia (404) 429-8862
Fax: (404) 953-6286
Hours: 9am-8pm EST
Monday thru Friday

We Will Gladly Answer Any Customer's Technical Questions!

Circle 186 on Reader Service Card

YOU CAN'T BEAT THE BOSS

DATABOSS APPLICATION GENERATOR for Turbo Pascal V4.0 and Turbo C

- The simple and revolutionary new 4GL used to develop sophisticated relational database applications.
- Lets you design and paint data entry screens and datafile layouts, as well as menus and reports.
- Automatically generates the solid, structured Pascal or C source code that makes up your finished system.
- DATABOSS is only $399 — and it's complete. You need only Turbo C or Turbo Pascal V4.0.



DATABOSS TOOLS

An integrated, intelligent, high level interface to DOS for managing Files and Console input and output. Available as an independent package for $99. An invaluable adjunct to DATABOSS Application Generator.



DATABOSS COMPONENTS INCLUDE THE FOLLOWING:

MENU GENERATOR:

- Unlimited menu nesting
- Call internal DOS commands and external .EXE .COM and .BAT files with parameters
- Include your own initialization and exit routines
- Nine security levels and modifiable password file

SCREEN PAINTER:

- Free form full screen editor
- Draw lines and boxes — full IBM extended character set
- Copy, move, insert, center text
- Color painting, foreground, intensity and background

DATAFILE AND FIELD DEFINITION:

- Each field defined via a 4GL template
- Up to 16 related datafiles per application module
- 16 index keys per datafile unique or duplicate
- Up to 9 segments per index key
- Allows multiple use of fields in key segments
- Automatic datafile linking
- Dynamic traceback of linkages
- Unlimited number of open files
- Character input control via pictures
- Any field default value allowed
- Full field validation via BOOLEAN check
- User defined error messages
- Compute and key expressions
- Automatically generated re-indexing module
- Automatically generated datafile reconfiguration module

THE MOST POWERFUL RELATIONAL REPORT GENERATOR EVER DEVISED

- Design any type of report
- Automatic structure definition for relational reports
- A report element can be a field, text, function
- Unlimited number of totals and subtotals
- Send report elements to CON, LST, RS232, DSK individually or simultaneously
- Paint and build report range selection screens
- Print multiple records across a page

IMPEX QUERY BY EXAMPLE MODULE

- Import external ASCII files into your DATABOSS database.
- Query datafiles using point and select cursor movements
- Select fields to be output and specify order
- Impose conditions for data selection
- Select index or create ad hoc
- Output to screen, disk or printer

PROGRAMMERS CAN CUSTOMIZE AND MAKE APPLICATIONS MORE POWERFUL

- Write your own functions, initialization and exit routines and include them in the function table
- Customize a skeleton file and use this file at generation time

GENERATE AND COMPILE USING TURBO PASCAL V4.0 OR TURBO C

- Generate 1000 lines of code in 10 seconds
- Compile to produce fast executable object code
- No runtime licence fees
- We provide you with end user screen and printer installation modules to include in your menus

LAN versions available now.

SAVE $25
On receipt of your returned DATABOSS Application Generator Registration Card, Top Gun Systems will send you an introductory CASH BACK of $25.

TOP GUN SYSTEMS

Rush coupon below to:
TOP GUN SYSTEMS,
4 COTTAGE AVE.,
MILL VALLEY,
CALIFORNIA. 94941.
PHONE: (415) 461 4040.
FAX: (415) 388 9226.

OR FOR ORDERS PHONE:
(800) 323 7767.

☐ Please send me DATABOSS APPLICATION GENERATOR at $399
☐ For Turbo Pascal V4.0, or ☐ For Turbo C
☐ Please send me DATABOSS TOOLS at $99
☐ Please send me your CAN'T BEAT THE BOSS booklet.

Name: _____
Company: _____
Street Address: _____
City: _____ State: _____ Zip: _____
☐ Check enclosed. Charge to my ☐ VISA ☐ ☐ B _____
Account No. _____ Account Name: _____
Expiry Date: _____ Signature. _____


Trademarks: DATABOSS by Top Gun Systems. Turbo Pascal and Turbo C by Borland International. MC 47



OUR μP DEVELOPMENT TOOLS HELP PROJECTS GET ON THEIR FEET.

The "creature" shown above doesn't depict a futuristic lunar landing. Rather, it represents a *polar* landing of a sophisticated weather monitoring device. A new parachute-deployed device that instantly transmits vital environmental data to waiting scientists. And whose Antarctic installation and erection now happen automatically, in a matter of minutes, allowing critical data collection in remote areas that were impossible to reach before.

This "Self-Erecting Weather Station," sponsored by the National Science Foundation and designed and developed by Polar Research Lab, was made possible by Avocet and AVSIM™, Avocet's unparalleled simulator/debugger.

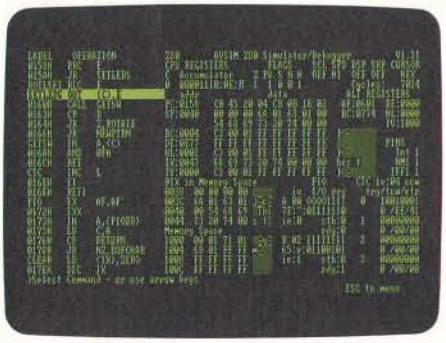

The AVSIM Full-Screen Display

Unequaled capability

Polar Research needed AVSIM's sophistication to control the sensors in the weather station's "legs" and to create its transmitter. AVSIM's detailed on-screen CPU simulation, unlimited breakpoint facility, and unique "undo" capability gave their engineers the ease of use and flexibility that allowed them to *execute and test the software even before the hardware was ready.* Saving crucial time and frustration in both the programming and testing phases of development. And money, too: at only $379, AVSIM is a fraction of the cost of additional hardware.


Complete compatibility: from the ground up

Best of all, AVSIM is completely compatible with our AVMAC™ macro assemblers and our AVOCET C™ cross compilers – the ideal combination of tools which gives you a comprehensive development solution.

Get your own project off the ground: try before you buy

Try the AVSIM demo yourself for 30 days. If you're not satisfied for any reason, return the unopened program disk for a full refund – less $35 for the demo disk and manual, which are yours to keep.

Free Catalog



Call Toll-Free 1-800-448-8500*

For your free catalog, to order, or for more information about AVSIM and other Avocet products.

Call Avocet today and ask about our complete line of affordably priced software and hardware μP development tools. Discover how we can help you get *your* next project on its feet, too.

©1988 Avocet Systems, Inc. All rights reserved.

AVOCET SYSTEMS,® INC.


THE SOURCE FOR QUALITY μP DEVELOPMENT TOOLS

Avocet Systems, Inc., 120 Union St., P.O. Box 490AV, Rockport, ME 04856 / *In Maine, or outside U.S., call (207) 236-9055 / TLX: 467210 Avocet CI / FAX: (207) 236-6713

Circle 27 on Reader Service Card



D the Data Language

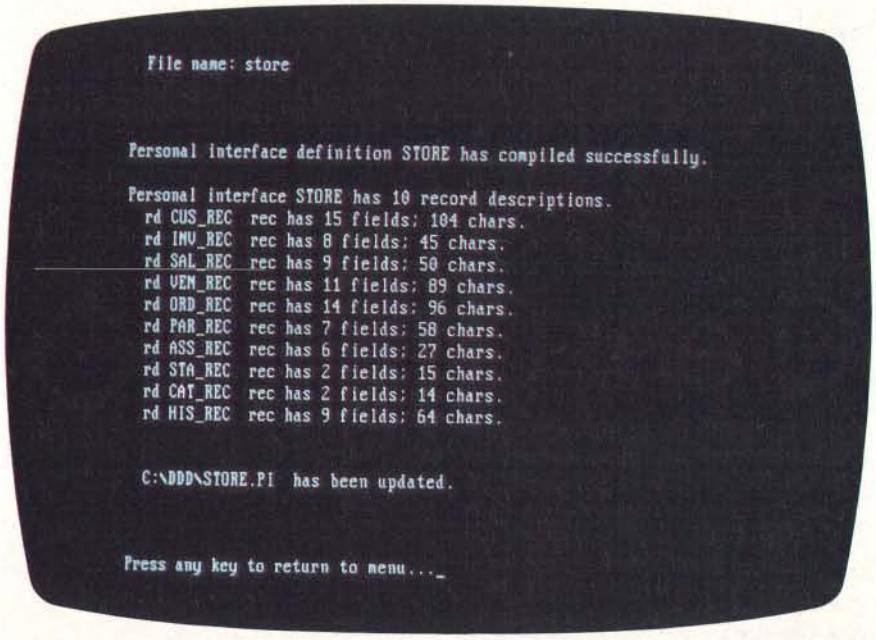

A powerful tool for storing and manipulating data

Pam Oppenheim

The manual to D the Data Language advises that "D is a very different animal in many respects. Not difficult, just different." And it's right—D is very different from the majority of PC database packages. It is a DBMS that, for example, lets you create custom applications for every user who accesses the database. A number of people can, therefore, get only the information they need without seeing confidential or extraneous data.

Indeed, D is a powerful, flexible tool for manipulating data. First, it provides a mechanism for getting information into a database, and then it supports development of integrated menus, procedures, reports, and screens. But this flexibility is not always immediately apparent.

D ($395) comes with two spiral-bound manuals, a small addendum for the latest version, and four 360K-byte 5¼-inch floppy disks. The addendum, included with version 2.7, which I reviewed, covers new features, such as pop-up menus, color monitor support, the ability to recover deleted records, new options for many commands, pie charts, bar graphs, histograms, and a facility for building context-sensitive help for your applications.

A batch file handles the installation and lets you put D in the subdirectory of your choice. The batch file prompts you for the three program disks and checks that you've inserted the correct one. The program is not copy-protected. The fourth disk contains an example database, which you copy into the subdirectory with D. The program requires 512K bytes of RAM and a hard disk drive (it uses about 1 megabyte). I ran D on a Compaq Deskpro that uses an 8086 processor at 7.14 MHz with a 20-megabyte hard disk drive.

D in Action

Within D, information is organized as database definitions (DBDs) that contain data groups, which are analogous to files, procedures for menus, automated processing, and reports. Data groups are defined as fields, supporting alphanumeric or numeric character and binary field types. Subfields are supported and add to your ability to control and access information. For example, a master field-name job number can consist of a customer number, a sequence number, and the year. You can reference the single entity or any of the components.

The lack of a date type is inconvenient. However, using the JDATE and EDATE functions, which convert character data from a specified format to the equivalent Julian date or calendar date, procedures can be developed to process dates as needed. The starting date for Julian calculations is user-definable as part of the database definition. If you set up a dates field with subfields, it's easy to pull reports for specific periods without any date conversion required at all.

You must compile the DBDs and pro-

continued

Back, by popular demand.

Just a few years ago, illegal hunting and encroaching civilization had all but destroyed the alligator population in the south. They were added to the official list of endangered species in the United States.

Now alligators have made a comeback.



Conservationists intent on preserving this legendary reptile helped the alligator get back on its feet. Once again some southern swamps and marshes are teeming with alligators.

With wise conservation policies, other endangered species have also made comebacks . . . the cougar, gray whale, Pacific walrus, wood duck, to name a few.

If you want to help save our endangered species, join the National Wildlife Federation, Department 106, 1412 16th Street, NW, Washington, DC 20036.

D the Data Language 2.7

Type
DBMS

Company
Caltex Software, Inc.
3131 Turtle Creek Blvd., Suite 1101
Dallas, TX 75219
(214) 522-9840

Format
Four 360K-byte 5¼-inch floppy disks

Language
C

Hardware Needed
IBM PC, XT, AT, or compatible with 512K bytes of memory, one floppy disk drive, and one hard disk drive

Software Needed
DOS 2.0 or higher

Documentation
136-page Introduction Manual
367-page User's Guide

Price
$395
$75 for the run-time module

Inquiry 889.

cedures before you use them. Part of the data group definition is the number of records it contains. When the file is full, you can't add more information without updating the DBD. Changing a database is a multistep process that, at the very least, requires you to unload data from the DBD into a temporary file, make the modification, recompile the DBD, modify and recompile procedures if you've changed any DBD names, open the DBD, and reload it. After verifying the data, you must edit procedures to reflect the new field types and sizes and recompile them again. Finally, you must rebuild the keyed field references. Sometimes, flexibility has a high price.

An INFO command lets you know all about your database, from the basic structure to the number of loaded and active records. A uniqueness column shows you the number of unique values that exist for a particular field. An associated command, REDUCE, lets you compress a set of isolated records to reflect only the unique values. This is similar to dBASE's UNIQUE qualifier on indexes, but it's more flexible since it does not limit access.

To Caltex's credit, it advises users of the importance of establishing backup and reload procedures for all DBDs. In fact, the company goes so far as to include a chapter in the documentation on database maintenance and recovery. STRUCTURE, CONSTRUCT, DESTRUCT, and KEY help you rebuild keyed fields should they become damaged. Yet, in working with D, I experienced no data losses, even when I purposely turned off the power while updating a file.

To DOS, a database definition represents only four open files, regardless of how many data groups and procedures exist. D supports an unlimited number of data groups, keyed fields, and related files within a DBD.

Confusion arises when you first try to use these keyed fields, because the data is displayed in the order in which it was entered. The terms *key* and *keyed index files* imply that the data is ordered on the value. I determined that, unlike dBASE's index files or indexed sequential-access method file structures, keyed fields do not generate index files or, in any other way, impose a visible structure on the data. The keyed field provides an internal structure used by the FIND command to isolate records within the data group.

There are trade-offs to either approach. Imposing the structure takes time during all data-entry and update activity and makes the system more vulnerable to corruption during power failures. Without that structure, you must organize your data via sorts every time the order is important.

Sorting It Out

Fortunately, D's sorts are fast and powerful. A sort lets you specify multiple fields, ascending and descending orders, and case insensitivity. An option enables you to specify the use of high instead of low values for missing data. You can apply sorts to a collection (isolated portions of files) or to an entire data group. The sorted order remains in effect until you sort on another field, add records to the working set, clear the collection, or close the database. A single-field sort of 1586 records took less than 2 seconds, while the comparable dBASE sort (I used dBASE III Plus 1.1) took 4 minutes and 27 seconds and also took up valuable disk space.

D's PICK, FILL, and FIND commands are the mechanisms for isolating data. They more closely resemble dBASE's FOR and WHERE clauses than its SEEK command. dBASE's SEEK command located a record and advised me that a record did not exist in less than 1 second using my

continued



Which would you like to see first? The world's fastest dBASE compiler or the most powerful database development language?

Surprise. Now you get both in the same package. New Clipper™ from Nantucket.®

Our latest version—Summer '87—is still the best-performing compiler ever. It lets users run dBASE® applications up to 20 times faster. But there's a lot more to it than raw speed.

Because new Clipper is one of the most powerful, full-featured development languages ever. And gives you more control over your applications than any release of dBASE ever will. Now or in the future.


Instead of designing Clipper as an add-on, we've structured it as an extended database language that uses dBASE as a subset. In addition to emulating the dBASE language, we've added commands for menus, screens, windows and extended functions. As a result, you get dBASE compatibility and an entirely new level of power and versatility.

And with Clipper's open architecture, you can write functions in Clipper, C, Assembler or other languages, and integrate them into one seamless application. Which helps you create more sophisticated applications in less time. And by using our full-featured debugger, you'll be done even faster.

We also give you source code security that keeps users from damaging your application. And sophisticated record and file locking capabilities that make networking applications easier to create. But no matter what you create, you don't have to buy runtime modules or additional software. You don't even have to pay licensing fees.

If you haven't tried Clipper yet, just call (213) 390-7923 today. We'll send you full information and a free demo diskette. Or the complete program, if you'd rather.

But call today. And see how easy it is to find the best dBASE development language. Just get the fastest compiler. And open the box.



Clipper™

Nantucket, 12555 W. Jefferson Boulevard
Los Angeles, CA 90066 Telex: 650-2574125

© Nantucket Corporation, 1988. Nantucket is a registered trademark and Clipper is a trademark of Nantucket Corporation. dBASE is a registered trademark of Ashton-Tate.



Diamond Scan 14
Auto-Tracking
800 x 600 pixels (digital, analog, monochrome)
330 x 500 pixels (composite NTSC)

Diamond Scan 20A
Auto-Tracking
800 x 600 pixels (digital, analog, monochrome)
1024 x 800 pixels (maximum)

Diamond Scan 16L
Auto-Tracking
1024 x 768 pixels (typical)
1280 x 1024 pixels (maximum)

Diamond Scan 20L
Auto-Tracking
Up to 1280 x 1024 pixels

Actual unretouched screen images

A Clear View To Monitor Quality

1586-record file. The FIND command isolated matching records in just over 2 seconds. But FIND allowed me to look at these matching records nearly instantaneously, while dBASE's BROWSE FOR and DISPLAY FOR were slow in writing just the first 16 entries to the screen. FIND is the means for loading data records into memory from a data group. A WHERE clause that supports greater than, equal to, less than, starting value, and an "any value" expression provides control over which records are retrieved. The any value operator is extremely powerful, locating records if the contents of the field contain the value. This capability does not exist in dBASE. PICK supports locating information by record numbers rather than by values. You can specify single records or ranges of records to be retrieved.

Command and Control

You can edit any command that is still on the screen; simply move the cursor to the command and press Enter. The line is now redisplayed as the next line to execute, and you can edit the line before execution.

Context-sensitive help is always available by pressing F1. The use of a split screen when displaying help lets you complete a command easily by following the displayed syntax. You can look up field names in the same fashion. I found this process far superior to that of manually writing down the syntax while in help so that I could enter the command correctly when I exited help.

Creating moving light-bar menus was a delight. From the procedure menu, I selected MENU, and, using the text editor, I listed the procedure names and descriptions. To mark the options for the menu, I placed the cursor to the left of the procedure name and pressed F5, for each allowable menu selection. D automatically handles all the cursor control and highlighting, then invokes the selected procedure.

On the down side, there is no type-ahead buffer and no indication that what you've typed has gone to never-never land. Most commands, except for compiles, execute fast enough so that this is not a major problem. Still, I would have preferred to receive a warning from the program, rather than having to type the commands all over again.

A text editor lets you create reports, procedures, screens, and even the database definition. The editor supplied with D is adequate, providing insert and overstrike modes, full-screen and line-edit modes, and block moves and copies. You can use any text editor that creates pure ASCII files; however, you can't invoke the editor from D, resulting in a loss of productivity.

Within the screen definitions, you have access to a wide range of field edits, including required, unique, fill, uppercase conversion, and auto-increment. Templates, ranges, and lists are fully supported. As it does with moving light bars, D handles all the specified edits from the menu to enter or edit data without any user-generated code. When specified conditions have not been met, a terse prompt like ALPHA or REQUIRED appears on the screen and a beep sounds. Unless the override option is invoked, you must correct the response before D proceeds to the next prompt.

UPDATE and APPEND commands let you enter and edit information in the data file. When using screens, you must be on

Circle 174 on Reader Service Card (DEALERS: 175)

Only one supplier of color monitors offers the widest selection of features and operating flexibilities in the market today.

That company is Mitsubishi Electronics.

Mitsubishi® delivers the reliability and performance that can meet your color information display requirements today as well as tomorrow. Larger screen sizes, truer colors, and optimum resolutions make your work easier—and far more productive.

Whether your requirements call for fixed-frequency graphics standards, like EGA and VGA, or multiple-frequency performance, Mitsubishi has the color monitor with the resolution and size to fit *your* specific needs. This includes the Diamond Scan Series of 14", 16" and 20" auto-tracking monitors, some with microprocessor-enhanced programmable display settings. All at very competitive prices.

To get a clear view of monitor quality and value, look to Mitsubishi.

For product information or nearest authorized Mitsubishi Electronics sales representatives, please call 1-800-556-1234, ext. 54M. In California, call 1-800-441-2345, ext. 54M. Mitsubishi Electronics America, Inc., Computer Peripherals Division, 991 Knox Street, Torrance, CA 90502, (213) 217-5732.

Mitsubishi Model	Screen Size (inches)	Horizontal Scan Frequency (kHz)	Mask Pitch (mm)	Compatibility/Resolution							
							VGA				
				NTSC	CGA	EGA	Std.	Ext.	Apple Mac II	1024 x 768 (48 kHz)	1280 x 1024 (64 kHz)
Diamond Scan 14 (AUM1381A)	14/13V	15.7 ~ 36 auto-tracking	0.31	•	•	•	•	•	•		
Diamond Scan 16L* (HL6605TK)	16/15V	30 ~ 64 auto-tracking	0.31				•	•	•	•	•
Diamond Scan 20A (HA3905ADK)	20/19V	15.7 ~ 36 auto-tracking	0.31		•	•	•	•	•		
Diamond Scan 20L* (HL6905TK)	20/19V	30 ~ 64 auto-tracking	0.31				•	•	•	•	•
XC1429C	14/13V	31.5	0.28				•				
XC1410C	14/13V	22 or 15.75	0.40		•	•					
XC1430C	14/13V	22 or 15.75	0.31		•	•					

*Microprocessor-enhanced programmable display settings



XC1429C
VGA Compatible
640 x 480 pixels

XC1410C/XC1430C
EGA Compatible
640 x 350 pixels

MITSUBISHI ELECTRONICS

See us at COMDEX Booth #1128

And Value.

© 1988 Mitsubishi Electronics America, Inc.
Mitsubishi is a registered trademark of Mitsubishi Electric Corp., Tokyo.

Screen images produced with permission from the following companies *(trademarked software package name follows company name)*: Autodesk, Inc. *(AutoShade)*; Computervision Corporation *(Personal Designer)*; Computer Friends, Inc. *(Modern Artist)*; SuperMac Software *(PixelPaint)*; Three iDi Graphics, Inc. *(Perspective)*; Microsoft Corporation *(Excel Version 2.0)*.

REVIEW

D THE DATA LANGUAGE

the last transfer field to write the data to the file. Because you have total control over the prompt order, this field may be anywhere on the screen. To avoid problems, the manual advises you to press End to get to the last transfer field, then press Enter to write the data to disk.

You can generate output via print commands or a comprehensive report procedure. PRINT does a reasonable job of providing columnar information with titles, column headings, subtotals, and grand totals, but there is little format control. PON and POFF commands control output that is sent to the printer.

REPORT provides more control over content and appearance via detail, breakpoint, and final (ATEND) sections. Within these sections, conditional processing is supported with IF statements. Data can be calculated, printed, or written to data groups.

From the title and declaratives sections, you can control titles, subheadings, and footers. As with most databases, you can place date, time, and page-number displays within the report. BTITLE enables you to put titles in the body of a report, greatly adding to the flexibility of the report generator.

From a report, you can isolate records to another collection using the SELECT command. This feature can help you reduce the number of times you must process a file to get information. For example, while printing customer statements you can collect all the customers whose balances are over 30 days outstanding. From this collection, you can also print an overdue account list without processing the file a second time.

Via a WRITE statement, you can use a report to update any data group within the database. As with SELECT, this lets you accomplish complex processing with a minimum of overhead.

File Importation

DBF, ASCII, data-interchange format, and blocked files can be loaded into D, but there is no automated import. After correctly defining a data group to store the information and a record definition, which defines the file structure to be read, you must LOAD the information. This area in particular is not well documented. It took me four tries and about 30 minutes to transfer my file. Caltex says it is currently rewriting the documentation for the new version. The company specifically acknowledged the problem with the import/export explanations and advised me that additional material would be available in the new release.

An intuitive relationship exists between data groups whenever they share a common field. Consider a DBD consisting of customers and sales. Viewing the related data is as simple as FINDing the records you want from the sales files and MATCHing the information with customers using the customer number field. The MATCH command locates all records in the sales data group that have customer numbers equal to those in the customer file. There is no limit to the number of data groups that can be matched. And since D does not structure the data files, you need not worry about the related files being indexed on the relate field, as is required in dBASE. D's strength becomes apparent when you use RELATE in conjunction with MATCH. RELATE lets you create one ordered, logical file of the merged data for reports and fully sup-

continued

BYTE's Subscriber Benefits Program

Your BYTE subscription brings you a complete menu of the latest in microcomputer technology every 30 days. The kind of broad-based objective coverage you read in every issue. *In addition*, your subscription carries a wealth of other benefits. Check the check list:

BONUSES

- ☑ ***Annual Separate Issues:*** In addition to BYTE's 12 monthly issues, subscribers also receive our annual IBM PC issue free of charge, as well as any other annual issues BYTE may produce.
- ☑ ***BYTE Deck:*** Subscribers receive five BYTE postcard deck mailings each year—a direct response system for you to obtain information on advertised products through return mail.
- ☑ ***Reader Service:*** For information on products advertised in BYTE, circle the numbers on the Reader Service card enclosed in each issue that correspond to the numbers for the advertisers you select. Drop the post-paid card in the mail and we'll get your inquiries to the advertisers.
- ☑ ***TIPS:*** BYTE's Telephone Inquiry System is available to subscribers who need *fast response* from advertisers. After obtaining your Subscriber I.D. Card, dial TIPS and enter your inquiries. You'll save as much as ten days over the response to Reader Service cards.
- ☑ ***Free Programs Via BYTEnet:*** You get access to the BYTEnet Bulletin Board Service, which allows you to download, via modem, valuable program listings. There is no connect charge for this service.



- ☑ ***Subscription Service:*** If you have a problem with, or a question about your subscription, you may call our service department toll-free at 800-423-8272 (in New Jersey call 800-367-0218) during regular business hours (Eastern Time). You can also use Subscription Service to obtain back issues. Should you care to correspond, use the following address: P.O. Box 6821, Piscataway, N.J. 08855.
- ☑ ***Editorial Indices:*** Available through our customer service department P.O. Box 328, Hancock, New Hampshire 03449.

PAID SERVICES

- ☑ ***BIX:*** BYTE's Information Exchange puts you on-line 24 hours a day with your peers via computer conferencing and electronic mail. All you need to sign up is a microcomputer, a modem, and telecomm software. For further information and cost, call 1-800-227-BYTE.
- ☑ ***Program Listings:*** Listings of programs that accompany BYTE articles are now available on BIX, on disks or in quarterly printed supplements (see reply cards in this issue for cost information), or call 1-800-258-5485.
- ☑ ***Microform:*** BYTE is available in microform from University Microfilm International in the U.S. and Europe. See Contents page for cost information.

DISCOUNTS

- ☑ One-year subscription at $22.95
- ☑ Two-year subscription at $39.95
- ☑ Three-year subscription at $55.95
- ☑ One-year group subscription for ten or more at $18.95 each. (Call or write for details.)

TOLL-FREE NUMBERS FOR YOUR CONVENIENCE:

Subscriptions & Back Issues:
1-800-423-8272
(in N.J., 1-800-367-0218)

BIX: 1-800-227-BYTE

Program Listings Orders:
1-800-258-5485

BYTE

It's indispensable.

ports one-to-one, one-to-many, many-to-one, and many-to-many relationships, all with remarkable ease. By comparison, to process these complex relations in dBASE correctly, you must write code that explicitly tests the conditions.

Options with RELATE let you translate information via an intermediate data group and control the primary sort order for reports. The translation feature lets you use codes as input for speed and reliability, while reports show the appropriate meaning instead of the code.

Variables are defined by the SET command and are accessible everywhere within D. Arithmetic calculations and string concatenation are supported.

Final Input

Where does D fit in the PC database picture? If you're looking to manage a few files, such as a mailing list or parts inventory, the more traditional tools, such as dBASE, are better choices. If the order of your data is always important, the required sorting in D makes it an unacceptable alternative.

D is a viable applications development tool and is especially useful for situations where many people use the database for separate functions. By defining personal interfaces, which are yet another kind of procedure, the developer can show the users only the information they need to know and provide access to only those functions they need to perform. Data security is easier to enforce, because users see only what you want them to see—without ever knowing that more data exists.

Applications that require multiple file updates, as a result of processing, are also a good fit, as are large applications with highly normalized files that exceed the maximum number of open files allowed by DOS.

The flexibility of the data structures, and the ability to order the data when you need it, as you need it, are perhaps most useful for those situations where it is difficult to initially determine all the required operations and reports.

D is different and takes some getting used to. But it allows a high degree of customization and is a good alternative to dBASE for developing custom applications. ■

Pam Oppenheim is president of Rational Solutions, Inc. (Fort Lauderdale, Florida), an independent software consulting firm involved in the planning, design, and implementation of mini- and microcomputer systems. You can reach her on BIX as "editors."

Handy scan.

Full-Page Scanning In The Palm Of Your Hand.

Mitsubishi Electronics now gives you all the advantages of scanning in a practical size at an affordable price.

Incorporating the 3-in-1 capabilities of handheld, sheetfed and flatbed scanners, the scanner from Mitsubishi® scans up to 8½ inches wide and 14 inches long, at 200 dots per inch resolution.

The scanner recognizes up to 16 gray shades and can scan any photo, text, or illustration in seconds. With the included utility software and controller, the scanner runs with IBM® PC, AT or compatible computers. All for $995 suggested retail price.

Images scanned can be loaded into popular paint or desktop publishing software packages which support .TIFF or .PCX file formats, such as Aldus® Pagemaker,™ Ventura Publisher,™ ZSoft PC Paintbrush® Plus, and many others.


For product information or nearest authorized Mitsubishi Electronics sales representatives, please call 1-800-556-1234, ext. 54H. In California, call 1-800-441-2345, ext. 54H. Mitsubishi Electronics America, Inc., Computer Peripherals Division, 991 Knox Street, Torrance, CA 90502, (213) 217-5732.



The scanner, model SP-MH216AF, can scan an 8½" x 11" page in 10 seconds, independently or with its optional automatic paperfeeder, model SP-MH01FA, shown above.

Visit us at COMDEX
Booth #1128

MITSUBISHI ELECTRONICS

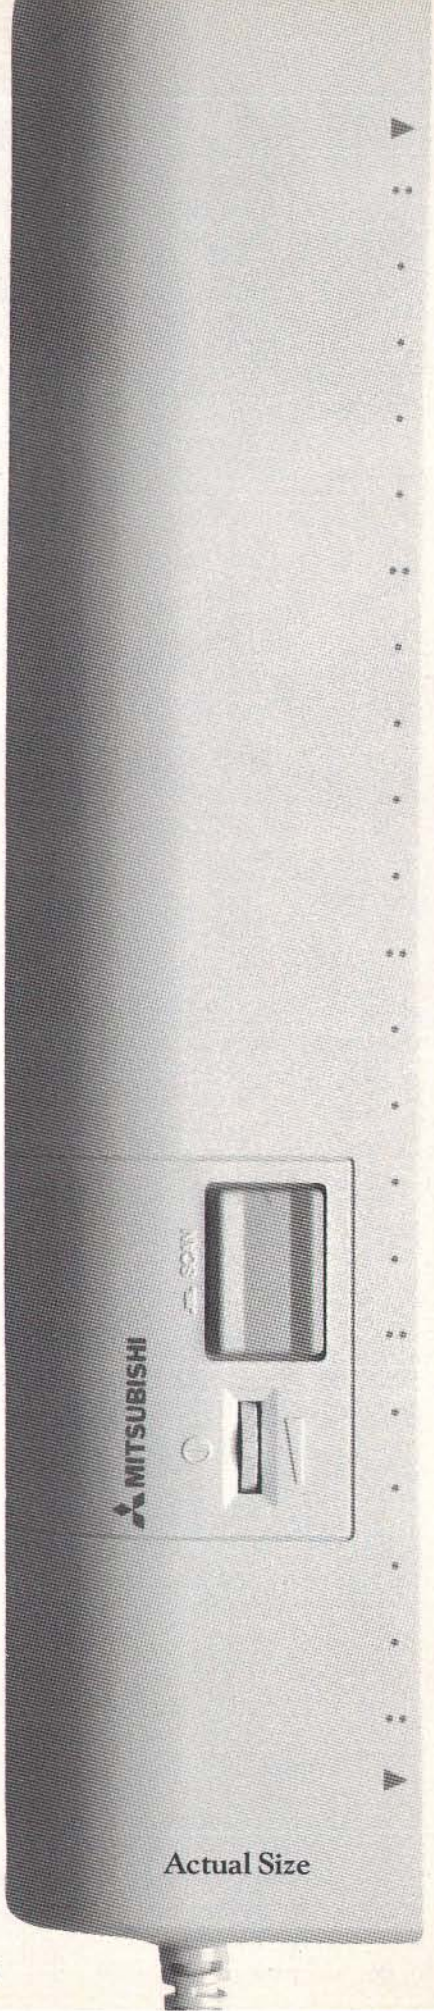

© 1988 Mitsubishi Electronics America, Inc.
Mitsubishi is a registered trademark of Mitsubishi Electric Corp., Tokyo.
Aldus and PageMaker are registered trademarks of Aldus Corporation.
IBM is a registered trademark of International Business Machines Corporation. Ventura Publisher is a trademark of Ventura Software, Inc.
PC Paintbrush is a registered trademark of ZSoft Corporation.

Circle 172 on Reader Service Card (DEALERS: 173)



Cut your losses.

Buy MICRO CADAM CORNERSTONE™ R. 1.3, send us your obsolete PC CAD software, and get a $1,000* check from CADAM!

If you've always wanted real mainframe-based CAD power for your IBM® PS/2,™ PC/AT® or compatible system, here's a sharp new offer from CADAM.®

Buy new MICRO CADAM CORNERSTONE R. 1.3 now. Compare its productivity, ease of use, and mainframe-based features with your conventional PC CAD system. (You can go right to work with your existing CAD files, thanks to MICRO CADAM CORNERSTONE's new DXF data translator.)

Then cut up your obsolete software and send us the half with the label, along with your completed rebate coupon and proof of purchase for MICRO CADAM CORNERSTONE R. 1.3. We'll cut you a check for $1,000.

CADAM's rebate offer is the ultimate deal on the "ultimate PC CAD production tool." But act fast. Rebate expires December 31, 1988. See your dealer today for qualification details and rebate coupon. For the location of your nearest dealer, phone CADAM toll-free today: 800-255-5710.

MICRO CADAM CORNERSTONE . . . The Ultimate PC CAD Production Tool

Please see us at COMDEX, Booth #4014 and AUTOFACT, Booth #7080


CADAM INC
A LOCKHEED COMPANY

*This rebate may not be combined with any other special CADAM INC promotion or discounts and is available only in the United States to end users. Certain restrictions apply—see rebate coupon available from your MICRO CADAM CORNERSTONE dealer for details and restrictions. All sales will be verified with dealer of record.

CADAM is a registered trademark and MICRO CADAM CORNERSTONE is a trademark of CADAM INC. AutoCAD is a registered trademark of Autodesk, Inc. IBM and PC/AT are registered trademarks and PS/2 is a trademark of International Business Machines Corporation. ©1988 CADAM INC.

Circle 45 on Reader Service Card (DEALERS: 46)

Suit Yourself with Sprint

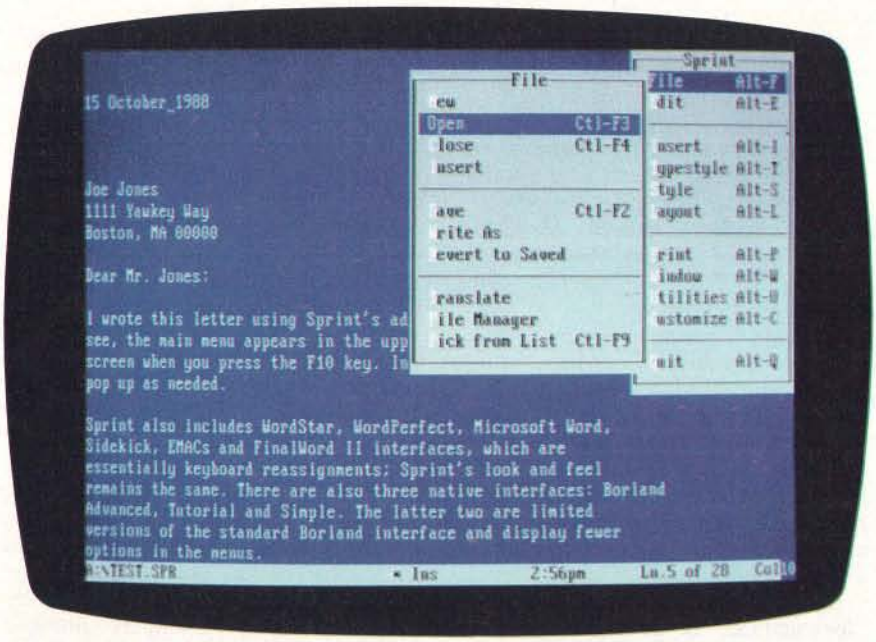

A high-end word processor that you can customize

Lamont Wood

Borland International, the firm that originated the pop-up software genre with SideKick, has come up with another new genre—soft software.

Softness is the whole idea behind Borland's new Sprint word processor, a full-featured, top-of-the-line word processing package that you can customize beyond recognition, since the necessary source code and programming language are included with it. It also does a perfectly good job when it comes to producing a document, although it lacks many of the desktop publishing functions offered in other packages. For this review, I ran Sprint 1.0 on a 4.77-MHz Eagle PC with 640K bytes of RAM and a 20-megabyte hard disk drive.

Different by Design

Borland touts Sprint as a word processor with multiple interfaces. This multiple interface capability is actually a product of Borland's design philosophy—Sprint isn't just a word processing program; it's also a macro-based programming language designed for writing word processing programs. Its verbs and syntax are reminiscent of C. When you run Sprint, you're actually running a program in what Borland calls the "Sprint macro language." Unlike the macro capabilities of other word processors, Sprint goes beyond printer file and keyboard interface modification to let you alter or rewrite any part of the program.

Sprint includes the source code for its macros. Once you find and unpack them from an archive file on one of the distribution disks, you can load them into Sprint as word processing documents and then study, modify, compile, and use them. Complete documentation for the macro language is included.

The language is specially designed for writing word processing applications; its verbs deal mostly with text and menu manipulation. It also has global and local variables and conditional statements, and there's an interesting `menu` verb that handles displaying a pop-up menu and executing whatever command the user picks from the menu list.

It's fairly simple to load the source code for the user interface and change key assignments: You simply load and edit the source code as you would any other word processing document. For instance, if your sloppy typing makes it advisable to eliminate the command assignment for Control-A, you can load the source file (`SP.SPM`) and find the list of keyboard assignments using the `Find` command; you'll see `^A : WordBack`. You replace `WordBack` with `Null`, save the file, and then load it as a macro definition, so that when your left hand slips, nothing happens.

You could also use the Sprint macro language to write your own word processor from scratch. But budding word processor programmers had best take note—the source code for the main Bor-

continued

Sprint 1.0

Type
Word processor

Company
Borland International
1800 Green Hills Rd.
P.O. Box 660001
Scotts Valley, CA 95066
(800) 543-7543
(408) 438-8400

Format
Eleven 5¼-inch floppy disks; 3½-inch floppy disks available

Language
C

Hardware Needed
IBM PC or compatible with 384K bytes of RAM and two floppy disk drives or a hard disk drive

Software Needed
DOS 2.0 or higher

Documentation
362-page User's Guide
388-page Advanced Reference Guide
504-page Advanced User's Guide
32-page Alternative User Interfaces

Price
$199.95
$595 for five-user network license

Inquiry 891.

land interface macro is 73K bytes long. Word processor programming is not a trivial task.

Sprint also comes with some interesting canned macros (invoked through the Potpourri menu) for things like "transpose letters" and "delete next paragraph." You can either call them up from a menu or assign a keystroke to each one and invoke them automatically.

Presumably, you could keep adding macros and eventually rewrite Sprint to something that exactly suits your tastes. You could have Sprint automatically do a lot of little chores, like stripping out the `Return for next line` prompts that always sprinkle everything you download from certain electronic mail services—or you can create entire programs, such as a text database for handling filing tasks (see listing 1). But Borland is selling Sprint as a word processor, not a programming language, so the package should stand on the merits of its word processing features.

Abundant Interfaces

As shipped, Sprint 1.0 is bundled with nine interfaces: Microsoft Word, WordPerfect, WordStar, SideKick, Final Word II, EMACS, Borland Tutorial, Borland Simple, and Borland Advanced.

The first three interfaces offer compatibility with the leaders in the word processing market, so their inclusion is to be expected. SideKick is a Borland product. Borland produced Sprint by acquiring, rewriting, and enhancing Mark of the Unicorn's Final Word II, so Final Word's interface was included. EMACS, a mainframe editor, was included because it was the precursor to the Final Word interface. The Tutorial and Simple interfaces are subsets of the Borland Advanced interface, which is the native Sprint interface. Borland is also working on other interfaces, including MultiMate Advantage and DisplayWrite. You can also create your own interface using Sprint's macro language.

The idea of having multiple interfaces seems to be simply to ease the user into using Sprint. Having a Microsoft Word or WordStar interface doesn't mean that when you call up Sprint you'll be tricked into thinking you're using those programs. The interface basically covers keyboard reassignments and custom pop-up menus that are overlaid on Sprint's main structure.

Borland makes no attempt to clone the "look and feel" of the target software. It simply attempts to help users, habituated to one of these word processing programs, to get up to speed with Sprint by emulating the function keys and key combinations these programs use.

For instance, when using the Microsoft Word interface, that program's command menu doesn't suddenly appear along the bottom of the screen. Instead, Sprint's one-line shaded status line appears there. But when you press Escape, a pop-up menu appears that lists the commands you would normally see on the bottom of the Word screen, and the function keys have the same effects they would have if you were using Word. If you choose to load more than one interface during the installation procedure, you can switch between them while editing a document.

For the perplexed, there's a command that gets you an on-screen diagram of the assignment of the function keys, and a macro prints a quick reference card for whatever interface you're using. The Alternative User Interfaces booklet that comes with the documentation covers the basics for each.

Sprint stores files in its own format, which is ASCII with embedded control characters, no matter which interface you use. But it does include translation facilities to convert to and from ASCII, DisplayWrite 4.0 (and other IBM Document Content Architecture–formatted files), Microsoft Word, MultiMate 3.3, MultiMate Advantage, WordPerfect 4.0, and WordStar. You can also import SideKick Plus Outlook outline files, but you can't export them back to SideKick.

The Native Interface

The Borland Advanced interface has several ways of doing almost anything. To save a file, for instance, you invoke the `Save` command by pressing F10 to bring up the main menu, and then you scroll to the menu's File item (via the cursor keys or by pressing *F*) to call up the submenu dealing with file commands. (Or you could just press Alt-F.) You press *S* to scroll to the Save entry on the submenu. Or you can skip the whole process and just press Control-F2. Alternately, you could edit the interface macro as described earlier so you can invoke it with any key combination you select.

Meanwhile, on the screen, what you see is *not* what you get, and it may not even be approximately what you get when you're doing fancy formatting, such as columns or footnotes. Sprint has no graphics mode, and the screen displays straight text with embedded commands. Changing to multiple columns or changing font sizes has no apparent effect. You simply see a highlighted `BEGIN COLUMNS2`, for instance, if you go to a two-column page.

You can change fonts through the Typestyle selection on the main menu. Since the process of installing Sprint involves specifying which printer (and font cartridge, if applicable) you're using, Sprint knows what typefaces are available and presents you with a list. To change to, say, 14-point Helvetica Bold (having installed the B cartridge on a LaserJet Plus or equivalent), you'd invoke the Font command under the Typestyle command and pick HelvBold from the list. The boldfaced command `FONT HELVBOLDENDF` appears with the cursor under the `E` in `ENDF`. All text positioned between `HELVBOLD` and `ENDF` appears in Helvetica Bold.


The Customize Screen option replaces the highlighted screen commands with the actual control characters Sprint uses. This helps to diagnose formatting prob-

continued

we never stop asking

How to look good from start...

if not...

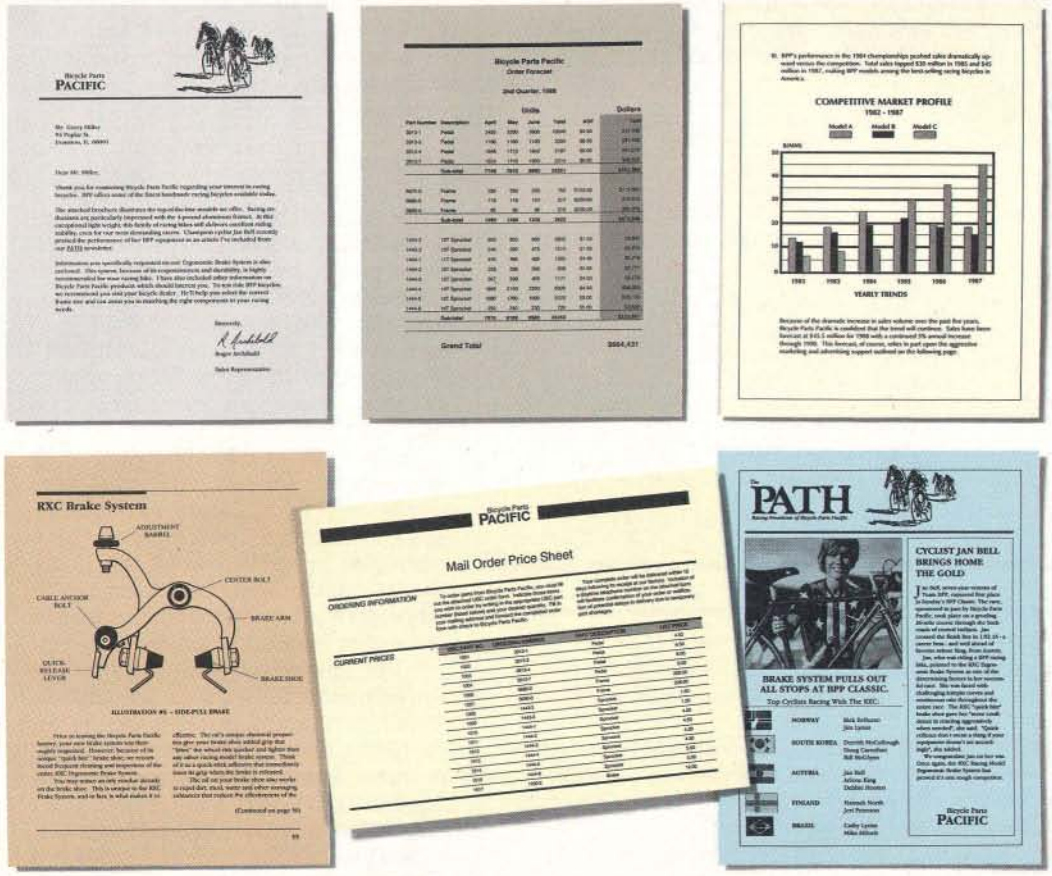

to finish.

The HP LaserJet Series II Printer.



Nothing brings your ideas to life like the HP LaserJet Series II Printer—from office memos to forms to newsletters. As the leading laser printer, it works with all popular PCs and PC software packages. And, with a wide range of fonts, you get more options to create superior looking documents.

With additional memory you can even print sophisticated 300 DPI full-page graphics. And with HP's ScanJet scanner, you can also easily add photographs, illustrations and text.

No wonder more people choose the original over all other laser printers combined.

So call 1 800 752-0900, Ext. 900D for your nearest HP dealer.

HEWLETT PACKARD

© Hewlett-Packard 1988

Print samples were created using Microsoft Word, Microsoft Excel, and Aldus PageMaker.

Listing 1: *This simple macro provides a look at Sprint's macro language. The routine formats a Sprint text file for use with Ventura Publisher by replacing quotation mark characters (ASCII 34) with printers' open or closed quotation marks (indicated in Ventura Publisher as <169> and <170>, respectively).*

```
Ventura :                          ; Name of macro.
 while (34 csearch) {              ; Search for ASCII
                                   ; 34 (") occurrences and
   c                               ; when found move forward
                                   ; one character.
   if istoken                      ; If the new position is
                                   ; part of a word,
     (r c del insert "<169>")      ; back up, delete the ", and
                                   ; insert <169>.
  else                             ; Or, if the position is not
                                   ; part of a word,
     (r c del insert "<170>")      ; back up, delete the ", and
                                   ; insert <170>.
  }                                ; This } ends the "if true"
                                   ; condition for the search.
  r toend                          ; Means "reverse to end"
                                   ; (i.e., go to top of file).
```

Table 1: *Benchmark results for Sprint versus Microsoft Word and WordPerfect. The use of a mouse with Microsoft Word and Sprint gives both programs an advantage on the keystroke count test. All times are in seconds.*

	Sprint 1.0	Microsoft Word 4.0	WordPerfect 4.2
Keystroke count	160	158	246
Search and replace	46	24	8
Reformat 4K-byte file	1	<1	<1
Convert ASCII to word processing	11	1	7
Convert word processing to ASCII	17	5	12
Print in columns	101	160	90
Scroll text	32	35	89
Load word processing file	1	3	2
Save word processing file	3	6	4

lems. For example, in one document I created, I found that strange blank spaces and randomly positioned capital letters showed up in my printouts. Using the Customize Screen option, I discovered stray control characters in the file left over from my previous editing sessions. I deleted these, and the problem went away. Switching to control-character mode makes the text hard to read, however; tabs, for example, show up as ^I, and the actual tab spacing disappears.

To get an idea of what your text looks like without actually printing it, you can use the Preview command. This formats the text as if Sprint were printing it, with headers, footers, and margins displayed on the screen. But the text has the same fixed size and spacing that the raw text on the word processing screen has. So if you change to an 8-point proportional font, for example (so that a lot more text can fit on a line), the text on the preview screen doesn't change size. Since the character size remains the same on the screen, and the margins stay the same, where does all the extra text go?

The preview screen formats the text so that it shows the material that is flush against either margin, and the extra text drops from the middle of the line. Except for the first and last words of each line, the material is gibberish. There's no harm in this, since the point is to see how the page is laid out, but it's a bit disconcerting the first time you see it.

According to Borland, a version that supports graphics mode is in the works and will run under OS/2's Presentation Manager. Borland says that it avoided graphics for version 1.0 in order to make the software useful on a broader range of hardware and to enhance performance. Sprint does, indeed, respond well, and its benchmark results were respectable, if not blazing, compared to Microsoft Word and WordPerfect (see table 1).

I/O Issues

As for printed graphics, Sprint lets you use embedded commands to print Encapsulated PostScript Format (EPSF) graphics as part of a document, but it doesn't handle any other kinds of graphics files. There are also commands to draw lines and bars, but these, likewise, work only if you are using a PostScript printer. Sprint also makes provisions for using a Microsoft Mouse.

Sprint includes a 100,000-word spelling dictionary and a 25,000-root-word thesaurus. The dictionary has an autospell feature that you can set to beep when you misspell a word. The autospeller actually kept up with my typing (about 80 words per minute), and I found the instant feedback valuable.

Also included is a mail-merge facility for generating form letters, an outliner, style sheets, and a glossary facility for capturing and replaying keystroke sequences. There are commands for creating indexes, which are dynamic (i.e., they follow page-numbering changes).

You can configure Sprint to save text automatically—it updates your changes to a separate "swap" file every time you stop typing for at least 3 seconds, so that a power outage or forgetting to save the file won't cost you a day's work. Sprint automatically retrieves unsaved changes from the swap file each time you call up the document. You can also set the interval between disk updates to any number from 0 (no update) to 60 seconds. This process is transparent; it doesn't snag the keyboard or the display, and the only evidence that shows it occurring is the disk indicator light.

You can have up to six windows open on the screen at one time, each containing either different documents or different parts of the same document, and you can shift text between windows. Each window stretches all the way across the screen, but the vertical size is adjustable and can be as shallow as one line.

The documentation—a softbound user's guide, an advanced user's guide, a reference guide, and an alternative user interfaces booklet—is thorough. However, Sprint's help screens are all that most users will need to get up and running. Also, while each book has an in-

continued

we never stop asking

"What if..."

Small cash input for laser-quality output.

HEWLETT PACKARD


Dear Reader:

This letter was printed on one of the finest printers available today.

The HP DeskJet Printer.

It prints text and graphics more crisp and clear than 24-pin printers. And as you can see from the chart, it's a lot quieter than 24-pin printers, too.

PRINTER NOISE LEVELS



It's also easy to use. It does your important office tasks, but it's small enough to fit on your desk. Everything considered, it's the perfect personal printer.


And one of the most amazing features of all is its price. **It's under $1,000.**

Call us for the name of your local HP Dealer at 1 800 752-0900 Ext. 908B. Then go see for yourself why we call it laser-quality printing.

Sincerely,

Richard Snyder

The HP DeskJet Printer. Laser-Quality Output for Under $1000.

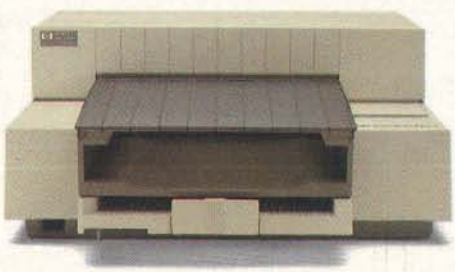

© Hewlett-Packard 1988 PE12811

HEWLETT PACKARD

Circle 112 on Reader Service Card

1	Exxon	25	Standard Oil (Ohio)	49	Consolidated Foods
2	General Motors	26	AT&T Technologies	50	Lockheed
3	Mobil	27	Boeing	51	Georgia-Pacific
4	Ford Motor	28	Dow Chemical	52	Monsanto
5	IBM	29	Allied	53	W.R. Grace
6	Texaco	30	Eastman Kodak	54	Signal Companies
7	E.I. du Pont	31	Unocal	55	Anheuser-Busch
8	Standard Oil (Ind.)	32	Goodyear	56	Nabisco Brands
9	Standard Oil of Cal.	33	Dart & Kraft	57	Johnson & Johnson
10	General Electric	34	Westinghouse Elec.	58	Coastal
11	Gulf Oil	35	Philip Morris	59	Raytheon
12	Atlantic Richfield	36	Beatrice Foods	60	Honeywell
13	Shell Oil	37	Union Carbide	61	Charter
14	Occidental Petroleum	38	Xerox	62	General Mills
15	U.S. Steel	39	Amerada Hess	63	TRW
16	Phillips Petroleum	40	Union Pacific	64	Caterpillar Tractor
17	Sun	41	General Foods	65	Aluminum Co. of Amer.
18	United Technologies	42	McDonnell Douglas	66	Sperry
19	Tenneco	43	Rockwell Int.	67	Gulf & Western Ind.
20	ITT	44	PepsiCo	68	Continental Group
21	Chrysler	45	Ashland Oil	69	Bethlehem Steel
22	Procter & Gamble	46	General Dynamics	70	Weyerhaeuser
23	R.J. Reynolds Ind.	47	3M	71	Ralston Purina
24	Getty Oil	48	Coca-Cola	72	Colgate-Palmolive

27 million Americans can't read. And guess who pays the price.

While American business is trying to stay competitive with foreign companies, it's paying an added penalty. The penalty of double-digit illiteracy.

Believe it or not, 27 million American adults can't read and write. Another 47 million are literate on only the most minimal level. That adds up to almost one third of our entire population. . . and probably a disturbing number of *your* employees.

What does illiteracy cost you? Get out your calculator. Illiterate adults make up 50%–75% of our unemployed. Every year they cost us an estimated $237 billion in lost earnings. They swell our welfare costs by $6 billion annually and diminish our tax revenues by $8 billion.

Illiteracy costs you through your community, too. It robs the place where you work and live of its resources. It undermines the potential of the people who make your products and the people who buy them. No dollar figure can be assigned to this. But over the years, this may be the costliest loss of all.

What can your company do about this? It can join in local efforts to fight illiteracy. It can volunteer company dollars and facilities for better school and tutorial programs. It can invest in a more literate community.

The first step is to call the Coalition for Literacy at **1-800-228-8813** or fill out the coupon below. Do it today. You may find it's the greatest cost-saving measure your company has ever taken.

A literate America is a good investment.

Ad Council

Coalition for Literacy

☐ I want my company to join the fight against illiteracy. Please send brochure with additional information.

☐ We want to discuss funding the Coalition for Literacy. Please have a representative contact me.

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone _____

Please return to: Coalition for Literacy
Business Division
PO Box 81826
Lincoln, NE 68501-1826

dex, the documentation could use a central index. There's no hint in the user's guide of advanced features, such as column formatting, which are discussed in the reference guide.

Run for the Money

Seen from a programmer's viewpoint, Sprint is a delight. Seen from a typist's viewpoint, however, it offers nothing new. Sprint's most unique feature is its programmability. But how many typists want to write their own user interfaces? And even experienced users are more likely to cringe than salivate when presented with yet another programming language.

Putting programmability aside, Sprint offers most of the features of its competitors and is adequate. However, it doesn't share the aspiration of the current generation of word processing programs: adding desktop publishing functions (see "Word Processors for Desktop Publishing" in the May BYTE). For example, Total Word can capture screen graphics from other programs, and MASS-11 supports Lotus PIC, Hewlett-Packard Graphics Language, and EPSF files. By contrast, Sprint has no graphics mode, supports only PostScript graphics files, and you can create only lines and boxes with it. It also has no redlining, scientific equations, on-screen math, or other recent offshoots of the word processing features checklist wars.


On the other hand, at $199.95, Sprint is far less expensive than its rivals. It's a no-risk word processor that's so easy to use that anyone brought in from a temporary office help agency could pick it up immediately. Sprint's multiple interfaces could also help users that are familiar with different word processors to standardize on one word processing file format without having to learn a new keyboard interface.

If your word processing needs are more sophisticated and you're willing to do some programming, Sprint is a word processor you can ultimately adapt to any project. If you want a word processor with capabilities that push the limits of technology, Sprint won't fit the bill. But if desktop publishing functionality isn't essential, or if you want a word processor you can alter to match your needs, then Borland has something for you. ■

Lamont Wood is a freelance writer in the computer and electronics fields and lives in San Antonio, Texas. He has been using word processors professionally for more than 10 years. He can be reached on BIX as "lwood."

New Corporate Profile.

This is the remarkable new, AT™ compatible, TCS-4000. Like today's most successful corporate executives it's slim, effective, ready to do what has to be done...and then some.

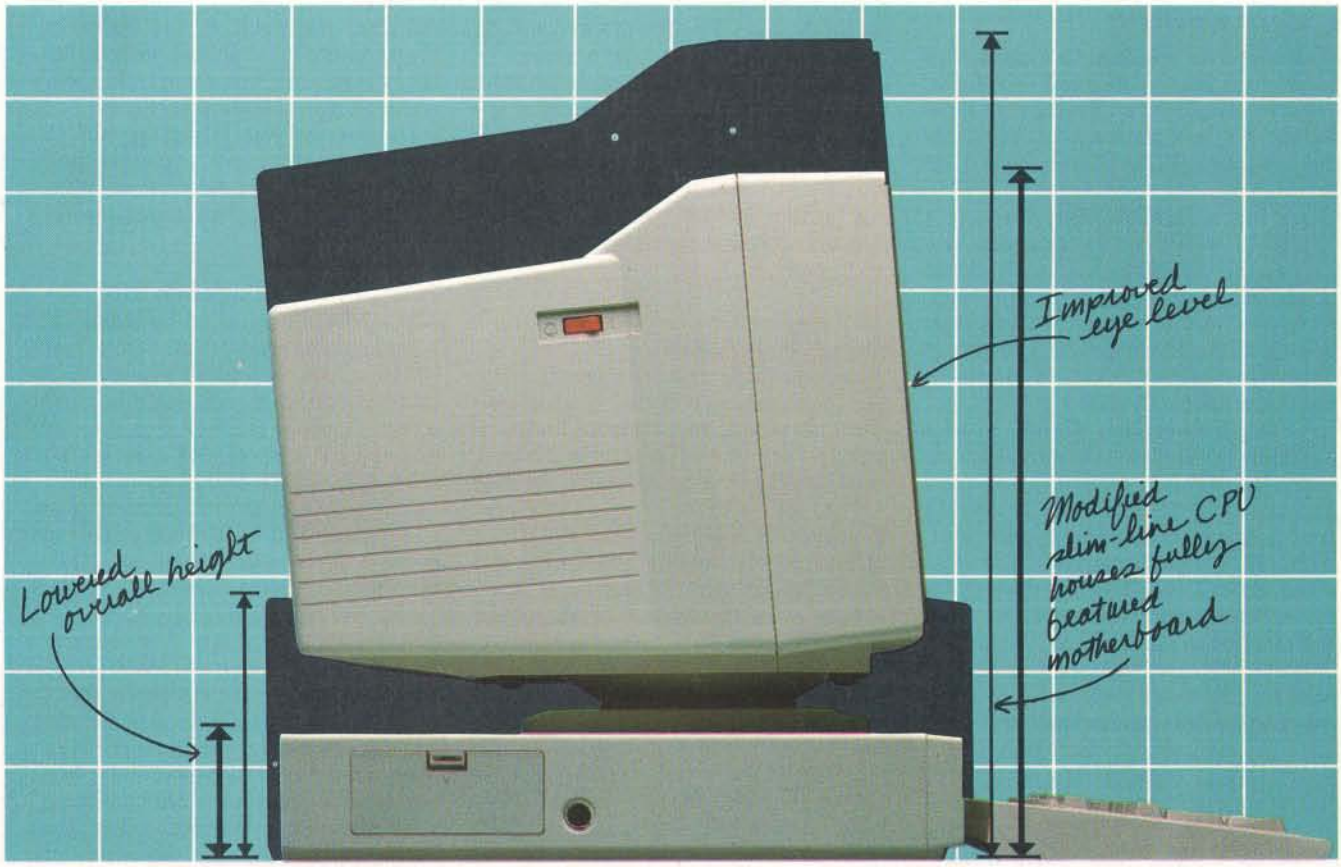

Thanks to an advanced design, and the advanced manufacturing techniques needed to turn design into hardworking reality, the TCS-4000 is an ideal computer for even the most demanding corporate system requirements. Yet, its price is such that it can easily and effectively serve as a workstation.

Key to the TCS-4000's enormous capabilities, flexibility, and value is its sophisticated, fully featured motherboard. It allows you to quickly, simply, make the TCS-4000 part of a network. In short, the TCS-4000 is a complete computer. There's little need to worry about selecting components and peripherals.

The TCS-4000, and its motherboard, features an 80286, 10MHz, microprocessor, 640KB RAM...expandable to 1MB, 2 I/O slots (all that's needed since the motherboard includes floppy and hard disk controller, parallel and serial ports, and an EGA adaptor), and a host of other features that add up to enormous capabilities.

At Tatung, the measure of technology is not how big it is, but how hard it works. The new TCS-4000 measures up. For complete details, call today.



TATUNG

Advanced thinking is an ancient art.

West (213) 979-7055 — Mid-West (817) 640-3175
East (609) 395-6770

Tatung Company of America, Inc.
2850 El Presidio Street, Long Beach, California 90810
Tatung Science & Technology, Inc.
2060 Ringwood Ave., San Jose, CA 95131

All trademarks are property of their respective manufacturers.

Review Update

Poor Man's PostScript

No longer must you invest a minimum of $4000 for a laser printer or $1800 for an upgrade card to take advantage of PostScript, Adobe's standard page-description language (PDL). GoScript, a $195 printing utility from LaserGo (9235 Trade Place, Suite A, San Diego, CA 92126, (619) 530-2400), generates output on a Hewlett-Packard LaserJet Series II printer from most PostScript files. And you don't even need a fancy laser printer. GoScript can produce PostScript documents on your lowly dot-matrix. A poor man's dream!

Unfortunately, the dream withers under the harsh glare of reality. Because GoScript requires no intelligent laser printer controller board, you'd expect a trade-off in processing speed. This trade-off, though, is hard to swallow. As a reference, I ran GoScript through the same benchmarks used for our PostScript laser printer review (September BYTE). I also used the same IBM PC AT with PageMaker and Adobe Illustrator to create and print Encapsulated PostScript files. In the review, the QMS ColorScript 100, a thermal printer with beautiful output in four colors, posted the slowest time by far on all three speed tests. The large (30-page) text file printed in 26:22 (minutes:seconds); the small (6-page) text file printed in 6:02; and the 1-page graphics file printed in 4:57.

I started the tests by booting GoScript and sending the large text file to a dot-matrix printer. Four pages and 90 minutes later, I aborted. The small text file poked through in 22:15, and the 1-page graphics file took 15:40. I thought the throughput times might improve when printing to the LaserJet, but they actually got worse. The graphics file, for instance, took 35:05.

For $195, you may be willing to live with slow-motion throughput, but it'll be even harder living with the output. The dot-matrix printout approached illegibility, and the laser output, though much better, did not support special-effects features (e.g., rotation and shadowing). GoScript uses Bitstream outline fonts rather than true Adobe fonts, but that's not the problem. PostScript was not made for dot-matrix printers, and it shows.

When I ran GoScript on a 20-MHz 80386 system, the times edged up to tolerable limits. The graphics file came through at 3:03, and the small text file took 13:38. Unfortunately, us poor folk can't afford 20-MHz 80386s. And so it seems PostScript must remain a luxury of the privileged elite.

Adobe's Destiny: More Clones Ahead

As hard as Adobe tried to stave off imitators by employing proprietary scaling algorithms and hiding embedded font commands, any industry standard-bearer must one day face the inevitable. Destiny Technologies (930 Thompson Place, Sunnyvale, CA 94086, (800) 874-5553; in California, (408) 733-3171) has joined the first wave of PostScript clonemakers with the release of PageStyler PDL.

PageStyler has a 12-MHz 68000 CPU and 2.5 megabytes of RAM (upgradable to 4.5 megabytes). The PC-resident board costs $1195, but you'll also need the $495 software and at least one of the $100 printer interface cards (for the HP LaserJet Series II, Destiny LaserAct II, Acer LP-76, or Canon LBP-8 II). That still adds up to a significant savings over true PostScript boards. The software includes 13 base fonts. Options include an additional 22 downloadable fonts and a memory upgrade.

The PageStyler software took a while to load (4:26), but you can set up your autoexec file to do that. The large text file printed in 8:27, at the bottom of the heap compared to other PostScript printers or even true PostScript boards such as the JetScript ($2495). However, PageStyler handily beat out PC Publisher's Kit, a PostScript clone we tested in September. The small text file printed in 1:59. Only the ColorScript was slower than that. PageStyler also came up slow on graphics throughput, posting a time of 4:12.

PageStyler, despite its slowness, did produce high-quality output. Destiny selected Bitstream fonts over the Adobe versions, but the differences between the two, though noticeable, are not flagrant. PageStyler performs all the slick PostScript effects: shading, rotation, curves, character manipulation, and shadowing. If you have a laser printer without PostScript capability, you should take the upgrade plunge. The improvement in output will startle you. Which upgrade path to take will be a harder choice to make. You can go with true Adobe PostScript or you can opt for a less expensive—and slower—clone.

PostScript Printing from NEC

NEC (NEC Information Systems, 1414 Massachusetts Ave., Boxborough, MA 01719, (508) 264-8000) throws its hat into the PostScript ring with the Silentwriter LC-890. The $4795 unit is actually an LED printer, not a laser. It comes with a 10-MHz 68000 processor, 3 megabytes of RAM, 35 resident fonts, and two 250-sheet hoppers. The rated speed is 8 pages per minute at 300 dots per inch. Interfaces include parallel, serial, and AppleTalk connections.

The Silentwriter is one of the easiest page printers to set up and use. The toner cartridge snaps over the toner hopper for quick and clean loading. All functions and interfaces are configurable from a menu on the control panel, and a print-density dial controls the print darkness.


In addition to handling all of PostScript's special features, the Silentwriter produces exceptional print with particularly smooth gradations. NEC has gone with the real thing: true PostScript (version 47) and licensed fonts from Adobe.

The printer is slow, though. It came out near the bottom on all three of the AT speed benchmarks when compared to the printers reviewed in September. The large text file printed in 5:59, the small text file in 1:37, and the graphics file in 3:03. The Silentwriter did much better on the Macintosh side, placing among the upper half of those printers tested. Interfacing through AppleTalk, the Silentwriter registered times of 7:40 on the large text file, 1:30 on the small text file, and 1:57 on the graphics file. Despite slow times, this is a solid product and a good buy.

—Stanford Diehl
Testing Editor, BYTE Lab

VGA

A new way to look at color; a better way to buy it.

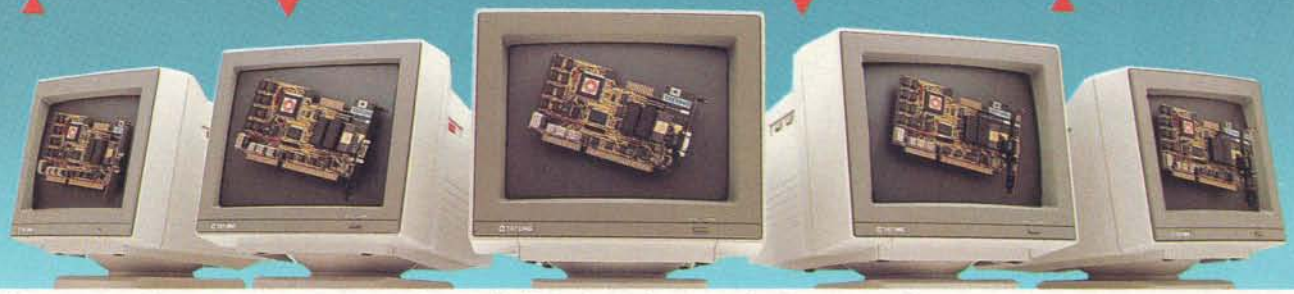

MM-1233: 12" analog monochrome, Grey scale. MM-1433: 14" analog monochrome,Grey scale. CM-1496: 14" analog color, .31mm dot pitch. CM-1492: 14" analog color, .39mm dot pitch. CM-1296: 12" analog color, .28mm dot pitch.

Advantages are enhanced by Tatung
VGA provides significantly higher resolution. In fact, image clarity is 37% higher than EGA. And while EGA gives you 16 on-screen colors, VGA puts 256 colors (from a palette of 262,144 colors) on a monitor's screen at a time. Distortion, ghosting, and even eye fatigue is sharply reduced. In text modes, characters (even those with descenders like y, p and g) are more clearly defined thanks to a 9 x 16 dot matrix. But, while the monitor is a vital part of a VGA system, we think the real key is the VGA card that goes with it.

The Tatung VGA card is all performance
Ours is a 16-bit graphics array board with a single high speed, register compatible, VGA chip...a graphics controller that's incredibly fast (it has a bandwidth more than 7 times that of other VGA boards)! You can access this speed through the 16-bit data path to display memory, BIOS ROM, and I/O. Our exclusive SwiftWrite makes the wait state virtually non-existant. More? With 16 colors, resolution increases to 800 x 600. On-board is a 256K DRAM; and the card is backward compatible with EGA, CGA, MDA and Hercules graphics standards.

Tatung Monitors deliver the new standard
We offer the broadest line of VGA monitors available; 5 newly styled and engineered monitors. Each model provides 640 x 480, 640 x 350 lines of graphics resolution; 720 x 400 lines for text. Tatung's new VGA monitors offer a broad range of features that contribute to their superior value: dark, non-glare CRT's, automatic vertical sizing encoding, multi-color text or reverse video switch, 110/220V switchable power supply, removable tilt/swivel bases...all supported by Tatung's full year warranty.

Tatung bundles provide superior value
By bundling VGA monitors and cards, Tatung puts VGA within the reach of everyone. In most cases, the Tatung VGA bundle will cost no more than EGA packages! That's why we believe that feature for feature, dollar for dollar, the Tatung VGA bundle represents incomparable value. The kind of value only the largest manufacturer of monitors in the world can deliver.

In addition, Tatung offers users a huge advantage: a Tatung VGA bundle is 100% IBM,™ VGA compatible and more...your investment in software is fully protected.

Tatung offers guaranteed compatibility
Whenever a new standard is introduced, system users have a justifiable concern about software compatibility. That's why **Tatung offers a unique guarantee*: if you note any software incompatibilities within the 1 year warranty period, Tatung will correct them free of charge within 30 days, otherwise the full value of the Tatung VGA card will be refunded.**

That's the Tatung VGA story. It's a story worth seeing. For complete information,specifications, and the name of the Tatung dealer near you, and to arrange for a demonstration, call us today. After all, seeing is believing.

TATUNG
We monitor the world.

West: (213) 979-7055
Mid-West: (817) 640-3175
East: (609) 395-6770
Tatung Company of America, Inc.
2850 El Presidio Street
Long Beach, California 90810

M PC, XT, AT Systems and their compatibles. Refer to Tatung VGA Card Manual for specific details. All details included with each Tatung VGA card. All names trademarked are pro

on Reader Service Card

PICK BIX BRAINS

. . . With a 10 Day Trial Membership

If you've thought about joining **BIX** before but weren't sure it was what you needed, now is the time to try it. Because now for a limited time, we're inviting you to try **BIX** for 10 days. If at any time during this 10 day trial period you don't feel **BIX** has made you a more knowledgeable microcomputer user, we'll refund your entire registration fee. You pay only for time spent on the system.* *(See log-on instructions for hourly rates).*

Explore **BIX** in your home or office. Put its power to work for you and unleash your full microcomputer potential — programming, designing, specifying, researching — and more.

Try **BIX** for 10 full days and see what it can do for you. Explore more than 160 conferences. Access vendor support. Speak to expert consultants. Research new products and systems, and download public domain software.

Prepare yourself for success

It takes a sharp mind and hard work to stay ahead, and having the right tools helps.

Today, you can put one of the most powerful instruments for career advancement to work for you: **BIX.**

- Learn about new products before they hit the market.
- Get quality marketplace feedback on the products you're thinking of purchasing before you invest.
- Research problems and find the solutions that no one else has been able to render.
- Access some of the most advanced public domain software available in the industry.
- Increase your working knowledge of micros to make more confident purchasing decisions and recommendations.

Join BIX and arm yourself with the latest in microcomputer-related information

BIX's exclusive *Microbytes* newswire gives you complete, daily, up-to-date computer industry information. You'll gain insight from BYTE editors and writers who analyze new products and their potential impact, inform you of the latest mergers and acquisitions, and report late-breaking news from important seminars and conferences.

Talk to colleagues worldwide

You'll stay on top of your company's business with **BIX**'s electronic mail service.

"Talk" to your east coast, west coast — even European — contacts all in the same day.

Or, simply communicate with other **BIX** users worldwide. Share information and ideas privately, or in conference.


Choose any option for online access with a one time $39 membership fee

- Use MasterCard, VISA or American Express and begin your 10 day trial use of **BIX** right now.
- The 10 day trial also applies if you open an individual pre-paid account on **BIX**. Trial commences once we open your account and notify you.
- Other billing options including qualified corporate accounts are available. (Sorry, our 10 day trial is not available for these accounts.) Call or write **BIX** for details.

Use credit cards for immediate access or call the **BIX** Helpline for information on any other payment option at, 1-800-227-2983 (from U.S. and Canada) 603-924-7681 (in New Hampshire and elsewhere).

Act now! Our 10 day trial offer is subject to cancellation at any time.

*To notify **BIX** that you wish to discontinue service at any time during the trial period, call the **BIX** Helpline, and your entire membership fee will be refunded.
BIX can be accessed via Tymnet throughout the U.S. and Canada. For the Tymnet number nearest you, call the **BIX Helpline or Tymnet at 1-800-336-0149.
†If your local Tymnet number is a toll call you will receive additional charges from your local phone company at their prevailing rate.
††Continental U.S. Tymnet rates. Rates from other areas are available from **BIX.**

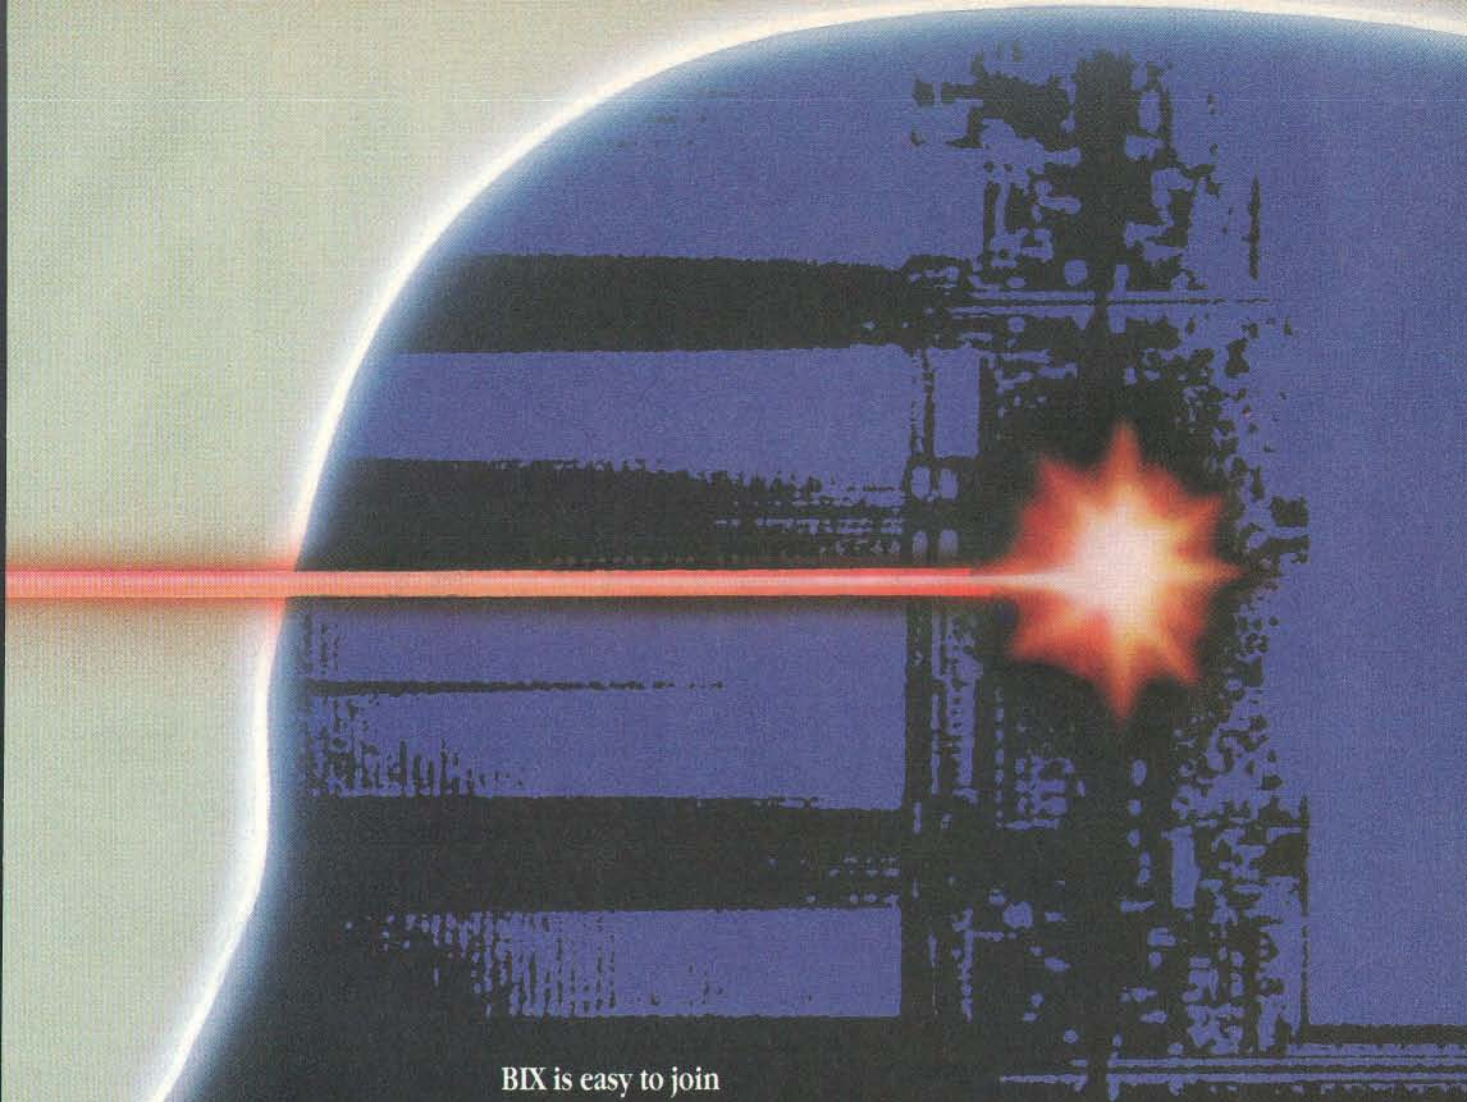

BIX is easy to join

To log-on to **BIX**, simply:

Set your computer's telecommunications program for full-duplex, 8-bit characters, no parity, 1 stop bit OR 7-bit characters, even parity, 1 stop bit. Use 300 or 1200 baud.

Call your Tymnet number ** and respond as follows:

Tymnet Prompt	You Enter
Garble or request for "terminal identifier"	a
login:	bix‹CR›
BIX logo/name:	bix.038 ‹CR›

Callers outside the U.S. who have a communicating computer or terminal and a packet switching account with their host country phone system can reach **BIX** by entering 310690157800. To commence registration, enter the code listed at the **BIX** logo/name: prompt.

After you register, you'll automatically be taken to the **BIX** Learn Conference, an online tutorial that will show you how to begin using the system immediately. Time spent in the Learn Conference is FREE. Complete system documentation will be sent to you within a few days.

Access time will be billed at the following hourly rates.†

Off-Peak Time $11/hr. ($9 **BIX**, $2 Tymnet)††
(7 PM – 6 AM weekdays, all day weekends and holidays)

Peak Time $20/hr. ($12 **BIX**, $8 Tymnet)††
(6 AM – 7 PM weekdays)

BIX
BYTE INFORMATION EXCHANGE

One Phoenix Mill Lane
Peterborough, NH 03458

IN DEPTH

Hypertext

237 **A Grand Vision**
by Janet Fiderio

247 **From Text to Hypertext**
by Mark Frisse

255 **The Right Tool for the Job**
by Michael L. Begeman and Jeff Conklin

268 **Hyper Activity**

Imagine, if you will, walking into the New York Public Library and picking up a book on Mozart. You begin to read and learn that Mozart was an Austrian composer in the late 1700s. You wonder what else was happening in Austria then, so you go to the card catalog, find a book on Austrian history, go to the stacks, locate the volume (if it's not checked out), and read it before you continue.

In this book, you find a reference to old Salzburg, and you wonder what it looked like. Back to the card catalog, and the stacks, to find a book with images from that time. Finally, you get back to Mozart and read of a piano concerto you've never heard. This time you head for the library's record collection and listening room.

This process continues until you have either satisfied your desire for knowledge on the subject or worn yourself out searching for it, whichever comes first.

Now imagine sitting at your computer and bringing up a hypertext system on music. You begin to read about Mozart. When you wonder about Austrian history, you simply highlight the text and request more information with a mouse click or a few keystrokes. To find images of old Salzburg, you use the same process. And to hear the piano concerto? The same.

Sounds a lot simpler, doesn't it? The only restriction to this seemingly endless fountain of knowledge is that the author of the hypertext system had to establish the connections for you to follow and provide the additional knowledge for you to retrieve.

In the article "A Grand Vision," Janet Fiderio delves into the mysteries of hypertext: where it came from (Ted Nelson's Xanadu and Douglas Engelbart's NLS), where it is now (Guide and HyperCard for microcomputers), and where it's going (CD-ROM). Janet describes its form and various functions, such as browsing, nodes, and links—aspects that separate hypertext systems from normal databases—as well as the two main directions of recent hypertext research.

One of these directions, using hypertext for great libraries of information, is the thrust of the article "From Text to Hypertext" by Mark Frisse. To organize large volumes of textual material, you must convert and structure quantities of (hopefully) on-line text into hypertext format. Mark deals with this process and its attendant problems.

The other research direction is using hypertext as an aid to problem resolution. In their article "The Right Tool for the Job," Michael L. Begeman and Jeff Conklin describe the gIBIS system's approach to system analysis. This system provides a framework within which to present issues, take positions on those issues, and argue with those positions—a framework for constructive discussion.

Finally, in "Hyper Activity," we provide a variety of resources, including some current hypertext products, various educational institutions involved in hypertext research, and a short, noninclusive reading list.

As the mass of knowledge we all must assimilate in this multifaceted world of ours continues to grow, from Mozart to microcomputers, the future of hypertext systems looks bright indeed.

—Jane Morrill Tazelaar
Senior Technical Editor, In Depth



ILLUSTRATION: ROBERT TINNEY © 1988

INTRODUCING FUJITSU'S
DL3000 SERIES PRINTERS.

If you have to ask how much it costs, this is the printer for you.



Meet Fujitsu's new DL3000 series printers. All you ever wanted from a 24-wire dot matrix printer at a surprisingly affordable price.

Superb Paper Handling, Speed, and Quiet Operation.

First, with just a push of a button you can switch between letterhead and computer paper. The built-in tractor with paper parking does all the work.

Next, print fast. 288 characters per second, or one-page memos in 10 seconds.

Finally, print quiet. Quiet enough to let you comfortably carry on a conversation.

Easier, faster and quieter than the competition. Ask to see one. We'll prove it.

Comes Fully Loaded, Ready To Go To Work.

The DL3000 printers give you crisp graphics and exceptional letter quality printing.

They give you an easy-to-use programmable operator panel with memory for two different menus. And you'll be compatible with today's popular business systems and software.

You even get an industry leading reliability rating of 8,000 hours MTBF. For years of trouble-free performance.

Call 800-626-4686 today for more information on this or any of our world famous family of printers, including daisywheel, dot matrix, laser and band.

DL3300 (Narrow Carriage), DL3400 (Wide Carriage)		
Speed	High Speed Draft Draft Quality Letter Quality	288 cps at 12 cpi 216 cps at 12 cpi 72 cps at 12 cpi
Fonts	Courier 10 Prestige Elite Compressed Optional Font Card with 2 Fonts per Card	
Paper Handling	Standard Push Tractors with Automatic Sheetloading and Paper Parking; Optional Single and Double Bin Cut Sheet Feeders	
Acoustic Noise	55 dBA	
Interfaces	Centronics Parallel or RS232C Serial	
Emulations	IBM® Proprinter XL,® IBM Graphics Printer,® Diablo 630® API, Epson JX80® (with Color Option)	
Color Option	User Installable Kit	

Because the more you ask, the more we can do for you.

A COMPANY WITH CHARACTER AND DRIVE

FUJITSU

FUJITSU AMERICA
Computer Products Group

FOR MORE INFORMATION ON THE DL3000 SERIES PRINTERS, CALL 800-626-4686

© 1987, Fujitsu America, Inc. IBM, Proprinter XL and Graphics Printer are registered trademarks of International Business Machines Corporation. Epson JX80 is a registered trademark of Seiko Epson Corporation. Diablo 630 is a registered trademark of Xerox Corporation.

Circle 101 on Reader Service Card (DEALERS: 102)

A Grand Vision

Hypertext mimics the brain's ability to access information quickly and intuitively by reference

Janet Fiderio

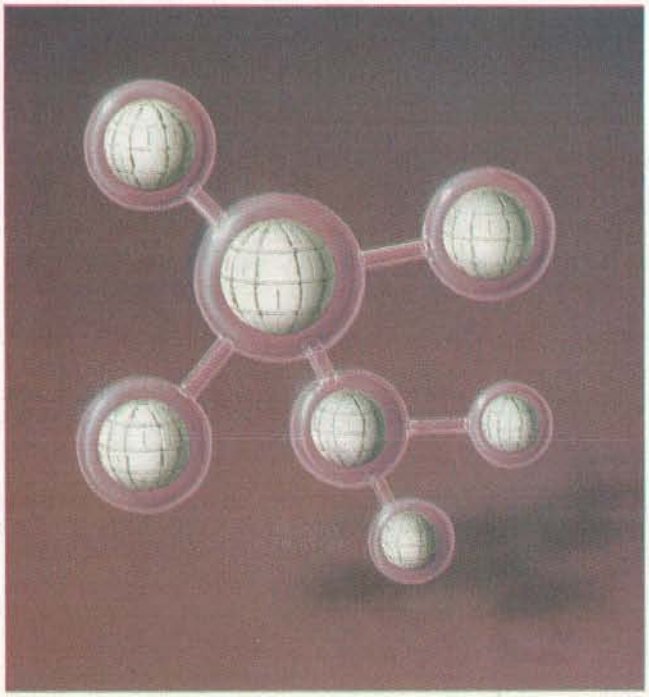


ILLUSTRATION: ROBERT TINNEY © 1988

For 1945, the vision was a grand one: an on-line text and retrieval system that contained not only post-war scientific literature but also sketches, photographs, and personal notes. The machine, called a memex, would let you browse and make associative links between any two points in the library. You could then record and traverse them at will.

Vannevar Bush, President Roosevelt's science advisor and overseer of all wartime research, including the Manhattan Project, envisioned, yet never created, the mechanism. It became the foundation for all hypertext systems. (See the text box "The Pioneer Spirit" on page 238.) Now, 43 years later, hypertext applications are finding their way out of the research laboratories and into the market.

What Is Hypertext?

Hypertext, at its most basic level, is a DBMS that lets you connect screens of information using associative links. At its most sophisticated level, hypertext is a software environment for collaborative work, communication, and knowledge acquisition. Hypertext products mimic the brain's ability to store and retrieve information by referential links for quick and intuitive access.

Current hypertext programs don't use typical database record and file structures; their databases usually consist of screen-size workspaces called *nodes*. You can fill these computer index cards with text, graphics, images, and audio and video data. Most hypertext implementations link nodes in either a hierarchical or nonhierarchical fashion; some support both structures.

Early designers envisioned hypertext either as an environment for interconnected writing and literature storage or as a sophisticated, multipurpose research environment that encouraged cooperative thinking on shared projects. Product development now proceeds on several fronts. Universities, including Brown, Carnegie-Mellon, and the University of North Carolina at Chapel Hill, are experimenting with hypertext systems as multiuser teaching, library-reference, and writing environments. Commercial hypertext applications—like on-line reference manuals and documentation, public information systems, authoring systems, cooperative work systems, and personal organization tools—are either available or in development.

Hypertext programs, and the free-flowing databases that are their trademark, have been adapted for electronic publishing, project management, systems analysis, software development, and CAD. You can also find software

continued

The Pioneer Spirit

Vannevar Bush designed a simple machine by today's standards. It used microfilm and photocells to store its data. But Bush, who was President Roosevelt's science advisor, dreamed up an information organization and retrieval scheme bold enough to influence two hypertext pioneers 20 years after the fact.

The first researcher influenced by Bush's concepts of associative links and browsing was Douglas Engelbart. His research at the Stanford Research Institute in the early 1960s centered around using computers to augment human intellect. At that time, he began developing the On-Line System, or NLS, now called Augment and used internally for several projects at McDonnell-Douglas.

Augment is an on-line work environment. In its original form, it served as a storage receptacle for memos, research notes, and documentation; as a communication network, since on-line conferencing was possible; and as a shared work space where researchers could plan and design projects.

Still running on a DEC 20, Augment stores information in a sophisticated hierarchical structure allowing nonhierarchical branching. Since speed was important, Engelbart invented the mouse as an input device. He also came up with the concept of viewing filters. Via filters, you can view a shortened version of the statement or file, which lets you move quickly through a hypertext database, scanning for only pertinent data. In fact, Engelbart was the first to use an F10 context-dependent Help system, an integrated mail system, multiple windows, and a shared screen.

While these developments helped researchers deal with complex multidimensional problems, Ted Nelson took Bush's concept a step further. Nelson envisions hypertext as an on-line network holding the world's literary treasures under one roof. Xanadu is his version of the publishing utility of the future. It is, perhaps, the most well-known hypertext system. It was Ted Nelson, in fact, who originally coined the word *hypertext* over 23 years ago to mean nonsequential writing.

As designed, Xanadu will be an ever-expanding publishing environment that millions of people could use to create, interact, and interconnect with linked electronic documents and other forms of hypermedia, such as movies, audio, and graphics. It's designed to run in parallel on many networks of servers. On a basic level, a storage manager lets you create links between like topics and then keeps track of the origins, variations, and interconnections of the text.

Xanadu documents consist of native bytes, the original document and inclusions, information originally found in other documents, and hidden pointers. Links are attached to bytes. You can ask the system to tell you where bytes came from, and you can ask to see them in their original form.

Since the number of documents created via Xanadu's system can be immense, the system tracks documents using a four-part designator that can locate the server, user, document, and contents. (For a detailed explanation of the tracking scheme, see "Managing Immense Storage" in the January BYTE.) Xanadu is more than just an on-line reference system, however. It's also an interactive writing and conferencing environment.

One of the most radical points about Xanadu is that existing programs won't operate under it. New applications will need to be developed for it to gain widespread acceptance.

A Xanadu prototype is now up and running on a Unix-based Sun workstation. Nelson claims that products based on the Xanadu hypertext concept will ship sometime in 1989 (see the item in Microbytes in the July BYTE).

(e.g., outline processors, teleconferencing systems, and windowing products) that borrow some, but not all, hypertext techniques.

In Many Flavors

Hypertext systems come in many flavors and support varying tasks. Typical hypertext software consists of a text editor, graphics editor, database, and browsing tool for three-dimensional viewing. (The *browser* is usually a graphic that you use to become oriented within a database filled with many nodes.) Bit-mapped displays, a mouse, windows, icons, and pull-down menus are all standard hypertext tools.

The various systems have one underlying database, and so far there's no DBMS standard. Current products use everything from home-grown to relational databases. Some products let you distribute the database across a number of networked file servers to create a collaborative hypertext environment.

When you use a hypertext application that you didn't help to author, you really see only the front-end of the program—the user interface. The machinations of the back-end, the database, are hidden. Depending on the application, some systems feature highly developed front-ends, like those in CAI systems, or complex back-ends, like those in research and cooperative work environments.

As a system user, you have access to a number of indexing capabilities. You can create inverted files of words, phrases, or keywords in context and perform word or Boolean searches. Some programs let you create hierarchical indexes, like tables of contents, while others let you create content-based indexes, like thesauri. Some systems let you create both.

If you write applications or use a system that doesn't delineate between author and user, you have access to hypertext's editing, linking, and development tools. You can author both simple and complex applications, depending on the hypertext system you use. In addition, many products let you invoke programs from your application at the touch of a mouse. These programs can be short and macro-like or large conventional programs that you would normally run from the operating system.

Not surprisingly, the only thing standard about hypertext systems is that there are no standards. It's a new technology with creative new implementations. One emerging standard, the Standard General Markup Language (SGML), lets hypertext authors create links across various applications. Although you usually hear SGML described as an electronic-publishing standard indicating type sizes and formats, it also features useful document-structure cross-referencing and indexing commands. Most text editors can read links created with SGML.

A Discrete Affair

To use a hypertext system, you must get used to parsing your information into small discrete units, or nodes, which consist of a single concept or idea. In theory, nodes are both semantically and syntactically discrete. The information contained in a node can usually be displayed on one computer screen. In situations where you need more space, some programs let you create longer nodes that scroll up from the bottom of the screen.

Nodes can come in two varieties:

typed and untyped. An untyped node is a box for information. It has no label or descriptor, so you can fill it with anything. A typed node is labeled, and the descriptor helps you determine the style of information contained in the node. Types help you to classify nodes or define specialized operations. They are also helpful when you're browsing through a database looking for a particular area of interest.

One system that uses typed nodes is gIBIS, the Graphical Issue-Based Information System from MCC (Microelectronics and Computer Technology Corp.). It's a prototype designed for systems analysis of complex problems. It lets you create three basic types of nodes: *issue* nodes, describing an issue you wish to discuss with your work group; *position* nodes, describing an assertion that resolves an issue; and *argument* nodes, containing your objection or support for a position node. Organizing nodes in this manner helps gIBIS users navigate easily through a complex hypertext network. (For more details, see the article "The Right Tool for the Job" on page 255.)

You can also combine nodes to form *composite* nodes. These are composed of related subnodes that can be handled as a single object or broken out into individual elements. You can create icons to reflect the contents of a composite node for easy access. You can also rearrange subnodes if needed.

Depending on the hypertext product you use, nodes can be displayed on the screen one at a time, as in Apple's HyperCard, or in groups, as in NoteCards from Xerox Palo Alto Research Center (PARC), a system designed for idea processing (see figure 1).

The Missing Link

In general, links are used to connect the nodes. A hypertext link is like an electronic footnote, an endnote, or a parenthetical phrase. That is, just as footnotes and parenthetical phrases direct readers of printed material to related points or further topics for research, hypertext links connect you to associated text or ancillary information.

Links, therefore, are the mode of transportation in a hypertext network. You follow them to move about between various nodes. You can usually embed them in text and then edit and review them to ensure that they are valid. You can also create, delete, or change link attributes.

Links must have two qualities: Your computer must be able to trace or follow them, and they must be able to transport you quickly from one node to another. Usually one or two keystrokes or the tap of a mouse button is all you need to transport you from one node to the next. The total time required to traverse a link is small, usually only a second or less.

While it's normally up to you to create links between nodes, some products can create links automatically; this ability may be useful for systems that need to cross-reference large text databases. Systems such as NoteCards also let you "type" links. A typed link specifies a particular relationship between two nodes, one that you define.

Links can do more than just connect two nodes, however. Depending on the hypertext system, links can connect annotations to a document (including notes and comments, like electronic Post-its) and provide organizational information, such as where the text fits in a table of contents or where it originated. Therefore, links can help define the node's relationship to other nodes within the database. Links may also clarify the contents of charts and graphics by connecting the graphics to explanatory information like longer descriptions.

Links usually originate at a single point, like a sentence, called a link *reference*. Their destination, called a link *referent*, is usually a node, a chunk or region of text.

Points and Buttons

A *point* is a single character, token, or icon that "points out" a link in a document. It's usually identified by either the name of the destination node, the link, or an arbitrary string, and by whether it's a source or destination point.

HyperCard and Guide (from OWL International) refer to points as *buttons*. Buttons can trigger the display of additional information, traverse a link, or activate a program. They can be represented by text or icons, or, as in HyperCard's case, they can even be invisible. (For more information on these two popular microcomputer hypertext systems, see the text box "What about Micros?" on page 242.)

A Bird's-Eye View

Hypertext systems are designed to let you browse through or quickly peruse associated nodes. While this feature is important, it can also be a problem, because in large hypertext databases, you can forget how or why you got to where you are. To alleviate this problem of disorientation,

continued

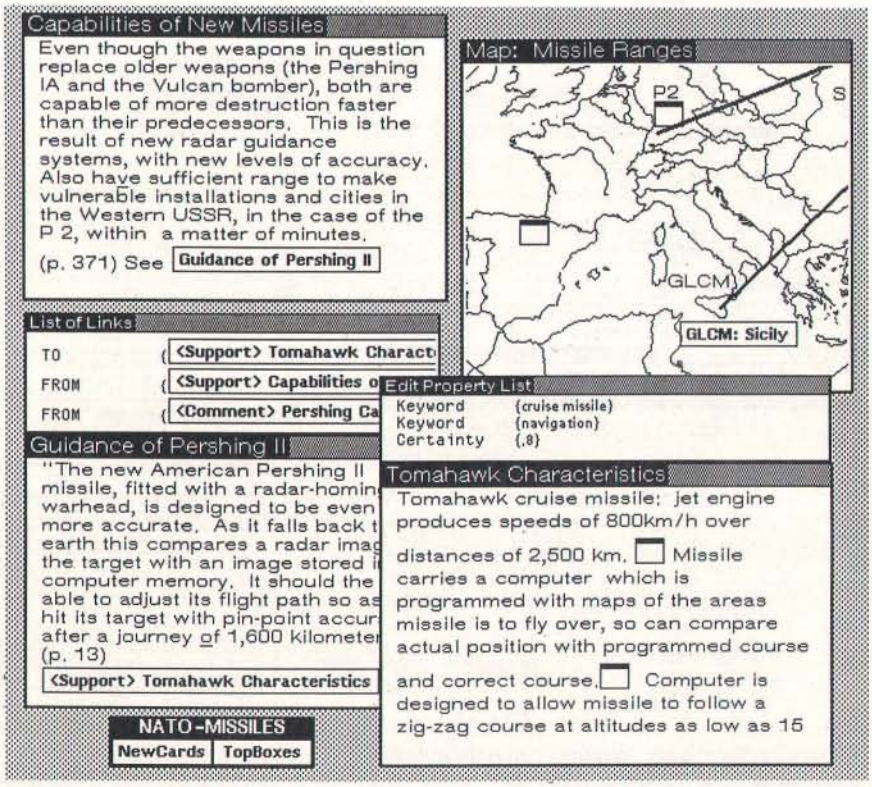


Figure 1: *NoteCards' display of multiple nodes. Note that the lower two nodes further clarify the topic introduced in the upper left node. (Graphics courtesy of Frank Halasz from MCC.)*

many systems provide a tool called a *graphical browser*.

The graphical browser is a node that contains a structural diagram of a network of nodes. Browsers usually supply a global or "zoom lens" map of the network. You can use the browser to orient yourself or to move directly to an area you're interested in by selecting that point on the screen with a mouse (see figure 2). While not all systems provide a graphical browser, most attempt to provide some type of overview system that helps you stay oriented in the network and visualize how information is linked. In large hypertext environments consisting of hundreds of nodes, browsing tools are especially important because it's so easy to get lost.

A browser can also help you decide on your next action. For example, Symbolics' Document Examiner, an on-line hypertext documentation system for Symbolics' Lisp machines, uses its browser, the Show Overview command, to help you quickly locate information. The command displays a tree-structured view of related nodes called *records*. By repeatedly using this command, you can get a feel for the context of the surrounding subject area and familiarize yourself with an area of interest.

A Variety of Tools

Depending on the particular product you use, commands and features may vary. Some hypertext products use a *path* to help you find your way through a network. Paths are default routes through a database; they guide or direct you through an ordered list of nodes.

When you follow a path, you are really letting the original author guide you to the next logical node, which relieves you of navigational duties. An example of a system that used paths is Textnet, created by Xerox PARC researcher Randall Trigg. It was designed as a multiuser literary-exchange system for the scientific community.

A viewing filter is another interesting hypertext tool. Basically, a filter does exactly what you'd think it would—it suppresses detail. By filtering the lower level of a node's contents, you can scan quickly through a network for the information you need.

Where the Products Are

The availability of windowing products and low-cost workstations with high-resolution graphics and storage options like CD-ROM have made the development of hypertext products more attractive. Fifteen or more systems are now used in universities and in research centers such as MCC and Xerox PARC, and commercial products are in development.

Hypertext systems vary significantly, depending on the applications and users they address. They are designed for either single-user or multiuser applications and are most commonly run on workstations, although more and more microcomputer applications are becoming available. HyperCard and Guide are perhaps the best known of the microcomputer products.

Typically, you'll find four types of hypertext systems: problem-resolution systems, on-line browsing systems, library or literary-exchange systems, and multipurpose systems. Depending on the type of system, the tools available may differ.

Systems designed primarily for problem resolution and network creation feature tools that help you define and analyze data through structured types of links and nodes. These systems help you organize elements in unstructured problems and feature commands that let you create and modify internal links between concepts quickly.

Most importantly, the tools can usually suppress details through viewing filters similar to those in Douglas Engelbart's On-Line System (NLS). (NLS is now used as a prototype for several collaborative-work projects at McDonnell-Douglas under the name Augment.) Such products might be used for systems analysis, idea processing, or authoring new applications. Augment and gIBIS are examples of systems designed to be problem-resolution work environments.

Just Browsing

Hypertext systems created primarily for browsing, such as CAI programs or on-line reference manuals, have fewer user tools for editing or link creation. These systems feature clear, understandable screen displays for presenting information and easy-to-operate browsing commands for perusing it. For example, the Document Examiner features a clean, book-like user interface and heuristic on-line string and keyword searches. You use these features to browse through the documentation, sometimes viewing information in several levels of detail.

Like many other browsing systems, the Document Examiner won't let you modify a reference manual, but you can keep a chronological record of recent searches or information of interest using the Bookmarks Pane. You can save personalized bookmarks and use a mouse to call bookmarks for fast retrieval. And

continued

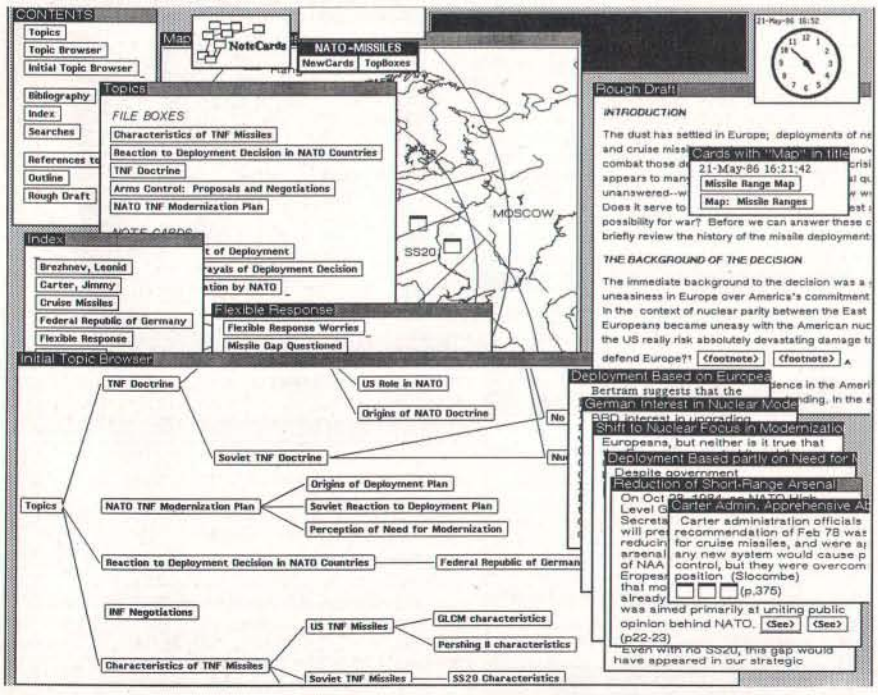


Figure 2: *NoteCards' displays can hold a significant amount of information. In this screen shot, a graphical browser (lower left) takes up much of the display space; a contents node, a topics node, and an index node are also displayed; and pages of relevant information are shown at the lower right. (Graphics courtesy of Frank Halasz from MCC.)*

Train with NRI for a high-paying career servicing computers.



Get started now by building this fully PC-compatible computer

NEW! Includes 20 meg hard disk!

Now you get it all . . . training for one of America's fastest-growing career opportunities . . . training to service all computers . . . training on a total computer system. Only NRI can give you the well-rounded training you need, because only NRI gives you a complete computer system . . . computer, monitor, floppy disk drive, hard disk drive, software, even test instruments like a DMM and logic probe to work with and keep. It all adds up to training that builds the knowledge and ability you need to succeed as a computer service specialist.

Get inside the newest Sanyo Computer—fully compatible with the IBM PC*

As an NRI student, you'll get total hands-on training as you actually build your own latest model Sanyo 880 Series computer from the keyboard up. It's fully compatible with the IBM PC and, best of all, it runs programs almost twice as fast as the PC. As you assemble the Sanyo 880, you'll perform demonstrations and experiments that will give you a total mastery of computer operation and servicing techniques. You'll do programming in BASIC language—even run and interpret essential diagnostic software.

Understanding you get only through experience

You need no previous knowledge to succeed with NRI. You start with the basics, rapidly building on the fundamentals of electronics with bite-size lessons. You perform hands-on experiments with your NRI Discovery Lab and then move on to master advanced concepts like digital logic, microprocessors, and computer memories.

Learn at home in your spare time

You train in your own home at your own convenience, backed at all times by your own NRI instructor and the entire NRI staff of educators and student service support people. They're always ready to give you guidance, follow your progress, and help you over the rough spots to keep you moving toward your goal.

Free 100-page catalog tells more . . . send today

Send the postage-paid reply card today for NRI's 100-page catalog that gives all the facts about computer training plus career training in robotics, data communications, TV/audio/video servicing, and many other fields. If the card is missing, write to NRI at the address below.



*IBM is a registered trademark of International Business Machines Corp.

NRI SCHOOLS
McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue
Washington, DC 20016

We'll give you tomorrow

What about Micros?

Want to test the hypertext waters and see what all the hoopla is about? Well, if you don't have a workstation handy, two of your primary options for microcomputer hypertext environments are OWL International's Guide and Apple's HyperCard.

Guide

Guide, which runs on both the Macintosh systems and the IBM PC AT and compatibles running Microsoft Windows, is a general-purpose hypertext tool (see "Guide" by William Hershey in the October 1987 BYTE). A few of the applications you can develop with it include on-line documentation, storyboards, E-mail, and CAI courseware.

Guide lets you create dynamic layered documents. The "guideline" network is organized in both a hierarchical and a nonhierarchical manner. To move about hierarchically, you use replacement buttons, which follow embedded menus. You can also use note buttons to bring up complementary information, such as a definition of a word or phrase. An inquiry button, which reveals the other buttons at your disposal, is also available.

To follow nonhierarchical links, you use the reference button, which will jump you to a new document or a different section of the document you're in.

Guide 2.0 uses an internal script language to let you execute external programs from your Guide document. You can also access and control videodisk players and modems via the serial port.

Last, but not least, a version called CD-Guide lets you create CD-ROM applications. OWL also markets a developer's toolkit so software developers can use Guide as a frame for an on-line help system.

HyperCard

HyperCard, available for the Mac II, the Mac Plus, and the Mac SE, is a personal organization tool and a simple database manager (see "HyperCard" by Gregg Williams in the December 1987 BYTE). It is also a commercial software developer's tool and is in use in some corporations as a front-end to the mainframe database.

This system uses screen-size cards (or window-size cards on the Mac II) organized into topic-related stacks to create simple databases. One card is displayed at a time. Touching your mouse cursor to a button on a card executes a script written in HyperTalk, HyperCard's programming language.

You can browse through already-created stacks (stackware), paint and type, author new cards and stacks, and write and edit HyperTalk scripts. (It's fairly easy to write scripts with HyperTalk because of its English-like syntax.)

HyperCard applications have been developed in many areas. Much stackware is available in the public domain.

Editor's note: *An assortment of public domain stacks can be found on BIX in the "stackware" area of the listings conference. See page 3 for more details.*

you can display a piece of documentation in an editor window while you write program code in another part of the screen.

The Document Examiner is particularly interesting because it's integrated into the software-development environment that it supports. It lets you scroll through the entire Symbolics software-development product documentation. The hypertext implementation of this documentation has an estimated 11,000 nodes and 23,000 links.

Another system designed for structured browsing by a large user base is ZOG, developed in 1972 at Carnegie-Mellon University and installed in 1982 as a computer-assisted information-management system on the USS *Carl Vinson*, a nuclear-powered aircraft carrier. Its applications included an on-line policy manual and an on-line maintenance manual with a videodisk attachment.

The commercial version of ZOG is KMS (Knowledge Management System) from Knowledge Systems. ZOG/KMS uses *frames* instead of nodes; frames are connected by two kinds of links, hierarchical and cross-referential. To help you navigate through a network, frames are formatted with a name, a title, a body, tree items linked to lower-level links, and special and command items. For simplicity and speed, ZOG and KMS use neither overlapping windows nor a graphical browser. The developers focused, instead, on fast text-search capabilities, multiuser support, and a minimal system-response time.

CD-ROM is particularly well suited as a database for hypertext browsing systems. One such system, being beta tested by Boeing for Knowledgeset Corp., is an on-line maintenance manual for the Boeing 757.

On-Line Libraries

Systems envisioned to support mammoth on-line libraries, documents, and document creation and critiquing, such as Ted Nelson's Xanadu, are the third major application group of current hypertext systems. These systems will probably feature complex, multiple structured back-ends, or databases, that can store everything from collaborative notes and research to E-mail, documents, and whole libraries.

Unfortunately, these systems will be difficult to implement because of the complexity and size of the task. Before such systems can become a reality, we must develop a standard user interface and a central storage system. In addition, we must be able to maintain the network such that all links are legitimate, copyrights and royalty issues are addressed, and the systems are fast enough to meet the needs of the general public.

Significant research in this area has been completed. Ted Nelson and his colleagues have worked on Xanadu for years. Randall Trigg's system, Textnet, let users store archival documents, making time-consuming research unnecessary. The system allowed collaborative writing and the critiquing of new documents. It featured two types of nodes—those containing text and those containing tables of contents of other nodes. The system defines over 80 types of links.


While many of the designs for the original on-line library systems had to be implemented from scratch, researchers at Bellcore are working on a hypertext-like front-end to connect existing on-line encyclopedias, libraries, and wire services. When completed, Telesophy, as the design is called, will let you access CD-ROM, recorded speech, and image archives. (Putting existing text onto a hypertext system is a challenge in itself. See the article "From Text to Hypertext" on page 247.)

Several well-known hypertext products function as general-purpose systems. You can customize these products to fit your application or simply to experiment with hypertext itself. NoteCards, HyperCard, and Guide are three such systems.

In the Driver's Seat

Regardless of the application, to use a hypertext system correctly, you must real-

continued

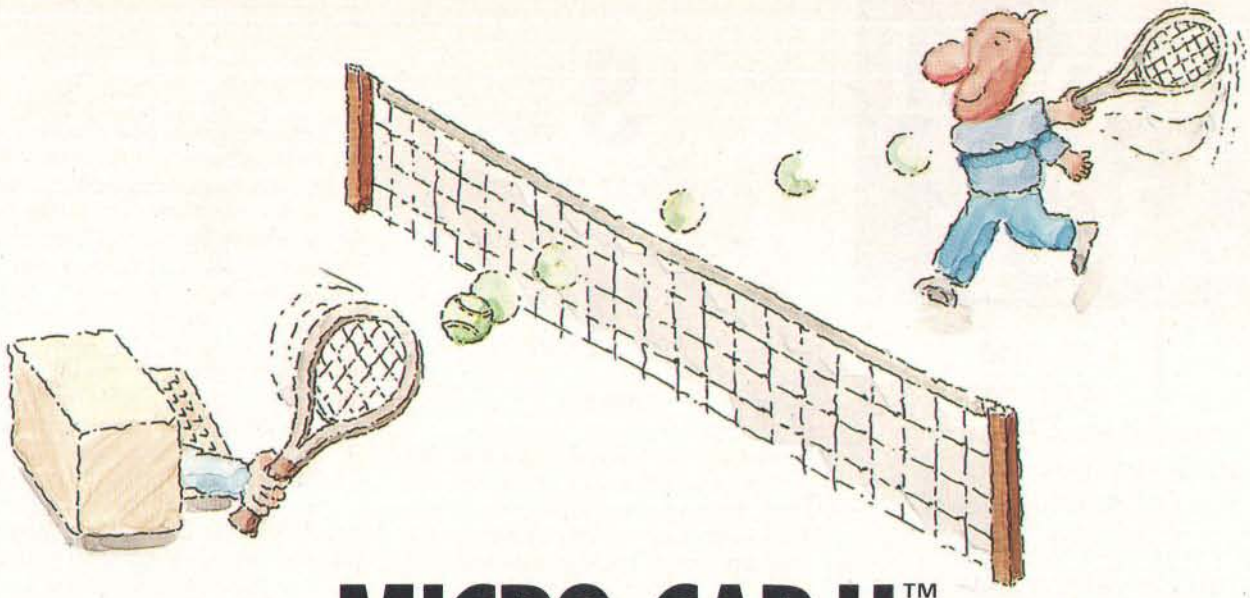


MICRO-CAP II.™

The CAE tool with fully interactive analog simulation for your PC.

Spectrum Software's MICRO-CAP II® is fast, powerful, and feature rich. This fully interactive, advanced electronic circuit analysis program helps engineers speed through analog problems right at their own PCs.


MICRO-CAP II, which is based on our original MICRO-CAP software, is a field-proven, second-generation program. But it's dramatically improved.



Schematic Editor

MICRO-CAP II has faster analysis routines. Better resolution and color. Larger libraries. All add up to a powerful, cost-effective CAE tool for your PC.

The program has a sophisticated integrated schematic editor with a pan capability. Just sketch and analyze. You can step



Transient Analysis


component values, and run worst-case scenarios—all interactively. And a 500-type* library of standard parts is at your fingertips for added flexiblity.

MICRO-CAP II is available for IBM® PCs and Macintosh.™ The IBM version is CGA, EGA, and Hercules® compatible and costs only $895 complete. An evaluation version is available for $100. Call or write today for our free brochure and demo disk. We'd like to tell you more about analog solutions in the fast lane.

- Integrated schematic editor
- Fast analysis routines
- High-resolution graphic output
- Standard parts library of 500* types

*IBM versions only.

- Transient, AC, DC, and FFT routines
- Op-amp and switch models
- Spec-sheet-to model converter*
- Printer and plotter* hard copy



AC Analysis

spectrum

1021 S. Wolfe Road, Dept. E
Sunnyvale, CA 94087
(408) 738-4387

MICRO-CAP II is a registered trademark of Spectrum Software.
Macintosh is a trademark of McIntosh Laboratory, Inc. and is being used with express permission of its owner.
Hercules is a registered trademark of Hercules Computer Technology
IBM is a registered trademark of International Business Machines, Inc.

Circle 288 on Reader Service Card

Some hypertext systems give you control when you may need guidance.

ize that you are in the driver's seat. Hypertext products won't think for you. They have no artificial intelligence. They might help you clarify and manage your thoughts or speed you through your research, but you are in control. Your value judgments determine what to include in the database, what type of links to create, and how to organize topics.

If you use an on-line hypertext documentation system, you decide which nodes to access and which links to follow. If you follow obscure paths, you may find it hard to locate information. Likewise, if your associative powers are weak and you create meaningless links, you may well end up with a worthless database. To put it simply, branching documents, like hypertext, require greater attention from both the system's users and its authors.

The Problem with Hypertext

Hypertext is an immature technology with many problems yet to resolve. Perhaps the most difficult part of creating a hypertext system is not building the user interface but creating sound underlying data models that can be maintained.

Since hypertext systems need to be maintained, systems designers should watch for uncontrolled linkages, which will become maintenance problems. Just as large software programs with many patches can turn into "spaghetti" code, so a hypertext system can turn into a morass of meaningless, obscure connections and references. Hypertext systems, therefore, must let you edit and delete links and nodes easily.

Another problem for some users is that some hypertext systems give you control when, in fact, you may need guidance. You may, for example, get lost following obscure links before you have a firm grip on the basics of the subject area you're trying to research.

When you're reading printed text, a good author will guide you through a network of interrelated, relevant points. With hypertext, you guide yourself and make your own associations—at the risk of taking the wrong turn and getting lost. Even experienced hypertext users can get lost in large hypertext networks. While graphical browsers may help, the lack of visual and spacial cues can still be disorienting. One of the valuable attributes of printed copy is that it has such cues.

Another issue is the difficulty of breaking a thought or a segment of information into a node. Themes in a document or thought can be very tightly interwoven, so much so that breaking the information into discrete nodes would be detrimental. Therefore, not all literature is suited for a hypertext literary system.

On a similar note, even though information may have discrete components, you may not be at the level where you perceive these units when you are constructing a hypertext application. In such cases, you might break information into nodes prematurely and at a later time realize that your logic was skewed. Then you would need to edit, rearrange, or retitle the information.

Unfortunately, such changes are not well-supported by all hypertext systems at this time. Virtual structures—nodes, links, or composites—would be useful in this situation. They would change dynamically when you add or delete nodes and links, depending on their descriptions. Virtual structures are similar to relational database views.

One last concern is that many hypertext systems are really only suited for new application development. Converting existing applications to hypertext is a difficult task because the file structures are so different.

Tremendous Potential

Augmenting human intellect with the help of hypertext is a grand vision indeed, one worth exploring. Hypertext applications, including interconnected writing, on-line libraries, and collaborative work environments, have tremendous potential. Current products are just the forerunners of more sophisticated applications, and we will probably see many hypertext features in mainstream software packages.

But hypertext is still in its infancy; implementation and design problems and standards issues must be resolved. Just as it takes a writer time to shape and mold a good short story, it takes time for the structure of new concepts to gel and for practical applications to emerge. But the concepts that underlie hypertext, whether they go by that name or another, will be with us for a long time to come. ■

Janet Fiderio is a BYTE technical editor. She can be reached on BIX as "jfiderio."

Capital Gain.

Time and again, you've heard it said, "To make money, you have to have money."

The truth is, you have to know how to save money before you can think about making more.

That's why more and more people are joining the Payroll Savings Plan to buy U.S. Savings Bonds. That way, a little is taken out of each paycheck automatically.

In no time, you'll have enough Bonds for a new car, your child's education, even a dream vacation.

Whatever you save for, Bonds are the safest, surest way to gain capital.

Take stock in America.

UNITED STATES SAVINGS BONDS

When you put part of your savings into U.S. Savings Bonds you're helping to build a brighter future for your country and for yourself.

Ad Council A public service of this publication and The Advertising Council.

MEET THE GUYS WHO CHEATED DIGITAL EQUIPMENT CORPORATION OUT OF $60,000,000.



With their software, you can do everything a $1000 DEC terminal does — on your PC — for a mere $245.

The suave and debonair gentlemen bandits who sit before you virtually invented DEC terminal emulation for the IBM personal computer.

To the uninitiated, what that means is this.

With their software, you can do everything a $1,000 DEC terminal can do — right on your own PC — for the paltry sum of only $245.

Has business been good for our heroes?

You bet: to the tune of 60,000 users, who would otherwise have blithely gone out and bought DEC terminals.

Does this make DEC happy? What do you think.

Heavy DEC Experience + Heavy IBM Experience = Perfect Emulation.

The product these wizards invented is VTERM/220. And the reason it's so good, frankly, is that nobody has more experience than they do in DEC emulation on a PC.

With VTERM/220, you can emulate DEC's VT220, VT102, VT101, VT100, and VT52 terminals.

Of course, there's emulation and then there's EMULATION. This is *TRUE EMULATION*. Complete! Comprehensive! Thorough! Fast! Accurate!

Installation's a snap. Setup is a simple full-screen operation. You can toggle between DOS and the terminal screen and put mainframe data directly into PC spreadsheet and data base products such as Lotus 1-2-3™, dBase™, and Multiplan™. And for file transfer, there's XMODEM, ASCII, Kermit or VTRANS, our own high-speed, error-correcting protocol.

One last word from the Robin Hoods of software.

Are there other terminal emulators?

Of course there are.

But, we invented DEC terminal emulation at Coefficient. We know the subtleties, the little features (and the big ones) that make an emulator a joy to use. And we've incorporated them all into VTERM/220.

Just ask any of our 60,000 users.

They paid us the highest compliment of all.

They chose our software over the real thing.

A free working copy of their software. *Free?* Yes, free.

There's only one way to experience the speed, power, and simplicity of VTERM/220. Try it.

- ❑ Send me a free, time-limited, full-blown working copy of VTERM/220, which is mine to keep.
- ❑ Send me a free, time-limited full-blown working copy of your new ❑VTERM/4105 or ❑VTERM/4208 Tektronix graphics terminal emulators.

Name _____

Title _____

Company _____

Address _____

_____

Telephone (___) _____

I am a ❑ user ❑ dealer.

Coefficient Systems Corporation

611 Broadway, New York, New York 10012

Voice: (212) 777-6707, ext. 421 Fax: (212) 228-3137

Telex: 6503156498 MCI Mailbox: CSC

PC is a registered trademark of IBM. DEC and VT are registered trademarks of Digital Equipment Corp.

BEST



NEW MINI PORTABLE BEST-286 LCD

- ☐ 10 MHZ 0 WAIT (12 MHZ Option)
- ☐ 512 K RAM
- ☐ 1.2 M. Floppy Drive
- ☐ 20 MB Hard Disk
- ☐ 165 W DC Fan Power Supply
- ☐ Serial & Parallel
- ☐ Non-Glare LCD Screen
- ☐ Super Twist
- ☐ Built-In Back Light
- ☐ 640 x 200 Dots (640 x 400 Optional)
- ☐ Weight 22 lbs
- ☐ Padded Soft Carry Bag
- ☐ Dimension 16" x 8" x 9"

$1650



BEST-286 DESK TOP

- ☐ 12 MHZ
- ☐ 512 K RAM (4MB RAM Expandable)
- ☐ 1.2 MB Floppy
- ☐ EGA Monitor
- ☐ EGA Card (Paradise Compatible)
- ☐ 20 MB H.D. (ST-125 28ms)
- ☐ Serial & Parallel Port
- ☐ 8 I/O Slots
- ☐ 200 W Ⓤ Power Supply
- ☐ Fujitsu 101 Enhanced Key Board

$1675

BEST-88 DESK TOP $ 605



BEST-286 PORTABLE

- ☐ 12 MHZ
- ☐ 512 K RAM
- ☐ One 1.2 MB Floppy Drive
- ☐ 7 Expension Slots
- ☐ 200 W DC Fan Power Supply
- ☐ 9"Amber Screen
- ☐ Mono or Color Graphic Card
- ☐ Serial & Parallel Port
- ☐ 84 Key Soft Tough Key Board

$1155

BEST-88 PORTABLE $845

386 SYSTEM

- ☐ 16 MHZ 80386 CPU 8/16MHZ
- ☐ 20 MHZ (Option)
- ☐ 80287 & 80387 Socket
- ☐ 1 M RAM
- ☐ One 32-bit, Five 16-bit, Two 8-bit Expansion Slots
- ☐ 1.2 M Floppy Drive
- ☐ WA2 or NCL Control Card
- ☐ 3.5" Drive (Option)
- ☐ Tower Chassis

$1995





BEST-286 LAPTOP

- ☐ 10 MHZ 0 Wait (12 MHZ Optional)
- ☐ 512 K RAM
- ☐ Two 1.44 M Floppy Drive
- ☐ Back Light Supertwist LCD
- ☐ 80 x 25, 640 x 400 Pixels Graphics
- ☐ Enhance 86-Key Key Board
- ☐ One Parallel Two Serial Port
- ☐ Dimension 16" x 11" x 3.5"
- ☐ RGB / Monochrome Monitor Port
- ☐ AC Adaptor
- ☐ 1.5 Hours Rechargeable Battery (Optional)
- ☐ 20 MB or 40 MB Hard Disk (Optional)
- ☐ Weight only 11 Lbs.

$1950

286 BABY MOTHER BOARD	
10 MHZ	$265
12 MHZ	$295
8088 Mother Board	$95
Mono Graphic	$55
Color Graphic	$55
80286 I/O Card	$59
200 W Power Supply	$79
150 W Power Supply	$55
Mono Monitor	$79
EGA PLUS 640 x 480 (Paradise Compatible)	$139
PORTABLE CASE	
9" Dual Amber Monitor 200 W Power Supply	$359
9"Dual Amber Monitor 150 W Power Supply	$339
LCD CASE	
640 x 200 Dots	$549
640 x 400 Dots	$699

DEALER CALL FOR DISCOUNT

BEST *COMPUTER INC.*
5017 Telegraph Road
Los Angeles, CA 90022

Tel: (213) 265-0900
Tech: (213) 265-0300
Fax: (213) 265-4234
Toll: (800) 634-7920
Outside Cal.

MON - SAT 9:00 - 6:00 PACIFIC TIME
PRICE ARE SUBJECT TO CHANGE WITHOUT NOTICE

Circle 32 on Reader Service Card (DEALERS: 33)


Credit Card Purchase Subject to Service Charge

From Text to Hypertext

Traditional tools like outline processors already incorporate many of hypertext's lessons

Mark Frisse

One reason hypertext is attracting so much attention these days is that more and more people are communicating via electronic media. Equipped with a modem and a microcomputer, you can spend a good bit of time reading electronic bulletin boards, composing electronic mail messages, contributing to group databases, and preparing large documents for printing and distribution.

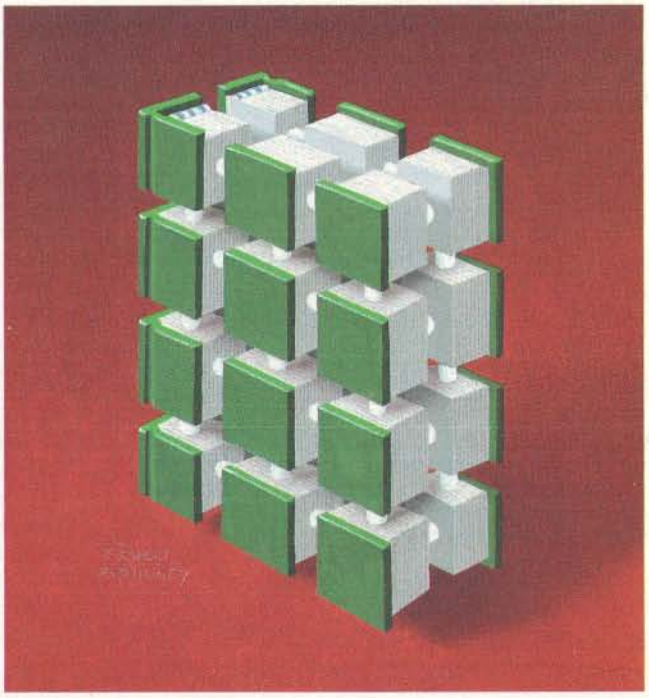

However, communicating through these channels means that you often have to integrate fragments of text into your personal computer archives. You can do this by placing text items as separate entries into a file system, which works as long as you don't have too many interdependent files to manage. Hypertext programs provide another alternative for information storage.

But hypertext can be used for more than creating simple databases of 3 by 5 cards. You can also use these programs to convert on-line versions of a printed document, such as a book, into hierarchical hypertext skeletons amenable to complex user-specified interactions. The examples included in this article come from converting part of a manuscript for a medical textbook into an experimental hypertext handbook using Xerox's NoteCards. You can follow them to learn some of the tips you'll need to turn text into hypertext.

Setting Up the Cards

Hypertext lets you rearrange text. In the early systems described by Theodor Nelson and Douglas Engelbart, the basic unit of text is a single character. New documents are created by linking characters from different documents. For instance, character strings from *Romeo and Juliet* could be merged with those from *Julius Caesar* to create a new play entitled *Caesar and Juliet*.

While this approach is exciting, it isn't widely adopted in hypertext design. A second approach, which is advocated by developers of systems such as Xerox's NoteCards and Apple's HyperCard, specifies a nondecomposable data structure, often called a card. You define cards both in terms of the types of data structures they support (e.g., text, bit-mapped graphics, and video) and the operations that can be performed on the data structures (e.g., text insertion and deletion).

To map a flat-text file onto a set of hypertext cards, you first decide how much text you want to place in each card and then create a program that will perform this transfer with minimal intervention. If your text file consists of a series of E-mail items, addresses, or telephone conversation summaries, you can easily fit

continued

ILLUSTRATION: ROBERT TINNEY © 1988

each item from the text file into a separate card. If an essay or other lengthy text file is not divided into logical sections, you usually must place an arbitrary number of paragraphs onto a card. You can write sentences into scrolling text fields, but this approach can detract from the power of the card metaphor.

But the organization of some flat-text files can't be characterized as either a series of discrete, unrelated paragraphs or a single lengthy text file. The medical-handbook text files used in these examples are hierarchically structured documents. A specific set of identifiers—either Roman numerals, uppercase letters, integers, or lowercase letters—pinpoints each level of the hierarchy (see figure 1). Because the text between the identifiers consists of only a few sentences or paragraphs each, it's appropriate to use these identifiers as card delimiters (see figure 2). In text files with many sentences between delimiters, you might have to obtain a line or paragraph count to decide when to start a new card.

II. Pathophysiologic mechanisms. Respiratory failure can be separated into oxygenation failure and ventilation failure. While the two may occur together, it is useful to separate them to understand their pathophysiology and management. In addition, critical tissue hypoxia may result from nonpulmonary factors that influence oxygen delivery, and these must also be considered in comprehensive treatment.

A. Oxygenation failure. The transfer of oxygen from alveolar air to pulmonary capillary blood is affected by the partial pressure of oxygen in the alveolus (PAO2), the diffusion of oxygen across the alveolar-capillary membrane, and the matching of alveolar ventilation to capillary perfusion. The five mechanisms that may lead to a low arterial oxygen tension (PaO2) are low inspired oxygen tension, alveolar hypoventilation, diffusion impairment, mismatch of ventilation to perfusion, and right-to-left shunt. The goal of oxygen therapy is to relieve critical hypoxemia. Although clinical criteria are important, serial ABGs are crucial to plan and evaluate treatment.

1. **Response to oxygen administration** depends on the underlying pathophysiology (see sec. II.A). Three patterns are common.

   a. **Hypoxemia** caused by mild to moderate lung disorders. This pattern is typical of flu and asthma.

   b. **Hypoxemia** caused by severe lung disorders is more refractory to supplemental oxygen, and potentially toxic concentrations are often typical of severe disorders.

Figure 1: *A representative section of a medical handbook. The identifiers are (in order) Roman numerals, uppercase letters, integers, and lowercase letters.*

S1.II. PHYSIOLOGIC MECHANISMS

II. Physiologic mechanisms. Respiratory failure can be separated into oxygenation failure and ventilation failure. While the two may occur together, it is useful to separate them to understand their pathophysiology and management. In addition, critical tissue hypoxia may result from nonpulmonary factors that influence oxygen delivery, and these must also be considered in comprehensive treatment.

S1.II.A. OXYGENATION FAILURE. THE TRANSFER OF OXYGEN

S1.II.B. VENTILATION FAILURE IS PRESENT WHEN THE

S1.II.C. OXYGEN DELIVERY AND TISSUE OXYGENATION

S1.II.D. INSPIRATORY MUSCLE FATIGUE OCCURS WHEN THE

Figure 2: *A hypertext card from the same section of the medical handbook. The card contains only the text delimited by the identifier II and the identifier* A. *The titles of other child cards denoted by uppercase* B, C, *and* D *are visible on the hypertext card but not on the page displayed in figure 1.*

Making the Connections

Hypertext's power resides in the links that weave isolated cards into a unique graph-structured fabric. When you transform a flat-text file into hypertext, you must recognize two distinct classes of links. The first, structural links, enforces the mapping between the conventional document and the hypertext skeleton. These links must be generated by programs, text parsers, that convert conventional text into hypertext. The second class, user-defined links, lets you create new, nonsequential paths through text.

Each collection of cards in a hypertext document has some underlying order maintained by structural links (see figure 3). The order of cards in a random-file hypertext database (e.g., recipes, phone numbers, and so on) can be arbitrary and quickly modified through standard sorting techniques. The order of cards representing a lengthy essay is sequential and usually static. E-mail stacks can be ordered by topic, and, within a topic, by date of receipt. In a hierarchically structured document like the medical handbook, card order resembles a tree. In this case, the limbs of the tree declare the structural relationships between cards.

A text-parsing program converts flat-text files into hypertext documents. The underlying structure of the flat-text file determines the text parser's complexity and function.

For example, database parsers can look for new record identifiers. These identifiers signal the system to create a new card and to copy the new record's contents to the new card. Parsers for essays can simply allocate to each card in turn as many paragraphs of text as will conveniently fit on each card. Parsers for mail systems, on the other hand, might require a list of acceptable identifiers and, for each topic, a pointer to the last card filed under the identifier. Parsers for hierarchical documents can use an ordered list of identifiers to create a hierarchical hypertext consisting only of cards and structural links.

For each possible set of identifiers, there exists only a limited number of "acceptable" tokens that lead to creation of a new card and appropriate links. For example, if you were placing text from a section labeled "V.C.2.a." into a card,

the acceptable identifiers would be any member of the set VI, D, 3, b (see figure 4). If the identifier read was D, the current subtree "C.2.a." would be popped, a new card of level "VI.D." would be instantiated, and a structural link between card "VI." and card "VI.D." would be created. Defining card identifiers appropriately is critical for simple, rapid parsing of hierarchical documents.

Although most flat-text file parsers employ ad hoc grammars, the parsing process will be simplified if document-definition language standards become more widespread. One of these, the Standard Generalized Markup Language (SGML), appears particularly promising. SGML emphasizes document structure over document appearance. For example, the standard might identify a string as a "section heading," but it would not make any statements about the section heading's font or size.

SGML also lets individuals or groups define logical structures for new document types. This flexibility increases the likelihood for standards in specialized and highly technical publishing niches. Finally, the interest shown in SGML by the federal government has encouraged the development of a number of tools for authoring, revision, and document parsing. Conceivably, these tools can be used to simplify the conversion of text already in electronic form into personal or community hypertext.

Finding the Right Card

Creating a hypertext from a flat-text file is rather simple. You exploit document identifiers to parse the file and create the new data structure. Developing the software that lets you access appropriate portions of a hypertext document is much more difficult. Most hypertexts let you access cards through several methods.

First, the initial cards in many hypertext documents contain a brief table of contents. This method provides you with an overview of the overall organization of the hypertext document. Browsers are another way you can find a card. They are useful when you want to peruse small lists or card networks. String pattern-matching is the third card-access method. It's useful when you think that the search will retrieve a small number of useful cards and very few, if any, useless cards.

Unfortunately, there are many situations where these methods are inadequate. The table of contents method fails when a card can be filed under any one of several categories, which requires you to

continued

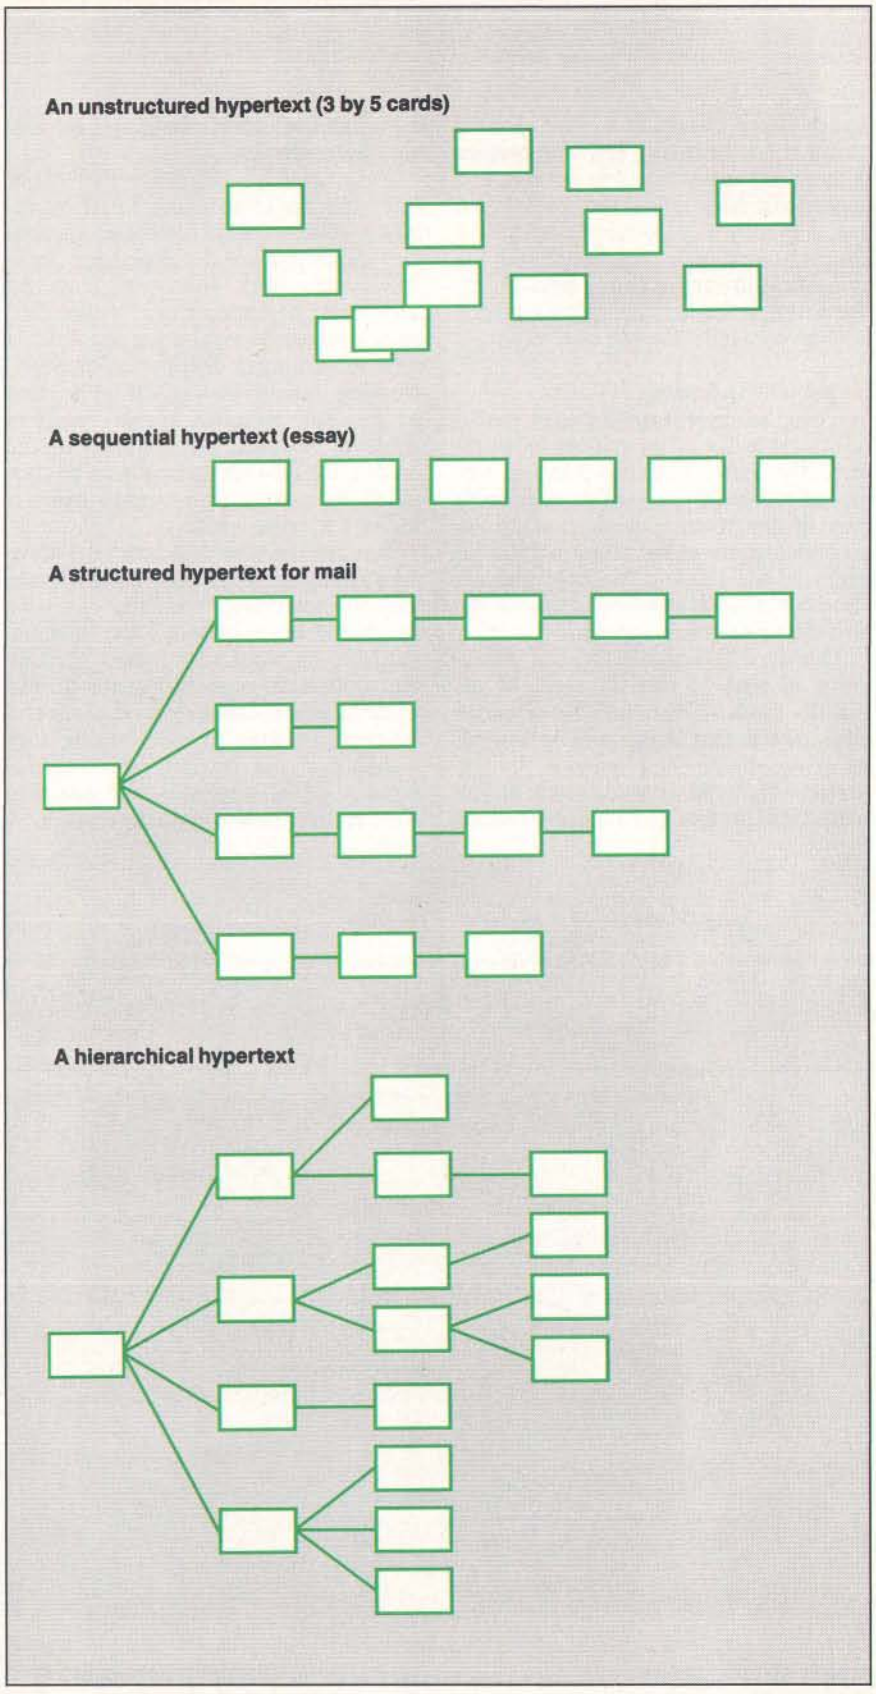


Figure 3: *Hypertext file-card arrangements. Some applications, like unsorted recipes or telephone logs, require only a random ordering. Long essays generally require a sequential ordering. Mail files resemble trees with a strong sequential component. Complex documents in outline format require hierarchical data structures.*

search many categories to find desired information. Browsing can be laborious if there are many cards to peruse, and pattern matching fails if the desired card uses a synonym (poor recall) or if there are many unwanted cards containing the same search string (poor precision). Therefore, you need alternative methods for both card indexing and card retrieval.

Hypertext Indexing

You can, however, exploit two powerful document-indexing techniques in hypertext. The first, indexing using a controlled vocabulary, classifies each document by one or more members of a finite set of descriptor terms. The National Library of Medicine's Medical Subject Headings (MeSH) system is one of the best examples of this approach.

This 15,000-term hierarchical vocabulary is used to classify most of the world's medical literature. Its principal advantage is that it is a widely agreed-upon vocabulary implemented by experts in the field of medical classification. This ensures that properly trained users, and effective programs, retrieve equivalent queries.

Unfortunately, there are two major shortcomings to indexing small hypertext documents with controlled-vocabulary terms that are developed for larger documents. First, you must create the vocabulary so that each card is classified by at least one term, and you must have a relatively uniform distribution of classification terms among all hypertext cards. Both criteria are difficult to achieve. Second, the contents of the cards using the index terms must be classified manually, a prohibitive expense for most hypertext authors.

You can use a second powerful document-indexing technique, classification with an uncontrolled vocabulary, when a structured body of index terms is not available or when cost factors prohibit the controlled-vocabulary method. The uncontrolled-vocabulary method creates inverted indexes by eliminating stop words (e.g., *the*, *are*, *a*), removing suffixes (e.g., -s, -ing, -ed), and retaining word roots as indexes into the text file.

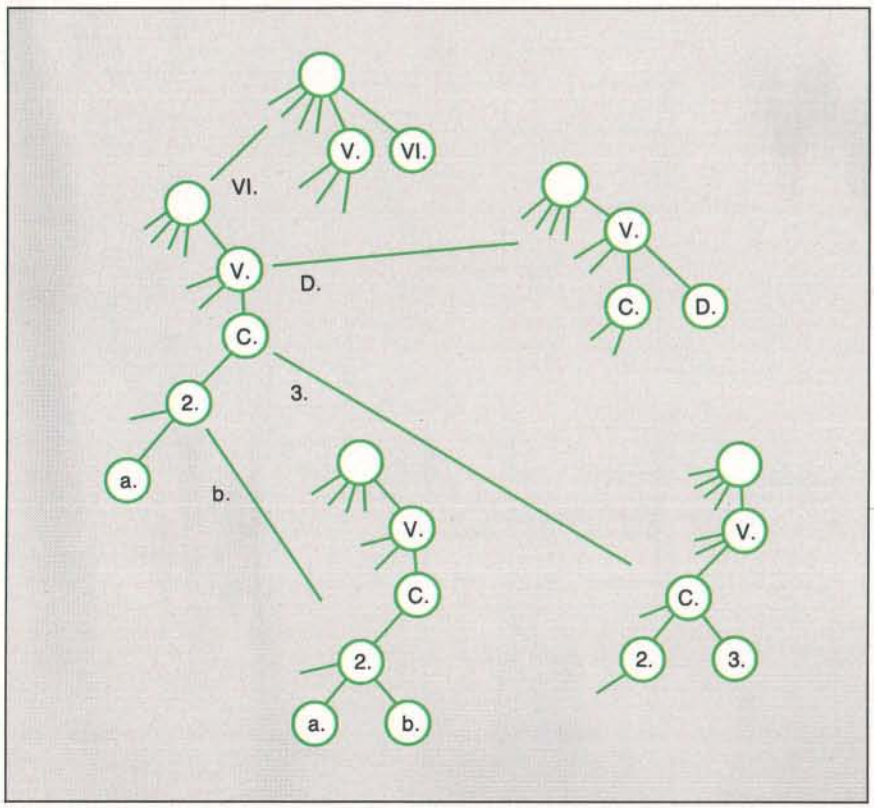


Figure 4: *The characters preceding each section of the handbook serve both as delimiters to assigning text to a card and as identifiers to control the parsing and creation of links between cards. The leftmost tree is a part of the subtree present when the active card is V.C.2.a. The arrows depict each possible new card identifier. The rightmost trees depict the trees that would result from the detection of each legal identifier.*

For example, the sentence "The lungs are inflated" creates the index terms "lung" and "inflate." In general, the index file will be about one half the size of the text file. Proponents of this approach argue that, for most domains, it is as effective to retrieve information this way as it is via controlled vocabularies. Moreover, the software needed to create these indexes is readily available. But for many applications, the space required by the indexes and the problems that occur because of misspellings and synonyms offset the benefits of indexing with an uncontrolled vocabulary.

Making the Best Match

Adding information-retrieval approaches commonly used for larger documents could make hypertext systems more powerful and responsive. How you implement these approaches depends on the structure of the underlying hypertext. In unstructured, highly modular hypertext (e.g., unrelated cards with significant amounts of free text on each card), the hypertext is really just a "folder" containing many tiny documents. In these settings, you don't need to enhance traditional free-text document-retrieval techniques. If, on the other hand, you have created a highly structured hypertext, you must exploit retrieval techniques.

In the hypertext medical handbook prototype, the power of uncontrolled-vocabulary indexing techniques that measure card content was combined with heuristic card-weight propagation functions that reflect card context. This was done so that the user could identify the "best" set of cards for browsing about a requested topic. The system doesn't try to identify a card with "the answer" to the query.

For example, if a hierarchically structured hypertext contains several potentially useful sibling cards whose parent doesn't contain text relevant to the query, you could design the system so it presents you with a sequential list of the sibling cards (see figure 5). As an alternative, it could just show you the parent card and provide a note on the card saying several of the children appear to contain useful information (see figure 6).

The good point about the second option—seeing the parent card—is that it conveys additional information concerning the context in which the various child cards are stored. This means you can better judge their relevance.

There are three basic steps to implementing this approach. First, define a utility function that calculates a card's intrinsic "utility" based on the query

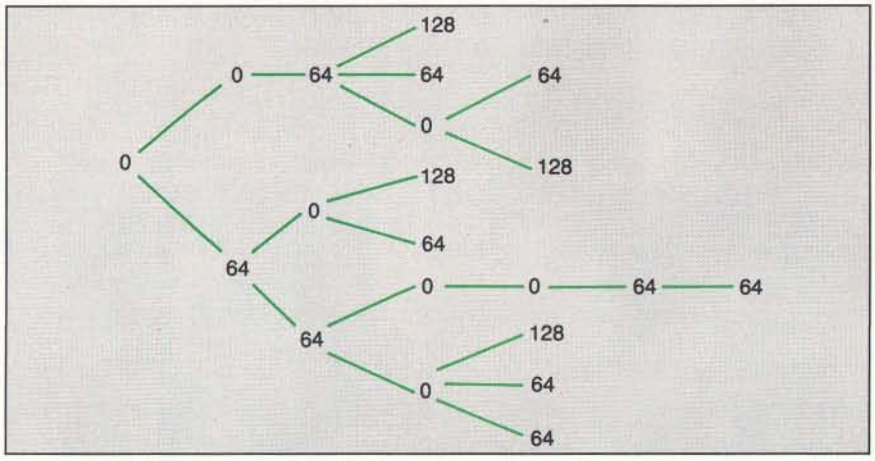


Figure 5: *This graph displays only the intrinsic card utilities resulting from a query. Cards with positive values contain one or more terms in common with the query terms. Cards with a value of 0 do not contain any of the query terms. The graph displays only structural links between cards.*

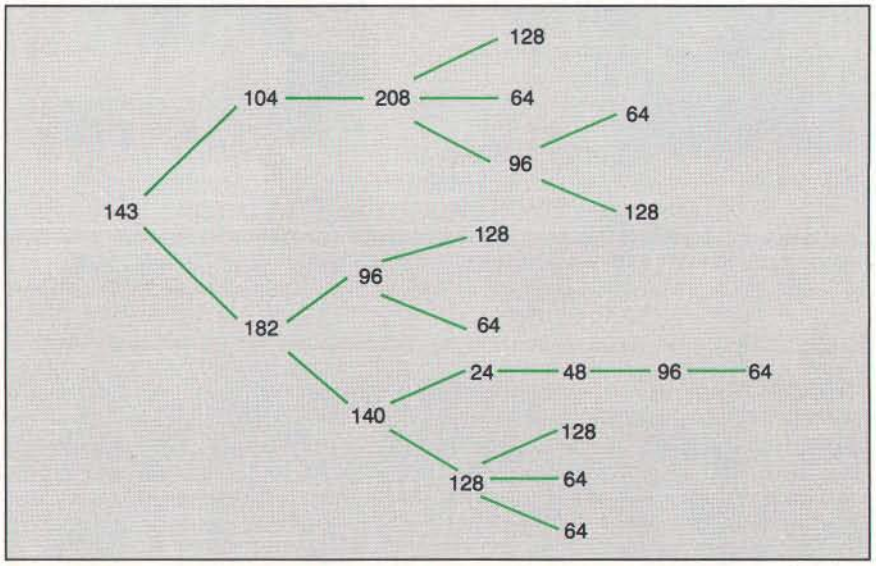


Figure 6: *Here, a graph displays the total card weights, which are the sum of the intrinsic card utilities based on card content and the propagated weights based on card context. Even in this simulation, the propagation of weights has a marked impact on the ranking of cards and suggests that the lower subtree might prove to be a good candidate for browsing.*

terms and card contents. Then, identify a method that propagates these weights to neighboring cards so that cards with contextual information are recognized. Finally, use both the intrinsic utility and the propagated weights to identify which cards should be considered candidates for graphical browsing. Let's analyze each of these steps in greater detail.

Weights and Measures

A card's utility is due in part to the correspondence between terms within the card and the query terms stipulated by the user. This component of card utility is called the *intrinsic weight*, and the value can be calculated using a modification of Salton's well-known algorithm.

This algorithm assigns term weights to cards as a function both of the frequency of occurrence of the term in the entire search space and of the number of cards containing the term. The algorithm assigns a higher weight to cards containing infrequently used terms and also to cards containing several occurrences of a term that is not found in many other

continued

Circle 5 on Reader Service Card

The best
Modula-2
compilers for PCs and compatibles

Taylor Modula-2

The professional high-performance compiler for PCs: the fastest compiler in the world!

* **unrivalled speed of compilation**
  7,000–10,000 lines per minute (80286, 8 MHz).
* **excellent code**
  Mini-computer standard global optimisation. Code performs 1580 Dhrystone tests per second! (80286,8 MHz)
* **ultra-compact**
  high code density and a library of unrivalled compactness (23 modules in a total of 13K!)
* **completely standard implementation**
  Follows N. Wirth's standard for Modula-2. BIOS independent – uses MS/PC DOS exclusively.
* **easy to use**
  Straightforward user interface. Comprehensive documentation for system programmers.
* **Guarantee and support**
  One year guarantee. Maintenance contracts available. Swiss quality product.

TaylorModula-2 $ 900
Demo disk $ 10

M2SDS $ 99

The professional Modula-2 software development system M2SDS comprises the following features in an easy-to-use window environment:

– modern, syntax-driven editor
– fast compiler
– linker producing EXE programs
– unique library manager
– comprehensive standard library

There are a vast number of tools, toolboxes, demo disks, public domain programs and books for M2SDS – probably more than for any other development system! M2SDS was used for the writing of the Farsight integrated business software package!

Demo disks $ 10

JPI-Modula-2 $ 149

A reasonably-priced Modula-2 compiler with a configurable environment, integrated Make function and highly optimising code generator.

We have Modula-2 compilers for the Amiga, HP9000/300, IBM/370, OS-9 and Sun. The list is constantly growing!

Texas residents add 6% sales tax. International Orders add $ 20 shipping.

The Modula-2 people:

INTERFACE TECHNOLOGIES
3336 Richmond, Suite 323
Houston, TX 77098-9990 (713) 523 8422

Dealer inquiries welcome

International
Austria: 0222/4545010
Belgium: 071/366133
France: 20822662
Italy: 02/405174
Scandinavia: +45/3/512014
Switzerland: 01/9455432
United Kingdom: 01/6567333
Germany: 02983/8337;
0731/26932;
0821/85737;
04106/3998;
0531/347121

A. + L. Meier-Vogt
Im Späten 23
CH-8906 Bonstetten/ZH
Switzerland
Tel. (41)(1) 700 30 37

WAREHOUSE SALE

Order These Back Issues of BYTE and Popular Computing Before They're Gone Forever!

BYTE

Limited Quantities — Order Now!

	1979	1980	1981	1982	1983	1984	1985
January	■	■	■		■	■	■
February	■	■	■	■	■	■	■
March		■		■	■	■	■
April	■	■	■	■	■	■	■
May	■	■		■	■	■	■
June	■	■		■	■	■	■
July	■	■		■	■	■	
August	■			■		■	■
September	■	■		■	■	■	■
October	■	■	■	■	■	■	■
November	■		■	■	■	■	■
December	■	■	■	■	■	■	■
Inside the IBM PCs							■

$4.00 U.S. includes shipping and handling
$5.00 foreign includes shipping and handling

Available Issues ■

Popular Computing

Limited Quantities — Order Now!

	1982	1983	1984	1985
January	■	■	■	■
February	■	■	■	■
March	■	■	■	■
April	■	■	■	■
May	■	■	■	
June	■	■	■	■
July	■	■	■	■
August	■	■	■	
September	■	■	■	■
October		■	■	■
November	■			
December	■			■
Special Guide to Computers			■	

$3.00 U.S. includes shipping and handling
$4.00 foreign includes shipping and handling

Special Bound Copies of BYTE

Volume I, Part 1— September 1975 through April 1976
Volume I, Part 2— May 1976 through December 1976
Volume II, Part 1— January 1977 through June 1977
Volume III, Part 1— January 1978 through June 1978
Volume III, Part 2— July 1978 through December 1978



$9.95 U.S. includes shipping and handling
$11.95 foreign includes shipping and handling

Please indicate which issues you would like by checking (√) the boxes.

Send requests with payments to:

BYTE Back Issues
One Phoenix Mill Lane
Peterborough, NH 03458
(603) 924-9281

☐ Check enclosed. Payments from foreign countries must be made in U.S. funds payable at a U.S. bank.

Charge: ☐ VISA ☐ MasterCard

Name _____

Address _____

City _____ State _____ Zip _____

Card # _____

Exp. Date _____

Signature _____

Postcode _____ City _____

Country _____

BYTE

cards. The formula is as follows:

$$weight_{ij} = k \times freq_{ij} \times (\log(n) - \log(docfreq_j) + 1)$$

where $weight_{ij}$ is the weight component of card i due to term j; k is a constant; $freq_{ij}$ is the number of occurrences of term j in card i; n is the number of cards in the collection; and $docfreq_j$ is the number of cards containing the term j.

A card's utility also depends on its relationship to other cards. The term *extrinsic weight* describes the component of a card's total weight contributed by propagation from neighboring cards. In the hypertext medical handbook, a card's extrinsic-weight component depends on the weights of its immediate descendant cards. The following formula represents this dependency:

$$totalweight_i = \sum_j weight_{ij} + \frac{1}{y} \sum_d totalweight_d$$

where y is the number of immediate descendants of card i, and d is an immediate descendant of card i.

This propagation function is called recursively from the leaf cards to the root card. A graphical display of the search subtree and card weights (see figure 6) serves as a road map for browsing.

Term-weight assignment and propagation allow for cards to be ranked on the basis of an estimate of their utility to the user. In general, you hope for a ranking that will produce a short list of cards that are distributed throughout the hypertext. In this situation, you can quickly explore various subtrees, jumping from one location to another. You can, however, retrieve more aberrant lists. Consider, for example, the common case where the second-highest-ranking card is the parent of the highest-ranking card.

Presenting both cards on the browsing candidate list may suggest that the cards represent two markedly different avenues for browsing rather than the actual state of term-weight predominance in a single subtree. As an alternative, you could remove the highest-ranking child card and display only the parent, under the assumption that the increased context provided by the latter outweighs the decrease in weight due to card content. However, if this process is applied recursively, you ultimately will arrive at a card list containing only the root of the tree. You can apply several heuristics to manage these aberrant cases. One of the most useful heuristics halts the replacement process when the replacing parent card is of some fractional weight of the original highest-ranking card.

In addition to the obvious traditional problems associated with uncontrolled indexing vocabularies and full-text document retrieval, the approach used throughout this article is limited in many other ways. First, the propagation function does not take into account graphs, cycles, and link types with different semantics. Second, the current approach can't exploit user feedback in any meaningful way.

It would be desirable to update card weights dynamically on the basis of user responses to the card's contents. Unfortunately, most alternative approaches to this problem (e.g., Bayesian updating or Connectionism) appear too impractical for routine use.

Learning Its Lessons

Many points about creating and using hypertext are already clear. First, you have to distinguish hypertext programs from hypertext documents. You can use hypertext programs for tasks ranging from replicating mundane 3-by-5 card files to creating complex hypertext documents consisting of multiple interrelated cards and links. This distinction is crucial, since only card content is important for simple 3-by-5 card files, but both content and context are important when creating true hypertext.

Second, it's easy to build hypertexts and add links incrementally, but it's difficult to use hypertext effectively. Even with extensive search capabilities and graphical browsers, it's not always possible to retrieve desired information or to avoid getting lost in a hypertext graph.

Third, the computational complexity of information-retrieval algorithms suggests that alternative computer architectures might be more useful.

Finally, it's clear that many problems in the field are unresolved. Will effective updating and revisions require that links be bidirectional? Can we arrive at a standardized set of hypertext card types (e.g., text, graphics, sound, and video)? Will hypertext systems provide a true advantage over other media?

Traditional tools like outline processors have already incorporated many of hypertext's lessons. Similar innovations will affect E-mail, collaborative work tools, and others in the future. ■

Mark Frisse is an assistant professor of medicine and medical informatics at the Washington University School of Medicine in St. Louis, Missouri. He can be reached on BIX as "editors."

Circle 6 on Reader Service Card

Tools and Toolboxes
Modula-2

Applications Generator
Amadeus $ 395
Generate Modula-2 programs directly from your own input, and save yourself hours of coding!

Graphics
M2Graph* $ 65
Controls Hercules cards in Modula-2.
M2EGA* $ 65
Controls EGA cards in Modula-2.
Modula Graphics Toolbox I* $ 112
A collection of extremely fast graphics routines for CGA cards written in Modula-2.
Modula Graphics Toolbox II* $ 188
Comprehensive package of Modula-2 procedures for all currently available graphics cards. Includes grahics window system, font generator, sprite handler, mouse driver, maths routines, as well as pie chart, histogram and line graph functions etc.

Input/Output
LCR-Window Manager* $ 133
Fast, compact window system.
M2Windows* $ 188
Fast, professional window system. Small, high-performance library with integrated menu system and simple mask generator.
Modula Mask & Menu Generator* $ 360
Development system for creating masks and menus in Modula-2 source code. Mask, menu and frame editor. Supports all colours and attributes.

Other Tools
M2 Prolib $ 495
The professional library
B-Tree ISAM $ 290
Ultra fast database
Pascal-Modula Converter $ 59
Converts Turbo-Pascal to Modula-2.
RTA-Utility Disk $ 30
2–10x faster I/O, extended MathLib.
EMS-Utilities* $ 188
Make full use of your Megabytes of memory expansion.
M2IEEE-Interface* $ 144
Modula-2 interface to National Instruments IEEE Interface.

This is only a small selection from our comprehensive list of tools for Modula-2. Demo disks are available for products marked with an asterisk. Send $ 10 for three demo disks, $ 20 for seven. There is also a wide choice of books and literature on Modula-2.

We have Modula-2 compilers from Logitech, HE, [illegible]

The Modula-2 people:
INTERFACE TECHNOLOGIES
3336 Richmond, Suite 323
Houston, TX 77098-9990 (713) 523 8422
Dealer inquiries welcome

International
Austria: 0222/4545010
Belgium: 071/366133
France: 20822662
Italy: 02/405174
Scandinavia: +45/3/512014
Switzerland: 01/9455432
United Kingdom: 01/6567333
Germany: 02983/8337; 0731/26932; 0821/85737; 04106/3998; 0531/347121

A. + L. Meier-Vogt
Im Späten 23
CH-8906 Bonstetten/ZH
Switzerland
Tel. (41)(1) 700 30 37

For Anyone Who Considers Code A Four Letter Word.

If you think writing program code is a dirty business, we have something to help you clean up your act.

It's called Matrix Layout. Layout lets you create programs that do exactly what you want, quickly and easily—without writing a single line of code. Layout does it for you automatically, in your choice of Turbo Pascal, Turbo C, Microsoft C, QuickBasic or Lattice C. And if you're not a programmer, you can even create programs that are ready-to-run.

As the first true CASE (Computer Aided Software Engineering) development tool for the PC, Layout lets you write your programs simply by drawing an icon-based flow chart. They'll have windows, icons, menus, buttons, dialog boxes, and beautiful graphics and text. Like the Macintosh and the OS/2 Presentation Manager.

And because Layout is so efficient, everything you create will work incredibly fast, even on standard PC's with 256K and only one disk drive. To top it off, all your programs will feature Layout's automatic mouse support, sophisticated Hypertext functions, and decision handling.


The full Layout package also comes with three additional programs:

Matrix Paint is a professional paint program that comes with a full palette of high-powered graphics tools, plus scanner support. And any picture or symbol that you draw or scan into Paint can be included in your program.



1. Draw a flow-chart.
2. Matrix Layout creates the program code.
3. Your program is complete.





Matrix Helpmaker allows you to include an electronic manual in all your programs. Context-sensitive help windows, a table of contents, indexing, and the convenience of Hypertext functionality can now become a part of everything you create.

Finally, Matrix Desktop gives you the ability to organize your files and disks in a very Macintosh-like easy to see, easy to use way.

What's the cost? At just $149.95 for the entire package, Layout speaks in a language you'll love to hear. Especially with our free customer support, no copy protection, and a 30-day, money-back guarantee.

Video Tape Offer

Our new demonstration videotape graphically illustrates how the many features of Matrix Layout will make a difference in your life. Call **1-800-533-5644** and order your VHS copy now (just $9.95 for shipping and handling, credited against your purchase). In Massachussetts, call (617) 567-0037.

Do it today. Because once you see what Layout can do for you, we think you'll swear by it.

MATRIX
LAYOUT

Circle 290 on Reader Service Card

Matrix Software Technology Corporation • One Massachussetts Technology Center • Harborside Drive • Boston, MA 02128 • (617) 567-0037

Matrix Software/UK • Plymouth, England • 796-363 • Matrix Software/Belgium • Geldenaaksebaan 476 • 3030 Leuven • 016202064

The following are registered and unregistered trademarks of the companies listed: Matrix Layout, Matrix Paint, Matrix Helpmaker, Matrix Desktop, Matrix Software Technology Corporation; Macintosh, Apple Computer, Inc.; OS/2 Presentation Manager, International Business Machines Corporation.


The Right Tool for the Job

Even the systems design process falls within the realm of hypertext

Michael L. Begeman and Jeff Conklin

Hypertext is an ideal model for the systems design process. We have been working on a hypertext project, the Design Journal, to provide a systems design team with a medium in which all of their work can be computer-mediated and supported. This includes such traditional documents as requirements, specifications, high-level design, and the design document itself; it also includes scenarios, design reviews, interviews with users, designers' early notes and sketches, design decisions and rationale, internal design constraints, meeting minutes, and so on.

The Design Journal places particular emphasis on capturing the *design rationale* as the center around which to integrate all the other documentation. This rationale includes design problems, alternative resolutions (including those later rejected), trade-off analyses among these alternatives, and a record of the tentative and firm commitments made during problem resolution. We have built a running prototype of the Design Journal; it's based on the Issue-Based Information Systems (IBIS) method and is called gIBIS (graphical IBIS).

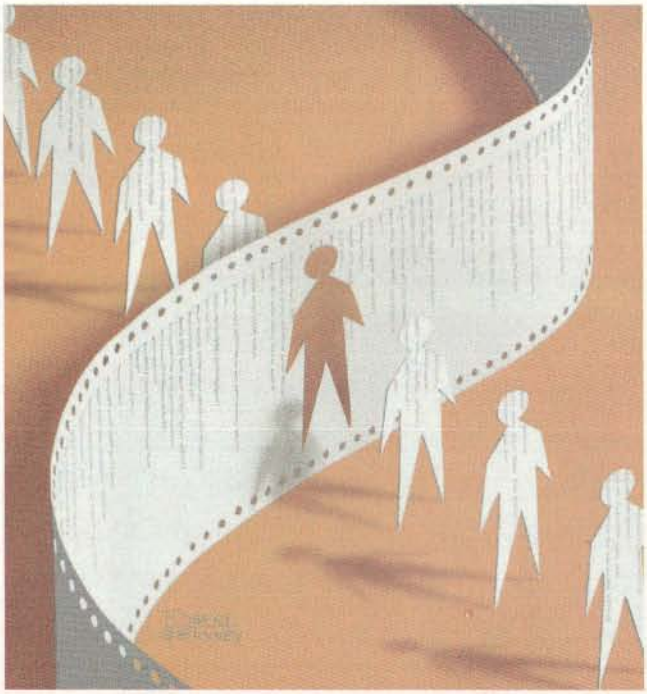

The IBIS Method

The IBIS method was developed by Horst Rittel (see reference 1) and is based on the principle that the design process for complex problems is fundamentally a conversation among the stakeholders (i.e., designers, customers, and implementers) in which they pool their respective expertise and viewpoints to resolve design *issues*. Any problem, concern, or question can be an issue and may require discussion (if not agreement) for the design to proceed. In the IBIS model, this argumentation constitutes the design process.

IBIS focuses on articulating the key *Issues* in the design problem. Each Issue can have many *Positions*. A Position is a statement or assertion that responds to the Issue. Often Positions are mutually exclusive, but they needn't be. Each Position, in turn, can have one or more *Arguments* to support or object to it. Thus, each separate Issue is the root of a (possibly empty) tree; its children are Positions, and their children are Arguments.

There are nine kinds of links in IBIS. For example, a Position *Responds-to* an Issue, and this is the only place you can use the Responds-to link. An Argument either *Supports* or *Objects-to* its Position. Issues can *Generalize* or *Specialize* other Issues, and they can also *Question* or be *Suggested-by* other Issues, Positions, and Arguments. (The remaining two links are *Replaces* and *Other*.)

A typical IBIS discussion begins when someone posts an Issue node containing

continued

ILLUSTRATION: ROBERT TINNEY © 1988

a question such as "How should we do X?" That person can also post a Position node proposing one way to do X, as well as some Argument nodes to support that Position. Someone else can post a competing Position responding to the Issue and can support the Position with Arguments, and so on. New Issues that the discussion raises can also be posted and linked into the nodes that most directly suggested them.

There is no stopping rule, nor is there a particular way of registering Issue resolution by agreeing on some Position. The goal of the discussion is for each stakeholder to try to understand the elements of the others' proposals, and perhaps to change the others' minds. The method inhibits unconstructive rhetorical moves, such as argument by repetition and name calling, and supports more constructive moves, such as seeking the central issue, asking questions and giving answers, and being specific in supporting your own viewpoint.

In implementing gIBIS, some changes and extensions have been made to allow needed flexibility, but the method has been changed as little as possible. The extensions to IBIS in the current gIBIS tool are three: an additional Other type for nodes and links, as an escape mechanism when you can't find a way to express a thought within the IBIS framework; an additional External type for nodes that contain non-IBIS material, such as requirements, documents, design sketches, or code; and the ability to let Positions specialize or generalize other Positions, and to let Arguments specialize or generalize other Arguments.

The gIBIS Tool

Three technological themes guided our design of gIBIS. First, we wanted to explore the capture of the rationale behind the design. Second, we wanted to support computer-mediated teamwork, particularly the kinds of design conversations that might be held over networked computers, electronic mail, or news (see references 2 and 3). Third, we needed an application with an information base large enough to allow us to investigate the navigation (searching and browsing) of very large information spaces.

The browser lets you see the IBIS graph structure, its nodes, and their interconnecting links.

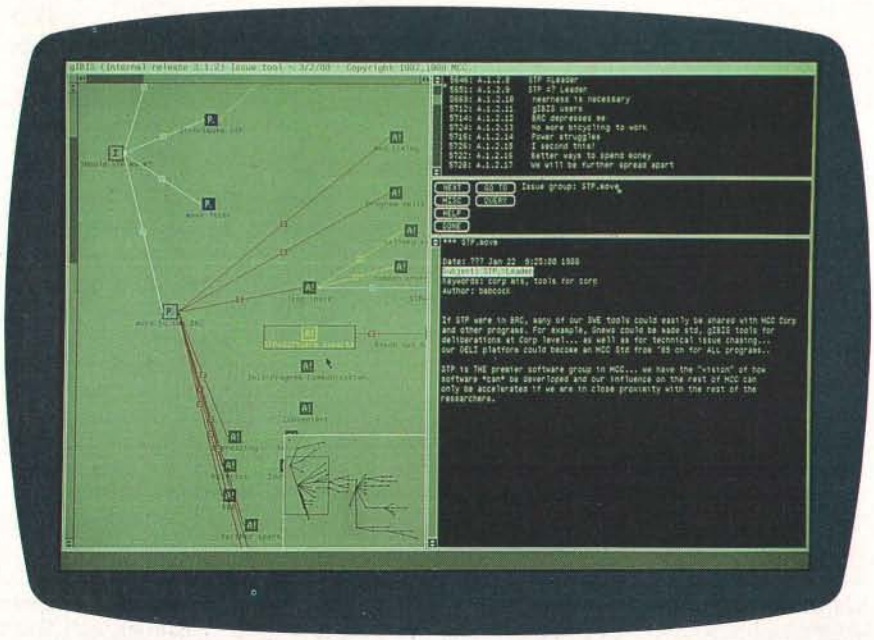


Photo 1: *The gIBIS interface. Note the graphical browser (left), the structured index (upper right), the control panel below the index window, and the inspection window (lower right).*

The pattern of gIBIS usage falls into two categories: Some people use the tool primarily as an isolated hypertext tool for structured thinking and design, while others use it primarily as a vehicle for structured communication.

The basic gIBIS interface is divided into four windows (see photo 1): a graphical browser on the left, a structured index into the nodes on the top right, a control panel below the index window, and an inspection window in which to view the attributes and contents of nodes and links. This interface is somewhat unusual among hypertext systems: To view the contents of a node or link, you must select it, and the contents will display in the inspection window.

The Browser

The browser lets you see the IBIS graph structure, its nodes, and their interconnecting links. Most of it is dedicated to a local view of the current area of interest, with nodes and links in full detail. The lower-right portion of the browser contains a global overview: a zoomed-out view of the entire network without node labels, link-type icons, and secondary links. A rectangular overlay indicates the scope and position of the current local view.


You can scroll the browser window by using traditional scroll bars or by "snap scrolling" (clicking the mouse anywhere within the local view to center that location in the window). This method lets you fine-tune the position of the display and scroll diagonally without having to reposition two independent scroll bars. You can also scroll to an area outside the local view by repositioning the local-view indicator in the global-view window. You simply drag the rectangle to a new area within the global view to update the local view.

The browser supports a direct-manipulation-style interface (see reference 4) to the display objects (nodes and links). You select a display object by clicking on it with the left button of your three-button mouse. The browser highlights and boxes it, puts its contents in the inspection window (see photo 1), and scrolls its index line to the top of the index window. A right-button mouse click displays context-sensitive menus that let you create, edit, delete, and move objects.

For example, if you press the menu button without selecting an object, a menu appears indicating that the only legal operation you can perform is Issue creation (i.e., the beginning of a new

continued

Leprecard



Leprecards feature components utilizing the latest technology from Seagate & Western Digital. You get a 1 year warranty, & illustrated user's guide. Low power drives mean less strain on the power supply, lower operating temperatures, and longer component life. **FREE SOFTWARE** including **TakeTwo,** the backup utility. PC MAGAZINE Editor's Choice in 1986 & 1987, & **PC-KWIK** disk cache software from Multisoft.

21MB	30MB	30MB	40MB	49MB	65MB
85ms	85ms	40ms	70ms*	28ms*	16ms*
$299	**$339**	**$389**	**$449**	**$549**	**$649**


*Average access speed per partition

TANDY 1000/A/SX/TX Leprecards add $20

LepreFAX Modems

New!

Internal **$299** External **$359**



- Easy to use Pop-up Menus
- Sends ASCII or word processing files
- Send/Receive from any Group 3 fax machine
- Prints on standard dot-matrix or laser printers
- Automated sending during low phone rate periods
- Internal 4800bps, $289 9600bps $559
- Portable external plugs into PC serial port, $359

PC/XT Disk Kits



- Pretested & formatted
- Western Digital short controller
- 30 page installation guide & reference manual
- Cables, mounting screws, full & half-height face plates
- **TakeTwo** backup software, PC MAGAGINE "Editor's Choice"
- **PC-KWIK** disk cache software by **Multisoft**
- 1 year Warranty, 30 day Money Back Guarantee
- Optional: 150 watt, UL/FCC approved power supply for IBM PC's **$69**

TANDY 1000 kits add $20

20MB kit **$289**
Seagate ST225 21.4MB/65ms/Half-Height/14.8 watts

30MB kit **$309**
Seagate ST238 32.7MB/65ms/Half-Height/14.8 watts

40MB kit **$459**
Seagate ST251 42.8MB/Half-Height/11 watts pre-formatted into a pair of 21MB/28ms partitions

65MB kit **$549**
Seagate ST277R 65.5MB/Half-Height/11 watts pre-formatted into a pair of 32MB/28ms partitions

286[10] Computer



80286 processor at running at 6/10 Mhz with 0 wait states provides a Norton SI rating of 11.5. 8 slots - Room for 1 full height and 3 half - height drives - 200 watt power supply - Clock calendar - Choice of 1.2 or 1.44MB floppy drive - Combination Hard Disk/Floppy drive controller - Maxiswitch 84 or 101 key Keyboard - 512K RAM standard expandable to 1 MB - Award BIOS - 1 year warranty - 30 day money back guarantee. **$895**

Complete Systems with Serial/Parallel/Game Ports:

Monographics Card & Monitor	**$1095**	Orchid 512K VGA & Multisync II	**$1995**
with 20MB/65ms Seagate	**$1289**	with 20MB/65ms Seagate	**$2189**
with 40MB/40ms Seagate	**$1429**	with 40MB/40ms Seagate	**$2329**
with 65MB/40ms Seagate	**$1549**	with 65MB/40ms Seagate	**$2449**

1.5 MB Laser Printer



"One of the Laserjet's strongest competitors."
INFOWORLD October 5, 1987

512K RAM **$1495** 1.5MB RAM **$1595**

- 100% HP Laserjet, & Laserjet + compatible
- 1.5MB RAM Gives Full Page 300dpi graphics
- Vector graphics capability improves speed on programs like Autocad up to 93%
- 9 resident & 5 downloadable soft fonts standard
- Printer utility software
- Serial & Parallel Interfaces
- 120 day TRW on site maintenance
- 1 year Warranty
- Options: All HP style font cartridges Toner Cartridge **$29**

AT Hard Disk Kits

- Includes IBM AT rails & cables
- **SpeedStor** or **OnTrack** large drive software
- Formatted, Partitioned & Tested

Size	Model	Speed	Capacity	Price
HH	Seagate ST251	40ms	42.8MB	**$359**
HH	Seagate ST251-1	30ms	42.8MB	**$449**
FH	Seagate ST4096	28ms	80.2MB	**$599**
FH	Maxtor 1140	27ms	117MB	**$1669**
FH	Maxtor 2190	30ms	150MB	**$1999**

Orchid

Designer VGA
512K **$299** 256K **$269**
Tiny Turbo 286 **$289**
Ramquest II 1MB **$799**

Shamrock

2524B Townsgate Rd, Dept. B / Westlake Village, CA 91361

To order, or get our free catalog, call:

Toll Free
800-722-AT-XT

California
805-373-7847

MEMBER MMC MICRO COMPUTER MARKETING COUNCIL

- ★ No extra for Visa/Mastercard (AMEX add 3%).
- ★ Prices include UPS surface shipping.
- ★ Federal Express shipping just $1.50 per pound.
- ★ 30 Day Money Back Guarantee.
- ★ Corporate & Institutional PO's accepted.

3.5" Floppy Kits

Internal kits for PC/XT/AT computers include 5¼" mounting bracket, black & gray face plates, and AT rails. 1.44 MB for PC/XT includes high speed Western Digital controller. FREE TAKE TWO floppy backup software.

720 Kit **$109** 1.44MB for AT **$139** 1.44MB for PC/XT **$199**

2400 MNP Modems

$239/$229

- Hayes Compatible, 300/1200/2400
- MNP level 4 error correction
- **FREE** MIRROR II Software, a $69 value
- Internal model $229, fits in short slot

Internal with MIRROR II (non MNP) $109

IBIS structure). By contrast, if you select an Issue node, the menu changes to reflect the legal operations on Issues. If you create a follow-up Position node, it is placed next to the Issue and linked to it with a Responds-to link. Then, the inspection window divides in half and a Node Creation window preloaded with a structured template appears beneath it.

You fill in the template's structured fields (e.g., Subject, Keywords, and so forth) and provide an optional description of the node's topic (i.e., an unstructured node body). When the node is complete, you push the Submit button in the control panel (which appears only during Node Creation and Editing); the node is then parsed and stored, and the browser and index windows are updated to include it.

When you follow the "Link to another node" menu item, you can choose from the set of legal outgoing link types for the current node, and the new link appears stretching between the source node and the current mouse position. You move the mouse to the destination node (by "rubber banding") and then drop the end of the link there.

You can also select canonical IBIS subnets (i.e., a single Issue followed by its Positions, and their Argument nodes) as a single entity. The gIBIS tool supports the movement and automatic layout of these subnets as wholes. Further, it lets you gather a subnet into a single composite Issue-Position-Argument (IPA) node; this node provides additional structure to analyze competing Positions and commit to one of them (Issue resolution).

While it has a structure and body all its own, the IPA node by default inherits its label, subject, and keywords from the root Issue of the underlying subnet. Selecting the composite means traversing the underlying subnet and composing an "inherited" body, which is shown in the inspection window along with any composite-specific text (see figure 2). Since the inherited body can become quite long with a large subnet, a function key lets you suppress (or reveal) it in the inspection window.

The node-index window provides an ordered, hierarchical view of the nodes in the current network.

The Node-Index Window

The node-index window provides an ordered, hierarchical view of the nodes in the current network. To traverse the network, you follow Primary links in depth-first order starting from each Issue. The Issues, Positions, and Arguments are given sequence numbers like you might find in an outline editor (see reference 5). For example, the Subject line for Issue 8 is I.8; it has no children, so that's all there is. The Subject line for Issue 9 is I.9; its first Position node (P.9.1) has two Argument nodes (A.9.1.1 and A.9.1.2), and so forth. Issues are ordered by creation date. The view-configuration panel lets you tailor the index to reflect by Subject, Author, Keyword, or node Label.

You can select nodes through the index as well as the browser. Clicking on a node's index line makes that node current: Its icon is highlighted in the browser, the window is scrolled, if necessary, to bring it into the local view, and its contents appear in the inspection window. This browsing method provides a linear, compressed view of the data in the network.

The Control Panel

The control panel is composed of a set of buttons that extend gIBIS's functionality beyond simple node and link creation. Each button hides a menu that extends or tailors its basic function. The Next button, for example, normally records that you have read the current node before it displays the next one. But if you press the right-hand mouse button while over the Next button, the hidden menu will appear. This is a slight extension of basic

continued


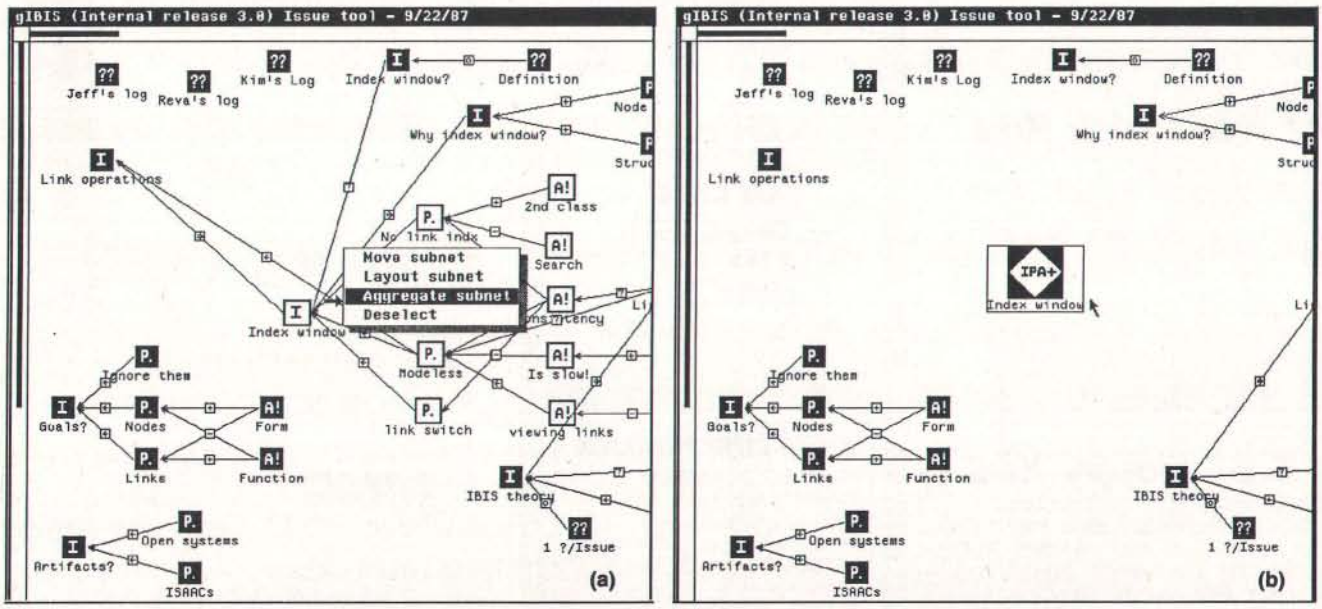


Figure 1: *A canonical IBIS subnet* **(a)** *before and* **(b)** *after aggregation. Since the "inherited" body can be quite long in a large IBIS subnet, a function key lets you suppress or reveal the inherited text body in the inspection window.*

Circle 24 on Reader Service Card →

With Modems you can *Get Smart* ...or *Get Smarter*

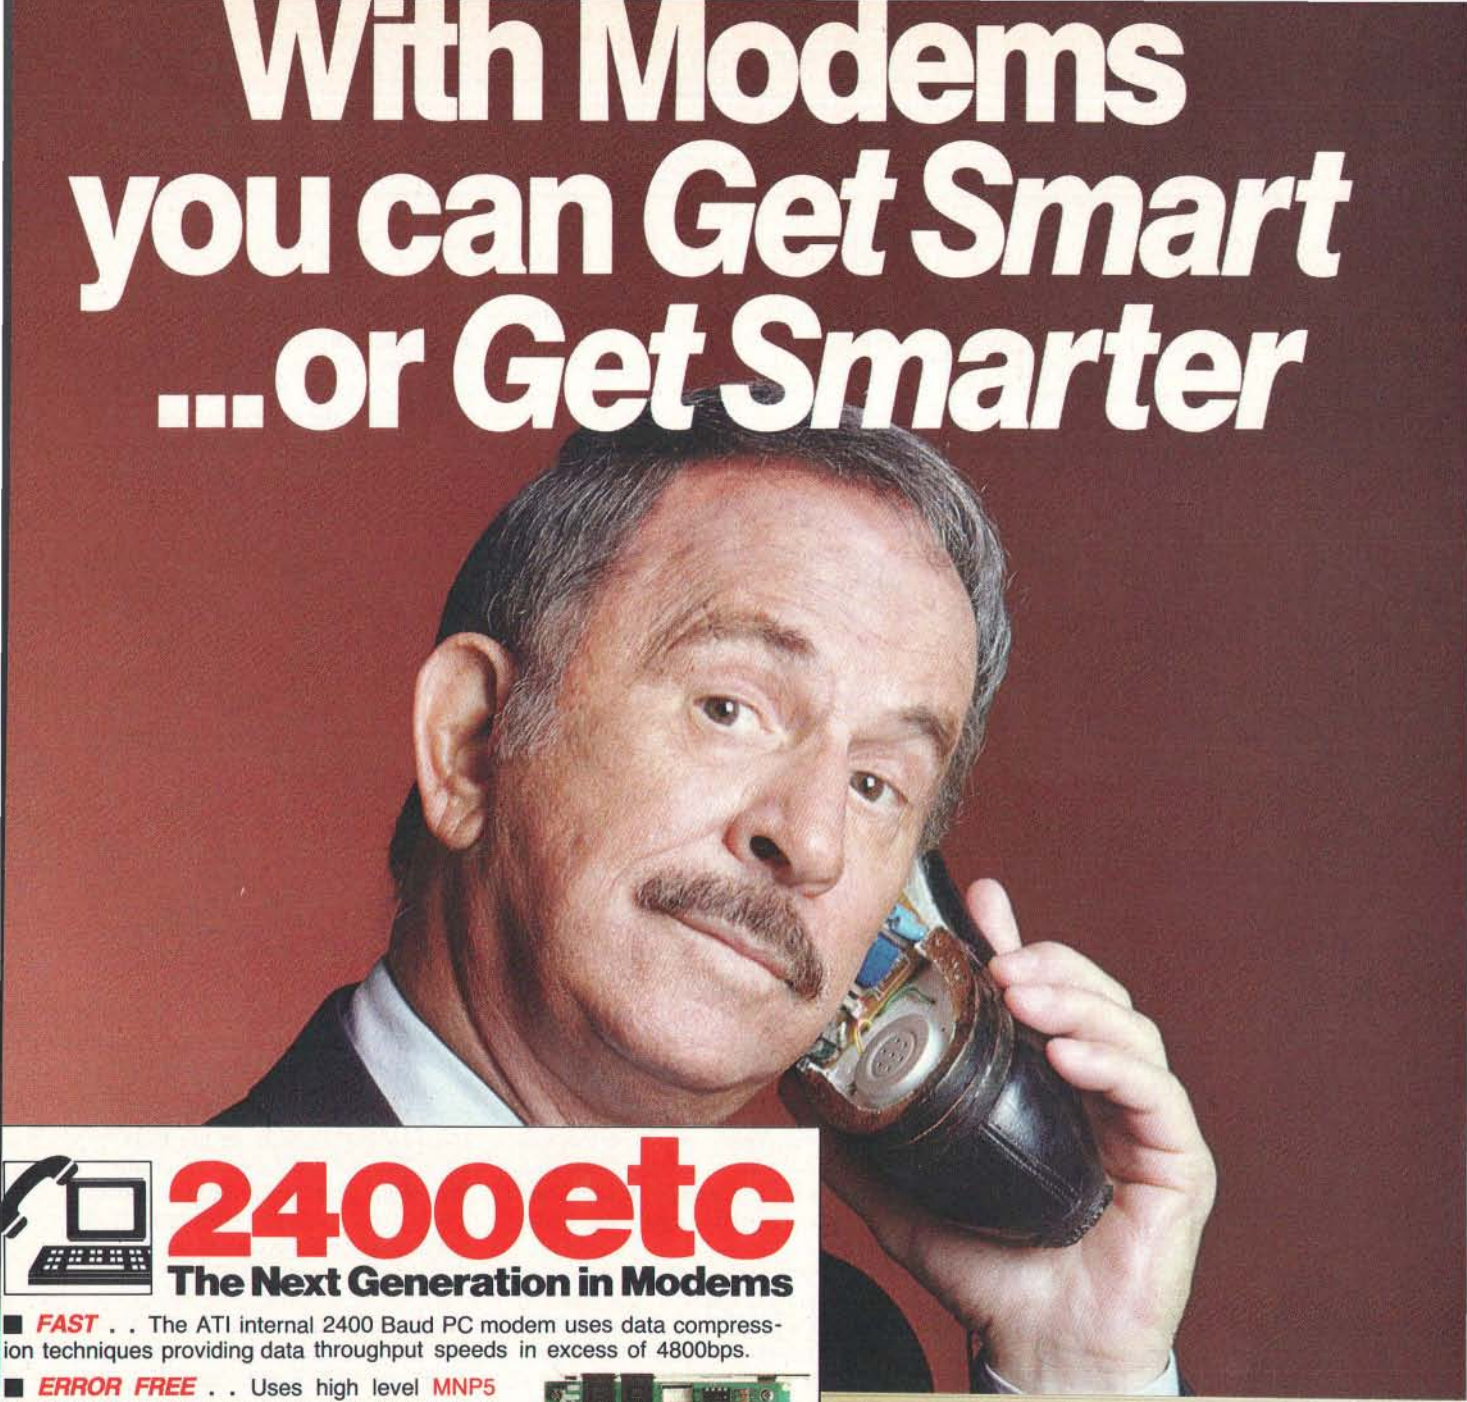

2400etc
The Next Generation in Modems

■ ***FAST*** . . The ATI internal 2400 Baud PC modem uses data compression techniques providing data throughput speeds in excess of 4800bps.

■ ***ERROR FREE*** . . Uses high level MNP5 hardware error correction procedures to guaranty 100% error-free data.

■ ***DEPENDABLE*** . . Built by the manufacturer of the world famous **EGAWONDER** graphics cards, the 2400etc has full compatibility with popular communication software.

■ ***SMART*** . . Every modem includes a *FREE* copy of *Mirror II* communications software which allows users background tasking for receiving Electronic Mail or Data transfers concurrently with screen applications.





$239
Suggested List Price

Smart price to pay for Smart technology

AVAILABLE FROM LEADING COMPUTER DEALERS.

ATI® TECHNOLOGIES INC.
Technology you can Trust.

ATI Technologies Inc., 3761 Victoria Park Ave. Scarborough, Ontario, Canada M1W 3S2
Tel: (416) 756 0711, Tlx: 06-966640 (ATI TOR) Fax: (416) 756-0720

ATI is a registered trademark of ATI Technologies Inc. MNP is a trademark of Microcom Corporation. Mirror II is a trademark of Softklone Distribution Corporation. Crosstalk – Digital Communications Associates Inc. Smartcom II – Hayes Micro Computer Products Inc.

Problems in Paradise

One common but subtle difficulty in hypertext systems is that sometimes it's unnatural to break your thoughts into discrete units, particularly if you don't understand the problem well and those thoughts are vague, confused, and shifting. With gIBIS, this effect is pronounced, because the IBIS method imposes on you a rather austere selection of node and link types; gIBIS makes you think within a particular framework (i.e., you focus on Issues without necessarily resolving them), and this can be disruptive.

The early phase of considering a writing or design problem is critical and fragile and must be allowed to proceed in a vague, contradictory, and incomplete form for as long as necessary (see references 1 and 2). However, any insights should be captured, and gIBIS should support the emergence of a coherent structure as it develops.

Design conversations often feature commitments like "Let's try X—it has advantage Y." This is a Position and a supporting Argument, but no Issue is mentioned. Since you don't always see the Issue or Position immediately, it would be nice to have a "proto-node" in which to record ideas, snippets of text, and perhaps graphical sketches before having to structure them.

Ultimately, of course, it's valuable to have separated these elements into Issues, Positions, and Arguments. But when you're struggling to solve a problem, the mental effort required to separate it into discrete thoughts, identify their types, label them, and link them can be prohibitive.

Finding the Right Answer

In the IBIS method, you resolve an Issue by selecting one of the Positions that respond to it as being "the right answer," or at least "the Position we are committing to for now." You could mark the Position node as Selected and display it by marking such nodes distinctively in the browser, perhaps with a somewhat different color.

We have recently added an Issue resolution feature to gIBIS. It combines indicating resolution with the aggregation into Issue-Position-Argument nodes; once an Issue is part of an IPA node, you can resolve it. At the moment, you change the value of the Resolved field to True and indicate which Position holds the resolution.

The rationale for adopting a particular conclusion may require more explanation; for instance, perhaps all the argumentation didn't occur within gIBIS. Sometimes, resolving an Issue transcends the original options. Such resolutions may combine elements of the original options and abandon prior assumptions or presuppositions. Sometimes, when a breakthrough occurs, it's clearly the right solution.

The gIBIS tool needs to allow such leaps in argumentation and not force the Issue to a well-structured resolution. This may be as simple as providing the free-text annotation of an IPA tree or the marking of some discussions as "irrelevant in light of Position X."

Getting the Whole Picture

Using hypermedia for cooperative work has its problems as well. Sometimes, an unexpected problem can emerge when several users work cooperatively in a shared Issue group. Unless each author writes clearly and completely, while you might understand the individual nodes, it's hard to follow the thread of thoughts as it winds through several dozen nodes. That is, the hypertext tool forces the author to express ideas in a fined-grained, separated manner, and this obscures the larger idea being developed.

This is a familiar problem common to many hypertext systems: The freedom of choice inherent in branching documents requires greater care from both the author and the reader. The separation of Position and Argument in IBIS (i.e., an idea and its justification) could also be another factor.

However, there may be a more subtle issue here: Traditional linear text provides a continuous, unwinding context thread as ideas are proposed and discussed—a context that the writer constructs to guide you to the salient points and away from the irrelevant ones. Indeed, a good writer anticipates questions and confusions that you may encounter and carefully crafts the text to prevent them.

The hypertext (or at least the gIBIS) author, however, is encouraged to make discrete points and separate them from their context. Sometimes, the gIBIS author, in a hurry to capture a design Issue and its analysis, may write only the bare minimum necessary to record the essence of the Issue, Positions, and Arguments. Even the careful author, however, may not anticipate all the routes to a given node, and so may fail to develop the context sufficiently to clarify its contents.

Using a *path* may linearize a network's segments sufficiently to provide context (see references 3 and 4). And there are higher-level constructs that aggregate a set of nodes. The new IPA-node type combines all of an IBIS subtree's nodes (an Issue, its Positions, and their Arguments) into a single node and lets you append additional IPA-specific text as well. This linearizes the discussions of individual Issues and reduces the sense of fragmentation you sometimes have when reading a gIBIS network, but it's probably not sufficient to restore the context in which those nodes were created.

Finally, part of the context is the relative importance of the points presented, and we need to incorporate an "importance" meter into gIBIS nodes. One possibility would be to incorporate one of three keywords, HI IMPORTANCE, MED IMPORTANCE, or LO IMPORTANCE, into each node at creation. This would guide you to the most salient points first (see also reference 5); it could also be used to control the level of clutter in the browser display.

Staying on Track

It's common in conversations to "go meta" and make a comment on the *process* (as opposed to the content) of the discussion (i.e., "But that isn't the issue here"). Similarly, in IBIS discussions, sometimes you need a meta-discussion when one person in an Issue group feels that another has misused the IBIS structure to present ideas. For example, if B feels that A's Issue node is actually two Issues and a Position, B needs a way to express this and to initiate a discussion about it.

There are three levels of collaborative work: *substantive* (the content of the work), *annotative* (comments about substance), and *procedural* (comments about procedures and conventions) (see reference 4). In IBIS, you can theoretically treat all three levels as Issues. For

example, B could post an Issue, connected by a Questions link to A's Issue, asking "Isn't this really two Issues and a Position?" While this is a valid move, it has drawbacks.

B's Issue is by its nature meta-substantive, although whether it's annotative or procedural is unclear. But by placing it in the network, B creates an Issue that adds complexity to the browser display without shedding any light on the problem being discussed; B also initiates a discussion that may change the network, after which this meta-discussion will have only historical interest.

This problem has several resolutions. You could have special meta-level Issue, Position, and Argument nodes to distinguish them from substantive ones. Or you could label nodes as "only of historical interest." Such nodes could be archived or have their display suppressed so they wouldn't normally be visible. You could also give each node its own meta-layer (only displayed on request) for such discussions. In a simple version of this option, you can append a meta-line at the end of any gIBIS node and then begin an annotative or procedural discussion there. The node's author might append a response or revise the network to correct the structural error.

Lost and Found

A hot issue in hypertext research is how to use a graphical browser effectively to navigate networks with more than a few dozen nodes. This is part of the more general problem of disorientation, particularly its visual and spatial aspects in a large data space. Although gIBIS has addressed this problem with its global-view and query mechanisms, many hypertext systems have not.

Keeping Current

Any database must be able to manage changes to its data. Often, a versioning scheme that allows older versions of the data to be marked and archived is used. In gIBIS, the issue of change is of unusual importance, because the very nature of an "Issue base" is its use for evolving discussions in which older material may be accurate and highly important, inaccurate and of only historical interest, or anything in between. For example, the original form in which an Issue is framed may be biased toward a particular Position, or it may contain a presupposition that is later made explicit and rejected. How can you handle this "outdated" form of the Issue?

Sometimes, the Issue and its discussion subnet may be isolated and wrong; then it's easy to decide to archive that subnet and delete it. But more often, parts of the subnet will be wrong, misleading, or irrelevant, while others are still relevant or important and part of an active region of the network. How do you prevent these partially invalid segments from poisoning the network?

Perhaps you could systematically indicate the age and relevance of network material by, say, displaying older nodes as yellowed or frayed (unless they have been recently visited and updated). Like importance, salience, and confidence, age and relevance are somewhat subjective measures and can be only partially automated. Another possibility for managing change is completely human: As Issue networks grow in size and importance, organizations should have people whose job is to maintain the currency and consistency of the Issue base.

REFERENCES

1. Brown, J. S. "Notes Concerning Desired Functionality, Issues and Philosophy for an AuthoringLand." Xerox PARC CIS Working Paper, 1982.

2. Smith, John B., Stephen F. Weiss, Gordon J. Ferguson, Jay D. Bolter, Marcy Lansman, and David V. Beard. "WE: A Writing Environment for Professionals." Technical Report 86-025, Department of Computer Science, University of North Carolina at Chapel Hill, 1986.

3. Bush, Vannevar. "As We May Think." *Atlantic Monthly*, July 1945, pp. 101–108.

4. Trigg, Randall, Lucy Suchman, and Frank Halasz. "Supporting Collaboration in NoteCards." Proceedings of CSCW '86: The Conference on Computer-Supported Cooperative Work, MCC/STP, Austin, Texas, December 1986.

5. Lowe, David G. "Cooperative Structuring of Information: The Representation of Reasoning and Debate." International Journal of Man-Machine Studies, vol. 23, 1985.

functionality and leaves the current node marked unread.

For those functions with no extensions, the menu provides a longer explanation of the button's functionality. For example, the Goto button loads a particular Issue group's data into the browser; it hides a Help menu that tells you to "enter an Issue group name and push this button."

The Misc button hides a grab bag of functionality. For instance, the Tool Config item lets you tailor particular aspects of the interface. If you select it, a new window appears that contains the gIBIS configuration parameters, their current settings, and any constraints on their legal settings. These parameters are divided according to whether they affect the index, the browser, or the inspection window.

Primary and Secondary Links

When a node is created, it's usually automatically linked into the existing network of nodes. This automatic first link is its *primary* link. Later, you may connect that node to others in the network, but all subsequent links are *secondary* and differ from the primary one both visually and navigationally.

Filtering out the secondary links from a canonical IBIS subnet results in a hierarchy that becomes the basis of the index window's structured listing. For example, let's say that three Positions respond to an Issue, and two of them have supporting Arguments. The Positions are mutually exclusive, so each Argument also objects to the other Positions; hence, secondary links make these connections explicit.

It's easier to understand the IBIS network if, on first pass, the browser displays only the primary links and "turns off" the secondary links. The Next button leads you through the network in the canonical IBIS order (the same sequence as the index window). The primary-link view shows clearly how the current node relates to the surrounding conversational structure. After the first pass, you can make the secondary links visible, if you wish, to see the cross-relationships encoded in the network. (In keeping with the design philosophy of tightly coupled windows, selecting a node with the Next button causes the same scrolling and highlighting as selection via the browser or index window.)

The Use of Color

We designed gIBIS for use on Sun workstations with color monitors. Thus, color

continued

is used to indicate node- and link-type information, as well as such special node states as "currently selected" and "matches the current query." You can also configure gIBIS to customize the color mapping.

This flexibility caused some trouble at first, and we quickly added a set of standardized color mappings. Having colored nodes and links turns out to be one of the most compelling aspects of gIBIS. You can quickly learn the type mappings for the most commonly used nodes and links, and type identification then becomes a rapid, reflexive activity. While you may occasionally change your mappings with the Tool Config panel for special purposes (like making some links invisible for presentations), most users commonly set up their colors and leave them alone.

If you have a monochrome monitor, the information encoded by color is duplicated with icons. While gIBIS by default presents both color and icons, both can also be suppressed. Usually, the color-monitor user suppresses the link icons to make the browser view appear less cluttered.

Using color presents its own set of problems, however. For one, you must have a color display. And you are limited to a small number of color mappings. The gIBIS tool contains nine link types and is probably near the limit of people's ability to reliably perform the mapping. By adding the link-type icons, the mapping complexity drops, and more link types could be safely added.

More surprising, however, is the large machine-to-machine variation among color monitors in overall brightness, convergence, and RGB-gun saturation. This variation has eliminated the possibility of using a single, standardized set of color mappings for all machines. The color settings that produce bright, highly defined images on one screen can be dark, muddy, and indistinct on another. To address this, the four sliders at the bottom of the Tool Config window let you fine-tune the color map to your machine.

Search and Query

Another control-panel feature is the Query button. Pressing it brings up a small query-construction window. It contains a small control panel and a specification section for "query by example," which lets you create a proto-node against which the nodes in the current IBIS net will be matched. When you press the Execute button, the query is parsed and evaluated, and its results displayed in both the browser (selected nodes turn a bright yellow in both the local and global views) and the index window (the window shows only the index lines for those nodes satisfying the query).

You can then examine those nodes using standard navigation techniques. Pressing the Help button reveals another window (obscuring the browser window), which contains instructions on how to formulate queries, their appropriate grammar, and a number of examples.

This query-specification technique lets you formulate node-content searches based on the logical AND of predicates over node attributes. The grammar could be extended to allow full Boolean expressions over the predicates, but there has been little demand for it. These more sophisticated queries may be required when the networks become very large, but the simple query engine in gIBIS is

continued

Wow! STOP
and Compare Our Quality and Prices

100% IBM Compatible

IEEE
12 MHz 286 EGA Color System
$1895



- Samsung 14" EGA Color Monitor
- 12 MHz PC-AT Computer, 0/1 Wait State Selectable
- AT Case with Key Lock, Turbo, Power and Hard Drive LEDs
- Enhanced Auto Switch EGA Card • Intel 80286 CPU
- Multi-speed 6/8/10/12 MHz
- Keytronics 101 Enhanced Keyboard
- 640k Memory Expandable to 1 Meg • 200 Watt Power Supply
- Seagate Model ST251 42+ Meg Hard Disk Drive
- 5¼" 1.2 Meg Floppy Drive
- Western Digital 2 Hard Disk & 2 Floppy Controller with Cables
- Serial / Parallel & Game Port • Complete Operations Manual
- One Year Warranty • 80287 Math Co-Processor Slot

With Monochrome / MGA + 40 Meg $1550
With Monochrome / MGA + 20 Meg $1395

IEEE
20 MHz 386 EGA
Color System

- Samsung 14" EGA Color Monitor
- 20 MHz 0 Wait State Computer
- Enhanced Auto Switch EGA Card
- AT Case with Key Lock, Turbo, Power and Hard Drive LEDs
- Intel 80386 CPU • Multi-speed 9.6/21.0/26.7 Landmark
- Keytronics 101 Enhanced Keyboard
- 1 Meg, 100ns Memory • 200 Watt Power Supply
- Seagate Model ST251 42+ Meg Hard Disk Drive
- 5¼" 1.2 Meg Floppy Drive
- Western Digital 2 Hard Disk and 2 Floppy Controller with Cables • Serial / Parallel & Game Ports
- Complete Operations Manual • One Year Warranty
- Math Co-Processor Socket

$3095
With Monochrome / MGA 12" $2750

IEEE
Super Turbo XT — 10 MHz

- 10 MHz PC-XT Computer
- AT Style Case with Key Lock, Turbo, Power and Hard Drive LEDs • 4.77 / 10 MHz Motherboard
- Keytronics 101 Enhanced Keyboard
- 256K Ram Stnd. Expandable to 640K
- Serial / Parallel & Game Port • 150 Watt Power Supply
- 360 Floppy • Floppy Controller & Cable
- Hercules Comparable Graphics Card
- One Year Warranty • Complete Operations Manual


With 12" High Resolution Monochrome Monitor ..... Only $625
With Seagate ST-225 20 Meg $935

To Order, Call:
1-214-931-3777
ieee, inc. 17120 Dallas Parkway Suite 212 • Dallas, Texas 75248

Terms: One year warranty (12 mo. parts / 6 mo. labor). 30 day money-back guarantee (excluding shipping charge). Visa, MasterCard, Discover (add 3% for credit cards), cashier's check, money order, wire transfer, personal checks (personal checks allow 10 working days to clear) accepted. Shipping & insurance extra. Prices & availability subject to change without notice. IEEE reserves the right to substitute equivalent or better products. No COD's. 15% restocking fee on unauthorized returns. IBM XT/AT are trademarks of IBM Corp. HOURS: (Central Time) 9 a.m.-7 p.m. Mon.-Fri., 9 a.m.-5 p.m. Sat.

Circle 118 on Reader Service Card

TRY THE NEW GENERATION FOR $30

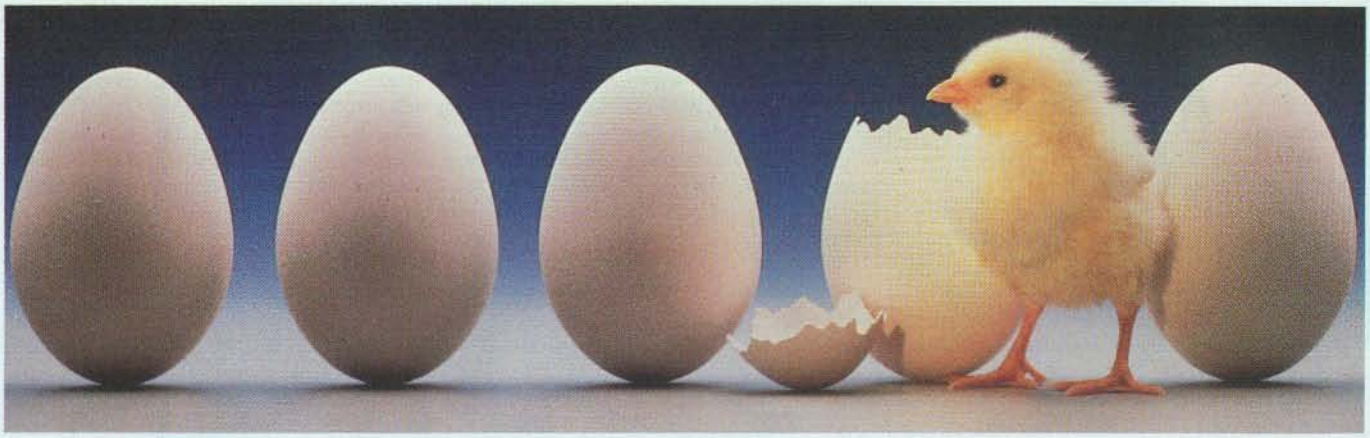

KNOWLEDGEPRO
KnowledgePro uses Topics to store "chunks of knowledge." Topics can contain data, hypertext, procedures, calculations, rules, lists and pictures. Using a dozen simple commands, non-programmers can use topics to explain complex procedures, rules or recommendations. Using the other 100 plus commands, professional programmers can create sophisticated expert system tools and applications quickly and easily.

HYPERTEXT
Hypertext can be a powerful tool for organizing text, graphics and data, but without an underlying structure the user becomes lost in a maze of information. KnowledgePro adds structure, control and intelligence to create an exciting new teaching medium.

Once you've used KnowledgePro you'll never go back to your shell!

Q. Who's using it?
A. Engineers, Educators, Lawyers, Scientists, Managers, Authors, Bankers, Software Developers, Expert System Developers, Computer VARs and VADs, Trainers, Consultants, Experts in Agriculture, Manufacturing, Insurance, Petroleum, Government and many many more.

Q. What are they doing with it?
A. Intelligent tutorials, smart manuals, procedure guides, rule books, computer aided instruction, sales and promotion, data analysis, non-linear documents, text analysis, diagnostics, software front-ends, expert systems, training and education, hypertext authoring, case studies, insurance claim determination, investment analysis, intelligent forms - there seems to be no limit to the diversity of applications.

Q. What can I do with the demo system?
A. The KnowledgePro demonstration system comes with a 100 page manual and lots of examples to get you started. You can create and save small working knowledge bases. The only commands that you can't use are those for handling external files or chaining knowledge bases. We even credit your $30 toward the cost of the full system.

Q. How much is the full development system?
A. KnowledgePro costs $495 and there are no run-time charges, so you don't have to pay more when you distribute your applications. The Database Toolkit (for access to dBASE and Lotus 123 files) costs $49 and the Graphics Toolkit (for access to PC Paintbrush pictures) costs $89. Our KnowledgeMaker induction system (for creating rules from data) costs $99. KnowledgePro runs on IBM PC, AT and PS/2 compatible machines with 640K memory.

TO ORDER Call 518-766-3000 (Amex, Visa, M/C accepted) or send $30 + $5 shipping & handling for the demo ($38 total foreign) or $495 + $8 shipping & handling for the full system ($553 total foreign) to Knowledge Garden, Inc., 473A Malden Bridge Road, Nassau, NY 12123. In NY State please add 7% sales tax.

KnowledgePro®
By Bev & Bill Thompson
The first Knowledge Processor.

published by Knowledge GARDEN inc

In association with McGraw Hill

KnowledgePro is a registered trademark of Knowledge Garden, Inc., Lotus 123 is a registered trademark of Lotus Development Corp., dBASE is a trademark of Ashton Tate. IBM is a registered trademark of International Business Machines Inc., KnowledgeMaker is a trademark of Knowledge Garden Inc. Photo Tcherevkoff ©

Circle 136 on Reader Service Card

sufficient for searching moderately sized networks.

A Time Saver

Choosing a relational DBMS as a storage manager for gIBIS provides concurrency control, record-level locking, reliable data storage, fast access methods, and a reasonable search engine. In addition, the one we used includes an uninterpreted data type (a field for long text passages, digitized voice, graphics bit maps, or whatever). Thus, you can store the body of a node as part of a database record. In retrospect, implementing gIBIS on top of an existing DBMS allowed us to focus on the task at hand and saved us many months.

Unfortunately, the DBMS doesn't adequately notify you when a table or set of records is modified (e.g., when a new node is added to an Issue group). To overcome this, we added a notification layer that keeps track of the status of the database for each individual user. When the database is modified so that it changes your view of the data, you are notified and your view is updated appropriately.

Using a DBMS presents one major drawback, however: It closes the system. In essence, all the objects that the Issue networks reference must reside within the database. Unfortunately, many objects that instigate Issue-based discussions, like requirements or architecture documents, as well as those objects resulting from these networks, such as code and documentation, are external to the database. A special *surrogate* type of node lets gIBIS reference external objects, such as text, graphics, or spreadsheets, in a "blind faith" sort of way.

A surrogate has two parts: a pointer to the external object (usually a fully qualified path name) and the name of an optional display program that gIBIS should invoke to display the object. If you don't specify a program name, the default display program assumes that the external object is a text file and loads it into the standard inspection window. If you specify a display program, gIBIS invokes it and passes it the external path name as an argument.


A Useful Structure

IBIS is a powerful method for research thinking and design deliberation. If you're working alone, the Issue-Position-Argument framework helps to focus your thinking on the hard, critical parts of a problem and to detect incompleteness and inconsistency in your thinking. If you're collaborating in an Issue group, the structure gIBIS imposes on discussions is useful and exposes axe grinding, hand waving, and clever rhetoric. It has a tendency to make assumptions and definitions explicit.


You can trace some of these advantages to the *semi-structured* nature of IBIS networks (see reference 6). The writer can structure a complete message without any constraints on what is said, while the reader has a recurrent structure in the text that aids search and comprehension. The explicit rhetorical structure of IBIS reveals at least the general structure of an unfolding discussion. Indeed, a distinct advantage stems from the particular structure that IBIS provides. That is, a good match exists between some of the cognitive structures and processes of design and the three node types and nine link types that compose IBIS.

However, we have found some major shortcomings in gIBIS. There is no spe-

continued

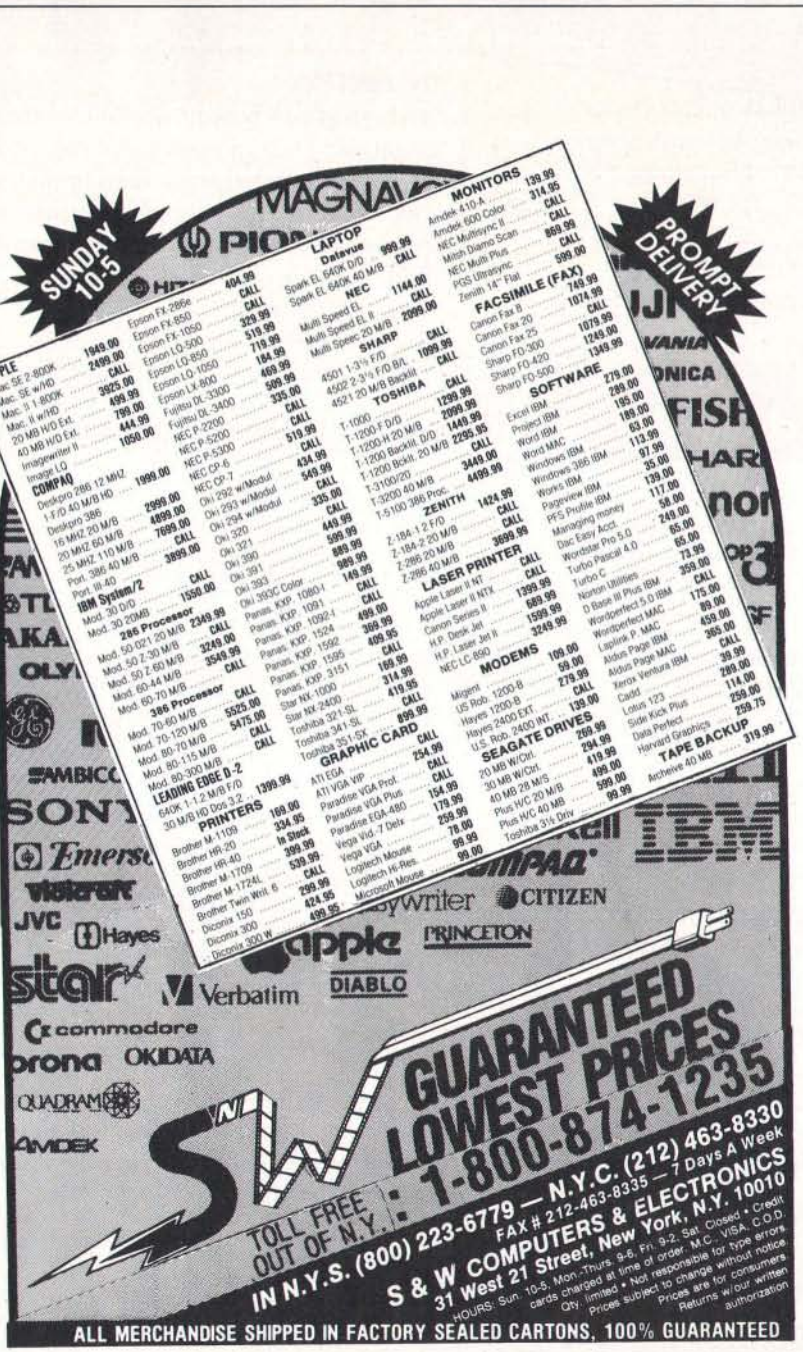

Circle 242 on Reader Service Card

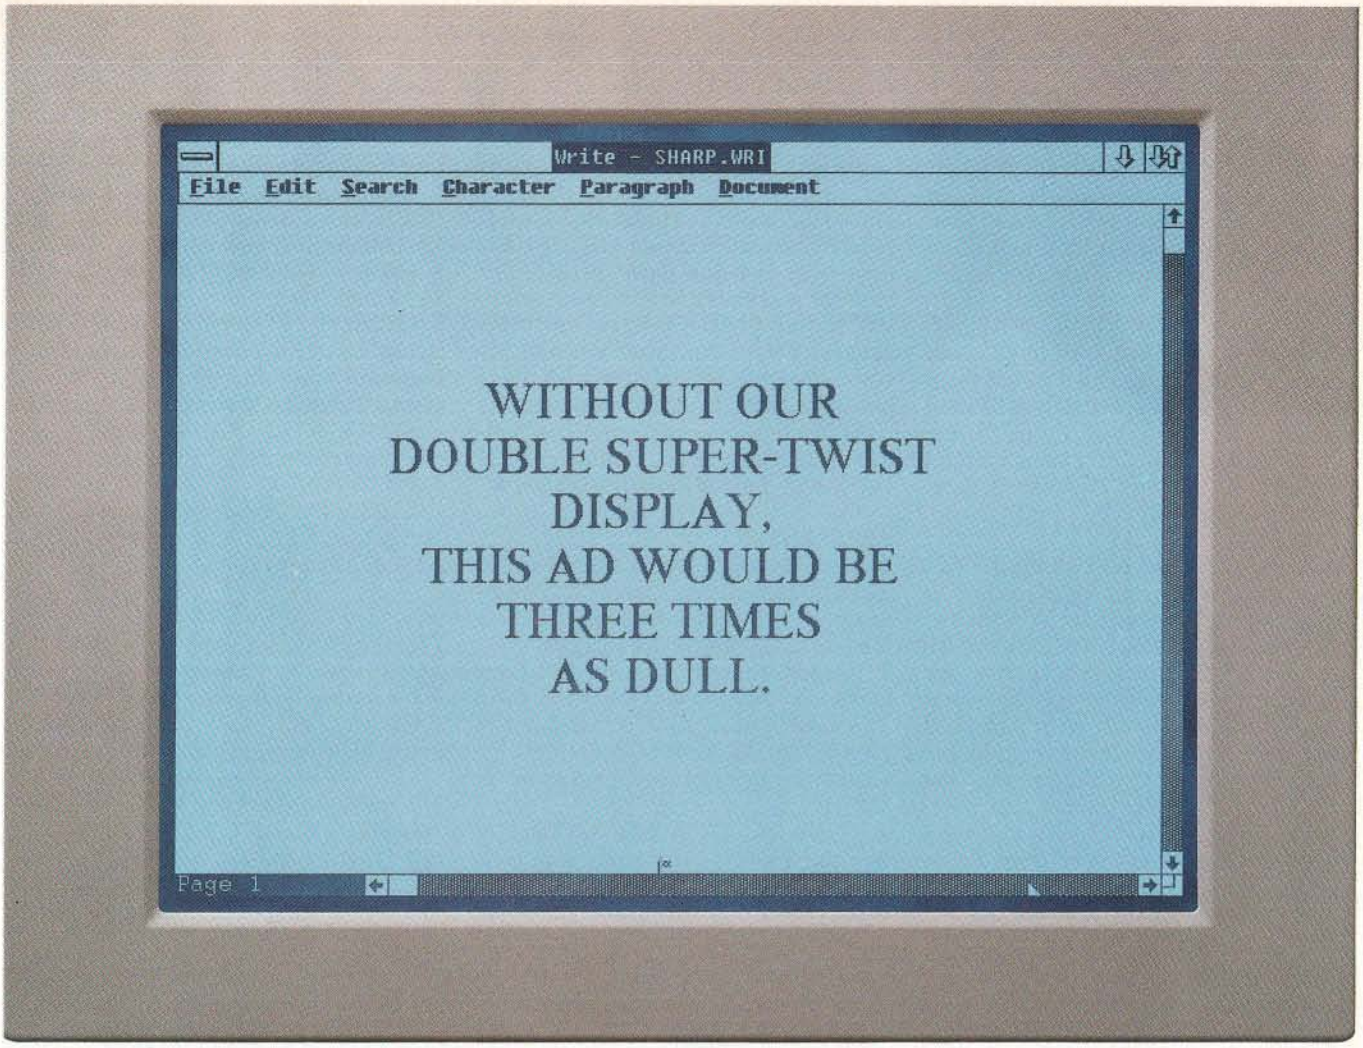

If it weren't for Sharp's new technology, chances are you'd still be trying to read the headline above. That's because our display screen offers unsurpassed brightness and clarity, with three times the contrast of conventional LCDs. Along with an increased viewing angle, our double super-twist display provides an image quality which approaches that of a printed page.

What's more, Sharp is the first to successfully develop and mass-produce this technology—which means we have DST displays available now in quantity. Each unit is fitted with a durable CCFT backlight for bright, clear display. And each offers low drive voltage, low power consumption, and fewer temperature-dependent tone variations.

Since the days of the first hand-held calculators, Sharp has been an innovative leader in LCD displays. To find out more about our new double super-twist units, call (201) 529-8757.

SHARP'S DOUBLE SUPER TWISTED DISPLAYS

MODEL #	DOT FORMAT	OUTLINE DIMENSIONS WxHxD (mm)	VIEWING AREA WxH (mm)	DOT SIZE WxH
LM24010Z	240x128	176x96x22	134x76	0.49x0.49
LM64135Z	640x400	300x166x26	218x139	0.30x0.30
LM64148Z	640x480	280x180x25.5	205x155	0.28x0.28
LM64048Z	640x480	310x240x25	237x180	0.33x0.33
LM72060Z	720x400	320.4x170.4x34	260x147	0.32x0.32

SHARP®
ELECTRONIC COMPONENTS DIVISION

IF IT'S SHARP, IT'S CUTTING EDGE.™

© 1988 Sharp Electronics Corporation, Sharp Plaza, Mahwah, N.J. 07430.

Circle 298 on Reader Service Card

cific node type for goals and requirements. There is no particular support for making a decision (or reaching a consensus) among the various Positions of an Issue, and no way to indicate that such a decision has been made. Design decisions usually result in adding solution elements to the design itself (e.g., code, module structure, and so on), but these elements are not supported by gIBIS and must be stored externally. (For further discussion of these and other shortcomings, see the text box "Problems in Paradise" on page 260.)

A Synergy of Tool and Method

The noncomputerized IBIS method is cumbersome and would not have reached the popularity that it has here in our lab without the gIBIS tool to support it. Although gIBIS is not the only hypertext system available in our environment, it has achieved wider and more prolonged usage in a much shorter time than has PlaneText, the other system (see reference 7). We speculate that this is due to a particularly good match between the requirements of the IBIS method and the hypertext facilities of the gIBIS tool.

For example, one clear success has been in using color to indicate the types of the IBIS nodes and links. Perhaps this is partly because there are only a few distinct node and link types in IBIS, and each has reasonably well-defined semantics, so the browser display can use bright primary colors that, after a while, become strongly associated with their meanings. Despite its narrow design and rigid functionality, gIBIS provides facilities that are easy to learn and quite helpful with ill-defined design problems. ■

REFERENCES

1. Rittel, H., and W. Kunz. "Issues as Elements of Information Systems." Working paper no. 131. Institut für Grundlagen der Planung I.A. University of Stuttgart.
2. Eveland, J., and T. Bikson. "Evolving Electronic Communication Networks: An Empirical Assessment." Proceedings of CSCW '86: MCC/ACM conference on computer-supported cooperative work, 1986.
3. Horton, M., and R. Adams (Center for Seismic Studies, Arlington, Virginia). "How to Read the Network News." Distributed by Mr. Adams quarterly over the Usenet news network.
4. Norman, D. A., and S. W. Draper. *User Centered System Design*. Hillsdale, NJ: Lawrence Erlbaum Associates, 1986.
5. Hershey, William. "Idea Processors." BYTE, June 1985.
6. Malone, T., K. Grant, K. Lai, R. Rao, and D. Rosenblitt. "Semi-Structured Messages Are Surprisingly Useful for Computer-Supported Cooperation." Proceedings of CSCW '86: MCC/ACM conference on computer-supported cooperative work, 1986.
7. Conklin, J. "Hypertext: A Survey and Introduction." *I.E.E.E. Computer*, vol. 20, no. 9, September 1987.

ACKNOWLEDGMENT

This is a shortened version of a paper to appear in ACM Transactions on Office Information Systems, *vol. 6, no. 4.* *Copyright 1988, Association for Computing Machinery, Inc. By permission.*

Michael L. Begeman and Jeff Conklin are members of the MCC Software Technology Program (Austin, TX) and the authors of gIBIS. They can be reached on BIX as "editors."

It's the Dawn of the Information Age. . .

The centerpiece of the **Flyspeed Collection** is **st/exp,** the brainchild of our resident Westinghouse Science Talent Search winner and Caltech alumnus, Thomas Fly. (Charles Townes, a Caltech alumnus from neighboring Greenville, SC, won the Nobel Prize for the laser. In the 1930s, another Caltech alumnus invented xerography, which, combined with the laser, put that laser printer in your office—if you're wondering why all the laser printing engines are made in Japan, ask an alumnus of the Harvard-genre of American business schools.)

Even on your 5-year-old IBM PC (that runs Borland's Turbo Lightning at an astounding 8 words per second), st/exp compresses text files at rates of over 500 wps (1000 wps for expansion), typically to 30% or less of their original size, allowing faster modem communications and more efficient data storage.

Other FlySpeed programs include: **Typing Demon.** Named after Maxwell's Demon from thermodynamics, it is a spin-off of our work on communication aids for the handicapped. Typing Demon currently works with Wordperfect, Microsoft Word, and Sidekick, to put 14 common word-processing functions under your fingertips; automatically space after punctuation; automatically capitalize sentences; allow you to type common words and suffixes with a single keystroke, and define abbreviations for less common words (i.e., "b" = because). Typing Demon automatically invokes st/exp to compress and archive your documents when you leave your word-processor.

The FlySpeed Collection, presently priced at $75 (a demo set is available for $15), will increase to $95 when Merlin, an indexed text-retrieval program based upon Fly Coding, becomes available in January. Current users will receive the update at no additional cost.

The FlySpeed Collection makes an excellent addition to the Caltechnology you didn't know you already have. It comes with a 60-day money-back guarantee.

roadrunr	a hard-disk optimizer/back-up/file resurrection program.
d	a user-friendly directory program.
look4	A non-indexed file retrieval utility.
hunt	A file-name finder utility.
twins	A program which sniffs out multiple copies of the same file on disk.
linguist	A vocabulary-analysis utility for use with Typing Demon

plus several other utilities

Do you know where your Optimal Representation of Language is?


MC²

MicroComputer Square
126 Hancock Avenue
Spartanburg, S.C. 29302
(803) 583-9655

Circle 163 on Reader Service Card (DEALERS: 164)

ACCU-SYS

FORMERLY TURN-POINT AMERICA

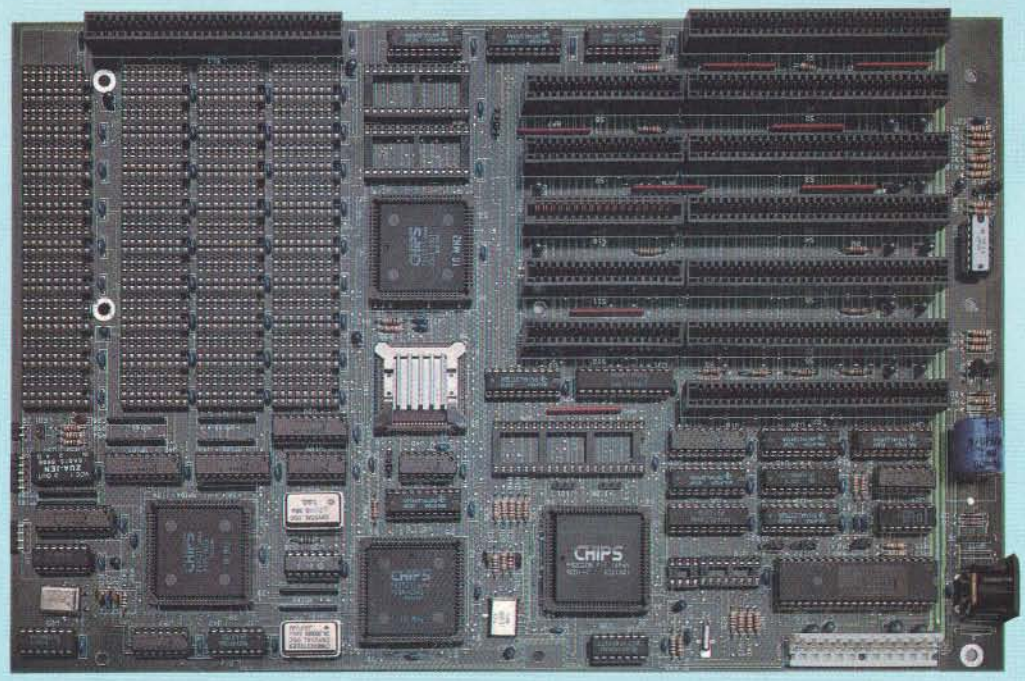

80286 16 Mhz 0 WAIT STATES

80286-16 Mhz	Utilizes the "NEAT" chip set to achieve performance that exceeds some 16 Mhz 386's (Norton SI 18.0). Accepts either 1 Mb or 256k DRAM chips (dual sockets) up to 4 Mb of DRAM. Software and hardware switchable between 6/8/12/16 Mhz.‡	**$700**
80386-20/25 Mhz	With optional RAM cashe memory to increase through put by 25%.*	Avail. by mid Oct.
80386-20/25 Mhz	0 wait state, Norton SI 28.0, dual sockets for up to 16 Mb of DRAM.*†	**$896**
80386-16/20 Mhz	0 wait state, Norton SI 23.0, dual sockets for up to 16 Mb of DRAM.*†	**$819**
80286-6/12.5 Mhz	0 wait state, Norton SI 15.3 dual sockets for up to 4 Mb of DRAM.‡	**$345**
VGA Card	100% register compatable with IBM, resolution up to 1024x768x16 colors.‡	**$275**
Super Multi I/O	FD controller for 1.44 Mb thru 360k, 2 serial, 1 parallel, 1 game port.	**$89**

Dealer and distributor inquiries are welcome, an aggressive price structure is offered to qualified dealers. All **Accu-Sys** products carry a 1 year parts and labor warranty. Visa, MasterCard and COD accepted.

*8/10 Mhz software switchable I/O bus and supports 80287, 80387 and Weitek processors.
†without CPU or DRAM, please call for current prices.
‡without RAM, please call for current price.

TRADEMARKS and REGISTERED TRADEMARKS: IBM — International Business Machines

Sales 1-800-247-6413

Tech Support (702) 746-1818

Accu-Sys
eclat corporation
3495 N. McCarran Blvd.
P.O. Box 41334
Reno, NV 89504
Telex: 650 308 4898 MCI
Fax: (702) 746-2306

Circle 291 on Reader Service Card

Hyper Activity

HYPERTEXT PRODUCTS

Business FileVision $395
Macintosh
Marvelin Corp.
3420 Ocean Park Blvd.
Suite 3020
Santa Monica, CA 90405
(213) 450-6813
Inquiry 958.

Document Examiner
Feature of Genera software environment that comes bundled with Symbolics workstations
Symbolics, Inc.
11 Cambridge Center
Cambridge, MA 02142
(617) 621-7500
Inquiry 957.

Graphic KRS (Knowledge Retrieval System) $400
Workstations
Text KRS $300
Workstations
Hyper KRS $3000
(includes 1 Hyper Indexer and 10 Hyper KRS)
Additional workstation copies $125
Knowledgeset Corp.
60 Garden Court, Building A
Monterey, CA 93940
(415) 968-9888
Inquiry 963.

Guide
Mac $199.95
IBM PC, AT, PS/2s $275
IBM XT $300
Owl International, Inc.
14218 Northeast 21st St.
Bellevue, WA 98007
(800) 344-9737
(206) 747-3203
Inquiry 959.

HyperCard $49
Mac Plus, SE, and II
Apple Computer, Inc.
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010
An assortment of public domain stacks for HyperCard is available on BIX in the "stackware" area of the "listings" conference.
Inquiry 960.

KMS (Knowledge Management System) $1995
Sun 3, 386i, and 4 workstations; Apollo DN 3000 and DN 4000 workstations
Scribe Systems, Inc.
Commerce Court, Suite 240
4 Station Square
Pittsburgh, PA 15219
(412) 281-5959
Inquiry 961.

Knowledge Pro, a knowledge processor $495
IBM PC, XT, AT, and PS/2s under MS-DOS
Knowledge Garden, Inc.
473A Malden Bridge Rd.
Nassau, NY 12123
(518) 766-3000
Inquiry 962.

MacSMARTS $195
Mac 512 or higher
MacSMARTS Professional $495
Mac 512 or higher
Cognition Technology Corp.
55 Wheeler St.
Cambridge, MA 02138
(617) 492-0246
Inquiry 964.

Marcon, a DBMS with hypertext-like indexes $495
IBM AT or higher
Marcon Plus $795
IBM AT or higher
AIRS (Automated Information Reference Systems), Inc.
335 Paint Branch Dr.
College Park, MD 20742
(301) 454-2022
Inquiry 965.

HYPERTEXT RESEARCH AND DEVELOPMENT

Bell Communications Research (Bellcore)
435 South St.
Morristown, NJ 07962
(201) 829-2000
Superbook, *a text browser*
Telesophy, *on-line literary system*
Thoth II, *a system that embeds semantics into hypertext*

Brown University
Institute of Research in Information and Scholarship
P.O. Box 1946
Providence, RI 02912
(401) 863-2001
Intermedia, *an interactive teaching and learning environment (in development)*

Carnegie-Mellon University
Computer Science and English Departments
Pittsburgh, PA 15213
(412) 268-2565
Notes, *a hypertext writer's tool (in development)*
ZOG, *a multiuser hypertext system (in development)*

MAD Intelligent Systems
55 Wheeler St.
Cambridge, MA 02138
(617) 492-1982
Developing hypertext through machine-generated links. Common Lisp software that runs on a Mac II and Unix machines. Prototype in use by the New York Stock Exchange.

MCC (Microelectronics and Computer Technology Corp.)
Software Technology Program
3500 West Balcones Center Dr.
Austin, TX 78759
(512) 343-0978
gIBIS, *a problem-analysis tool that runs on Sun workstations (in development)*
PlaneText, *a Unix-based, general-purpose system (in development)*

University of Maryland
Department of Computer Science
Human Computer Interaction Laboratory and Institute for Advanced Computer Studies
College Park, MD 20742
(301) 454-4255
Hyperties, *an instructional, interactive encyclopedia system (in development)*

University of North Carolina at Chapel Hill
Department of Computer Science
CB #3175
Sitterson Hall
Chapel Hill, NC 27599
(919) 962-1792
WE, *an interactive writing environment*

University of Southern California
Computer Science Department
Los Angeles, CA 90089
(213) 743-2311
DIF, *a hypertext system with software engineering tools (in development)*

The Xanadu Operating Co.
8480 Fredericksburg, Suite 138
San Antonio, TX 78229
(512) 927-6073
Xanadu, *a worldwide hypertext library (in prototype for Sun workstations)*

Xerox Palo Alto Research Center
Intelligent Systems Laboratory
3333 Coyote Hill Rd.
Palo Alto, CA 94304
(415) 494-4000
NoteCards, *an information analyst's support tool*

RECOMMENDED READING

Conklin, Jeff. "A Survey of Hypertext." *IEEE Computer*, September 1987.

Halasz, Frank. "Reflections on Notecards: Seven Issues for the Next Generation of Hypermedia Systems." *Communications of the ACM*, July 1988.

Hypermedia: The guide to interactive media production (premier issue from MIX Publications, 6400 Hollis St., #12, Emeryville, CA 94608, (415) 653-3307).

Hypertext '87 Conference Proceedings. University of North Carolina at Chapel Hill, Department of Computer Science (CB #3175, Sitterson Hall, Chapel Hill, NC 27599).

Nelson, Theodor H. "Managing Immense Storage." BYTE, January 1988.

Salton, G., and M. J. McGill. *Introduction to Modern Information Retrieval*. New York: McGraw-Hill, 1983.

CONFERENCE

HyperExpo Boston
World Trade Center
Boston, Massachusetts
October 15–16, 1988



EVERY HAYES MODEM MUST SURVIVE 8 HOURS OF TORTURE ON THE RACK.

The Rack. It's 8 straight hours of burn-in testing. Yet only one of many trials every Hayes modem must go through before it's packed and shipped.

In all, there are over 20 tests and inspections for quality and reliability. Thus allowing us to offer the most comprehensive performance warranty in the business.

Today, while all too many manufacturers are content to perform only the most perfunctory tests on their products and then only on a random basis, we believe in testing all of our modems.

With no exceptions.

At Hayes we've been making dial-up data communications as common and as reliable as ordinary phone calls for over a decade. Whether PC-to-PC, PC-to-Host or PC-to-LAN, Hayes has set the standards.



And we intend to let nothing lower those standards. Especially one of our own modems.

For your nearest Hayes dealer, call **800-635-1225**. Hayes Microcomputer Products, Inc., P.O. Box 105203, Atlanta, GA 30348. **Hayes.**

© 1988 Hayes Microcomputer Products, Inc.

Circle 289 on Reader Service Card

PC Power, Part 1:

POWER PROTECTION

Just what do those power protection devices do, and how well do they do it?

Mark Waller

Mention power protection, and the first thing many people think of is lightning. But, as someone who spends every day solving computer-related electrical-power problems, I think of money—protecting your investment in computing without wasting your money in the process.

To be sure, you must protect your computers from lightning. But you don't want to spend hundreds of dollars on a product only to find that it won't solve your problem. Neither should you deceive yourself into thinking that by spending just a few dollars on a surge suppressor, you have absolutely protected your computer from being damaged by a thunderstorm.

The Problem

Computer equipment is designed to operate with a steady stream of uninterrupted sine waves of 120 volts root means square (RMS). The nature of utility power is such that, as often as twice a day, you may experience some electrical disturbance that falls outside your computer's acceptable limits. In major data centers across the country, study after study has shown that surges, sags, brownouts, blackouts, and damaging impulses happen with dismaying frequency.

Over the last 10 years, the quality of power has steadily declined. Microcomputer users are especially vulnerable to this degradation. While mainframe computers have the advantage of employing a dedicated power source, microcomputers live off power straight from the local power company. However, there is one alleviating factor in this situation.

Since you plug your computer into a nearby outlet, your machine is normally located a good distance from the building service entrance (i.e., the meter, or the place where power enters your building). Thus, in order to reach your equipment, potentially damaging impulses generated outside your location must travel through the impedance of lots of copper wire. This barrier serves to dampen out many of those disturbances, but you can derive only small comfort from this fact.

The real problem occurs along the electrical path from where the power enters your building to your machine. Between these two points are all kinds of devices, such as elevators, air conditioners, coffee makers, and so on. The ignition of an oil furnace, for instance, produces an electrical spark that can generate an impulse that might be more than 1200 V. The starting transient of an air conditioner is strong enough to interfere with any electronic equipment that may be connected to the same power-source transformer. Copiers are notorious as a source of noise that creates soft errors in computers that share circuits with them.

Any equipment that arcs, cycles on and off, or draws excessive bursts of current is a potential hazard to your computer. There are far more pervasive culprits residing inside your building than any potential lightning strike, and they should be the prime focus of your protective strategy. Lightning-caused surges are rare events. When protective devices such as gas tubes (lightning arresters) are shorted across a power line, lightning is diverted to ground. When this happens, you and other users down the line will experience a momentary power sag. This is why you will see lights flicker during storms.

It's more important to protect your computer from the more common electrical malfunctions caused by equipment in your building than to protect it from infrequent lightning surges.

Cause and Effect

The pressure to put computers into smaller and smaller packages caused a quiet revolution in power-supply design. Until the 1980s, computers used what is called a linear power supply (see figure 1). Its most prominent feature was a 60-Hz power transformer connected across the input (between line and neutral). After the line voltage was transformed from 120 V to 5 V, or whatever level was necessary to satisfy the DC logic, the power was rectified and filtered. (A rectifier is a device that converts AC current into DC current.)

Those 60-Hz transformers made linear power supplies big and heavy. Out of the need for smaller, lighter power supplies,

continued



ILLUSTRATION: MIKE HODGES © 1988

the switching power supply was born (see figure 2). This design change eliminated the power transformer. With the new circuit, the incoming power is applied directly across the bridge rectifier. The resulting ripple DC is then pulsed at between 20 kHz and 100 kHz, depending on the specific supply design.

The action of chopping up the rectifier's output into high-frequency segments allows designers to use a high-frequency transformer, which is smaller and thereby reduces the size of the power supply.

The use of switching power supplies also dramatically affected computers' susceptibility to noise. A linear supply draws current in step with the voltage sine wave. In other words, as the line voltage rises and falls, the power supply's current demand rises and falls along with it. Linear power supplies are voltage-sensitive, however. If the supply voltage varies more than a few percent plus or minus, problems will develop.

On the other hand, a switching power supply (sometimes called a switch-mode power supply) is not voltage-sensitive. Such power supplies draw current in huge gulps once every half cycle. For this reason, the power source's internal impedance can be a problem because if the impedance is too high, the power source cannot deliver power easily. But while you must be concerned about current, you do not have to concern yourself with voltage regulation as you do with the linear power supply. Switching power supplies regulate the level of voltage by varying the amount of current that is drawn. This action is basically independent of the voltage of the power source.

Because they contain switching power supplies, microcomputers can operate over a wide voltage range. This range can be from as low as 80 V to as high as 140 V.

There are devices on the market, such as ferroresonant transformers, that regulate voltage to microcomputers. However, since your computer's power supply does not need voltage reg-

continued

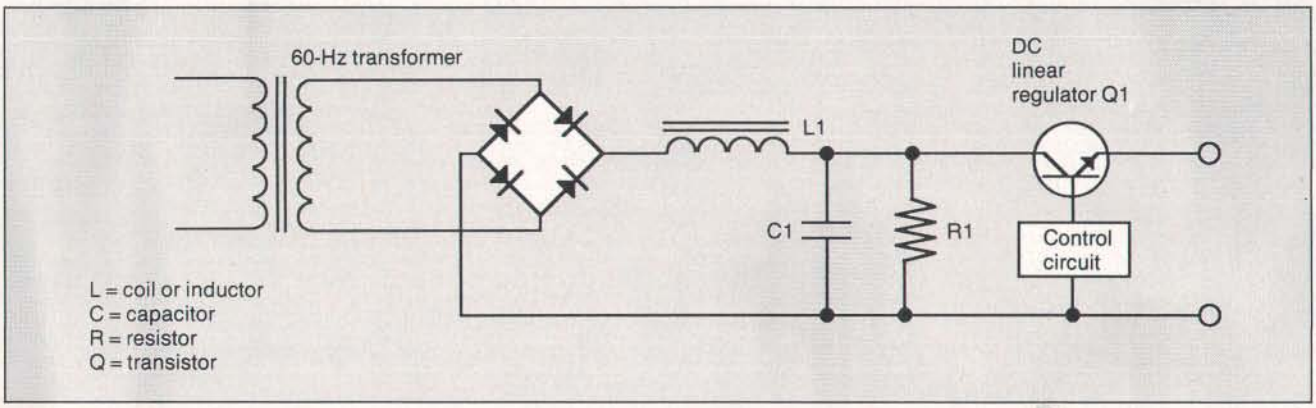


Figure 1: *Linear power supplies, used in small computers up until a few years ago, featured a large 60-Hz power transformer connected across the input. Such power supplies were sensitive to variations in voltage and made power supplies bulky.*

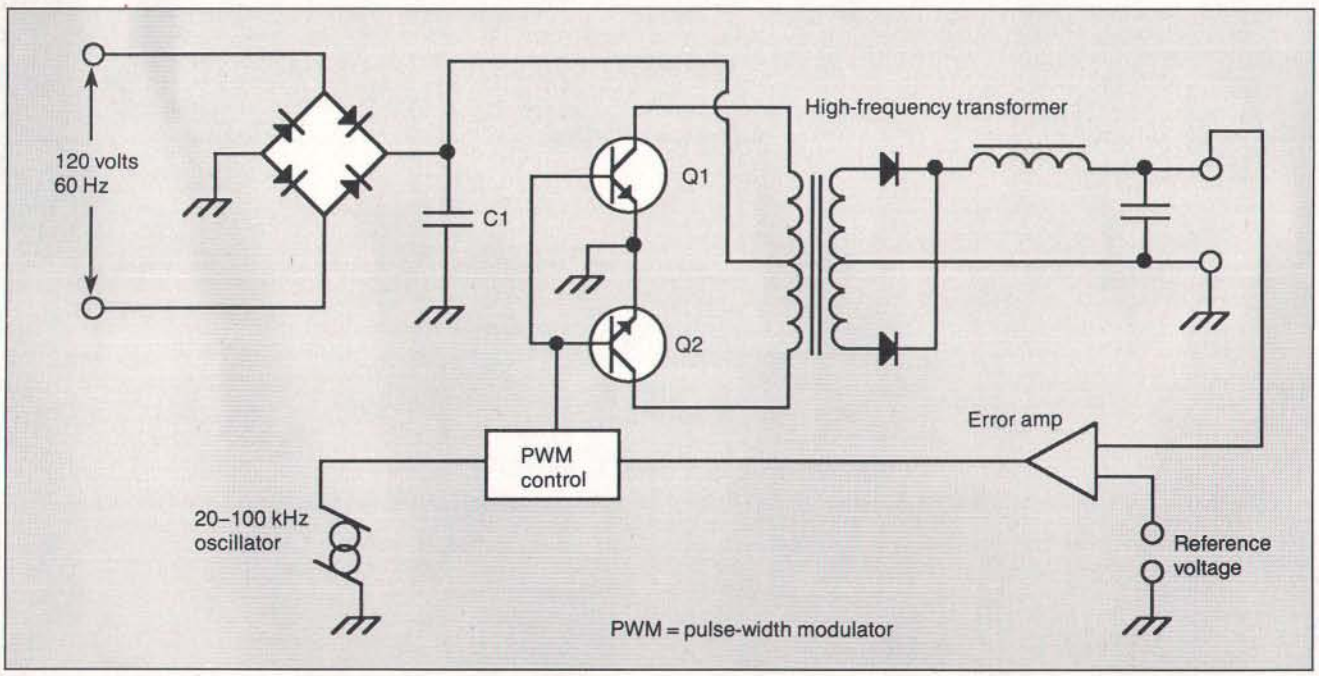


Figure 2: *The circuit of a switching power supply. The use of small, high-frequency components allows such power supplies to be smaller but makes the computer vulnerable to common-mode noise.*

Make Any Computer Do Exactly What You Want With McGraw-Hill's

Contemporary Programming & Software Design Series



From Writing Your Own Programs to Modifying Existing Software, Here's the New, Easy, and Low Cost Way to Unlock the Secrets of Your Computer

Whether you use computers for business, for personal applications, or for fun, off-the-shelf programs will never do everything you want them to do for you. That's because they were written by programmers to satisfy what they perceived as the needs of the greatest number of potential users—often missing some or many of your specific needs.

That's why McGraw-Hill's new Contemporary Programming and Software Design Series teaches you how to create your own software . . . either from scratch or by making key modifications to existing programs.

There is nothing magical about it. You learn the process of building a computer program step-by-step with McGraw-Hill *Concept Modules* sent to you one at a time, once a month. Each of the ten modules in the Series takes you through an important step in the development of the structure and detailed logic of a program, including testing, debugging, and documentation.



Unique Interactive Hands-On Instruction

Each module includes an easy-to-understand guide PLUS a 5¼" floppy disk containing typical programs and interactive instruction that you can run on IBM PCs, PC compatibles and Commodore 64 and 128 computers for hands-on experience.

In the first Module, for example, when your sample program (Declining Interest Loans) appears on your screen, you'll find errors on certain program lines. You'll also see that the program is only three-quarters completed.



Now comes the fun part. You'll discover how this program is built, and in the process you'll learn how to identify and correct errors. And by the end of Module 1, you'll actually have completed this program yourself.

But there's more. Special graphics on your screen work in conjunction with the accompanying guide to amplify, illustrate, and deepen your understanding of software design principles.

The Crucial 95%—Learn the Foundation of Computer Programming

While the Series includes interactive disks that run on specific computers, everything you learn you can apply to any language or machine. Why is this possible? Because McGraw-Hill knows programming is far more than coding a program into the computer using a specific language. In the real world of computers, 95% of the programming process is carried out using design techniques that are independent of specific language or machine. It is this crucial 95% that you thoroughly understand and master in the Series.

Make no mistake. Almost all books and courses on "programming" teach you only the final 5% of the total programming process—namely, how to code in a specific language . . . information of little value if you don't know how to reach the point in the programming process when you are ready to code.

With the Series, however, you'll learn to create your own programs from scratch, even modify off-the-shelf programs. You'll learn enough BASIC and machine language to get you started on the remaining 5% of the programming process.

Build Your Own Personal Software Library

The sample programs you work with throughout the Series are excellent learning tools. But they're more than that. By combining the sample programs onto one master disk, you'll have the start of your own personal software library. In addition to the programs you've written and modified throughout the Series, you'll also receive dozens of the most popular public domain and user-supported programs, such as data base manager, word processor, calendar generator, appointments reminder and much, much more.

15-Day No-Risk Trial

To order your first module without risk, send the postage-paid card today. Examine the first module for 15 days and see how the Series will help you make your computer do exactly what you want it to do!



If someone has beaten you to the card, write to us for ordering information about the Contemporary Programming and Software Design Series.

McGraw-Hill
Continuing Education Center
3939 Wisconsin Avenue
Washington, DC 20016

ulation, these devices are unnecessary. In addition, such devices limit the amount of instantaneous current that can be delivered to your machine's power supply—an undesirable attribute, for the reasons explained earlier.

Noise About Noise

If you look behind the faceplate of the nearest wall plug, you will see either two or three wires. The black wire is called the phase wire, sometimes termed the "line" or "hot wire." The white wire is called the neutral wire. If you see a third wire, it will be the ground wire and will be either green or bare copper. If you do not see a third wire, the installing electrician may have used the metal conduit as the ground path.

Where your service enters your building, you will find that the neutral and ground are bonded. If you measure the voltage between neutral and ground at the outlet, it will usually be zero. If you measure from line to ground, or from line to neutral, it will read 120 V. These three wires not only provide power to your computer, but are the path through which electrical noise travels.

Let's define electrical noise as any signal, other than the desired signal, that appears in a circuit. Noise, then, can be either minor or major. Noise can include large transient events or damaging impulses, or it can be continually oscillating signals from spinning motors and other kinds of interference. There are two kinds of noise: *normal mode* and *common mode* (see figure 3).

Normal-mode (or transverse-mode) noise appears as a voltage between line and neutral. The word *normal* is used because that's normally where utility power is transmitted, between line and neutral.

Common-mode noise can be measured from line to ground or neutral to ground. This type of noise appears on both the line and neutral with respect to ground; in other words, it is common to both lines.

Basically, your computer's power supply is vulnerable only to high-energy impulses that appear in the normal mode (normal-mode noise). And generally speaking, a computer's chips and logic are vulnerable only to common-mode noise.

Power-supply components are designed to take line voltage (normal mode) with peaks of up to 170 V and convert it to DC. Because power-supply components are so rugged, they have a high degree of immunity to normal-mode noise. An oncoming impulse would have to be several hundred volts before it would damage your computer's power supply.

The old linear power supply, with its big power transformer, was immune to common-mode noise. Noise appearing along the line and neutral would cancel in the primary winding, because they are 180 degrees out of phase. If the cancellation process was imperfect, the magnetic transformation would convert it to normal-mode noise. Not so with switching power supplies.

Switching power supplies have no up-front transformer. And, because their components are tightly packed, they offer many capacitive paths at various frequencies. Stray capacitive coupling inside your machine and ground loops between other devices can let common-mode noise slip into, around, and through the power supply and reach the computer's chips and logic. Also, your logic chip's ground reference is usually tied directly to power ground—a sure recipe for disaster. What this means is that at various frequencies, common-mode noise may appear across the logic circuits themselves.

Because the distance between connections on the chip is only a few microns, ICs can tolerate only a fraction of the voltage that the rectifiers inside the power supply can tolerate. Noise from a few volts to a few dozen volts will interfere with your processing. Common-mode noise exceeding a few dozen volts could destroy your computer's chips.

Ground Yourself

Ground, as it relates to computers, is probably the single most misunderstood electrical concept. As far as your computer is concerned, ground is not earth. Grounding something has nothing to do with driving a copper rod into your flower bed. The earth is not an electrical septic tank into which we flush unwanted noise to make it disappear forever.

Electricity travels in circuits, and current flowing to a point will flow away from that point. If current is directed to a ground wire, it will reemerge somewhere else along any electrical path that might be part of the ground circuit. This circuit may take different paths at different frequencies.

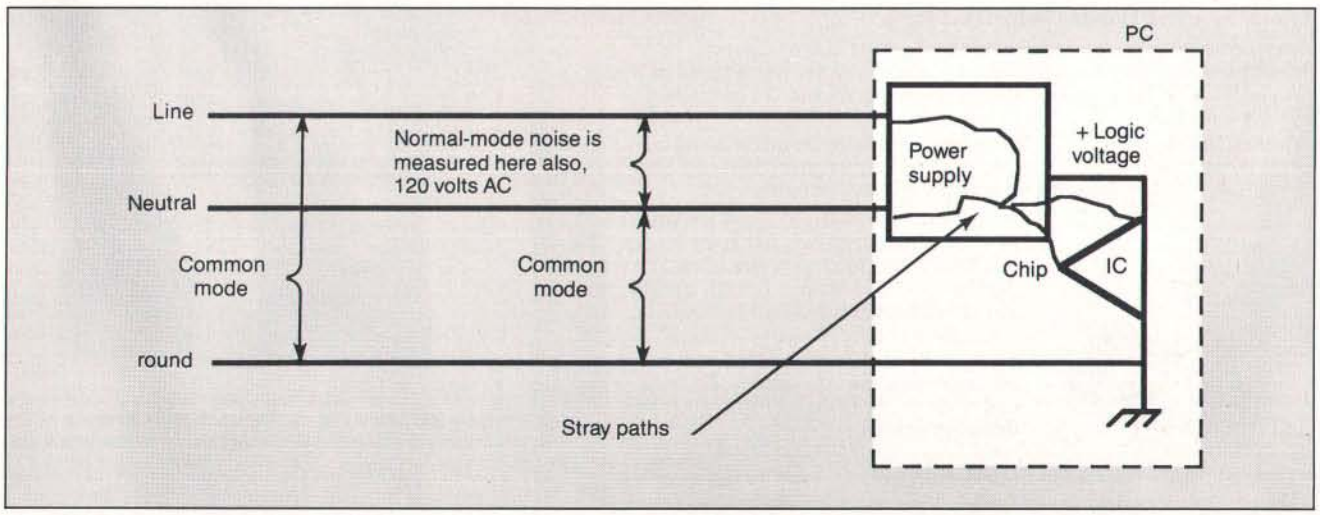


Figure 3: *Normal-mode noise appears as voltage between the line and neutral wires in a circuit. Common-mode noise appears between the neutral and ground wires. If common-mode noise can find a stray path (and it will, especially through a switching power supply), it will appear across the chip from one of its pins and the logic ground pin. Normal-mode noise appears across the power supply just like utility power.*

If a power glitch occurs in your computer at normal power frequencies, electricity directed to the ground wire should travel back to the electrical panel to trip a breaker. At higher frequencies, however, a noise signal may find stray paths through boards, cables, or between cabinets to be a far lower impedance route back to its source than the power ground wire. This is called a ground loop (see figure 4). Ground loops can be a source of processing errors as well as actual hardware damage.

Local area networks are extremely susceptible to ground loops. In such an environment, current will flow because of the electrical potential difference between the ground connections of different workstations. This undesirable current flow may induce dangerous voltage levels in nearby electronic components.

An IC is referenced to ground. It operates by detecting a logic level of so many volts with respect to ground. If the ground reference point changes in relation to the logic level, errors will result. If this voltage difference exceeds the *withstand* rating of the chip, current will bridge the substrate of your chips and destroy them.

Suppressing Those Surges

Before looking at the actual circuit elements involved in the common surge suppressor, let's look at what it is supposed to suppress. Typically, you think of a surge as a spike or an impulse. Figure 5 shows what an impulse might look like. It initially rises to a peak and then oscillates in a diminishing fashion until it dissipates.

There are two vital features to an impulse. The first is its kinetic energy (joules or watt seconds) determined by its peak voltage, current, line impedance, and time span. The second is its rise time, or the time it takes to rise from nominal voltage to its peak voltage.

It is the front slope of the impulse that causes damage to your computer. This rapid rate of change is full of energy at various frequencies. The faster the rise time, the more high-frequency components the spike contains. It is these high frequencies that find those stray paths and cause all the damage. Lightning, arcing, and sparking have extremely fast rise times. At these high frequencies, the physics of electricity and the paths it follows are very different from 60-Hz utility power. Your computer's circuitry was never designed to digest this kind of high-frequency energy.

Scientists have tried to quantify and define what the typical spike might look like. The result of their findings is a standard that has come to be known as the IEEE 587 ring wave (see figure 5). It is a waveform with strict parameters and is a test-measuring criterion for surge-suppression equipment. This is why so much good power equipment states proudly on its package that the product can withstand so many hits of the IEEE 587 test wave.

Recently, UL introduced a testing standard of its own, called UL 1499. In most respects, this waveform is similar to the ring wave. When you are in the market for surge-suppression products, look for these standards to tell you that the product actually performs as advertised.

But will surge suppressors really protect your computer?

Diversion Tactics

Actually, a surge suppressor doesn't suppress unwanted electrical energy; it diverts it. Rather than suppressing, absorbing, arresting, or otherwise making unwanted impulses disappear, these devices actually divert the energy from one path to another.

Transient suppression devices come in four different varieties: metal oxide varistors (MOV), zener diodes, filters, and gas tubes. By far the most popular device is the MOV. The term *varistor* means variable resistor and describes the MOV's basic function. As voltage builds up across this device's terminals, it reaches what's called the breakdown voltage. At this point, the varistor changes from a highly resistive device to a low-resistance device, and large amounts of current can then flow through it.

If you connect a MOV in parallel to your machine, when a spike comes along, the MOV will clip it. In other words, that portion of the impulse that rises above the MOV's breakdown voltage is clipped off and diverted through the MOV. This clipping level is usually around 140 V RMS. The peak let-through

continued

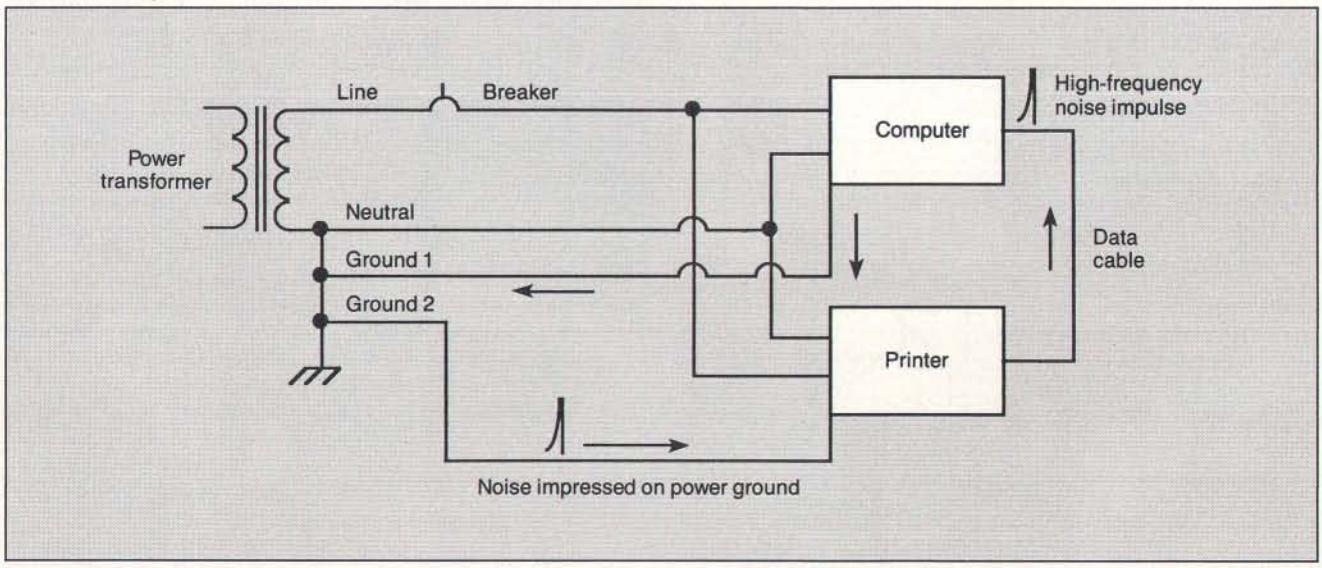


Figure 4: *Noise current will take the path of least resistance, a situation that may interfere with the transmission of data between devices or even cause damage.*

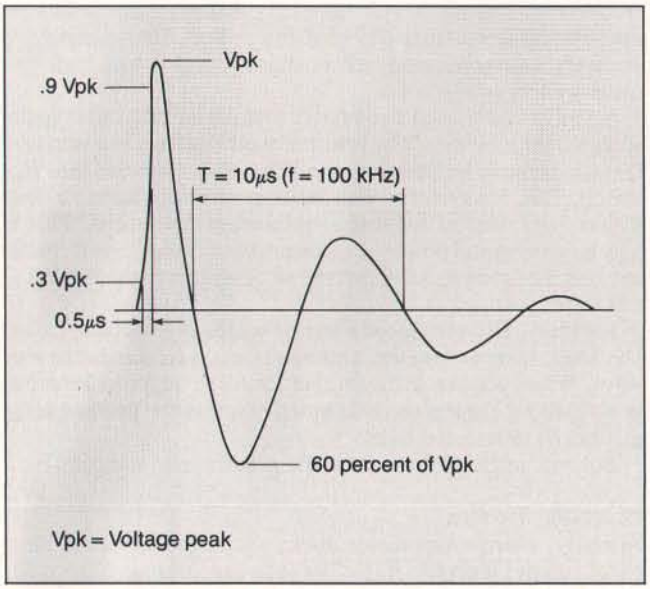


Figure 5: *The IEEE 587 ring wave is a testing standard for surge-suppression products. Engineers have found this wave shape to be typical of what might appear on 120-V circuits leading to your computer.*

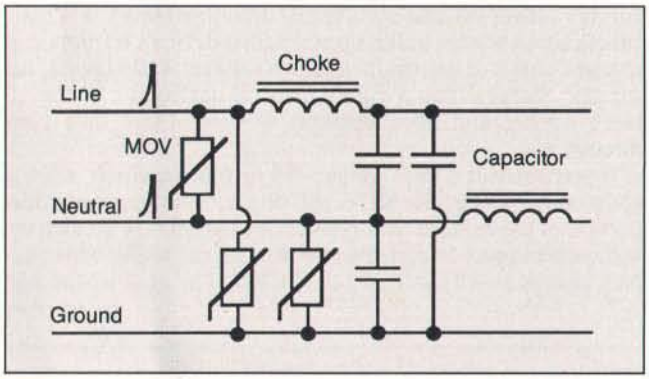


Figure 6: *Typical circuit of a surge suppressor. Most simple surge strips have only a MOV (metal oxide varistor) and capacitors from line to neutral.*

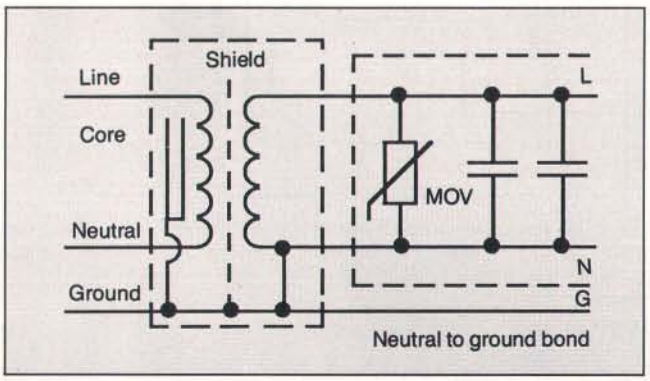


Figure 7: *A power-line conditioner contains an isolation transformer with secondary surge suppression and the neutral and ground bonded.*

voltage is likely to be as high as 340 V in some cases. Most often, you may think of a spike as appearing at the peak of the sine wave. But if the spike appears in the valley of the sine wave, the level of the voltage before clipping will be high. This is one of the weaknesses of this type of transient suppression device.

Zener diodes, sometimes called avalanche diodes, act similarly to MOVs. They do, however, have different performance characteristics. Zeners have a faster response time and come in sizes with a lower breakdown voltage than MOVs. MOVs, however, can usually handle more current than zeners. In order to take advantage of these complementary qualities, manufacturers often place both devices in surge suppressors.

Filters, in the form of capacitors and chokes (coils), are used in surge products to block the flow of noise current at the design frequency and to divert it through a lower-impedance path. Most surge suppressors have one or more capacitors. The better ones have chokes in series on the line and neutral wires.

Another device common to some suppression products is the gas tube. When voltage builds up across a gas tube's terminals, the gas inside the tube ionizes and becomes a conductive path. Through arcing, the path ionizes, and the energy is bypassed.

The arcing action of a gas tube, though, creates very undesirable high-frequency characteristics that make it inappropriate for placement near your computer. In addition, a gas tube can take a seemingly unimportant impulse and turn it into a damaging impulse. Yet, the market has seen the proliferation of tiny gas tubes inside surge suppressors. Evidently, designers think that including a gas tube in a surge suppressor will give you the illusion that it can handle enormous amounts of energy.

The proper use for a gas tube is in a lightning arrester placed near your building's service transformer. Enough wire exists between this point and your machine to block the passage of the high-frequency effects of gas-tube firing.

In figure 6, which shows a typical surge-suppressor circuit, notice the MOV that is placed between line and neutral. As this MOV conducts a high-energy impulse from the normal mode, current is dumped onto the neutral. This current flow creates a voltage drop between neutral and ground. By this process, the surge device has used normal-mode noise to generate common-mode noise. Photo 1 shows that the impulse created by this current flow is nearly as large as the one from line to neutral.

Notice that to protect your computer from common-mode noise, figure 6 also shows MOVs connected from line to ground and from neutral to ground. This is a good feature. But remember that common-mode noise sensitivity is significantly higher than that for normal mode. You must be concerned with the logic and any voltage that might appear across it. A MOV will allow up to several hundred volts to pass through before it activates.

Suppressor Circuit Caveats

In the surge-suppressor circuit (see figure 6) you see filtering elements made up of chokes and capacitors. This is a fairly well-engineered circuit. Someone has taken the time to worry about both normal- and common-mode noise and has included filtering as well. Unfortunately, simple surge strips that go for about $10 to $20 usually have only one MOV between line and neutral. Obviously, you should be concerned about what's inside the surge suppressor, though it is difficult (if not impossible) to tear open a product before you buy it.

There is still another problem. Not only does the common surge protector convert one kind of noise into the kind your computer finds least tolerable, but when parts of your device

continued



Data Sentry™

Protects Your PS/2 and PC Data

The DataSentry from Rainbow Technologies offers a cost-effective means of protecting files on any IBM PS/2, PC/XT/AT, or compatible. The DataSentry is a compact, user-installable, external hardware security system utilizing DES methodology. It is the only protection system of its type that is fully compatible with all models of the IBM PS/2 system.

Applications
- IBM PC/XT/AT and compatibles
- IBM PS/2 — *all models*
- Laptop computers

Benefits
- Secured modem transmissions
- File privacy on shared computers
- Department-wide data security

Features
- Simple to use and completely user-installable
- Can protect individual files or whole directories
- Encrypts files using DES or a fast proprietary algorithm
- Compresses encrypted files to save disk space
- Provides master keys for multi-level security systems
- Optional password protection

The DataSentry System. The Key to Safe Files.

RAINBOW TECHNOLOGIES

18011-A MITCHELL SOUTH IRVINE, CA 92714 USA
(714) 261-0228 TELEX: 386078 FAX: (714) 261-0260

© 1988 Rainbow Technologies, Inc. DataSentry is a trademark of Rainbow Technologies. IBM is a registered trademark of International Business Machines.

	1985	1986	1987	1988
Jan.	$4.00			$6.00
Feb.	$4.00	$6.00	$6.00	
March	$4.00		$6.00	$6.00
April	$4.00		$6.00	
May	$4.00		$6.00	$6.00
June	$4.00	$6.00	$6.00	$6.00
July		$6.00	$6.00	$6.00
Aug.	$4.00	$6.00	$6.00	$6.00
Sept.	$4.00	$6.00	$6.00	$6.00
Oct.	$4.00			
Nov.	$4.00			
Dec.	$4.00	$6.00		

BACK ISSUES FOR SALE

SPECIAL ISSUES and INDEX	
BYTE '83–'84 INDEX	$2.00
BYTE 1985 INDEX	$2.50
BYTE 1986 INDEX	$2.00
BYTE 1987 INDEX	$2.50
1985 INSIDE THE IBM PCs	$4.75
1986 INSIDE THE IBM PCs	$5.00
APPLICATIONS SOFTWARE TODAY SPECIAL	$4.00

Circle and send requests with payments to:

BYTE Back Issues
One Phoenix Mill Lane
Peterborough, NH 03458
(603) 924-9281

☐ **Check enclosed** *Payments from foreign countries must be made in US funds payable at a US bank.*
☐ **VISA** ☐ **MasterCard**

CARD # _____ EXP. DATE _____

SIGNATURE _____

The above prices include postage in the US. Please add $ .50 per copy for Canada and Mexico; and $2.00 per copy to foreign countries (surface delivery). Please allow 4 weeks for domestic delivery and 12 weeks for foreign delivery.

European customers please refer to Back Issue order form in International Advertising section of book.

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

fail, the device won't give you any indication that you no longer have surge protection. Because they are connected in parallel to your computer, when MOVs or zener diodes fail, your machine will still run and you won't know that the surge device has passed away.

Perhaps to make you feel better, some manufacturers build

continued

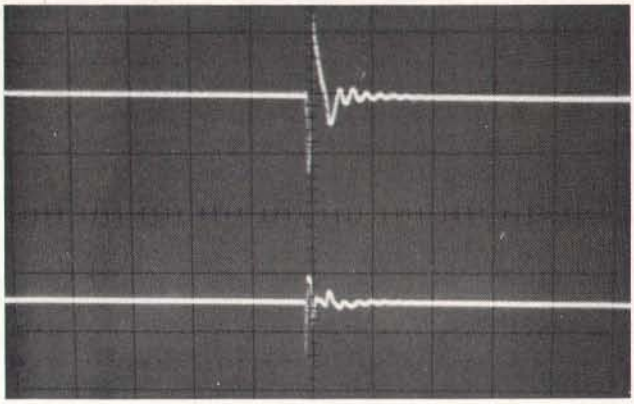


Photo 1: *As the impulse in the normal mode (top trace) is conducted by the MOV from line to neutral, another impulse (bottom trace) appears between neutral and ground, the common mode.*

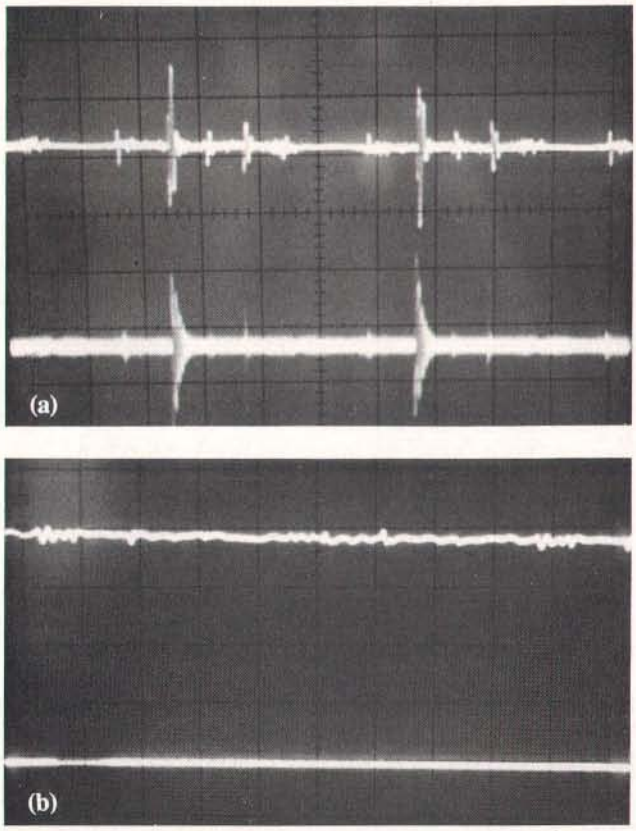


Photo 2: *These photos show noise in an electrical circuit,* **(a)** *before and* **(b)** *after insertion of a power-line conditioner. In both photos, the top trace is normal-mode noise and the bottom trace is common-mode noise.*

HOW DO YOU GET A JOB WITHOUT EXPERIENCE? AND HOW DO YOU GET EXPERIENCE WITHOUT A JOB?

Most young people have one answer to this problem. They avoid it until they're out of college. But they could be getting solid work experience while they're still in college. With your company's help. And ours.

We're Co-op Education. A nationwide program that helps college students get real jobs for real pay, while they're getting an education.

But we can't do it without you. Those real jobs have to come from real companies. Like yours.


For more information on how you can participate in this valuable program, write Co-op Education, Box 775E, Boston, MA 02115.

Not only will you be giving students a chance to earn money and pick up the most valuable kind of knowledge, you'll be giving yourselves a chance to pick up the most valuable kind of employee.


Co-op Education.

You earn a future when you earn a degree.


Ad Council A Public Service of This Publication ©1987 National Commission for Cooperative Education



1. Start with clean page at 1:10 p.m.




2. Type in text through Edit window.




3. Load image and add lines.




4. Add lines to form table.



5. Type and place sub heading.



6. Use tool 7 to add multiple lines.



7. Make connecting lines invisible.



8. The finished form in Reduced View at 1:24:32 p.m.

Create a professional form in less than 15 minutes!!!

ACERFORM is an MS-Windows application. All the advantages you enjoy and rely on from Windows, like excellent graphics, are at your fingertips when you use ACERFORM. With ACERFORM, lines can be as thin as a strand of hair or as thick as your pencil. For frame and text backgrounds you have 16 patterns to choose from.

Corporate logos and other images are easily loaded and sized. With SoftFont, character styles come in a wide variety of shapes and sizes -- and the fonts you select are shown right on the screen, just as they appear on your printed form.

Selectable line widths range from 0.5 cm to .01 cm.

ACER FORM

Actual loaded image.

ACER FORM

Loaded, resized image.

ACERFORM offers a comprehensive toolbox with 12 tools to aid you in drawing lines, loading and cropping images, and typing or loading text. There's also a tool especially for block operations, such as saving a part of your form for loading into another form or uniformly editing parts of your form.



The ACERFORM Toolbox offers an unprecedented range of form tools.


ACERFORM's text editing feature allows you to utilize data from several sources. You can key in directly from your keyboard or load data stored in WordStar, dBase III Plus and Lotus 1-2-3.

ACERFORM enables both mouse and keyboard users to develop a form efficiently without dealing with complicated screens and strange codes. The command menus and form tools complement one another to make form building a logical and simple process.

ACERFORM supports most laser printers and is for use on IBM PC/XT/AT/386 & PS/2 compatible systems. Write us today for more details.

USING ACERFORM YOU CAN:

- Merge data from external sources as you print.
- Easily draw lines and frames and place them on your form accurately.
- Load, place, crop and size images accurately.
- See the actual form and all font typefaces and sizes on your screen as you work.
- Fill out the form completely, partially, or not at all.
- Make this advertisement. (We did!)

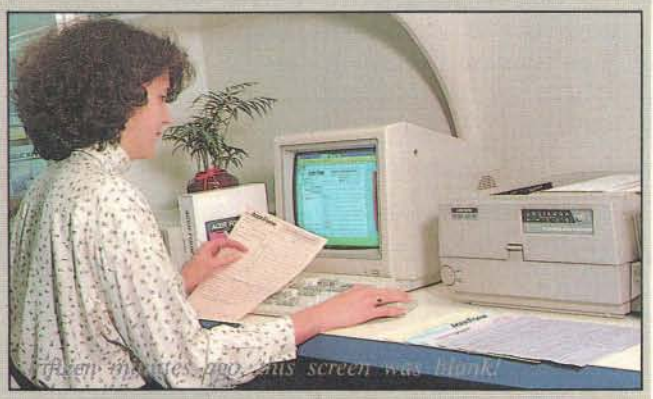

Then, minutes ago, this screen was blank!


MS-Windows is a registered trademark of Microsoft.
IBM, PC/XT/AT and PS/2 are registered trademarks of International Business Machines Corp. WordStar is a registered trademark of MicroPro, Inc. dBase III Plus is a registered trademark of Ashton-Tate, Inc. Lotus and 1-2-3 are registered trademarks of the Lotus Development Corp. ACER is a registered trademark of Acer Incorporated.

This advertisement was created using ACERFORM.

The Third Wave Publishing Corp.
Dept. J, 977 Min Sheng East Road, Taipei 10581, Taiwan, R.O.C.
TEL:886-02-763-0052 TLX: 29335 THIRDWVE FAX:886-02-765-8767

IntegrAda™

...the first completely integrated Ada Programming Support Environment priced for the individual programmer on a PC. Designed for the novice as well as the software engineer.

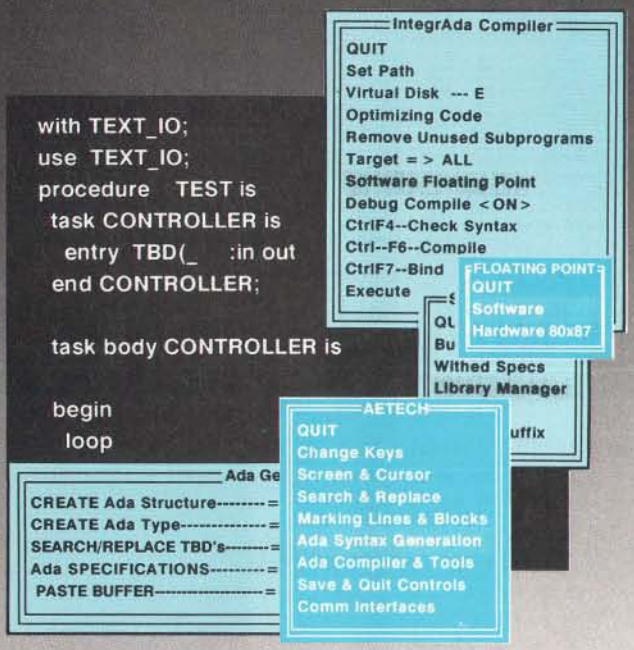

- Validated Production Compiler
- Use on 8086,80186,80286,80386.
- Full 640KB .EXE Programs
- No Extra Memory Required
- No Math Coprocessor required.
- On-Line Library Management
- Math, Text, Console Packages included
- Multiple File Code Retrieval
- Full-Color, Full Featured Editing
- Selectable Function Keys
- Ada Subprogram and Package Generation
- Ada Type Generation
- Ada Sensitive Cursor
- Interactive Cursor Error Correction
- Interface to Ada Design Language (ADADL)
- Ada Standard Pretty Printer
- DoD 2167 Documentation Features
- Optional On-Line Ada Training Course
- No Run-Time Royalties

AETECH *380 Stevens Ave, Suite 314,*
Solana Beach CA.92075
(619) 755-1277 FAX (619) 755-7540

"...the first choice among the half dozen or so compilers now on the market"— PCWEEK

AETECH *Introductory Offer* **$495**

Circle 11 on Reader Service Card (DEALERS: 12)

into surge protectors a status indicator—usually a little green light. A green light tells you everything is OK, right? Wrong. Most status indicators just tell you that power is flowing. Thus, you may think your surge strip is protecting you, but you don't know for sure.

So, is a surge suppressor the answer to protecting your equipment? Not really. There is an alternative that will protect your computer investment much better than a surge suppressor.

A Better Solution

If you want to protect your investment in computing without wasting money on products of dubious utility, or if you are trying to solve power problems you already have, I recommend a power-line conditioner with a built-in isolation transformer at its heart (see figure 7). Properly designed, the transformer, along with a couple of capacitors and a MOV across the secondary, will give you security far superior to that of a surge protector. Photos 2a and 2b (before and after insertion of a power-line conditioner) show how effective this design can be in protecting your computer from undesirable voltage impulses.

The isolation transformer acts as an inductive cushion, stripping away high-frequency components of normal-mode noise. Any remaining normal-mode noise will be shunted by the filter capacitors connected across the transformer's secondary, or by the MOV if it contains high energy.

Perhaps a power-line conditioner's most important feature is the neutral-to-ground bonding on the secondary side of the transformer. This is a requirement of the national electrical code that has some very happy consequences for all microcomputer users. This bonding is a short circuit for common-mode noise, and, since there is no impedance across a short circuit to allow a voltage to develop, common-mode voltages do not occur (Ohm's law: current × impedance = voltage). With this type of device, no voltage will appear across your logic circuits.

Suppress or Condition?

When all's said and done, then, what kind of device will really power-protect your computer? If you opt for a surge suppressor, a device that is relatively inexpensive and easily available, what features should you make sure it has? You want filtering as well as surge suppression. You have to have both normal- and common-mode protection. And you should have some way of determining the state of the device's internal components. In addition, be sure that it has been tested to UL 1499 or IEEE 587 standards. To obtain this type of surge suppressor, you will probably have to pay more than $100. But even if you do choose this route, you have hardly obtained the ultimate in power protection for your computer.

If you opt for the alternative, a power-line conditioner, you may need to ask the advice of a power professional to help you make the best choice, or you can purchase your device from an industrial or commercial dealer. This more effective product costs around $250, much more than a simple surge strip.

Computer power protection is not as easy or inexpensive as you might think. Protective devices are like insurance—a trade-off between cost and risk. In most cases, a quality choice, while it may not be the least expensive, is the best choice. ■

Editor's note: *Next month, in Part 2 of this series, Mr. Waller will discuss backup power devices.*

Mark Waller is a computer facilities consultant and the author of Computer Electrical Power Requirements *and* Mastering PC Electrical Power, *both published by Howard W. Sams. He can be reached on BIX as "editors."*

The Hot Performers.



"Solid performance and low price make this system an excellent value."
—InfoWorld

ME 386-20

20 MHz 80386-20 processor ☐ Microsoft OS/2 and DOS compatible ☐ 1 MB 32-bit RAM running at "0" wait state (upgradable to 8 MB) ☐ Socket for 80387/80287 math co-processor ☐ High performance NCL floppy/hard disk controller ☐ 1.2 MB floppy disk drive ☐ CMOS clock/calendar with battery back-up ☐ Enhanced keyboard

$2350
Upright Case Add $300

ME 386-18

18 MHz 80386 processor ☐ Microsoft OS/2 and DOS compatible ☐ 512K 32-bit memory on board ☐ Two 32-bit expansion slots ☐ Socket for 80387 math co-processor ☐ High-performance NCL floppy/hard disk controller ☐ 1.2 MB floppy disk drive ☐ CMOS clock/calendar ☐ Enhanced AT keyboard $1799

★ SPECIAL ★

WHILE THEY LAST!

ME V20 ☐ 64K (upgradable to 640K) ☐ 360K floppy disk drive ☐ Monochrome graphics card ☐ Monochrome monitor ☐ Keyboard ☐ Complete system...$499.00

ME 286-12

8/12 MHz 80286 processor ☐ 512K memory (upgradable to 1 MB on board) ☐ "0" wait state option (s.i. 15.3) ☐ Microsoft OS/2 and DOS compatible ☐ 8 I/O expansion slots ☐ High-performance NCL floppy/hard disk controller ☐ 1.2 MB floppy disk drive ☐ CMOS clock/calendar ☐ Enhanced keyboard $899

The Network Solution

ELS Network for two-to-four users. Increase your company's productivity without making a big increase in expenditures. Complete software... $499

Call for all Novell Products

HOT PORTABLES

ME Roadrunner

12 MHz 80286 processor ☐ Socket for 80287 math co-processor ☐ 640K memory (1 MB option) ☐ New Super-Twist LCD with Backlit and Reverse; 640 x 200 dots (640 x 400 option); 80 char. x 25 lines ☐ Monochrome/Color graphics card for external monitor ☐ 6 expansion slots ☐ Floppy/hard disk controller ☐ Serial/-parallel/clock-calendar ☐ 1.2 MB floppy disk drive ☐ 20 MB hard disk (30, 40, or 60 MB optional) ☐ 12-function AT style keyboard ☐ 110/220V auto-switchable ☐ 20 pounds $1799

Roadrunner Plus (386)

Intel 80387 processor ☐ 6/16 MHz clock speed ☐ 1 MB of memory ☐ Socket for math co-processor ☐ Floppy/hard disk controller ☐ 1.2 MB high capacity floppy disk drive ☐ 42 MB fast access hard disk (60 MB optional) ☐ Serial/parallel ports ☐ Color/mono display card for external monitor ☐ New Super-Twist LCD with Backlit and Reverse; 640 x 400 dots; 80 characters x 25 lines ☐ 6 expansion slots ☐ 12-function keyboard ☐ 110/220V auto-switchable ☐ 20 pounds $3399

Prices and availability subject to change without notice.

VISA master charge

CALL TOLL-FREE

(800) MICRO-21

in Calif. (714) 662-1973

ME MICRO EXPRESS

2114 South Grand Avenue
Santa Ana, California 92705
Fax: (714) 662-1258 - Telex: 910 240 3029

Come See Us At COMDEX Booth #C607

Circle 165 on Reader Service Card (DEALERS: 166)

Discover Parallel Processing!



Monoputer™

The Most Cost Effective Transputer Development System

MicroWay's **Monoputer** is the best selling Transputer-based PC coprocessor in the world. It was the first board available to run the 20 MHz T414 or T800. As a result, it received many rave reviews in the UK (available on request) and became the standard Transputer software development tool. Parallel code can be executed on a single Monoputer or on an array of Monoputers wired together by their external link lines. The Monoputer includes 2 megabytes of 100 nsec DRAM, a 20 MHz T414 or T800 and the MicroWay stand alone Occam Compiler, which generates Transputer code that runs under MS-DOS. Optional tools include our licensed version of the TDS and a Pascal, Fortran, C, and Prolog.

Quadputer™

Mainframe Power For Your PC!

MicroWay's **Quadputer** is the most versatile multiple Transputer coprocessor on the market today. It can be purchased with 2, 3, or 4 Transputers, each of which has 1 or 4 megabytes of local memory. Two or more Quadputers can be easily cabled together to build larger parallel processor systems. A single Quadputer using four T800s provides 40 MIPS of CPU and 6 megaflops of NDP throughput at one fiftieth the cost of a comparably performing mainframe.

For more information please call (617) 746-7341. After July, 1988, call (508) 746-7341.

MicroWay

The World Leader in PC Numerics

P.O. Box 79, Kingston, Mass. 02364 USA (617) 746-7341
32 High St., Kingston-Upon-Thames, UK 01-541-5466
St. Leonards, NSW. Australia 02-439-8400

TRADEMARKS: Quadputer, Biputer and Monoputer of MicroWay, Inc. INMOS, Transputer, TDS, OCCAM of INMOS Corp. MicroWay™ is a registered trademark of MicroWay, Inc.

Part 1

A SUPERCOMPUTER

Steve begins a supercomputer project by looking at multiprocessing basics

Every month, I get several hundred letters from readers. Many of them ask for help with specific hardware or software problems, but there are always a few letters chiding me for not building a *real* computer. They imply that even 80386 and 68030 machines are simply uninteresting, and that I should design a supercomputer of one sort or another.

Unfortunately, the problem with a supercomputer is that it takes super software to drive it. Remember, my favorite programming language is solder, and that doesn't make me particularly fond of introducing "Yet Another Computer System" with "Yet Another Programming Language."

But around the Circuit Cellar we like to do things that are out of the ordinary. I thus decided to see what it would take to build a supercomputer, and I thought you would be interested in how I determined the proper architecture. The result is a three-part description of multiprocessing that starts with theory and ends with reality.

The Circuit Cellar supercomputer is a multiprocessor computer specialized to evaluate the iterative formula describing the Mandelbrot set, so a more accurate name is the Circuit Cellar Mandelbrot engine. A driver program running on an IBM PC AT presents the results in real-time color on an EGA or a VGA, with smooth panning and scrolling so you can examine the results on the fly. System performance increases as you install more processors. You can start with a single processor, graduate to 64 processors (as in my example), or work up to a monster system with 256 processors.

The Circuit Cellar Mandelbrot engine starts at roughly twice the performance of an 8-MHz AT with just one card of 8 processors, increases smoothly past a 16-MHz 80386 with three cards (24 processors), and zooms far beyond it with 64 processors (eight cards). I haven't found anything (under $500,000) to compare with a full-bore system of 32 cards. Not bad, considering that the Mandelbrot engine is based on the lowly Intel 8051.

In this first part, I'll describe how to increase the performance of single-processor systems and show why there's a definite upper limit to processing speed. The solution seems to be using multiple computers on the same problem, so I'll explore some of the different ways to connect multiple processors in arrays, and the troubles that arise from these connections.

Before launching into a discussion of multiprocessing, I'll review some of the performance problems and solutions for single-processor systems. I'll start with the simplest possible system and work up to pipelining and caching.

Building Performance

In comparing performance, you must be careful what you're measuring. A convenient unit is the number of instructions per second, which you get by dividing the total number of instructions executed by the elapsed time from start to finish. A processor that executes twice as many instructions in a given time has twice the performance, for an increase of 100 percent. (Some of the examples I'll give will focus on the number of cycles per instruction, which is the reciprocal of the number of instructions per cycle. Be careful not to compute the performance ratio upside down.)

Figure 1 shows the two essential components of a computer: a CPU and memory to hold the program and data. The fat arrow between the two represents the address, data, and control lines running between them. For these discussions, I'll ignore the necessary I/O hardware and presume that the program and data are already loaded into memory.

This CPU is so simple that it doesn't include any registers; all operations must refer to memory locations. For example, an ADD instruction must specify three memory locations: one each for the two numbers to be added and where to put the result. Although your favorite microcomputer may not have such an ADD instruction, the earliest computers (back in the Good Old Days of relays and vacuum tubes) actually worked this way. Figure 2 shows the execution sequence for the ADD instruction I've described. Each vertical line marks a single CPU clock cycle or memory access.

The first step, of course, is to fetch the ADD instruction from memory. After the instruction arrives in the CPU, it is decoded to determine the addresses of the operands. The CPU then fetches the operands and performs the addition. Finally, the CPU stores the result back into memory. This sequence repeats for each instruction, with some variation.

What's of interest is that a single instruction requires four memory accesses: an instruction fetch, two data fetches, and one data store. During two more cycles, memory is idle while the CPU decodes and executes the instruction. Other instructions have different sequences, but the overall pattern is similar.

The memory in this example must be able to return data within a single CPU cycle and also be ready for another access at the start of the next cycle. Dynamic RAMs need some time after an access to get ready for the next operation; the minimum time between accesses is the DRAM's cycle time. The memory's cycle time is necessarily longer than the access time required to return data. Typically, DRAMs have a cycle time that's about twice the access time.

continued

COPYRIGHT © 1988 STEVEN A. CIARCIA. ALL RIGHTS RESERVED.

For example, premium DRAMs with a 100-nanosecond access time have a cycle time of about 200 ns, so each CPU cycle must be 200 ns. The ADD instruction I've presented will therefore take 6 × 200 ns, or 1200 ns. Some instructions may be faster and some slower, so the CPU will run at about 800,000 instructions per second.

Increasing the performance of this machine by a factor of 2 sounds simple enough: Double the clock frequency and reduce the CPU and memory cycle times to 100 ns. Unfortunately, DRAMs with a 50-ns access time and a 100-ns cycle time are on the forefront of technology right now, and more expensive than you can imagine. But all is not lost.

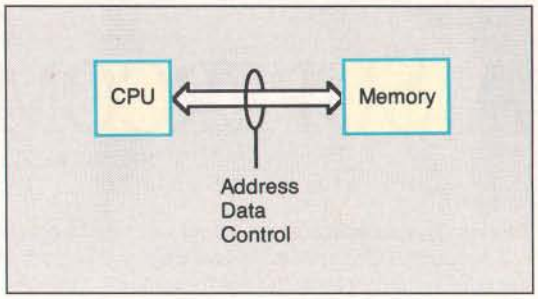


Figure 1: *The essential parts of a computer system.*

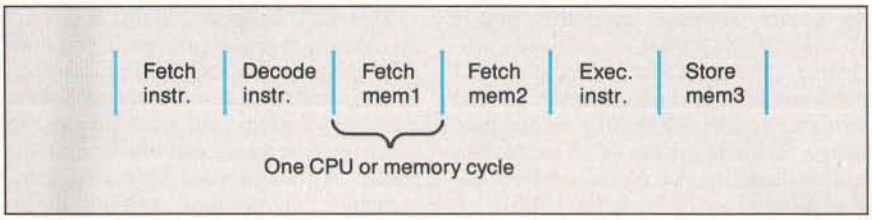


Figure 2: *Execution sequence for the instruction* ADD mem1,mem2,mem3.

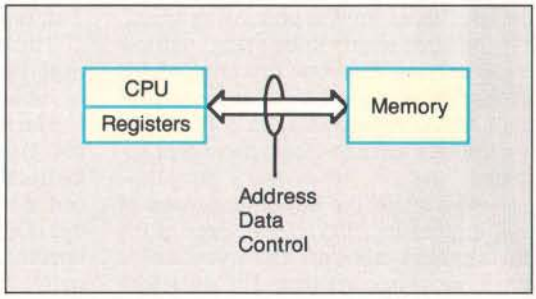


Figure 3: *Adding registers to the CPU of figure 1.*

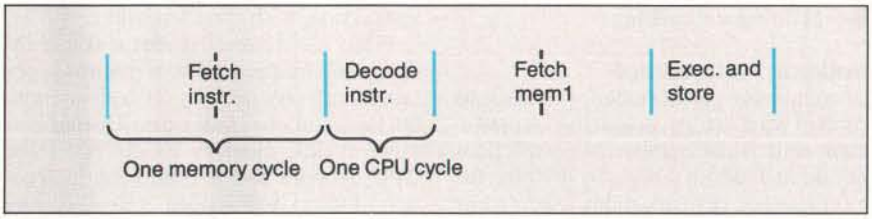


Figure 4: *Execution sequence for* ADD mem1,reg. *Note that memory access is now two CPU cycles (see text).*

Registered Speedup

Figure 3 shows a more complex CPU with internal data registers. Each register can hold the same amount of data as one memory location, so an instruction can refer to either memory or registers. Because the registers are on the CPU chip, register accesses are faster than memory accesses. To take advantage of this, the definition of an ADD instruction changes so that it now adds the contents of a memory location to an internal register and puts the result back into the same register. This reduces the number of memory accesses to two: one instruction fetch and one data fetch.

The reason for these changes is to let the CPU run with a faster clock rate than the memory could otherwise tolerate. The CPU cycle time can now be 100 ns, half the memory cycle time of 200 ns. Any memory access must include one extra cycle, but operations within the CPU can now proceed twice as fast as before.

Figure 4 shows the execution of the new ADD instruction. Fetching the instruction takes two clock cycles because of the memory access, but decoding it takes only one. Fetching the operand from memory takes two more cycles, but the result is computed and stored in a register in a single cycle. The ADD instruction takes six cycles from start to finish, but the faster CPU clock rate reduces the total elapsed time to only 6 × 100 ns, or 600 ns, half that of the processor in figure 1.

Both processors use the same type of memory, but the second system has twice the performance of the first. Bearing in mind that a typical system has only one CPU and several megabytes of memory, a more complex CPU is a good way to improve the overall system performance without increasing the overall cost beyond reason.

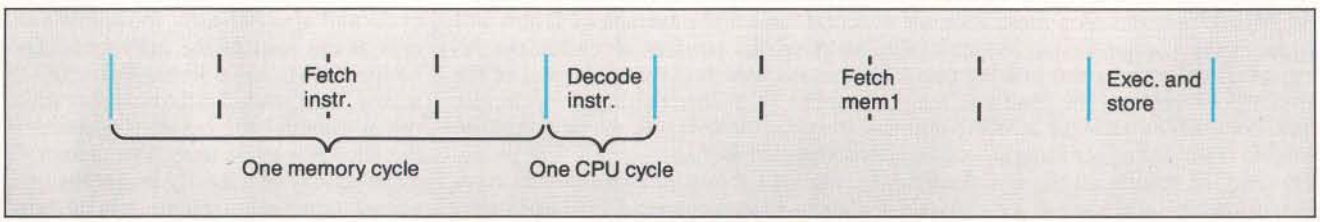


Figure 5: *Doubling the CPU clock speed for the instruction shown in figure 4 yields this sequence. Since the CPU is running twice as fast, memory access now requires four cycles.*

The extra cycle for each memory access is commonly called a wait state. Many of the newer AT clones run with zero-wait-state memory, which simply means that the memory can keep up with the processor. The complete details are a little more complicated than I've shown here, because the AT's memory is actually measured by access time rather than cycle time, but the principle is similar.

If doubling the CPU clock rate helped so much, how about doubling it again? Memory accesses now require 4 cycles (4 × 50 ns, or 200 ns), and figure 5 shows what happens. The ADD instruction now takes 10 cycles, for an elapsed time of 10 × 50 ns, or 500 ns. Doubling the clock rate improves performance by only about 20 percent because the CPU now spends most of its time waiting for memory accesses.

But if 100-ns-cycle-time memory was too expensive, you can imagine what 50-ns memory will cost. At some point, the system will outrun the fastest DRAMs, so static RAMs are the only choice. SRAMs have about 25 percent the density of DRAMs, so the chip area that can hold a 1-megabyte DRAM will hold only 256K bytes of SRAM. Prices are driven by chip area, so the memory cost increases by a factor of 4, even without considering the additional cost of the faster memory.

Access Caching

There's another trick we can use: memory-access caching.

Although the system may have megabytes of memory, most program instructions are clustered in small groups. For example, a loop may execute a dozen instructions hundreds of times. Data accesses can be clustered in the same way, as with a word processor updating successive characters in a buffer.

A cache takes advantage of this typical program behavior by storing the most recently accessed instructions and data in a local memory that's much faster than the main memory. Figure 6 shows a cache inserted between the CPU and the memory unit. Instructions and data in this cache can be returned in one cycle, just like the CPU registers. But if there's a cache miss and the cache must access the main memory, the access will take five CPU cycles.

Assuming that the CPU is running at 50 ns, figure 7a shows that an ADD instruction with all cache hits takes only 4 × 50 ns, or 200 ns. If those hits turn into misses, the ADD instruction takes 12 × 50 ns, or 600 ns (see figure 7b). It's obvious that the cache hit ratio determines the overall system performance.

More complex caches guess where the processor will need data and prefetch from those locations so that the CPU's accesses will be hits. Some systems have separate instruction and data caches with different updating strategies to take advantage of the differences in access patterns. In fact, a cache is one of the trickiest parts of a system, and it can harbor the most obscure bugs for the longest times.

The Last Drop: Pipelining

We can squeeze more performance from the processor by introducing instruction pipelining. Pipelining, also known as overlapped execution, takes advantage of the fact that each instruction breaks down into several distinct phases. The ADD instruction I've been using has four phases, which I'll call I-fetch, I-decode, D-fetch, and D-store. By adding CPU hardware to handle each phase separately, we arrive at figure 8.

Figure 9 shows the sequence of events as the CPU begins executing a series of ADD instructions, each with different memory and register operands. A new ADD instruction starts every clock cycle, so, after the pipeline fills, the throughput is one ADD instruction every clock cycle. Although an ADD instruction (with cache hits) still takes four cycles, one ADD instruction finishes every cycle, so the overall performance is 50 ns per ADD instruction.

In this example, the pipeline hardware improved performance by a factor of 4 at the same clock rate. As with the other tricks, pipelining doesn't always provide that much improvement. For example, if an instruction needs a register set by a previous ADD instruction, the CPU must ensure that the instructions complete in the right order.

Not all instructions have the same number of phases, so the pipeline may not always be full. Branch instructions are a particular problem, because the system can't determine the next instruc-

continued

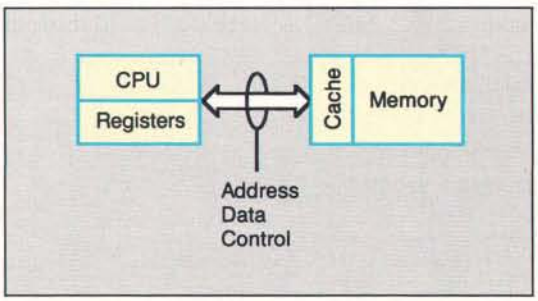


Figure 6: *The modified system from figure 3 is further modified by adding a cache between the CPU and memory.*

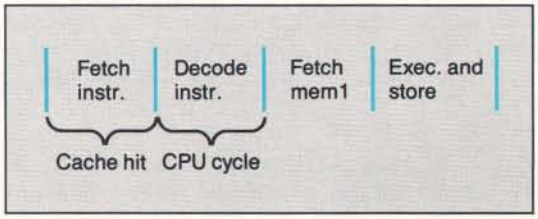


Figure 7a: *Executing the instruction* ADD mem1,reg *on the cached system, assuming one-cycle cache hits.*

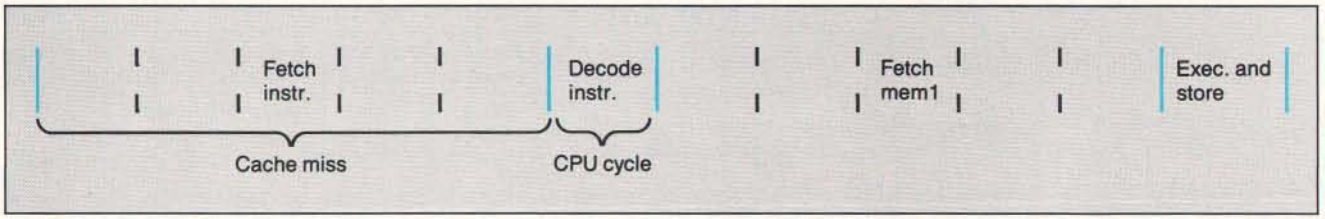


Figure 7b: *Executing the same instruction as in figure 7a with five-cycle cache misses.*

tion address until after the branch is decoded. As with caches, pipelines require some very subtle logic to take account of all the possible combinations.

It's worthwhile to remember that these tricks do not always improve the processor's performance. For example, if a program doesn't use a small set of data that fits into the cache, every data reference will be a cache miss. Similarly, if the program has many branches that flush the pipeline, the throughput will drop off to the level of a processor that hasn't been pipelined. No matter what the hardware assumes, someone can always write a program to bring the system to its knees.

Performance Limits

From these examples, you can see that the ultimate limit to a processor's performance is one instruction per clock cycle. Although several instructions may be in the pipeline, each clock cycle will produce only one result at a time. That's the upper, theoretical, ideal limit, so cache misses and pipeline flushes can only detract from it.

Because a single processor can produce only one result in a clock cycle, the only way to boost performance (for a given processor design) is to increase the clock frequency. This explains the "clock race" pushing 80386 machines beyond 20 MHz. Unfortunately, performance increases by the same factor as the clock rate. Therefore, a 24-MHz 80286 is, at best, three times faster than an 8-MHz 80286.

What the block diagrams do not show is the incredible amount of hardware required to add caches, pipelining, and all the other sorcery to support the higher clock rates. All this circuitry must run at the increased speed, and designers find out that tricks that worked well at lower speeds aren't as effective at higher speeds.

Regardless of your cleverness, the hardware circuit technology will set an upper limit to the clock rate. Mainframe computers, with custom LSI chips and optimized interconnections, run at about 60 MHz. In round numbers, 30 MHz is the fastest clock rate you'll see on your desktop computer for quite a while, because the price of the technology goes up dramatically beyond that point.

A 30-MHz clock rate means that a processor can produce one result every 33 ns at best. If the program and hardware can support one instruction per clock cycle, the processor will hit 33 million instructions per second. In real life, of course, your mileage may vary....

To put this into perspective, a standard 4.77-MHz IBM PC runs at about 0.1 MIPS. A stock 8-MHz AT runs at about 0.5 MIPS, and a 20-MHz PS/2 Model 80 does about 3 MIPS. The best we can expect in the near future is only another order of magnitude faster.

Obviously, something has to give if we want still more performance from a computer system.

Architectural Choices

If one processor can deliver one answer in one clock cycle, how many answers will two processors deliver in the same time? Although this sounds like a child's riddle, the answer is profound: two!

The work needed to solve some problems can be divided more or less equally among multiple processors. If each processor can run simultaneously, the total performance increases directly with the number of processors. Two processors will produce the result in half the time of a single processor, and so on.

There are several different types of multiprocessor systems, each suited for a different class of problem. I'll discuss some of the main architectural choices and describe what sort of problem each is best suited to solve; after that, the description of the Circuit Cellar supercomputer will make more sense.

A *scalar* is a mathematical term indicating a value that can be expressed as a single number. A scalar computer, therefore, can work on a single number at a time. You are probably most familiar with scalar processors, although you may never have thought of your computer in quite that way before. All the examples in the previous sections have dealt with scalar processor design.

A *vector* is a value that must be expressed with two or more numbers. For example, the coordinates for a point in space consist of three numbers: the distance from the origin along the x, y, and z axes. The notion of a vector is more flexible than that, though, and can describe

continued

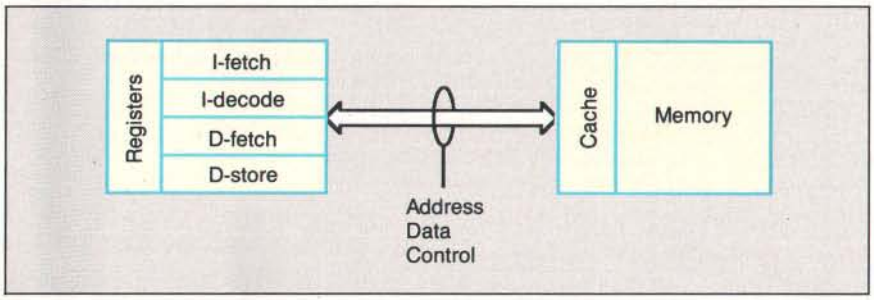


Figure 8: *In a final attempt to improve throughput, pipelining is added to the CPU.*

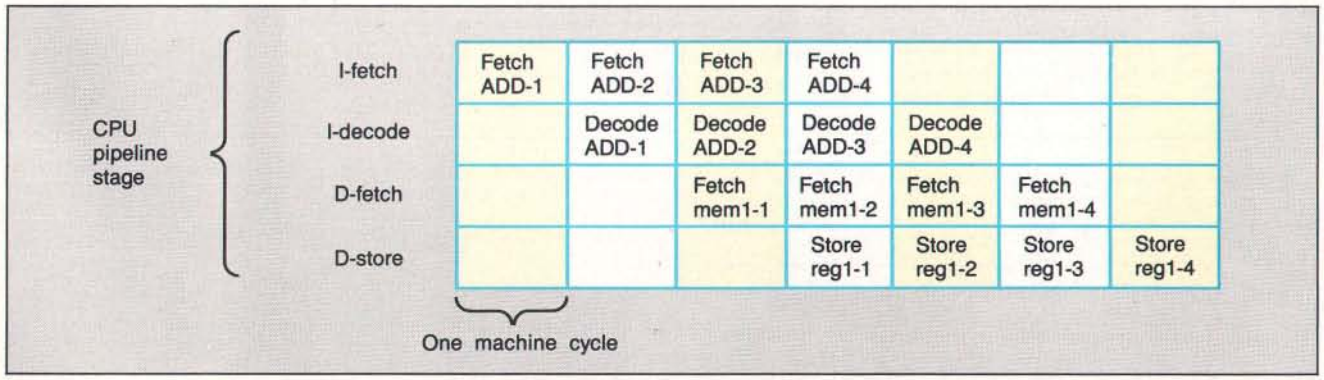


Figure 9: *The CPU from figure 8 executes a series of* `ADD mem1,reg` *instructions.*



Don't Be A Clone Alone.

The largest group of IBM-compatible users in the world shares its problems and solutions online every day in CompuServe's IBM® and Tandy® Forums. And you can join them.

Find out what hardware and software works best with your system, and what quirks to expect before buying it. Then work out the bugs with someone who has already solved the problem.

Are you going to end up paying more for a low-price peripheral, or have you really found an outstanding deal? Ask someone who's bought one.

Questions about printer compatibility? Add-on boards? Visit a CompuServe IBM or Tandy Forum and get the answers. There's no better way to get more out of your computer.

To join CompuServe, see your computer dealer. To order direct or for more information, call 1 800 848-8199. In Ohio and Canada, call 1 614 457-0802. If you're already a member, type GO IBMNET or GO TANDYNET at any ! prompt.

CompuServe®

An H&R Block Company

Circle 61 on Reader Service Card

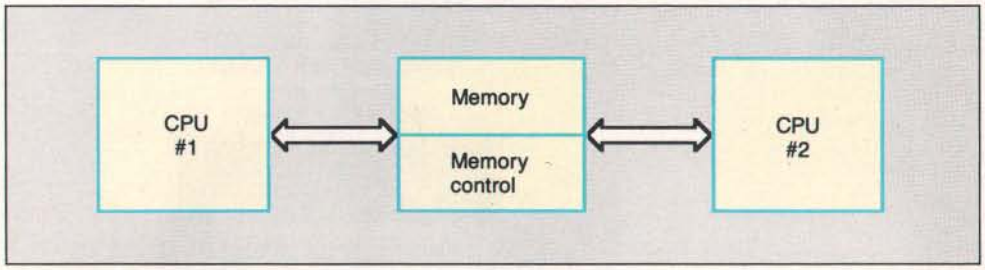
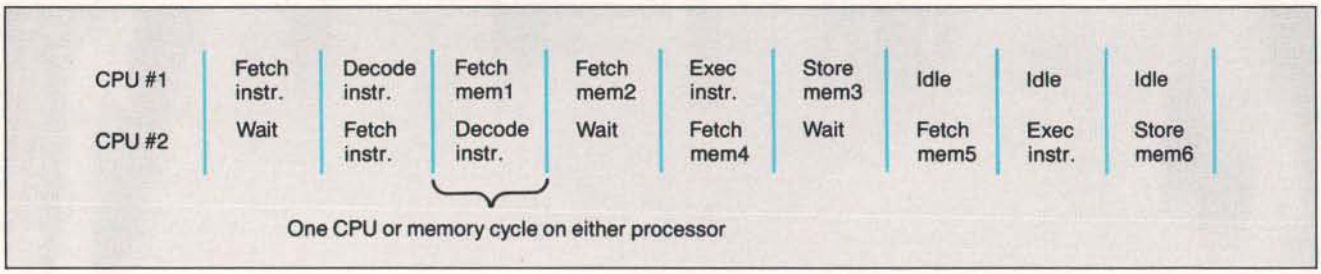


Figure 10: *Two processors connected to a common memory. Access to the memory is regulated by a memory control.*

Figure 11: *Both CPUs of the system described in figure 10 execute* ADD *instructions.*▼



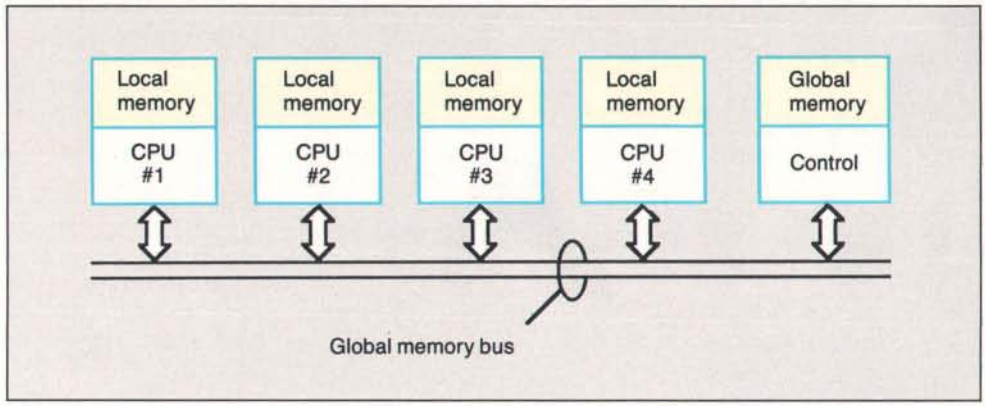


Figure 12: *A four-way tightly coupled multiprocessor system.*

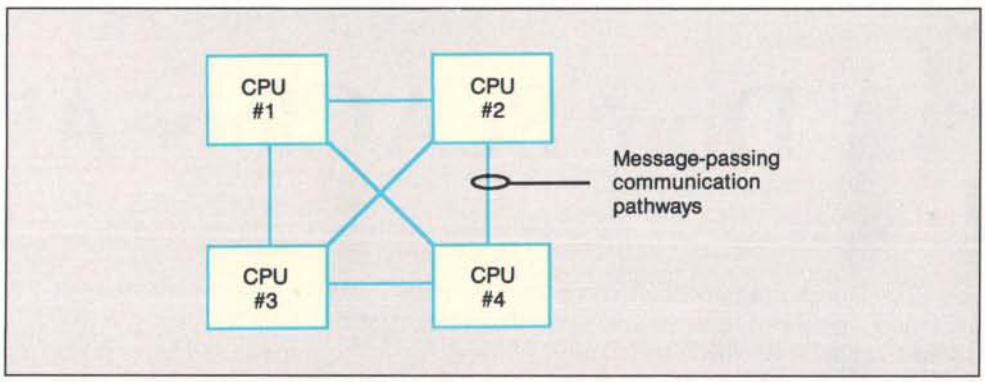


Figure 13: *A four-way direct-connected multiprocessor system.*

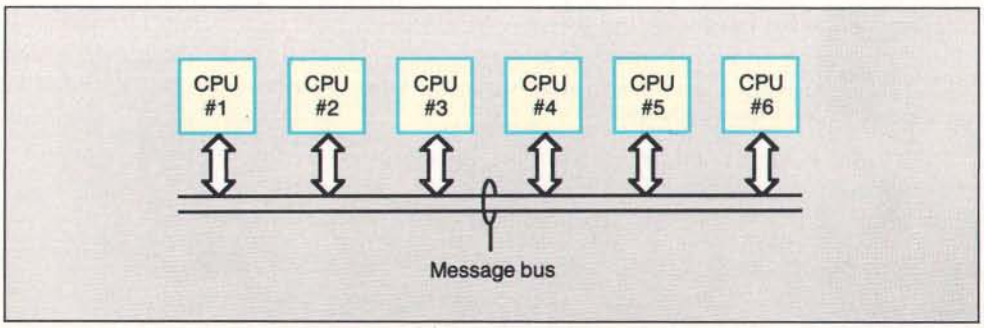


Figure 14: *A multiprocessor system consisting of six CPUs connected via a common message bus.*

points with hundreds or thousands of associated numbers.

A vector processor includes enough hardware to perform computations on all (or at least many of) the numbers for each point at one time. A machine with three ALUs could add all three coordinates of two points simultaneously, delivering the result in one-third the time of a scalar processor with one ALU.

All the ALUs in a vector processor perform the same operation on each of the vector's components. Many problems involving vectors need exactly this sort of lock-step processing, but some simply need more freedom. Although you can create some variations, in general, all the ALUs in a vector processor must do the same thing at the same time. This means that some problems simply don't fit the vector processor pattern.

The solution to problems that need more performance than the best scalar processor can provide, but are too unruly for a vector processor, can often be handled by a true multiprocessor system. Unlike scalar and vector machines, though, the exact design of a multiprocessor system determines what type of problems it can handle. In fact, some multiprocessors on the market are so specialized that they can solve only one class of problem.

The distinguishing feature of a multiprocessor system is that—unlike a vector system—the processors are all executing different instructions on different data. There's no centralized control determining which instruction to use on what data.

Although using multiple processors on a single problem can provide a dramatic performance improvement, not all problems will respond to this sort of treatment. For example, a program that computes the factorial of a number by recursive calls can't be split up on multiple processors, because each result depends on the preceding one. A word processor won't attain a dramatic speed increase on a multiprocessor system, because most of the time the software is waiting for keystrokes. (You could speed up reformatting by assigning one paragraph to each processor, but that's not a convincing application.)

It's worth pointing out that, regardless of the type of multiprocessor system, each individual processor can be any sort of scalar processor you'd like to use. Any and all of the tricks described earlier to crank up scalar performance are fair game in multiprocessor applications. The only catch is that, because the system has many processors, the cost goes up dramatically as each processor becomes more complex. Sometimes, as we'll see next month, many simple processors can outperform fewer complex ones.

And, as I mentioned above, the design of a multiprocessor system determines the types of problems it can handle with greatest efficiency. Just as with caches and pipelines, some problems will actually run slower on a multiprocessor than on a scalar machine.

Tightly Coupled Multiprocessors

Any multiprocessor system starts with two or more scalar machines. Figure 10 shows two simple processors connected to a common memory, which is similar to the simple DRAM we started with in figure 1. Because the memory can handle only one access at a time, a memory controller must decide which processor will get access to the memory on each cycle. If the processors access the memory simultaneously, one must wait until the other is finished.

Figure 11 shows what happens when these two processors both start executing different ADD instructions with three memory operands each. This is the same situation described in figure 2, but now you can see the lost time when CPU #2 is locked out of the common memory by an access from CPU #1. The two ADD instructions take 9 cycles to complete, where two on a pure scalar machine take 12 cycles.

Doubling the number of processors should increase performance by 100 percent, but it went up only 33 percent (⅔ compared to 2/12). What went wrong?

Even though the processors are executing separate instructions with different data addresses, both processors must access the shared memory to get information. Because it is possible for the memory to handle only one request, the system is running at only half efficiency when both processors need the memory simultaneously.

There are two solutions to this problem: The memory can become complex enough to handle two accesses at once, or the processors can reduce the number of memory accesses required for each instruction. Each solution raises additional problems, but the latter choice is the only practical one for systems that use more than a few processors. Imagine building a memory that can support a dozen simultaneous accesses.

Figure 12 shows a four-way multiprocessor. Each processor has a local memory for its program and working variables. Results and status flags are stored in common memory, which is accessed over the global memory bus connected to each processor. The memory controller decides which of the four processors will gain access during each memory cycle. Processors that lose the battle for access to common memory must wait for the next free memory cycle.

Because each processor has direct access to the global memory, this is an example of a tightly coupled multiprocessor system. The tightest of coupling is the limiting case occurring when the processors have no local memory. Each processor can change the state of any other processor's computation by simply writing new data in the right addresses. As you can imagine, this may not be an entirely good thing, particularly for debugging errant programs.

The hardware problem with this architecture is that the global memory bus requires a large number of signal lines. If the processors use 32-bit words and the global memory has only 1 megabyte, the bus needs over 50 lines for just the data and address. High-frequency transmission-line techniques are required to extend this bus more than a few feet, so there is a distinct limit to the number of processors that can connect to a single global memory bus.

For problems that demand a large number of processors, there is no feasible way to connect each processor to a shared high-bandwidth memory bus. Worse, the contention for that memory will begin to wipe out the advantage of multiple processors (remember the simple example in figure 11). Again, there must be a better way.

Loosening the Bonds

The best performance for a tightly coupled multiprocessor architecture occurs when you are running programs that don't need much access to the global memory. If that is indeed the case, the wide, fast, expensive global memory bus can be replaced by a relatively narrow connection between processors. The ultimate reduction is a bidirectional serial link, but it could be a byte-wide or word-wide channel with some handshaking control lines.

Figure 13 shows a four-way multiprocessor connected by narrow ports between each pair of processors. Because each link has a relatively low bandwidth compared to the previous global memory bus, the processors can exchange only limited amounts of data. But for problems with fairly strict partitioning, this works reasonably well.

continued

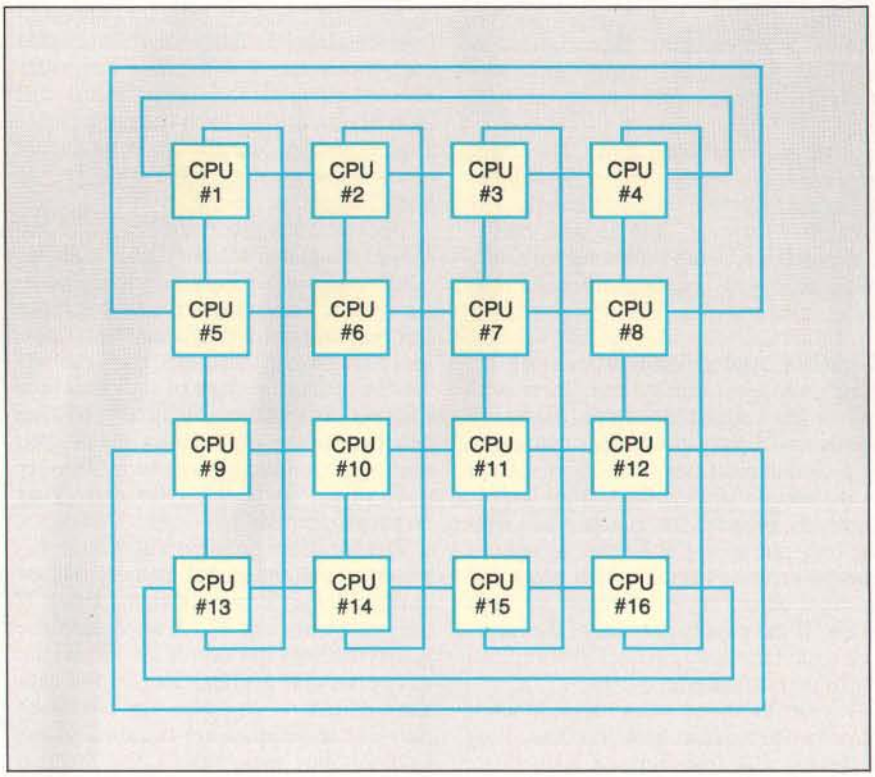


Figure 15: *A 16-processor system. Each processor can communicate with its four closest neighbors.*

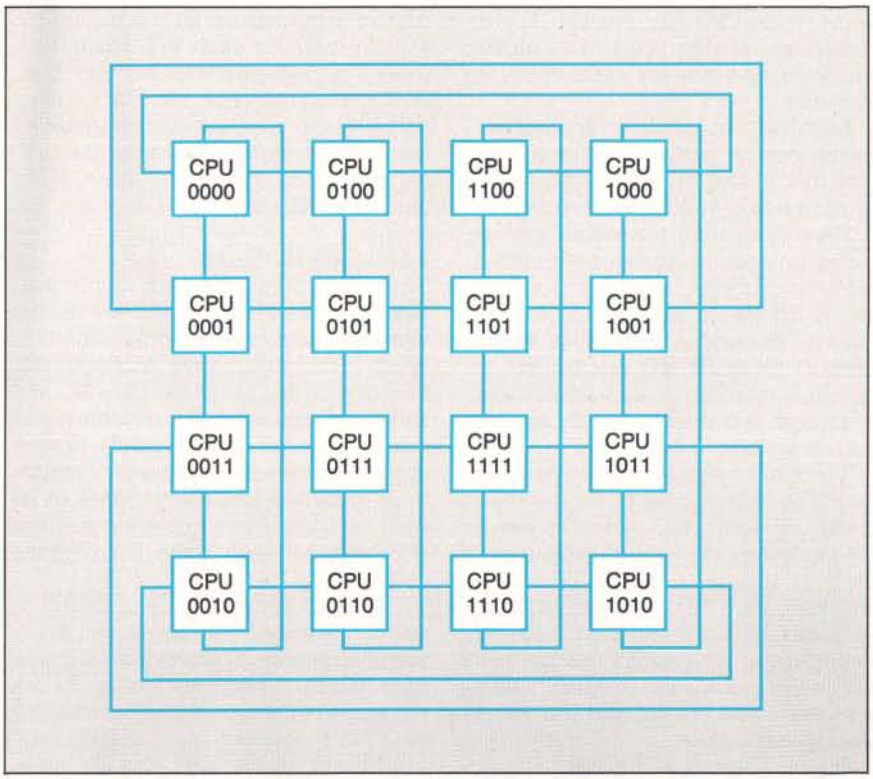


Figure 16: *The processors from figure 15 are each assigned an ID number to simplify message passing.*

Connecting each processor to all the others simplifies the task of exchanging data, but it requires $n-1$ ports on each processor. For four processors this is feasible, but I challenge you to draw the connections for a 16-processor system. For lots of small processors, there's a problem fitting all the connections into the available physical space.

One way around this is to connect all the processors to a common "message bus," as shown in figure 14. Although the figure looks much like figure 12, the difference is that the common bus is relatively narrow and doesn't connect to a global memory. Any processor can send a message to any group of the others, but only one transmitter can be active at any one time.

You'll notice a striking resemblance between figure 14 and the standard block diagram for a local-area network. In fact, although LANs are usually thought of as a way to share peripherals, they're also useful for coordinating the work of many processors. I've seen some work that uses otherwise idle computers on a LAN to perform "background" computations on a complex problem, shifting the calculations around the network to take best advantage of the available hardware.

The problem with a LAN, of course, is that there can be only one message active at a time. Regardless of the LAN bandwidth, there will be some lost time when the processors queue up to use that single resource.

Figure 15 shows one way around this problem. Each processor can send messages to its four closest neighbors, with processors on the edges of the array wrapped around to the other side. Depending on how the processors are programmed, each can support up to four messages at once. If the code is particularly clever, any processor can send a message to any other one by routing it along the shortest distance between the two.

That layout will work if most of the messages are to adjacent processors. Sending a message across the entire array will involve all the processors between the two nodes, and the overhead involved in figuring out the proper path can be significant. A slightly different way of connecting the processors can improve message passing, at the cost of greater wiring complexity.

Figure 16 looks almost the same as figure 15, with each processor linked to four others. If you look closely, you'll see that the processor numbers differ by only 1 bit across each link. That change

makes the message-routing problem almost trivial.

When a processor receives a message, it compares the destination address in the message header with its own address by performing an exclusive-OR. If the result is 0, the two addresses are the same and it can process the message. If the result isn't 0, the message must be forwarded to another processor. The processor sends the message to the neighboring processor that has an address differing in that same bit position.

Using this method, you can interconnect 65,536 processors with only 16 links per processor and a maximum message delay of 16 transmissions. This seems to be the best way to connect truly large arrays to minimize transmission delay without unduly complicating the backplane wiring.

Communication Bottlenecks

What should be obvious from these sample systems is the need to figure out just what level of communication will occur between the processors. A large communication volume requires high-bandwidth connections, with the attendant complexity of common memory design. Programs with shorter, less frequent messages between fewer processors can run effectively on processors with "narrower" links, perhaps using message passing between links to reduce the number of distinct connections.

A multiprocessor system must be designed to solve a particular class of problems. Ideally, it will handle that class with particular efficiency (although every now and again the designers find that there's a skeleton in the closet that hampers performance). Attempting to fit a problem from a different class onto that machine will result in poor performance, perhaps even lower than on a scalar machine.

Upcoming Events

If you're at all familiar with the calculations behind the Mandelbrot set, you can probably tell why I elected to use it as the foundation for a supercomputer. A single image requires massive amounts of computation, but it can be easily divided between an arbitrary number of processors. The results of the computations can be summarized by 1 or 2 bytes, so the output data transmission can use a relatively slow link. Even better, the algorithm doesn't need any communication between neighboring processors, so the interprocessor communication isn't a critical issue.

In the next part of this project, I'll describe the system architecture of the Circuit Cellar Mandelbrot engine and explore the mathematics and algorithms behind its operation. In the concluding part, I'll cover the array hardware and the control/display software for the Mandelbrot engine. ■

Special thanks to Ed Nisley and Merrill Lathers for their expert contributions to this project.

Editor's Note: Steve often refers to previous Circuit Cellar articles. Most of these past articles are available in book form from BYTE Books, McGraw-Hill Book Co., P.O. Box 400, Hightstown, NJ 08250.

Ciarcia's Circuit Cellar, Volume I covers articles in BYTE from September 1977 through November 1978. *Volume II* covers December 1978 through June 1980. *Volume III* covers July 1980 through December 1981. *Volume IV* covers January 1982 through June 1983. *Volume V* covers July 1983 through December 1984. *Volume VI* covers January 1985 through June 1986.

Circuit Cellar Ink

It's virtually impossible to provide all the pertinent details of a project or cover all the designs I'd like to in the pages of BYTE. For that reason, I have started a bimonthly supplemental publication called Circuit Cellar Ink, which presents additional information on projects published in BYTE, new projects, and supplemental applications-oriented materials. For a one-year subscription (6 issues), send $14.95 to Circuit Cellar Ink, 12 Depot Square, Peterborough, NH 03458. Credit card orders can call (203) 875-2199.

There is a multiline Circuit Cellar bulletin board system (running TBBS 2.0M) that supports past and present projects in BYTE and Ink. You are invited to call and exchange ideas and comments with other Circuit Cellar supporters. The 300-/1200-/2400-bps BBS is online 24 hours a day at (203) 871-1988.

To receive information about the Circuit Cellar Ink publication for hardware designers and developers, please circle 100 on the Reader Service inquiry card at the back of the magazine.

Steve Ciarcia (pronounced "see-ARE-see-ah") is an electronics engineer and computer consultant with experience in process control, digital design, nuclear instrumentation, and product development. The author of several books on electronics, he can be reached on BIX as "sciarcia."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH 03458.

Protect Your Copies of BYTE

NOW AVAILABLE:
Custom-designed library *files* or *binders* in elegant blue simulated leather stamped in gold leaf.

Binders—Holds 6 issues, opens flat for easy reading.
$9.95 each, two for $18.95, or four for $35.95.





Files—Holds 6 issues.
$7.95 each, two for $14.95, or four for $27.95.



Order Now!

Mail to: Jesse Jones Industries, Dept. BY,
499 East Erie Ave.,
Philadelphia, PA 19134


Please send _____ files;
_____ binders for BYTE magazine.
Enclosed is $_____. Add $1 per file/binder for postage and handling.
Outside U.S.A. add $2.50 per file/binder (U.S. funds only please).
Charge my: (minimum $15)
_____American Express _____Visa
_____MasterCard _____Diners Club
Card # _____ Exp. Date _____
Signature _____

CALL TOLL FREE (24 hours):
1-800-972-5858

Name _____
Address _____ (No P.O. Box)
City _____
State _____ Zip _____

Satisfaction guaranteed.
Pennsylvania residents add 6% sales tax.
Allow 5-6 weeks delivery in the U.S.

BYTE

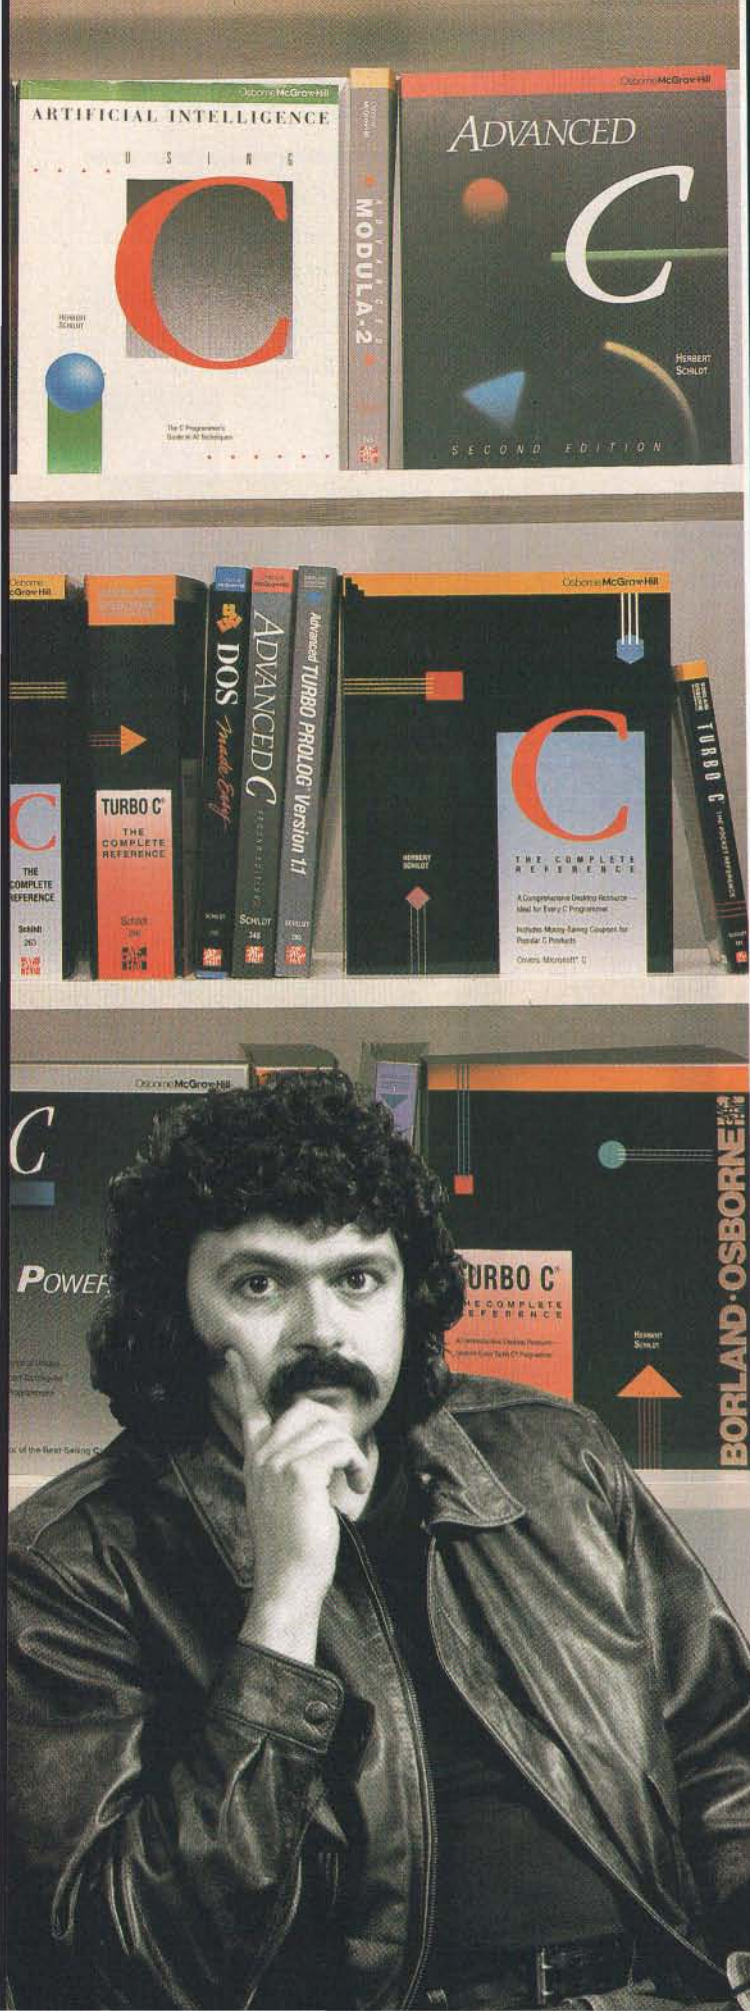

See C Writer.

Herb Schildt is the author that over 600,000 programmers turn to for the word on languages. That's because Schildt's expertise in programming is unprecedented. And he is unsurpassed in C. In fact, out of the 21 books Herb's published, all 9 of his books on C are bestsellers. Find out why over 600,000 programmers can't be wrong. **See C Writer, Herb Schildt.**

"Schildt's books offer first rate material"
Computerworld

"... Noted author and veteran C programmer ... produce(s) the kind of book programmers like best ..."
Philippe Kahn, President, Borland International, Inc.
From the Foreword of **Using Turbo C**

C: The Complete Reference $24.95, ISBN 0-07-881263-1
C: Power User's Guide $22.95, ISBN 0-07-881307-7
Artificial Intelligence Using C $21.95, ISBN 0-07-881255-0
Advanced C, Second Edition $21.95, ISBN 0-07-881348-4
Turbo C: The Complete Reference $24.95, ISBN 0-07-881346-8
Turbo C: The Pocket Reference $5.95, ISBN 0-07-881381-6
C: The Pocket Reference $5.95, ISBN 0-07-881321-2
Using Turbo C $19.95, ISBN 0-07-881279-8
Advanced Turbo C $22.95, ISBN 0-07-881280-1

Just Released-
OS/2™ Programming: An Introduction
$21.95, ISBN 0-07-881427-8

For a Free Catalog with More Information on All 21 Books Written by Herb Schildt

Call Toll-Free 800-227-0900

Visa, MasterCard, American Express Accepted for Orders.
Include local tax and $2.00 for shipping.

Osborne**McGraw-Hill**
2600 Tenth Street
Berkeley, California 94710

Trademarks: OS/2 is a trademark of International Business Machines Corp.
Turbo C is a registered trademark of Borland International, Inc.
Copyright©1988 McGraw-Hill, Inc.

Part 2

FLOATING-POINT WITHOUT A COPROCESSOR



Emulating a math chip is fine, but you still need some way to talk to the outside world

Last month I introduced a binary floating-point mathematics package and described the code for the four primary math operations: addition, subtraction, multiplication, and division. Using those routines, you can build the more complex functions—transcendentals and trigonometrics, for example—that you find in high-level languages.

But there are a couple of ingredients still missing from the recipe. Although you can manipulate floating-point numbers with the functions I've given, you need to be able to get numbers to and from the routines. I can remember when I toggled in my first program on my old Altair 8800's front panel and showed my mother its results on the accumulator LEDs.

"Look, Mom! That light means a 2, that one means an 8, and that light means a 16, for a total of 26!"

"That's nice, dear."

A mathematics package with no easy way to get the numbers in or out is not much better. It's time for some I/O.

Inside/Outside

As you'll recall from last month, the floating-point format I've defined accommodates storage for a 15-bit exponent, an 80-bit mantissa, and a 1-bit sign (which needs a separate byte of its own; you may want to refer to the diagram on page 314 of last month's BYTE). All this requires 13 bytes of storage per number local to the package. I referred to this storage area as the *floating-point accumulators*, FAC1 and FAC2.

However, a program that calls the package is not likely to want to allocate 13 bytes of storage for each floating-point number: A large array of such numbers can consume memory rapidly. And the format I've described uses an entire byte to hold the mantissa's sign. This is necessary only to make the execution of floating-point operations faster. When a number is being stored externally—waiting around until you use it again—it doesn't make sense to use 8 bits to store the sign when 1 bit will do.

Listing 1 shows the pseudocode for a pair of routines called LDFACC and STFAC1. LDFACC loads one of the two floating-point accumulators (selected by the DI register) from an external memory location, assuming that the number at that location is in external floating-point form. STFAC1, the reverse of LDFACC, stores the number in FAC1 to an external location. I didn't provide a routine for storing FAC2 anywhere, because the four operations I've so far defined all leave their results in FAC1.

The external representation the package uses is very close to the 10-byte extended format used by the Apple Macintosh's Standard Apple Numeric Environment library (which is compatible with the IEEE 10-byte extended definition). My numerics package doesn't define special cases like NAN (not-a-number) and infinity as defined in SANE, but some intrepid programming could add such entities; in fact, you can make the package compatible with whatever you want.

Most of these routines' time is spent shifting and masking. The external representation stores the mantissa's sign in the highest bit of the exponent (a bit that, internally, is used to detect exponent overflow). Also, since the normalization routine I presented last month aligns the mantissa so that its topmost bit is 0 (to catch overflow), STFAC1 shifts the mantissa before storing so you don't waste space storing an empty bit.

Actually, you can grab one more bit's worth of accuracy in the external representation if you consider that, unless the floating-point number is true zero, after one shift to the left the most significant bit of the number must be a 1. You could rewrite STFAC1 to perform a second shift before it stores the number. Then, rewrite LDFACC to recover those top 2 bits by shifting the mantissa to the right twice and setting the highest 2 bits to 01 binary. The IEEE and Microsoft formats for encoding short and long real numbers use this trick.

You can modify the load and store routines to customize your own external representations (or adhere to those of some other commercial numerics library). Perhaps you don't need a 64-bit mantissa's worth of accuracy—you'd prefer handling lots of less-precise numbers quickly, rather than take more time for a few really precise ones. In this case, you can lop bytes off the mantissa from the right—but keep in mind that for every bit you give up in the mantissa, you lose about one-third of a decimal digit's worth of accuracy. If you want to store the exponent in a byte rather than a word, you'll certainly have to pick a smaller bias value (128 comes to mind, since that number divides a byte's range: 0 to 255) and write some routines for translating to and from byte-wide and word-wide exponents.

Incoming

Getting a floating-point number into the package from the outside—typed in from the keyboard or read from a file—simply requires a routine to read a character string representing a floating-point number and translate that number into the package's internal representation. You can break this requirement down further into a series of simpler requirements: The routine must read and translate signs (+ or −), a mantissa, and an exponent.

The routine I've provided reads a character string whose format can handle any

continued

← *Circle 189 on Reader Service Card*

Listing 1: *Pseudocode for the* LDFACC *and* STFAC1 *routines that move numbers to and from the floating-point accumulators.*

```
LDFACC:
(Assumes SI points to number, DI points to _SIGN field of
 the floating-point accumulator to store.)

(Set the sign field)
Set byte at [DI] based on high bit of byte at [SI];

Move the number into the accumulator;
Clear lowmost word of mantissa;
Clear highmost bit of exponent;
Shift mantissa right 1 bit;
RETURN;

STFAC1:
(Assumes DI register points to destination.)

Shift FAC1_MAN left 1 bit;
IF FAC1_SIGN = 0 THEN FAC1_EXP = FAC1_EXP AND 7FFFH;
ELSE
   FAC1_EXP = FAC1_EXP OR 8000H;
Move the number out of FAC1, exponent first, followd by
 the top 4 words of the mantissa; (Since FAC1_EXP and
 FAC1_MAN are contiguous, this uses an REP MOVSW
 instruction.)
RETURN;
```

Listing 2: *Inputting a floating-point number.*

```
FPINPUT:
 CH = NextCHAR;
 IF CH = '+' THEN FAC1_SIGN=0; ELSE FAC1_SIGN=128;
 DEC_EXP=0;
 FAC1_MAN=0;
 CH = NextCHAR;
 CALL ADDIGIT(CH);
 CH = NextCHAR; (Skip decimal point)
 REPEAT
  BEGIN
   CH = NextCHAR;
   IF CH is not a digit THEN GOTO FPI1;
   CALL ADDIGIT(CH);
   DEC_EXP=DEC_EXP-1;
  END
FPI1:
(The next line skips the "E" and reads the exponent sign.)
  CH = NextCHAR;
  IF CH = '+' THEN EXP_SIGN=0; ELSE EXP_SIGN=128;
  EXP_VAL=0;
  REPEAT
   BEGIN
    CH = NextCHAR;
    IF CH is not a digit THEN GOTO FPI2;
    EXP_VAL = 10 * EXP_VAL + VALUE(CH);
   END
 FPI2:
  IF EXP_SIGN = 0 THEN
     DEC_EXP = DEC_EXP + EXP_VAL;
  ELSE
     DEC_EXP = DEC_EXP - EXP_VAL;
  FAC1_EXP=BIAS+79;
  CALL NORM1;
  FAC2 = 10.0
  IF DEC_EXP > 0 THEN
   REPEAT DEC_EXP TIMES
     CALL FPMULT;
  IF DEC_EXP < 0 THEN
   REPEAT ABS(DEC_EXP) TIMES
     CALL FPDIV;
  RETURN;
```

continued

floating-point number that the package is capable of handling. I haven't built a great deal of flexibility into the input routine—it likes its strings just so—but I'll point out places where you should have no problem extending the software to handle freer entry formats. While I'm on the subject of formats, here's the format that my input routine expects:

```
sD.DDDDEsDDD<null>
```

where s is a sign (+ or −), D is a digit (0 to 9), <null> is the null character (ASCII 0), "." is a decimal point, and E is E (which signals that the exponent portion follows). If you've done any engineering or scientific programming, you'll feel right at home with this format. You can see that a number is written as the sign of the mantissa, followed by the mantissa, followed by E, followed by the sign of the exponent, followed by the exponent. As I mentioned before, my input routine is fairly inflexible, so none of this is optional. You must write 1 as +1.0E+0; 5000 as +5.0E+3; −.0045 as −4.5E−3; and so on.

Listing 2 shows the pseudocode for the input routine. NextCHAR is a fictitious function that returns the next character from the input string (in the actual code, the SI register points to the input string, so the NextCHAR function is actually a LODSB instruction). Once FPINPUT translates the sign of the mantissa, it simply grabs each mantissa digit from the input string and adds it into FAC1's mantissa. (Like the other routines in the package, this routine returns with the inputted number stored in FAC1.) As each digit is added in, the routine treats FAC1_MAN not as a binary fraction but as a large binary integer. In effect, the routine ignores the decimal place; it remembers where it is by counting how many digits appear to the right of the decimal point. This value is kept in DEC_EXP.

Next, the routine reads the exponent sign and exponent value. This process is a miniature version of what's just gone on in the mantissa. For the exponent: Get a digit, multiply the accumulated exponent value by 10, add the new digit in, and repeat. Once the routine has successfully converted the ASCII exponent to binary, it adds that amount into DEC_EXP.

Now it's a cleanup job. The routine has all the numbers it needs. First, it normalizes the contents of FAC1_MAN. Notice the value loaded into FAC1_EXP prior to normalization to reflect the fact that the number in the mantissa is an integer—that is, that the binary point is to the right of the least significant bit. Then the rou-

tine loads a floating-point 10.0 into FAC2 and, depending on the sign of DEC_EXP, either multiplies or divides FAC1 repeatedly by 10.

You now have a binary floating-point number in FAC1.

My routine requires one digit to the left of the decimal point. Modifying the algorithm to accept any number of digits to the decimal point's left should be trivial. It would also be simple to recode things so that signs are not required; no sign would indicate an implied plus sign. Finally, you could have the routine assume a zero exponent if it encountered the end of the string before running into an E.

Outgoing

Once you've done all sorts of complicated floating-point calculations, you need a way to examine the results of your cipherings. You need the reverse of the input routine: something to convert a floating-point number to an ASCII character string (see listing 3).

The output algorithm works like this: Remember that the internal representation of the floating-point numbers is in base 2, so we need to somehow extract the base-10 exponent portion of the number. We already know the internal representation for 10.0 (we used that in our input routine), so we can perform a series of multiplications or divisions by 10 until the number falls somewhere between 1 and 16. You can tell when the number is in this range by watching the exponent (in this case, FAC1_EXP minus the bias amount), which tells you how many digit positions the binary point is from the number's most significant bit. For example, if FAC1_EXP = BIAS + 5, you know the number looks like *bbbbb.bbbbb*... (where *b* is a bit, 1 or 0). If FAC1_EXP = BIAS − 2, the number looks like this: 0.00*bbbbbbbbb*... (where the leftmost *b* is the most significant digit).

Each time the routine performs a multiplication (or a division) by 10, it increments (or decrements) DEC_EXP. In this way, the routine determines the number's base-10 exponent.

The routine's next step is to narrow the number's range even further by verifying that it is between 1 and 10. If the number is greater than 10 (it cannot be less than 1 because of what the routine has done to the number so far), FPOUTPUT does one more division by 10. Now the routine adjusts the number so that the binary point is between bits 75 and 76, and the top 4 bits of the number are its integer portion. And thanks to all the

continued

```
ADDIGIT:
 CALL FAC1x10;
 FAC1_MAN = FAC1_MAN + VALUE(CH);
 RETURN;

FAC1x10:
(This routine multiplies FAC1's mantissa by 10 using
 the identity 10*x=8*x+2*x.)
 Shift FAC1_MAN left 1 bit;
 FAC3_MAN = FAC1_MAN;
 Shift FAC1_MAN left 2 bits;
 FAC1_MAN = FAC1_MAN + FAC3_MAN;
 RETURN;
```

Listing 3: *Pseudocode for the floating-point output routine.*

```
FPOUTPUT:
 DEC_EXP=0;
 IF FAC1_EXP=0 THEN GOTO FOUT1;
 FAC2=10.0;

(Note: The comparisons in the following two WHILE
 statements treat FAC1 as a positive number.)
 WHILE FAC1 > 15
  BEGIN
   CALL FPDIV;
   DEC_EXP=DEC_EXP+1;
  END
 WHILE FAC1 < 1
  BEGIN
   CALL FPMULT;
   DEC_EXP=DEC_EXP-1;
  END

 IF FAC1>=10 THEN
  BEGIN
   CALL FPDIV;
   DEC_EXP=DEC_EXP+1;
  END

(Set binary point between bits 75 and 76.)
 IF FAC1_EXP=BIAS+4 THEN
  Shift FAC1_MAN left 1 bit;
 ELSE
  WHILE FAC1_EXP < BIAS+3
   BEGIN
    Shift FAC1_MAN right 1 bit;
    FAC1_EXP=FAC1_EXP+1;
   END

 ROUND FAC1_MAN;

FOUT1:
 IF FAC1_SIGN = 0 THEN OUTPUT('+');
 ELSE
    OUTPUT('-');
 CH = Leftmost nibble of FAC1_MAN;
 OUTPUT(ASCII(CH));
 OUTPUT('.');
 REPEAT N TIMES
   BEGIN
     Clear leftmost nibble of FAC1_MAN;
     CALL FAC1x10;
     CH = Leftmost nibble of FAC1_MAN;
     OUTPUT(ASCII(CH));
   END
 OUTPUT('E');
 IF DEC_EXP>=0 THEN OUTPUT('+');
 ELSE
    OUTPUT('-');
 OUTPUT(Integer_to_ASCII(ABS(DEC_EXP)));

 RETURN
```

multiplying and dividing by 10 that's gone on, we know that the integer portion of the number must be between 1 and 10—that is, a single decimal digit.

The rest of the job is a snap. Since you've isolated your first digit in the top 4 bits, you simply strip those bits out, convert binary to ASCII, and output the character. Then you multiply the mantissa by 10, strip the top 4 bits out again, and keep up the process until you have however many digits you need. (Warning: Do *not* use the package's FPMULT routine to do this multiplication, since FPMULT exits through the normalization routine, which would reset the binary point. Instead, you should use the fact that $10 \times x = 2 \times x + 8 \times x$ and implement the multiplication as a series of shifts and adds. Check out the pseudocode for routine FAC1 × 10.) The decimal exponent portion is waiting for you in DEC_EXP, so just output it using an integer-to-ASCII routine (the details of which I won't go over here, since there are plenty of sources for such algorithms), and you're all done.

The only thing I've glossed over is rounding (the pseudocode shows it as ROUND FAC1_MAN). There are various ways you can go about rounding the number for output; the choice depends on what sort of accuracy you're looking for. If you modify FPOUTPUT to be part of some formatted numeric output package, you'll have to add code to determine which digit to round on. This will depend on how many digits a particular calling routine requests to output. My math package's output routine simply adds 5×10^{-19} to the number in the mantissa since, as I said earlier, a 64-bit mantissa gives about 19 digits of accuracy. (It does this by adding 9393 hexadecimal to the least significant word of FAC1_MAN and rippling any carries on up the rest of the mantissa.)

Left as an Exercise

Carnivorous floating-point addicts may want to extend the package even further. This is understandable; there are plenty of functions involving floating-point numbers that I haven't covered here. Some of the more esoteric are beyond what I have room to present. Other, more recognizable functions are quite easy to implement:

- *Integer-to-floating-point*: The clue to this is hidden in the floating-point input routine. First, you check the sign of the integer, store that in FAC1_SIGN, and, if it's negative, convert the integer to a positive number. You move the integer into FAC1_MAN—right-justified, so that the low word of the integer is in the rightmost word of FAC1_MAN. Then you load FAC1_EXP with the value BIAS+79 and call the normalization routine.
- *Floating-point-to-integer*: Load the number into FAC1 using LDFACC and examine FAC1_EXP. If FAC1_EXP is less than or equal to BIAS, forget it—the number has no integer part. Otherwise, FAC1_EXP − BIAS tells you how many bits, starting with bit 78 and moving to the right, are the integer portion. For example, if FAC1_EXP − BIAS = 5, then bits 78 through 74 form the integer (with bit 78 being most significant). Do a looping shift operation and a final check with FAC1_SIGN to see if you have to negate things, and you're there.
- *Floating-point comparisons*: Comparison operations—greater than, less than, equal to, and so on—are easily done using the floating-point subtract routine

continued

PolyAWK™
The Toolbox Language™
For C, Pascal, BASIC, Assembler, FORTRAN & dBASE programmers.



For MS-DOS $99

Programmers, engineers and scientists are using PolyAWK to replace a host of specialized tools and programs. You will still use standard languages like C or Assembler to develop applications, but this versatile, simple and powerful language will become an indispensable part of your toolbox. Alfred **A**ho, Richard **W**einberger and Brian **K**ernighan of Bell Labs developed AWK for UNIX. PolyAWK, for MS-DOS fully conforms to the AWK standard as defined by the authors in their book, *The AWK Programming Language*, which functions as the user's manual.

A Pattern Matching Language

PolyAWK is a powerful pattern matching language for writing short programs to handle common text manipulation and data conversion tasks, multiple input files, dynamic regular expressions, and user defined functions. A PolyAWK program consists of a sequence of patterns and actions that tell what to look for in the input data and what to do when it's found. PolyAWK searches a set of files for lines or strings matched by any of the patterns. When a match is found, the corresponding action is performed. A pattern can select lines by combinations of regular expressions and comparison operations on strings, numbers, fields, variables and array elements. Actions may perform arbitrary processing on selected lines. The action language looks like C, but there are no declarations, and strings and numbers are built-in data types.

Concise Code Saves You Time & Effort

The most compelling reason to use PolyAWK is that you can literally accomplish in a few lines of code what may take pages in C, Pascal, BASIC, FORTRAN or Assembler. The brevity of expression and convenience of operations make PolyAWK valuable for prototyping even large sized programs.

Math Support & Large Model Implementation


PolyAWK includes extensive support for math functions such as strings, integers, floating point numbers and transcendental functions (sin, log, etc.) for scientific applications. PolyAWK is a large model implementation and can use all of available memory to run programs or read files greater than 64K.

30 Day Money Back Guarantee
Credit Card Orders: 1-800-547-4000 Ask For Dept. BYT
Send checks and P.O.s To: POLYTRON Corporation
1700 NW 167th Place, Beaverton, OR 97006 (503) 645-1150 FAX: (503) 645-4576

POLYTRON®
High Quality Software Since 1982

Circle 202 on Reader Service Card

How to create high-performance programs without wasting your time or money

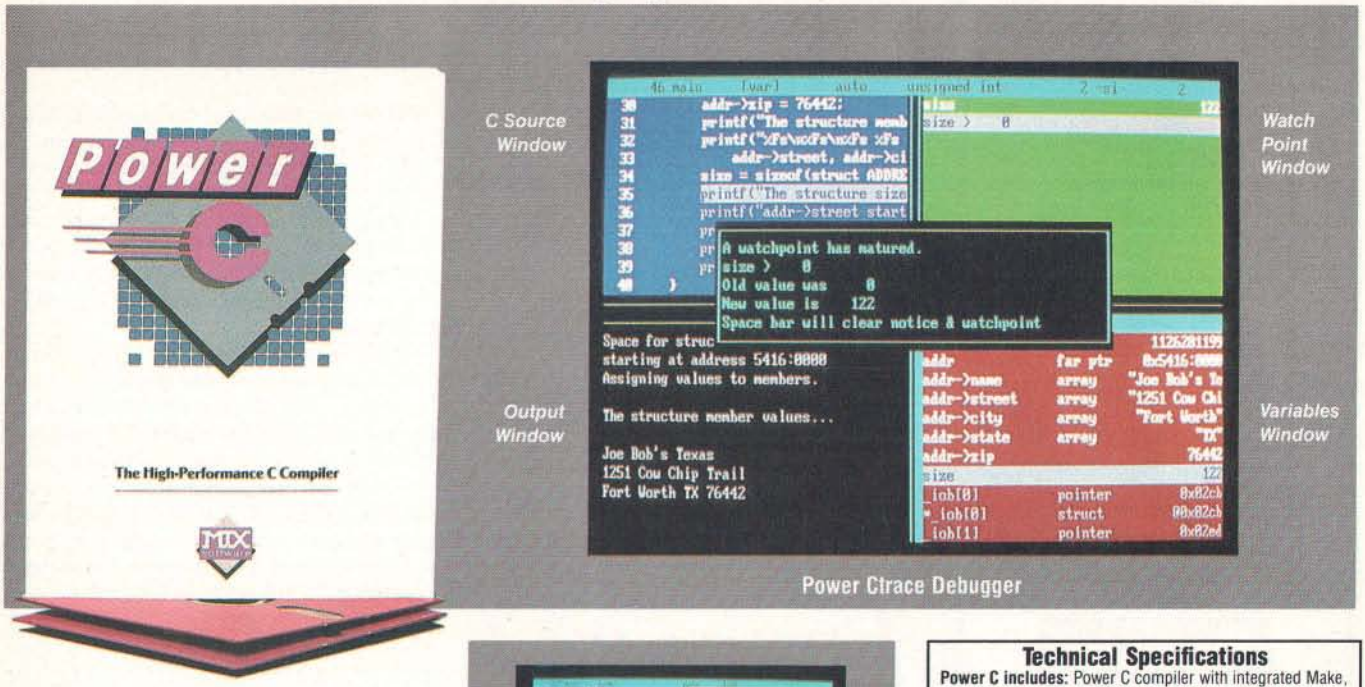

Step 1: The $19.95 Power C compiler

Power C is the new ANSI compatible C compiler that runs faster than Microsoft C and has more functions than Turbo C®. Power C combines high-performance software with superb documentation, all for less than the price of most C books alone. It's your fast route to fast programs without the fast bucks. Compare Power C to the competition and see how much time and money you'll save.

Performance/Price Chart
(execution times in seconds)

	Power C	Quick C®	Turbo C®
1) fib	23.8	53.4	26.4
2) sieve	27.6	43.2	25.5
3) tdbl	3.5	9.0	9.6
4) diskio	13.5	14.4	14.3
5) report	11.0	71.7	60.7
6) drystone	36.6	41.6	31.8
Compile/Link	73.9	113.5	81.4
EXE File Size	25120	32092	27184
Compiler Price	$19.95	$99.00	$99.95
Debugger Price	$19.95	N/C	N/A
Library Source	$10.00	$150.00	$150.00
Total Cost	$49.90	$249.00	$249.95

N/C no charge - N/A not available
Benchmarks compiled using Make utility, command-line compiler, and medium memory model



Step 2: The $19.95 Power Ctrace debugger

Power Ctrace is the new state-of-the-art C debugger that makes Microsoft's Codeview look like old technology. Power Ctrace will reduce the time you spend debugging your C programs by at least a factor of 10. With Power Ctrace, you'll be working smarter instead of harder. Actually, you'll be having so much fun that it won't even feel like work anymore.

Unlike other debuggers, Power Ctrace lets you debug graphics programs on a single monitor. You can even debug programs that write directly to video memory. However, the major advantage of Power Ctrace is simple operation. You won't waste any time trying to understand or remember cryptic commands. With Power Ctrace, a single keystroke is all it takes. Help screens show you which key to press and pop-up menus list your options. Invest just 10 minutes with Power Ctrace now and you'll save hours from now on.

Technical Specifications

Power C includes: Power C compiler with integrated Make, Power C Linker, Power C Libraries (450 functions), the Power C book (680 pages), and support for...

- ANSI standard
- IEEE floating point
- 8087/80287 coprocessor
- auto-sensing of 8087/80287
- automatic register variables
- unlimited program size
- mixed model (near & far pointers)
- graphics on CGA, EGA, VGA, & Hercules

Optional Products:

- Power Ctrace debugger
- Library source code
- BCD business math

Order now by calling our toll free number or mail the coupon to Mix Software, 1132 Commerce Drive, Richardson, TX 75081.

1-800-333-0330

For technical support call: 1-214-783-6001

Minimum System Requirements:
DOS 2.0 or later, 320K memory, 2 floppy drives or hard drive.
Runs on IBM PC, XT, AT, PS/2 and compatibles.

60 day money back guarantee

Name _____
Street _____
City _____
State _____ Zip _____
Telephone _____
Paying by: ☐ Money Order ☐ Check ☐ Visa ☐ MC ☐ AX ☐ Discover
Card # _____
Card Expiration Date _____
Computer Name _____ Disk Size ☐ 5¼" ☐ 3½"
Product(s) (Not Copy Protected)
☐ Power C compiler ($19.95) $_____
☐ Power Ctrace debugger ($19.95) $_____
☐ Library Source Code ($10.00) $_____
(includes assembler & library manager)
☐ BCD Business Math ($10.00) $_____
Add Shipping ($5 USA – $20 Foreign) $_____
Texas Residents add 8% Sales Tax $_____
Total amount of your order $_____

Power C & Power Ctrace are trademarks of Mix Software Inc.
Quick C & Codeview are registered trademarks of Microsoft Corp.
Turbo C is a registered trademark of Borland International.

B

Circle 176 on Reader Service Card

BULK DISKS
All Items In Stock
100% Guaranteed
MC, VISA, COD Accepted
24 Hour Shipment
Call For Our Monthly Specials
3.5" DS/DD
■ MAXELL 1.25
■ SONY 1.17
■ DATASAFE 1.09
5.25" DS/HD
■ TDK 1.29
■ DATASAFE .89
5.25" DS/DD
■ MAXELL .64
■ VERBATIM .59
■ 3M .57
■ DATASAFE .39
Prices based on 200 Disks
Includes Labels, Sleeves & Tabs
Smaller Quantities Available
In NJ 800-426-0247 FAX
201-892-5655 201-892-6186
PRINCETON DISKETTE
432 Macarthur Dr. ■ Brick, NJ 08724
Circle 203 on Reader Service Card


2400BAUD $95 MODEM
30 DAY FREE TRIAL
WE AREN'T KIDDING...HIGH PERFORMANCE TEXAS INSTRUMENT CHIP SET. LOW COST, NO COMPROMISE 2400, 1200, 300 BAUD MODEM. FULL FEATURED, HAYES COMPATIBLE IBM INTERNAL. SOFTWARE INCLUDED. 30 DAY MONEY BACK TRIAL
CALL FOR DETAILS
CompuCom Corporation
(800) ACT ON IT (408) 732-4500 (CA)
Circle 58 on Reader Service Card

PDK51

The $595 Solution to 8051 Product Development
The PDK51 is a powerful and economical choice for the development of 8051-based systems. The PDK51 is used with an IBM-PC or equivalent and includes:
- SIBEC-II 8052 Basic Microcontroller
- SXA51 Cross Assembler
- ROM-Based Monitor/Debugger
- PROM Programmer
- Power Supplies
- Documentation, Tutorial and More

Call Now! (603) 469-3232
Binary Technology, Inc.
Main St., P.O. Box 67, Meriden, NH 03770

CHIPCLOK™
10-year clock/calendar IN A CHIP!
Easy plug-in ■ 10-year battery
Never set date/time again
No slot needed ■ 100% compatible
NOW WORKS WITH PS/2
CHIPCLOK w/software NOW $49.00
30-day money-back guarantee
COMPUQUEST INC.
801 Morse Ave. ■ Schaumburg, IL 60193
1-800-722-2353
1-312-529-2552 in IL
Circle 59 on Reader Service Card

DATAFLEX™
- Multi-user Database!
- Powerful!
- Multiple Operating System Compatibility!
- Attractive Dealer Pricing!
- Full Dealer Support!

Dataflex is a trademark of Data Access
Dealer Inquiries Invited
COGITATE
24000 Telegraph Road
Southfield, Michigan 48034 USA
(313) 352-2345
Circle 55 on Reader Service Card

"D" SIZE PLOTTER
$2295.00 RETAIL
$1695.00 INTRODUCTORY OFFER

- Model PC 3600
- Repeatability .001"
- Speed at 7" Per Second
- Vacuum Paper Hold Down
- High Resolution Circles: Suitable for PCB Artwork

(415) 490-8380 ZERICON
STEVENSON BUSINESS PARK
BOX 1669, FREMONT, CA 94538
Circle 283 on Reader Service Card

(FPSUB) and checking the sign of the result.

Of course, there are other routines that are even simpler. To take the absolute value of a floating-point number, you simply clear the sign bit. To change a floating-point number's sign, you do an exclusive-OR operation on the sign bit. You can perform these functions without even moving the number into the accumulator.

Then there are the tough routines, such as trigonometric and transcendental functions. You can handle these by applying either interpolation to lookup tables (if you have lots of storage and you're looking for speed) or series expansion (which is best when storage is tight and you don't mind waiting a little for your answer). For example, the series expansion for sine(x) is as follows:

$$\text{sine}(x) = x - x^3/3! + x^5/5! - x^7/7! + x^9/9! \ldots$$

The infamous CRC (Chemical Rubber Company) Handbook of Standard Mathematical Tables, forever the sidekick of any university math, science, or engineering student and available in most college bookstores, will provide you with the series expansion for more functions than you can think of.

Finally, you can find more information on floating-point processing in the In Depth section of the March issue of BYTE.

Next Month

Dave Betz, author of XLISP, joins in for a discussion of embedded languages. ■

BIBLIOGRAPHY

Feierback, Gary, and Paul Thomas. *Forth Tools and Applications*. Reston, VA: Reston Publishing, 1985.

Findley, Robert. *Scelbi '8080' Software Gourmet Guide and Cook Book*. Milford, CT: Scelbi Computer Consulting, 1976.

Graham, Neill. *Microprocessor Programming for Computer Hobbyists*. Blue Ridge Summit, PA: Tab Books, 1977.

Rick Grehan is a BYTE senior technical editor at large. He has a BS in physics and applied mathematics and an MS in computer science/mathematics from Memphis State University. He can be reached on BIX as "rick_g."

Your questions and comments are welcome. Write to: Editor, BYTE, One Phoenix Mill Lane, Peterborough, NH, 03458.

HARDCORE SOFTWARE

Stop fooling around. It's time to get hardcore about software. With Microsoft.

We'll give you all the resources you want. Tens of millions in R&D funding. Along with one of the most elementary tools for thinking — a door, which leads to your own private office. All backed by management that truly does speak your language, because they probably helped write it.

We're serious about software design. If you are too, then apply right now for one of these opportunities.

Software Design Engineers

We're working on everything from worldclass application software, compilers, operating systems, and networking to sophisticated graphics, powerful productivity software and more. You could be too, if you have programming experience and a background that includes 68000, Macintosh® Toolbox, Windows™, "C", micro's, 8086, UNIX™/XENIX®, or MS-DOS®.

There are opportunities to work with our teams in systems, applications, CD-ROM, languages, or networking.

If you qualify, Microsoft offers you an opportunity to live and work where the quality of life is high and the cost of living is low — the beautiful Pacific Northwest. Along with amenities such as a health club membership, workout facilities and parcourse, plus an array of benefits.

To apply, please send your resume in confidence to: MICROSOFT CORPORATION, Human Resources, Dept. SSDE-1088BYTE, 16011 N.E. 36th Way, Box 97017, Redmond, WA 98073-9717. We are an equal opportunity employer. No phone calls, please.



Microsoft®

Trademarks are registered to their respective companies.

THE BUYER'S MART

A Directory of Products and Services

THE BUYER'S MART is a monthly advertising section which enables readers to easily locate suppliers by product category. As a unique feature, each BUYER'S MART ad includes a Reader Service number to assist interested readers in requesting information from participating advertisers.

RATES: 1x—$475 3x—$450 6x—$425 12x—$375
Prepayment must accompany each insertion. VISA/MC Accepted.

AD FORMAT: Each ad will be designed and typeset by BYTE. Advertisers must furnish typewritten copy. Ads can include headline (23 characters maximum), descriptive text (250 characters is recommended, but up to 350 characters can be accomodated), plus company name, address and telephone number. Do not send logos or camera-ready artwork.

DEADLINE: Ad copy is due approximately 2 months prior to issue date. For example: November issue closes on September 9. Send your copy and payment to THE BUYER'S MART, BYTE Magazine, 1 Phoenix Mill Lane, Peterborough, NH 03458. For more information call Mark Stone at BYTE 603-924-3754.

ACCESSORIES

FREE CATALOG
Thousands of parts and new surplus electronic parts at super low prices. FAST ORDER PROCESSING AND SHIPPING (95% of all orders shipped within 48 hours).
CALL OR WRITE FOR A FREE CATALOG. . .
ALL ELECTRONICS CORPORATION
P.O. Box 567, Van Nuys, CA 91408-0567
1-800-826-5432

Inquiry 576.

FREE UPS CATALOG
Protect your computer and make it last longer. Call or write today!
Best Power Technology, Inc.
World's largest manufacturer of
uninterruptible power systems.
P.O. Box 280, Necedah, WI 54646
TOLL FREE (800) 356-5794 ext. 1004
or (608) 565-7200 ext. 1004

Inquiry 577.

CUT RIBBON COSTS!
Re-ink your printer ribbons quickly and easily. Do all cartridge ribbons with just one inker! For crisp, black professional print since 1982. You can choose from 3 models: Manual E-Zee Inker — **$39.50**
Electric E-Zee Inker — **$89.50**
Ink Master (Electric) — **$159.00**
1000's of satisfied users in 5 years. Money back guarantee.
BORG INDUSTRIES
525 MAIN ST., JANESVILLE, IA 50647
1-800-553-2404 **In IOWA 319-987-2976**

Inquiry 578.

SELF-INKING PRINTER RIBBON
Awarded United States Patent #4701062
Lasts 10-15 times longer than the conventional ribbon
For printers using ½" width open spool ribbon:

Okidata-82A-83A-84-92-93	Dec LA 180/120
Teletype-33, 35	Dec LA 30/IBM 1443
Star Gemini 10X	Teletype-Model 40
Extel	TI 800/810, 820, 880

Contact us by mail, phone or telex and we will forward you a brochure.
CONTROLLED PRINTOUT DEVICES, INC.
POB 869, Baldwin Rd., Arden, NC 28704
(704) 684-9044 • TELEX: (FILMON-AREN) 577454

Inquiry 579.

Companion and Extender
The PS/2 COMPANION lets you add an extra keyboard and monitor up to 150 feet away from your system unit. It comes complete with all connections and supports both color and monochrome monitors. Prices start at $249 for a 25' unit. EXTENDER lets you move the keyboard and monitor up to 150 feet from the system unit. Prices start at $149.
Cybex Corporation
2800-H Bob Wallace Ave., Huntsville, AL 35805
205-534-0011

Inquiry 580.

ACCESSORIES

YOUR OWN COMPUTER PAPER
Put your name and/or department, project, proposal, or report across the bottom of every final presentation page. Send us your copy plus name, address, phone number and printer make and model number and we'll send you FREE SAMPLES.
FORMSMART, INC.
P.O. Box 592, E. Freetown, MA 02717

Inquiry 581.

SMART PRINTER STAND
UNDERSTAND
is an attractive printer stand with switchable data conversion, surge suppression & power switch. Saves space & avoids clutter!
UNDERSTAND-PP:
$295 (2 parallel in, 1 parallel out)
UNDERSTAND-PS:
$395 (1 parallel & 1 serial in, 1 parallel out)
MAS Inc.
15941 S. Harlem Ave., Suite 333, Tinley Park, IL 60477
(815) 469-4501

Inquiry 582.

ARTIFICIAL INTELLIGENCE

HIGH PERFORMANCE RULES BASED EXPERT SYSTEM "SHELL" (H.E.S.).
Caters for thousands and thousands of rules, integrate with your existing database. Easy to use, no knowledge of programming required. Applications: medical diagnosis, fault diagnostics, business, admin. banking, finance, insurance, law, engineering, education, electricity boards and many other application areas. Available on PC/XT/AT, MS-DOS, Xenix, Unix. Demo copy $84 (with facility to create 300 rules). Full version $21,000.
HORIZON SOFTWARE LTD.
27 East St., Leicester LE1 6NB. U.K.
Tel (44) 533 556550

Inquiry 583.

NanoLISP $99.99
An MS-DOS Common LISP interpreter that supports most Common LISP operations and strictly adheres to the standard. Numerous advanced and extra features, excellent debugging facilities, sample AI programs, fully-indexed manual, free technical support.
Microcomputer Systems Consultants
P.O. Box 6646, Santa Barbara, CA 93160
(805) 967-2270

NEW Expert System
FirstExpert - expert system generator. Ridiculously easy yet extremely powerful. No programming needed. Speed up business decisions and analysis. Information transferable to other environments. Amplifies your intelligence! An ingenious program for a sensational price. Many examples included.
$99 Call or write for more information.
NovaCast Expert Systems
2530 Berryessa Rd. Suite 607, San Jose, CA 95030
(408) 272-4071 fax: (408) 437-7777

Inquiry 584.

ARTIFICIAL INTELLIGENCE

LISP on a MAC
Get all the functionality of the Franzlisp dialect of the Lisp language. $20 purchases a 64K Lisp program, which will run on a MAC plus or equivalent. 1MB RAM recommended for this program. Send order to:
Oosson Software
Box 33113, Coon Rapids, MN 55433

Inquiry 585.

muLISP™ 87 for MS-DOS
Fast, compact, efficient LISP programming environment. muLISP programs run 2 to 3 times faster & take ½ to ⅓ the space of other LISPs. 450 Common LISP functions, multi-window editing & debugging, flavors, graphics primitives, lessons & help, demo programs, comprehensive manual.
Soft Warehouse, Inc.
3615 Harding Ave., Suite 505, Honolulu, HI 96816
(808) 734-5801

Inquiry 586.

BACK UP SYSTEMS

HD BAC-UP
THE EASIEST & FASTEST BACKUP UTILITY FOR PC/XT/ATS & COMPATIBLES.
AFFORDABLE PRICE $36.50.
EASY INSTALLATION & USE — REQUIRES NO KNOWLEDGE OF DOS — DAILY BACKUPS RUN IN A FRACTION OF THE TIME.
CALL FOR INFO & DEMO DISK 800-457-1313.
HI-TEC INDUSTRIES
6100 S. Fairfax Rd., Bloomington, IN 47401
812-824-8000

Inquiry 587.

BAR CODE

BAR CODES & BIG TEXT
On EPSON, IBM, OKI dot matrix or LaserJet. Design any format/size on ONE easy screen. 1-120 fields/label. 13 text sizes to 1" — readable at 50 ft. AIAG, MIL-STD, 2 of 5, 128, UPC/EAN, Code 39, etc. Color, Reverses, File Input, FAST—$279. Other menu-driven bar code programs from $49. 30 day $ back.
Worthington Data Solutions
417-A Ingalls St., Santa Cruz, CA 95060
(800) 345-4220 **In CA: (408) 458-9938**

BAR CODE READERS
From the manufacturer for PC/XT/AT, & PS/2. Attaches as 2nd keyboard, reads as keyed data. External or bus install. With steel wand—$399. Also Kimtron, Link, Wyse, & RS-232. Portables, Lasers, slot badge readers, and MagStripe too!
30 day $ back.
Worthington Data Solutions
417-A Ingalls St., Santa Cruz, CA 95060
(800) 345-4220 **In CA: (408) 458-9938**

THE BUYER'S MART

BAR CODES

PRINT BAR CODES/BIG TEXT FROM YOUR PROGRAM

Add bar codes and big graphics text to your program. Print from ANY MS-DOS language. Bar codes: UPC, EAN, 2 of 5, MSI, Code 39. Epson, Oki, IBM dot matrix text up to ½". **LaserJet up to 2". Font cartridges not required. $159–$239. 30 day $$ back.**

Worthington Data Solutions
417-A Ingalls St., Santa Cruz, CA 95060
(800) 345-4220 **In CA: (408) 458-9938**

COMPLETE LINE OF BAR CODE PRODUCTS

- **PrintBar II** • **PrintBar Softfonts**
- **PrintBar I** • **CodeScan 2000**

FREE BROCHURES *(206) 451-8966*

Bear Rock Software Co.
6069 Enterprise Dr. Placerville, CA 95667

BAR CODE MADE EASY

PERCON® E-Z-READER™ keyboard interfaces and multiuser RS-232 models make it easy to add bar code to virtually any computer/terminal WITHOUT SOFTWARE MODIFICATION. Immediate shipping. Two year warranty. Bar code printing software available. Call for details on fast, accurate, easy data entry. Substantial reseller discounts.

PERCON®
2190 W. 11th St., Eugene, OR 97402
(503) 344-1189

READ & PRINT BAR CODES

Fast, reliable data entry into your programs as if from your keyboard. Internal unit for PC, XT, AT PS/2-M30. RS-232 unit for DOS & Non-DOS systems (incl. all PS/2). Stainless steel wand and LASER interfaces. Powerful Bar Code and Text printing software.

Seagull Scientific Systems
15127 N.E. 24th, Ste. 333, Redmond, WA 98052
(206) 451-8966

BAR CODE READERS

Among the industries best and most widely used barcode reader, reads all major barcode formats (code 39, 2 of 5, UPC/EAN, codabar), connects between keyboard & system, advanced CMOS uses keyboard power supply, connects to all IBM compatibles and DIN terminals, completely OS independent, software independent. Same day ship, 1 year warranty, 30 day satisfaction guarantee. CALL for prices too low to advertise.

Solutions Engineering Sales
8653 Georgia Ave., Silver Spring, MD 20910
800-635-6533

Inquiry 588.

DATA INPUT DEVICES

Bar Code & Magnetic Stripe Readers for microcomputers & terminals, including IBM PS/2 & others, DEC, AT&T, CT, Wyse, Wang. All readers connect on the keyboard cable & are transparent to all software. Low cost bar code print programs & magnetic encoders are also available. GSA contract #GS00K87AGS5346.

TPS Electronics
4047 Transport, Palo Alto, CA 94303
415-856-6833 **Telex 371-9097 TPS PLA**

Inquiry 589.

BBS PUBLIC DOMAIN

7,500+ Titles in Download Library

18+ Special Interest Forum message bases plus Real Time Conferencing. USA TODAY Decision-Line News Service. Quarterly Newsletter & BBS System Users Guide. PC Pursuit Accessible. Fee: $10/3 Mo. — $25/Yr.

9 Incoming lines. FREE DEMO MODE
(503) 761-8100 12/2400 N,8,1
RANDOM ACCESS Information Network
P.O. Box 16675, Portland OR 97216
Voice: (503) 239-8299

Inquiry 590.

CAD/CAM

$39.95 CAD

Fully featured, symbols, auto dimensioning, hatching, fillets, reads DXF, handles all but the largest drawings. Extremely powerful BASIC-like macros, on line manual plus so much more. Requires IBM XT/AT/PS2 with 640K and hard disk. 20,000 new users this year.

PAFEC INC.
5550 Technology Park, Norcross, GA 30092
1-800-52PAFEC **(404) 441-9300**

Inquiry 591.

CASE

Affordable CASE

A new concept in **C**omputer **A**ided **E**ngineering for developing PC/DOS applications! C Dispatcher generates fast, efficient C code for command and menu driven applications. Develop, document, and change easily. Many features. For many compilers. $295.00 *MC/Visa*

Amaryllis Inc.
563 Wattaquadoc Rd., Bolton, MA 01740
(617) 365-5456

Inquiry 592.

CASE STATE PROGRAM COMPILERS

The COMPEDITOR, a software development tool quickly documents and forms real time and event driven source programs in ADA, BASIC, C, FORTRAN and PASCAL.

IBM PC, XT, AT, PS/2 190K RAM Dos 2.0+
Price: **$175.00** per language (With Primer and Debugger) Sampler $30

AYECO INCORPORATED 5025 Nassau Circle, Orlando FL 32808 **(407) 295-0930**

Inquiry 593.

PROTOTYPING TOOL

Build a **working** *system model* of your application with **PC-PROTO.** *Very Fast. Very Flexible.* No Programming Required. Screen Painter. Data Base Manager. Generate data dictionary, source code, documentation, programming specifications. *Suitable for JAD as well.* For PC, XT or AT. From $149.00. MC/VISA.

Kartech, Inc. **(416) 656-2032**
165 Pinewood Ave., Toronto, Ontario, Canada M6C 2V6

Inquiry 594.

CD/ROM

Public Data on CD-ROMs

- Econ/Stats I — Prices, Employment
- Consu/Stats — BLS/Census 1984 consumer data
- Agri/Stats — Agricultural series
- Makes tables, DIF, or ASCII
- $49 each, req. MS-DOS
- CD-ROM publishing services available

Hopkins Technology
421 Hazel Lane, Hopkins, MN 55343
(612) 931-9376 **Compuserve 74017,614**

Inquiry 595.

COMMUNICATIONS

Bi-Directional File X-fers

Multi-Com telecommunications program offers the following.....
- ☆ *Simultaneous* Downloading/Uploading
- Send/Receive Console Messages During File Transfers
- 100% Line Utilization During Multi-File Transfers
- Uses Full Duplex ADLC Protocol
- More Efficient Than Xmodem, Kermit, etc.
- Saves Time and Cuts Connect Costs

Information & 5¼" Demo Disk.....$5.00 + $3 s/h
Program Pkg., 3½" & 5¼" disks, manual....$49.95 + $4 s/h

Multiplex Systems (412) 276-3374 24 hrs.
P.O. Box 16174, Pittsburgh, PA 15242

Inquiry 596.

FAX MACHINES $395

MURATA FAX 1200/1600.....**$795/925**
SHARP FAX FO300/FO500.....**$1195/1495**
TOSHIBA FAX 30100/3300/3700.....**$1088/1240/CALL**
RICOH 10/20.....**$1295/1595**
CANON FAX 20.....**$1279**
PC/XT SYS. Receive/Transmit FAX+Scanner.....**$1595**
PC/XT Telephone Answer & Voicemail.....**$1195**

Prepay prices Visa/MC 2% cod 2% restock 20%

TELEPHONE PRODUCTS CENTER
23591 #213 El Toro Rd., El Toro, CA 92630 **714/739-9555**

Inquiry 597.

COMPUTER INSURANCE

INSURES YOUR COMPUTER

SAFEWARE provides full replacement of hardware, media and purchased software. As little as $39 a year provides comprehensive coverage. Blanket coverage; no list of equipment needed. One call does it all. Call 8 am–10 pm ET. (Sat. 9 to 5)

TOLL FREE 1-800-848-3469
(Local 614-262-0559)
SAFEWARE, The Insurance Agency Inc.

Inquiry 598.

COMPUTER RENTALS

R E N T A L S

WEEKLY MONTHLY YEARLY

IBM – APPLE COMPAQ
$189 PER MO.
Full Stock/Next Day Delivery
Free Service & Maintenance
IBM PS/2 Model 50
800 PC-RENTL

Inquiry 599.

CROSS ASSEMBLERS

CROSS ASSEMBLERS
Universal Linker, Librarian
Targets for 36 Microprocessors
Hosts: PC/MS DOS, micro VAX, VAX 8000
Developed and supported at:

ENERTEC, INC.
BOX 1312, Lansdale, PA 19446
215-362-0966 **MC/VISA**

Inquiry 600.

Professional Series

PseudoCode releases it's PseudoSam Professional Series of cross assemblers. Most popular processors. Macros, Conditional Assembly, and Include Files. Virtually unlimited size. For IBM PC's, MS-DOS 2.0 or greater. With manual for $35.00. Each additional $20.00. (MI res. 4% tax). Shipping $5, Canada $10, Foreign $15. Visa/MC. (Dealer Inquiries Welcome).

Kore
6910 Patterson, Caledonia, MI 49316
616-791-9333

Inquiry 601.

THE BUYER'S MART

CROSS ASSEMBLERS

FANTASTIC SIMULATORS
For the 8048, 8051, 8080, 8085, & Z80 families. Full function simulation including ALL MODES of interrupts. Built-in disassembler. Better than expensive I.C.E.'s.

CROSS ASSEMBLERS
We support the 8048, 8051, 8080/8085, 8096 & Z80 families. Just $75 each.

Lear Com Company
2440 Kipling St./Ste. 206, Lakewood, CO 80215
303-232-2226

Inquiry 602.

CROSS ASSEMBLERS
Macros, PC Compatible, Relocatable, Conditionals, Fast, Reliable . . . . . from **$150**
also: Disassemblers
EPROM Programmer Board
MICROCOMPUTER TOOLS CO.
Phone (800) 443-0779
In CA (415) 825-4200
912 Hastings Dr., Concord, CA 94518

Inquiry 603.

680X0 Cross Assemblers
Now, inexpensive quality 6080 Cross Assemblers that use your IBM PC or compatible. All versions include extensive listing facilities, up to 32 char labels, sorted symbol tables, INCLUDE files, PATH names, ORG, OC, DS, EQU, many other directives (except MACROS), printed manuals. Basic versions create S-records. Linking versions create either S-records or relocatable modules, and include a linker which creates S-records or binary output files. Not copy protected. Minimum requirements are 320K, DOS 2.XX, & 1-5¼" DSDD.
Basic 68000/68010—$49.95 Linking 68000/68010—$89.95
Basic 68020—$69.95 Basic 68020/68881—$129
Checks, VISA, MC accepted. MN residents +6% sales tax. No PO's or COD's, please.
RAVEN Computer Systems
Box 12116, St. Paul, MN 55112 (612) 636-0365

Inquiry 604.

ASSEMBLERS & TRANSLATORS
Over 20 high quality, full function, fast relocatable and absolute macro assemblers are available immediately. Source language translators help you change microcomputers. Hosts: MS/DOS, CPM80, ISIS.

RELMS™
P.O. Box 6719, San Jose, CA 95150
(408) 356-1210
MC/VISA TWX 910-379-0014 *AMEX*

Inquiry 605.

Z80/HD64180
SLR Systems cross assemblers run on PC and are compatible with Microsoft M80/L80. $195.00 for assembler and linker. We have CP/M emulator cards for PC. Up to 12.5 mhz Z80 clock speed, starting at $249.95! Also Z80/HD64180 C compilers.

Z-World
1772 Picasso Ave., Davis, CA 95616 **(916) 753-3722**
Please see our ads on page 320.

Inquiry 606.

DATA CONVERSION

MEDIA CONVERSION/DATA TRANSLATION
More than just a straight dump or ASCII transfer!
Word Processing, DBMS, and Spreadsheet data on **Disks** or **Tapes** transferred directly into applications running on **Mainframes, Minis, Micros, Dedicated Word Processors, Typesetters,** and **Electronic Publishing** systems.
IBM PS/2 & Macintosh supported
#1 in the translation industry!
CompuData Translators, Inc.
3325 Wilshire Blvd., Suite 1202, Los Angeles, CA 90010
(213) 387-4477 1-800-825-8251

Inquiry 607.

DATA CONVERSION

PEP Your Data to MS-DOS!
PEP ("Printer Emulation Package") is a unique software product which makes your MS-DOS system appear to be an intelligent serial printer. Converting your data from another operating system is as easy as printing it! Diskette plus 90 page typeset manual, $64.95 U.S. (Not copy protected.) Specify 5¼ or 3½ inch diskette size; add $5 for both formats.

Intelpro
13 Saratoga Dr., Kirkland, Quebec, Canada H9H 3J9
(514) 694-6862

Inquiry 608.

DATABASE MGMT. SYSTEMS

SOFTWARE KIT PACKAGING
OEM supplier to one of the world's largest computer companies offers quality packaging and supplies for your software products. From diskettes to printed manuals. Quality products reflecting your company's image is our highest priority. Call or write.

COMPUTER LOGICS LIMITED
4845 Transit Road Unit K-8, Depew, NY 14043
(716) 633-2810 Fax (716) 633-2813

Inquiry 609.

FREE TRIAL dBASE III CLO!!
"1 on 1 is a programmable relational DBMS. . . 1 on 1 = 3!! is a great deal for those who would be glad to have a dBASE III PLUS clone"
**** PC MAGAZINE 5/17/88 ****
Free 30 day trial full program USA only or Buy now get free upgrade. Money back guarantee $69 + $5. *S/H chk/Amex. CAN +$4. Other +$10.* Call or write:

1 on 1 Computer Solutions
26 Finchwood Dr., Trumbull, CT 06611 **203-375-0914**
dBASE III is a trademark of Ashton-TATE

Inquiry 610.

DATA/DISK CONVERSION

QUALITY CONVERSIONS
• Disk • Scanning • Tape
*TYPEWRITTEN $.33 per page to ASCII
*TYPESET 6–24 point Low Rates
(*WP Formats available)
IMAGES
Logos/Line Art/Glossies
1st Run Computer Services Inc.
1261 Broadway, Suite 508, New York, NY 10001
(212) 779-0800

Inquiry 611.

Get the Expertise You Need!
Disk/Disk • Tape/Disk • OCR
Over 1,000 formats! 3½, 5¼, or 8 inch disks; 9 track mag tape; 10 MB Bernoulli cartridge. Data base and word processor translation. Specialists in Government Security Data. Call for free consultation.
Computer Conversions, Inc.
9580 Black Mtn. Rd., Ste J, San Diego, CA 92126
(619) 693-1697

Inquiry 612.

DISK CONVERSIONS
Media transfer to or from: IBM, Xerox, DEC, Wang, Lanier, CPT, Micom, NBI, CT, also WP, WS, MS/WRD, DW3, MM, Samna, DEC DX, MAS 11, Xerox-Writer, ASCII.
FREE TEST CONVERSION
CONVERSION SPECIALISTS
531 Main St., Ste. 835, El Segundo, CA 90245
(213) 545-6551 (213) 322-6319

Inquiry 613.

DATA/DISK CONVERSION

DISK & TAPE CONVERSIONS AUTOMATICALLY
SAVE TIME AND MONEY
Over 1000 formats from Mini, Micro Mainframe, Word Processors, & Typesetters.
TAPE Conversions as low as $23.00 MB
DISK Conversions as low as $15.00 per Disk
Call or write TODAY for a cost saving quotation.
CREATIVE DATA SERVICES
1210 W. Latimer Ave., Campbell, CA 95008
(408) 866-6080

Inquiry 614.

RUN HP SERIES 80 PROGRAMS ON IBM PC
Translator allows users to move programs written on HP 85, 86, 87, 9915 to IBM PC, AT, PS/2, compatibles and run them on Microsoft's powerful QuickBASIC 4.0. File copy utility included. HP BASIC program translation and disk file copy to PC's our specialty. Call us.

Oswego Software **312/554-3567**
507 North Adams St. **FAX 312/554-3575**
Oswego, Illinois 60543 **TELEX 858757**

Inquiry 615.

CONVERSION SERVICES
Convert any 9 track magnetic tape to or from over 1000 formats including 3½", 5¼", 8" disk formats & word processors. Disk to disk conversions also available. Call for more info. Introducing OCR Scanning Services.
Pivar Computing Services, Inc.
165 Arlington Hgts. Rd., Dept. #B
Buffalo Grove, IL 60089 **(312) 459-6010**

Inquiry 616.

DEMOS/TUTORIALS

INSTANT REPLAY III
Build Demos, Tutorials, Prototypes, Presentations, Music, Timed Keyboard Macros, and Menu Systems. Includes Screen Maker, Keystroke/Time Editor, Program Memorizer, and Animator. Rec'd *Great* Reviews! Simply the BEST. Not copy protected. No royalties. 60 day satisfaction money back guar. IBM and Compatb. $149.95 U.S.Chk/Cr. Crd. Demo Diskette $5.00
NOSTRADAMUS, INC.
3191 South Valley Street (ste 252)
Salt Lake City, Utah 84109 **(801) 487-9662**

Inquiry 617.

DESKTOP PUBLISHING

HIGH RESOLUTION MONITOR
- Desktop Publishing and CAD low cost graphics subsystem
- Workstation Resolution for your IBM PC/XT or AT compatible
- 1024 x 768 paper white 14" flat screen
- Drivers for Ventura, Page Maker, Windows, GEM and AutoCAD
- Can coexist with another color graphics adapter
- Call NOW $595 including graphics board, monitor and software
- VISA and MasterCard accepted

CATi INC
16840-B Joleen Way, Morgan Hill, CA 95037
HOT LINE 408-778-CATS

Inquiry 618.

Desktop Publishers!
When you need the best "no-nonsense" tools for
Screen Capture and **Image Management**
Collage Display Utilities
Dynamic Grayscaling, Image Browsing and Cataloging, and *much, much more!* Supports **EGA, VGA, PS/2, CGA, Hercules,** and **MDA** displays!
Suggested Retail price, only **$89.95**
Inner Media, Inc. (603) 465-3216, -7195 Fax

Inquiry 619.

THE BUYER'S MART

DISK COMPATIBILITY

IBM PC's USE Mac DISKS

MatchMaker lets you plug any Macintosh external floppy drive into an IBM PC. Half size card and software lets you copy to/from, view directory, initialize, or delete files on the Mac diskette. Works with PCs, XTs, ATs, and compatibles. *The easy way to move information!*

$149.00 Visa/MC/COD/Chk.

Micro Solutions Computer Products
132 W. Lincoln Hwy., DeKalb, IL 60115 **815/756-3411**

Inquiry 620.

DISK DRIVES

HARD DISKS

MN6128	110 MB	28MS	$699.
MN9380E	338 MB	16MS	$2399.
MN6085	71 MB	28MS	$545.
MC1355	150 MB	23MS	$1299.
MC1335	71 MB	28MS	$545.
ST4096	80 MB	28MS	$525.
ST251	40 MB	40MS	$329.
ST251-1	40 MB	28MS	$379.

CPU INC **(714) 870-9033**

Inquiry 621.

PS/2 DRIVES FOR PC's AT's

CompatiKit/PC **$329**
CompatiKit/AT **$269**

Built-in floppy controllers—no problem. Supports multiple drives and formats. Lets your computer use IBM PS/2 1.4M diskettes *plus more!* Call for further information or to place an order. *VISA/MC/COD/CHECK.*

Micro Solutions Computer Products
132 W. Lincoln Hwy., DeKalb, IL 60115 **815/756-3411**

Inquiry 622.

DISK DUPE EQUIPMENT

DO YOUR OWN DUPLICATION

Copy 10,000 or only 10 ..... in as little as 15 seconds each with famous Mountain Duplication equipment at the very best prices!! See us for all of your duplication equipment needs from Disks to Drives to Duplicators.

SYSTEMS SUPPORT DATA
223 North Royal Avenue, Front Royal, VA 22630
1-800-231-4355

Inquiry 623.

DISK DUPLICATION

DUPLICATION IS THE SINCEREST FORM OF FLATTERY

Let us Flatter you!!! See us for all disk duplication needs. 10 disks to 100,000 and more All formats—All systems. Best prices—Our own in-house printing of documentation—labels-sleeves.

SYSTEMS SUPPORT DATA
223 North Royal Avenue, Front Royal, VA 22630
1-800-231-4355

Inquiry 624.

DISKETTES

CHEAP DISKS!!!

Although this headline may not convey quality.....our 3½" floppy disks do!

100% Certified
720k only 98¢
1.44 MEG only $2.60

SYSTEMS SUPPORT DATA
223 North Royal Avenue, Front Royal, VA 22630
1-800-231-4355

Inquiry 625.

DUPLICATION SERVICE

SOFTWARE DUPLICATION

- One Stop Shopping
- Technical Support
- Custom Packaging
- Drop Shipping
- Copy Protection
- Fast Turnaround
- Competitive Pricing

SATISFACTION GUARANTEED

800-222-0490 NJ 201-462-7628

MEGA*Soft*
P.O. Box 710, Freehold, NJ 07728 *See our ads on page 339.*

Inquiry 626.

SOFTWARE PRODUCTION

- Disk duplication
- All formats
- EVERLOCK copy protection
- Label/sleeve printing
- Full packaging services
- Warehousing
- Drop shipping
- Fulfillment
- 48-hour delivery
- Consultation & guidance

Star-Byte, Inc.
713 W. Main St., Lansdale, PA 19446
215-368-1200 **800-243-1515**

Inquiry 627.

ENTERTAINMENT

★★CHESS SPECTACULAR!★★

At last a chess program designed for the new graphics standard. High resolution animation brings your EGA to life! Solves mate in 7. Huge opening book. Save/restart your games. Animated teaching mode. Select level. Take back/Change sides. On screen clock. **MUCH MORE! EGA Chess** $69.95 256k EGA/VGA 5.25" disk. *VISA/MC*

CUBE Microsystems
P.O. Box 26064, Overland Park, KS 66225
(913) 649-6747

Inquiry 628.

HOOKED ON BLACKJACK?

Blackjack Players— improve your play with an inexpensive but good (IBG) Blackjack program. Plays ALL Casino games and options. Blackjack V1.00 includes: • on-line basic strategies • simple card counts. For you card-counters there is a Pro-Player Upgrade feature that allows YOUR card counts and YOUR strategies. Machine requirments: • IBM/PC compatible (256K) • PC-DOS V2.0 or later. • BLACKJACK program $20.00 Pro-Player Upgrade add $12.50 (Specify diskette size) Money back guarantee 30 days — allow 4 weeks for delivery. Mail check or money order to: (FL res. add 6%)

IBG SOFTWARE
P. O. Box 27-6354, Dept. B, Boca Raton, FL 33427-6354

Inquiry 629.

NEMESIS™ Go Master™

Go is a popular Oriental game of intellectual complexity and elegance. NEMESIS, recognized worldwide as the best Go program, is an ideal playmate and tutor. Pournelle's game of the month *twice:* **"If you are interested in Go, buy this program."** BYTE 7/87

Toyogo, Inc.
76 Bedford St., Ste. 34Y, Lexington, MA 02173
(617) 861-0488

Inquiry 630.

FLOW CHARTS

FLOW CHARTING II+ HELPS YOU!

Precise flowcharting is fast and simple with **Flow Charting II+.** Draw, edit and print perfect charts: bold and normal fonts, 26 shapes — 95 sizes; fast entry of arrows, bypasses & connectors; Fast Insert Line; shrink screen displays 200-column chart; 40 column edit screen for detail work, much more!

PATTON & PATTON
81 Great Oaks Blvd., San Jose, CA 95119
1-800-525-0082 (Outside CA)
408-629-5376 (CA/Int'l)

Inquiry 631.

FLOW CHARTS

STRUCTURED FLOW CHART

NSChart creates Nassi-Shneiderman (structured) flowcharts from a simple PDL. Keywords define structures & text strings appear in the chart. Easy to create, even easier to revise! Automatic chart sizing, text centering. Translators from many languages available. For Mac and IBM PC.

SILTRONIX, INC.
P.O. Box 82544, San Diego, CA 92138
1-800-637-4888

Inquiry 632.

HARDWARE

8096 Microcontroller

Single Board 8096/7, Ser. Interface, 5V only; Assembler+Forth in EPROM+Manual/Software Guide $400. Add-on EPROM Simulator incl. download S/W $350. Hardware/Software evaluation package incl. cabling and tutorial books $580. Cross Compiler (Assembler/Forth) available.

DIGITAL MICRO CONTROL
15617-25th Drive S.E., Mill Creek, WA 98012
(206) 338-2406

Inquiry 633.

CHIP CHECKER

- 74/54 TTL + CMOS
- 8000 Nat. + Signetics
- 14/4000 CMOS
- 9000 TTL
- 14-24 Pin Chips
- .3" + .6" IC widths

Tests/Identifies over 650 digital chips with ANY type of output in seconds. Also tests popular RAM chips. IBM compatible version $259. C128 + C64 version $159.

DUNE SYSTEMS
2603 Willa Dr., St. Joseph, MI 49085
(616) 983-2352

Inquiry 634.

PC CARDS/KITS

- 8 bit A/D card, 0-5V **$79**
- 8 bit D/A card, 0-2.5V **$79**
- Relay driver card, 8 outputs (3A) **$149**
- Digital I/O (8 TTL input/output) **$79**
- JB XT computer kit w/monitor **$499**
- FREE CATALOG—parts, kits, computers

JB COMPU-TRONIX
3816 N. Wadsworth Blvd., Wheat Ridge, CO 80033
(303) 425-9586

Inquiry 635.

LATEST VERSION AWARD BIOS

NOW, you can have the latest **AWARD** BIOS for your PC/XT, 286 or 386. Upgrade your old machine for VGA, networking and new keyboard and hard drive types. Fast, knowledgeable service, guaranteed results.

Call 1-800-423-3400 (9:00 AM to 8:00 PM EST)

KOMPUTERWERK, INC.
851 Parkview Blvd., Pittsburgh, PA 15215
For info., call (412) 782-0384

Inquiry 636.

87C51 PROG. $125.00

The UPA 87C51 Programming Adapter lets you use your general purpose programmer to program the 87C51, 8751H, AMD8753H, 87C252, and 8752BH. Also lets you program the 87C51/8751H security bits and the 87C51 encryption array. It's very simple and VERY cost effective.

LOGICAL SYSTEMS CORPORATION
6184 Teall Station, Syracuse NY 13217
(315) 478-0722 **Telex 6715617 LOGS**

Inquiry 637.

THE BUYER'S MART

HARDWARE

BUY ★ SELL ★ TRADE
Apple ● IBM ● Compaq ● Service Parts ● Accessories ● Systems ●
PRE-OWNED Electronics, Inc.
30 Clematis Avenue, Waltham, MA 02154
800-274-5343 FAX 617-891-3556
Service Centers and Dealers welcome

Inquiry 638.

SANYO 550/555 USERS

3.6/7.2MHZ TURBO BD. W/8088-2	$79.95
IBM STYLE CGA VIDEO BD.	$159.95
IBM STYLE RS-232	$79.95
HARD DISK CONTROLLER PKG.	$139.95
768K MEM/CLK/EXPANSION BD.	$169.95
20 MEG HARD DISK SYSTEM	$549.95
COMPOSITE MONO MONITOR	$109.95
550 COMMUNICATIONS SOFTWARE	$49.95

TAMPA BAY DIGITAL
1750 Drew St., Clearwater, FL 34615
*** FREE CATALOG *** 813-442-1577 813-443-7049

Inquiry 639.

68000 / 68020 / 68881
COMPLETE DEVELOPMENT SYSTEM
for the 68000, 68020 and 68881 chips—includes the chips, power supply, serial interface with software, 68000/68020 cross assembler (hosted on a PC), documentation, schematic, Operating System, cables. Special Price—$1100.00
Phone URDA, Inc.
1-800-338-0517

Inquiry 640.

HARDWARE/ADD-ONS

USE JOYSTICK ONE-HANDED!
Still using your joystick two-handed? Hand sore from holding that joystick? **STIK-FOOT™** lets you use any flat-bottomed joystick one-handed, and is easily installed. Just $9.95, plus $1.90 shipping, check or money order. Dealer inquiries welcome.
The Softwaresmith
Suite 131, 114 Daniel Webster Highway South
Nashua, NH 03060

Inquiry 641.

HARDWARE/COPROCESSOR

SC/FOX™ PARALLEL COPROCESSOR
PC/XT/AT/386 plug-in board with Forth software. 10 MIPS operation, up to 50 MIPS burst. 64K to 1M byte memory. Uses Harris RTX 2000™ RISC realtime CPU with 1-cycle multiply, 1-cycle 14-priority interrupts, two 256-word stacks, three 16-bit timer/counters, 16-bit i/o bus. Ideal for real-time control, signal and image processing and multiple board operation. From $1,995.
SILICON COMPOSERS, INC. (415) 322-8763
210 California Ave., Suite K, Palo Alto, CA 94306

Inquiry 642.

IMAGE PROCESSING

ZIP Image Processing
ZIP brings video image processing to the PC. Control ImageWise video digitizer, use 1 or 2 serial ports to capture/display images from any video source. Outstanding image display on EGA/EEGA/VGA in color and 64 gray levels.
Call *(314) 962-7833* for VISA/MC, or send check $79 + $2 s/h. MO add 5.8%.
Hogware Company
470 Belleview, St Louis, MO 63119
(314) 962-7833

Inquiry 643.

INFORMATION

The "Economic Report of the President" has concise tables of the major economic indicators **(GNP, Employment, Inflation, Population the deficit, and much more.)** The Tables of the 1988 Report are now available on disk in **(CAL, WKS, CSV, or TXT)** formats for **(PC or MAC or most CP/M)— $49.95**
FAIRFACTS
Box 536, San Rafael, CA 94915
Tel. 415-485-1781

Inquiry 644.

INVENTORY MANAGEMENT

STOCK-MASTER 4.0
Commercial grade inventory management software at micro prices.
- Supports all 12 transaction types
- Trend Analysis
- Quality Control
- Multiple Locations
- Purchase Order Tracking
- Open Order Reporting
- Serial/Lot # Tracking
- Stock Status Reporting
- Activity History Analysis
- Bill of Materials
- Purchase Order Writing
- Order Entry
- Material Requirements
- On Line Inquiry

Applied Micro Business Systems, Inc.
177-F Riverside Ave., Newport Beach, CA 92663 714-759-0582

Inquiry 645.

LANS

Are you about to spend thousands of dollars for
Novell or 3-COM?
The invisible Network does the same thing, but costs only $249 per machine. True NETBIOS-compatible Local Area Network with high-speed 1.8 Mbps interface cards, cables, and *all* networking software. Works great with Multi-user dBASE, Clipper, QuickSilver, FoxBASE+, and all other file-sharing and multi-user software.
Database Specialties *(415) 652-3630*
P.O. Box 2975, Oakland, CA 94618

LAPTOP COMPUTERS

LAPTOP SPECIALS
Toshiba • Zenith • NEC • DATAVUE • SHARP • *NEW!* Hard drives available for Tandy 1400 LT & Toshiba 1100+ • AFFORDABLE 5¼" or 3½" DRIVE UNITS for LAPTOPS & DESKTOPS • DICONIX PRINTERS • 768 card for T1000 • 2400 BAUD MODEMS for Laptops • Fast reliable and friendly service. For Low Pricing call
COMPUTER OPTIONS UNLIMITED
201-469-7678 (7 Days, 9 am–10 pm Eastern time)

Inquiry 646.

2 PC and 2pcLite
2 PC: Connects any two PC's for file transfer and communication. Features * 115,200 baud transfer rate * directory trees * chat mode * file tagging/viewing/deletion * print facility * universal cable * free cable wiring diagram (so you can "roll your own" cable!) * 3½" & 5¼" disks. **Complete - $55 (List: $80), without cable - $45. 2PC Lite:** Less Expensive, Works Great! **Complete - $40 (List: $50), without cable - $30.** Both programs have 43-line mode.
Cables sold separately: ser/par, kbd, mon, & others
Thompson Computing, 587F N. Ventu Park Road, Suite 306, Newbury Park, CA 91320, (805) 498-7653. VISA/MC add 4%.

Inquiry 647.

L A P - L I N K
The ultimate solution for linking laptop computer with any IBM compatible desktop PC. 115, 200 baud transfer rate—faster than any other product available. No installation necessary, easy to use split screen design. Includes incredible "universal cable" that connects any two computers. Transfer entire disks faster than a DOS copy command! Only **$129.95** including universal cable and both 3½" and 5¼" disks. "Bridge" owners can trade in for only **$89.95** w/o cable.
Traveling Software, Inc.
19310 North Creek Parkway, Bothell WA 98011
1-800-343-8080 (206) 483-8088

Inquiry 648.

LEGAL

LEGAL DOCUMENT MAKER
All pleadings and documents.
Any word processor software.
Free Brochure.
New! Supra II™.
TSC - The Software Company
P.O. Box 872687, Wasilla, AK 99687
(907) 373-6550

Inquiry 649.

MAC

DEVELOPMENT TOOLS
Professional Programmers Extender: Standard Mac interface, lists, printing, graphics, tiling. Extender GraphPac: Quality color graphs. Line, bar, semi-log, customizable symbols.
INVENTION Software
(313) 996-8108

Inquiry 650.

MARKETING

FREE BROCHURE & CATALOG
If you have a computer product that you're marketing. . .or thinking about marketing. . .we can help. We'll help you get free publicity from computer magazine editors, user groups and computer stores. Send for a free brochure today.
DP Directory, Inc.
525 Goodale Hill Road, Ste. 410, Glastonbury, CT 06033
(203) 659-1065

Inquiry 651.

MEMORY CHIPS

MEMORY CHIPS

41256-15-12-10	Call	51000 (1 Meg)	Call
4164-15	Call	51258 for Compaq 386	Call
4164-12	Call	8087-3-2	Call
41128 Piggy Back for AT	Call	80287-6-8-10	Call
41464-12 (64Kx4)	Call	80387	Call
414256 (256Kx4)	Call	NEC-V-20-8	Call
2764,27128,27256,27512	Call	Mouse	Call

Prices subject to change
ESSKAY ***718-353-3353***

Inquiry 652.

MONITOR INTERFACE

DRIVE MULTIPLE MONITORS
with one PC using our VOPEX video port expanders. Featuring no loss of resolution or color, presentations are more dramatic. We have a VOPEX for PC, PS/2, MAC II & workstations. Units are available from 2 to 10 output ports.
NETWORK TECHNOLOGIES INC.
800-RGB-TECH or 216-543-1646 MC/VISA/AMEX
19145 Elizabeth St., Aurora, OH 44202

Inquiry 653.

MUSIC

MIDI — PC/XT $84.95
Your MIDI instruments can talk with your PC/XT via a MIDIATOR®. Software INCLUDED! KE Enote™ Sequencer, KE Eboard Splitter/Auto-Chorder, & MIDI Monitor. Requires 256K, DOS 2.0+, Std. Serial Port (COM1 or COM2) & std. cables. Needs no modifications, exp. slot, or power sup. Introductory Price $84.95+5.00 s/h, TX res. add 7.25% tax. MC, VISA, Check (allow 10 days).
Key Electronic Enterprises
9112 Hwy. 80 W., Suite 221-B, Fort Worth, TX 76116
(817) 560-1912

Inquiry 654.

THE BUYER'S MART

PC BOARDS

P-C-B ARTWORK MADE EASY!
* Help Screens * Dip & Sip Library
* Printer or Plotter Artwork * Supports Mice
* Auto-Router available * ICON Menus
Requirements: IBM or Compatible PC, 384K RAM, DOS 3.0 or later.
PCBoards: $99.00 DEMO: $10.00
PCBoards
2145 Highland Ave./Ste. 201, Birmingham, AL 35205
(205) 933-1122

Inquiry 655.

PROGRAMMER'S TOOLS

Microsoft *QuickBASIC*
Does Database Management.
db/LIB Database Library
is 100% dBASE file compat. Only $139.00.
AJS Publishing, Inc.
(800) 992-3383
(213) 215-9145 In CA.

C or T Pascal Code Instantly
Complete database in just minutes. Draw & Paint your screen, show what fields to use for indexes—That's it—running source code in 6 seconds. Automatic context sensitive help, programmer docs on each program. $389/TPascal ver. or $499/TC or MS-C ver.
Call ASCII (800) 227-7681

Inquiry 656.

TLIB™ 4.0 Version Control
The best gets better! They loved TLIB 3.0: *"packed with features...[does deltas] amazingly fast...excellent"*—**PC Tech Journal Sept 87.** *"has my highest recommendation"*—R. Richardson, **Computer Shopper Aug 87.** Now TLIB 4.0 has: branching, more keywords, wildcards & file lists, revision merge, LAN and WORM drive support, more. MS/PC-DOS 2.x & 3.x **$99.95** + $3 s&h. Visa/MC.
BURTON SYSTEMS SOFTWARE
P.O. Box 4156, Cary, NC 27519 **(919) 856-0475**

Inquiry 657.

TURBO PLUS $99.95
Programming tools for Turbo Pascal 4.0 Screen Painter, Code Generator, I/O Fields, Dynamic Menus, Programming Unit Libraries, Sample Programs, 280 Page Illustrated Manual. 60 Day Satisfaction Guarantee! Brochures & Demo Diskettes avail. Highly Favorable Reviews! IBM & Compatibles.
Nostradamus Inc.
3191 South Valley St. (Suite 252) Salt Lake City, UT 84109
(801) 487-9662

Inquiry 658.

Get INSIDE!
INSIDE! is a powerful software performance analysis tool for popular PC compilers. INSIDE! measures the execution time of every function or procedure with microsecond accuracy or computes how often each source line is executed. Simply compile your application and INSIDE! does the rest. $75
Paradigm Systems Inc.
P.O. Box 152, Milford, MA 01757
(800) 537-5043 In MA: (508) 478-0499

Inquiry 659.

PROGRAMMER'S TOOLS

Modula-2
Graphix brings the widely used MetaWindow professional graphics library to users of JPI TopSpeed, Logitech, and other M2 compilers. Supports multiple fonts, image scaling, mouse tracking, many printers, and over 30 display adapters. Call for free demo. Only $149 ($189 with source). Includes MetaWindow package. From the creators of Repertoire ($89), NetMod ($69), Dynamatrix ($69), EmsStorage ($49), etc. *MC/VISA/AMEX/COD.*
PMI *4536 SE 50th, Portland, OR 97206*
(503) 777-8844; TLX: 650-2691013

Inquiry 660.

FREE BUYER'S GUIDE
See Page 39
Programmer's Connection is an independent dealer representing more than 250 manufacturers with over 750 software products for IBM personal computers. Call to receive our FREE comprehensive Buyer's Guide or refer to page 39 of this issue to see a partial list of our software products.
Programmer's Connection
800-336-1166
216-494-3781

Inquiry 661.

PUBLIC DOMAIN

OUTSTANDING IBM SOFTWARE
ONLY $2.75/DISK OR LESS
Our collection contains the latest versions of the Best Shareware and Public Domain Programs. Most are menu driven with full documentation. 3.50" format is also available. Orders shipped First Class Within 24 hours and Satisfaction is guaranteed. Write for free printed catalogue or send a 25¢ stamp for a disk catalogue.
A.C.L. (916) 973-1850
1621 Fulton Ave., Suite #35-B, Sacramento, CA 95825

Inquiry 662.

$3.00 SOFTWARE FOR IBM PC
Hundreds to choose from, wordprocessors, databases, spreadsheets, games, lotto, communications, business, music, bible, art, education, language and useful utilities for making your computer easier to learn. Most programs have documentation on the disk.
WRITE FOR YOUR FREE CATALOG TODAY!
BEST BITS & BYTES
P.O. Box 8245, Dept-B, Van Nuys, CA 91409
In CA: (818) 781-9975 800-245-BYTE

Inquiry 663.

FREE SOFTWARE
BEST OF PUBLIC DOMAIN & SHAREWARE.
Carefully selected and edited programs for I.B.M. Send S.A.S.E. for free catalog.
C.C.S., Inc. Dept. B1
P.O. Box 312, Lafayette Hill, PA 19444

Inquiry 664.

RENT SOFTWARE $1/DISK
Rent Public Domain and User Supported Software for $1 per diskfull or we'll copy. IBM (3½" also), Apple, C-64, Sanyo 550 and Mac. Sampler $3. VISA/MC. 24 hr. info/order line. (619) 941-3244 or send #10 SASE (specify computer) Money Back Guarantee!
FutureSystems
Box 3040 (T), Vista, CA 92083
office: 10-6 PST Mon-Sat. (619) 941-9761

Inquiry 665.

PUBLIC DOMAIN

FREE SOFTWARE
Buy or Rent $1/disk
World's largest Free Software Library of IBM PC & Compatibles and Macintosh. Over 3000 programs for Religion, Utilities, Business, Com., Word Processor, Education, and Games on 5.4" and 3.5" format. Best quality, Lowest rate, and Fastest service. For fast free catalogue write to:
SOFTSHOPPE
P.O. Box 15022, Ann Arbor, MI 48106
(313) 763-8721

Inquiry 666.

$4.00 SHAREWARE $4.00
IBM-PC Compatible Software
- Over 700 Disks to Choose From
- Not Half Full Like Some Distributors
- Dozens of Programs in All Categories

Call or Write for FREE Catalog on Disk
— Please specify 5¼" or 3½" Disk —
The Software Kingdom
P.O. Box 555, Auburn, NH 03032-0555
1-800-552-DISK (In N.H.) (603) 483-5055

Inquiry 667.

FREE SOFTWARE
We send you 15–20 new IBM programs a month on 5 disks—**FREE!** You pay only $5. shipping/handling. Annual membership reg. $29.95. Join today for only $9.95 and we'll send you over 30 programs on 10 disks as a bonus—**FREE!** No gimmicks—no catches!
toll free 800 669-2669 ext 348
SOFTWARE of the MONTH CLUB
we take visa/mastercard/amex

Inquiry 668.

GRADEASE OR CHECKEASE
GRADEASE FOR TEACHERS is the ultimate! Maintains grades. Prints class lists, reports, and seating charts. (IBM, Apple II, C64/128)
CHECKEASE FOR EVERYBODY is the best checkbook program available. Tracks bills. Records tax info. Reconciles unlimited accounts. Prints checks and user formatted reports, and more!!! (IBM only).
Shareware $10 or $29.95 for registration (+ $2 P&H)
SOFTWARR
11919 Barrytree Drive, Houston, Texas 77070
(713) 955-8210

Inquiry 669.

SCANNING SERVICE

Signature Scanning Service
If you have a HP LaserJet Plus, Series II or compatible, have your signature made into a graphic macro. Save time! Save yourself from writer's cramp! Let your LaserJet sign those letters for you! Includes instructions for most popular word processors. One signature only $50. Three or more, only $40 each. Logos and letterheads also available from $125. Send for free samples!
Orbit Enterprises, Inc.
P.O. Box 2875-BY, Glen Ellyn, IL 60137
(312) 469-3405

Inquiry 670.

SECURITY

TOTAL PRIVACY $49
Powerful data protection for PC/AT—documents, databases, spreadsheets—any data. The Diary's DES and Ultra Fast encryption keep the curious out. Menu and command line modes. Comprehensive Help. Clear manual starts you quickly. **$49** Introductory price. **$10** Demo. VISA/MC/COD. 90 day money back guarantee.
DIARY **1-800-87-DIARY**
Toll Free Information 24 Hours a Day
Or write, P.O. Box 70443, Bellevue, WA 98007

Inquiry 671.

THE BUYER'S MART

SECURITY

BIT-LOCK® SECURITY

Piracy SURVIVAL 5 YEARS proves effectiveness of powerful multilayered security. Rapid decryption algorithms. Reliable/small port transparent security device. PARALLEL or SERIAL port. Countdown and timeout options also available. KEY-LOK™ security at about 1/2 BIT-LOCK cost.

MICROCOMPUTER APPLICATIONS
3167 E. Otero Circle, Littleton, CO 80122
(303) 922-6410

Inquiry 672.

COPY PROTECTION

The world's leading software manufacturers depend on Softguard copy protection systems. Your FREE DISKETTE introduces you to SuperLock™—invisible copy protection for IBM-PC (and compatibles) and Macintosh.

- Hard disk support
- No source code changes
- Customized versions
- LAN support
- New upgrades available

(408) 773-9680
SOFTGUARD SYSTEMS, INC.
710 Lakeway, Suite 200, Sunnyvale, CA 94086
FAX (408) 773-1405

Inquiry 673.

SMALL BUSINESS SYSTEMS

SMALL BUSINESS SYSTEMS

Finally, a complete computer system classroom designed and field tested with the Small Business Owner in mind. Business capital of America we proudly present "The Y.E.S.! Collection"(c) (*Your Efficiency System*). Several modules written by New England's Ross Ballard II. If you are starting a new business or have been in business for less than two years, and can work with professional trainers via telephone then the Y.E.S.!(c) curriculum is for you. Choose from our "Starting a New Venture", "The Home Based Business", or "Women in Business" each built around NCR Hardware and our unique accounting software that we help you customize. Ask yourself if your business deserves the best then say "Y.E.S.!" Write or call now for our *free* brochure.

ALTERNATIVE BUSINESS TRAINING, INC.
206 Washington Street, Keene, NH 03431
1-800-328-7677 *(in NH 357-5111)*

Inquiry 674.

SOFTWARE/ACCOUNTING

ACCOUNTING TUTOR $79.95

Peanuts and Caviar Accounting Software is designed to introduce the principles of accounting and bookkeeping to non-accountants through its software and textbook. It then may be used as your business' accounting software. Being used by educational institutions to teach accounting (e.g., Pepperdine, etc.) $79.00

COUNTERTRADE PRODUCTS, INC.
5145 Idylwild Tr., Boulder, CO 80301
303-530-5433

Inquiry 675.

dBASE BUSINESS TOOLS

- General Ledger
- Purch Ord/Invntory
- Accounts Recvbl.
- Accounts Payable
- Order Entry
- Job Costing
- Sales Analysis
- Job Estimating

$99 EA. + s&h w/dBASE 2, 3 or 3+ SOURCE CODE

dATAMAR SYSTEMS Cr. Crd/Chk/COD
4876-B Santa Monica Ave.
San Diego, CA 92107 **(619) 223-3344**

Inquiry 676

SOFTWARE/ASTRONOMY

EARTH SATELLITE FORECASTS

SPACE BIRDS predicts visibility of earth satellites such as Mir, Salyut 7, NOAA 10 against the star background; runs on PC/XT/AT. Described in *BYTE* 6/88, p. 82. Reviewed in *Sky & Telescope* 7/88, p. 70. Quarterly *Space Ornithology Newsletter* keeps SPACE BIRDS purchasers informed.

Inquire for details.

Astronomical Data Service
P.O. Box 26180, Colorado Springs, CO 80936
(719) 597-4068

Inquiry 677.

SOFTWARE/BASIC

LOOKING FOR COMPILED BASIC TOOLS?

Having trouble finding tools, books and utilities for Compiled BASIC? We carry a full line.
Call KOMPUTERWERK for our FREE Catalog:
1-800-423-3400

KOMPUTERWERK, INC.
851 Parkview Blvd. Pittsburgh, PA 15215
For info, call (412) 782-0384

Inquiry 678.

SOFTWARE/BASIC TOOLS

QuickWindows

As seen in the Microsoft Value-Pack Catalog!
Create windows, pop-up and pull-down menus, data-entry screens, and multiple-input dialog boxes quickly and easily. Full support of Microsoft mouse. Join the many Fortune 500 companies using QuickWindows and order your copy today. QuickWindows $79. Advanced $139. For Microsoft QuickBASIC or BASCOM. See pg.78, BYTE, March '88.

Software Interphase, Inc.
5 Bradley St., Suite 106 • Providence, RI 02908
(401) 274-5465 **Call now for Free Demo Disk**

Inquiry 679.

SOFTWARE/BUSINESS

DATA ENTRY SYSTEM

Heads-down data entry with two-pass verification for the PC/XT/AT - PS/2 & compatibles. Loaded with features like: Auto dup & skip, verify bypass, range checks, & table lookups. Fully menu driven **only $395.**
Call for free 30 day trial period.

COMPUTER KEYES
21929 Makah Rd., Woodway, WA 98020
(206) 776-6443 **1-800-356-0203**

TSA88-TRANSPORTATION

A general-purpose system for solving transportation, assignment and transhipment problems. Solves transportation problems with up to 510 origins and/or destinations by applying the Transportation Simplex Algorithm. Menu-driven with features similar to LP88. Requires 192K, **$149** with 8087 support user's guide. VISA/MC.

EASTERN SOFTWARE PRODUCTS, INC.
P.O. Box 15328, Alexandria, VA 22309
(703) 360-7600

Inquiry 680.

dFELLER Inventory

Business inventory programs written in modifiable dBASE source code.

dFELLER Inventory **$150.00**
Requires dBASE II or III, PC-DOS/CPM
dFELLER Plus **$200.00**
with History and Purchase Orders
Requires dBASE III or dBASE III Plus (For Stockrooms)

Feller Associates
550 CR PPA, Route 3, Ishpeming, MI 49849
(906) 486-6024

Inquiry 681.

FINANCE MANAGER II

Easy to learn, fully integrated, menu-driven bookkeeping system for small business and personal use. IBM PC, XT, AT, PS/2 or compatible. **Try before you buy!** General Ledger evaluation copy for only $10!

CALL TODAY! (719) 528-8989
HOOPER INTERNATIONAL: PO Box 62219, Colorado Springs, Colorado 80962

Inquiry 682.

SOFTWARE/CHURCH

PowerChurch Plus®

Fast, friendly, reliable church administration system. Full fund accounting, mailing lists, membership, contributions, attendance, word processing, accts. payable, payroll, multi-user support, and much more - all for $695 complete. FREE demo version.

F1 SOFTWARE
P.O. Box 3096, Beverly Hills, CA 90212
(213) 854-0865

Inquiry 683.

ROMAR CHURCH SYSTEMS™

Membership-61 fields plus alternate addresses; labels, letters, reports any field(s). Offering-256 funds; optional pledge; statements; post to 255x/yr. Finance-gen. ledger w/budget; up to 500 subtotals & 99 depts., month & YTD reports anytime for any month. Attendance—8 service times, 250 events per service; 60 consecutive weeks. Available for floppy, 3½ & hard disk. Ad too short! Write for free 48-page guide.

Romar Church Systems, Attn: BJB
P.O. Box 4211, Elkhart, IN 46514
(219) 262-2188

Inquiry 684.

SOFTWARE/ENGINEERING

PRACTICAL ENGINEERING TOOLS

Hobbyists—Students—Engineers

CIRCUIT DESIGN__CompDes, menu selections from basic electricity through circuit designs.
MATHEMATICS__CompMath, menu selections from general math through statistics.
ANALYSIS__CompView. Fourier Analysis of waveforms and filters. PC/MSDOS. $49 each. VISA/MC

BSOFT SOFTWARE **(614) 491-0832**
444 Colton Rd., Columbus, OH 43207

Inquiry 685.

Affordable Engineering Software

FREE APPLICATION GUIDE & CATALOG

Circuit Analysis • Root Locus • Thermal Analysis • Plotter Drivers • Engineering Graphics • Signal Processing • Active/Passive Filter Design • Transfer Function/FFT Analysis • Logic Simulation • Microstrip Design • PC/MSDOS • Macintosh • VISA/MC

BV Engineering ***• Professional Software***
2023 Chicago Ave., Suite B-13, Riverside, CA 92507
(714) 781-0252

Inquiry 686.

VERSATILE DSP & DISPLAY

PC DATA MASTER is a DOS shell which integrates a full set of signal processing functions: flexible graphics, data file math, DSP utilities, data sampling/generation, and interactive help. Support for CGA, EGA, VGA, Herc & AT&T. Add custom analysis or graphics functions easily using your favorite compiler. $135. Toolkit $45. Demo $10.

Durham Technical Images
P.O. Box 72, Durham, New Hampshire 03824-0072
(603) 868-5774

Inquiry 687.

Engineer's Aide

Join the Desktop Engineering Revolution!

- Pipeline/Ductwork Sizing
- Orifice/Control Valve Sizing
- Pump/Fan/Compr. Sizing
- Project Financial Analysis
- Heat Exchanger Sizing
- Conversion Calculator
- Fluid Properties Library
- Specification Writer

Above programs in one stand alone integrated package for $695. For IBM PC & Macintosh.

EPCON
1-800-367-3585 P.O. Box 270, Woodsfield, OH 43793

Inquiry 688.

THE BUYER'S MART

SOFTWARE/ENGINEERING

• COMPOSITE ANALYSIS •
Menu driven program for analyzing composite laminates.

- Calculates fiber stresses & strains
- Graphical strength ratios
- Database includes Graphite, Kevlar & Fiberglass
- SI/US units; thermal & moisture effects

Send check/MO for $225 or $3 for demo disk to:

GS composites
7627 E.37th N. #706, Wichita, KS 67226

Inquiry 689.

SIMULATION WITH GPSS/PC™
GPSS/PC™ is an IBM personal computer implementation of the popular mainframe simulation language GPSS. Graphics, animation and an extremely interactive environment allow a totally new view of your simulations. Simulate complex real-world systems with the most interactive and visual yet economical simulation software.

MINUTEMAN Software
P.O. Box 171/Y, Stow, Massachusetts, U.S.A.
(508) 897-5662 ext. 540 (800) 223-1430 ext. 540

Inquiry 690.

Circuit Analysis — SPICE
Non-linear DC & Transient; Linear AC.
* Version 3B1 with BSIM, GaAs, JFET, MOSFET, BJT, diode, etc. models, screen graphics, improved speed and convergence.
* PC Version 2G6 available at $95.

Call, write, or check inquiry # for more info.

Northern Valley Software
28327 Rothrock Dr., Rancho Palos Verdes, CA 90274
(213) 541-3677

Inquiry 691.

FREE ENGINEERING MAGAZINE
Personal Engineering is a monthly magazine sent free of charge (USA only) to scientists/engineers who use PCs for technical applications. Topics each month include **Instrumentation • Data Acq/Control • Design Automation.** To receive a free sample issue and qualification form either circle below or send request on letterhead to:

Personal Engineering Communications
Box 1821, Brookline, MA 02146

Inquiry 692.

EC-Ace ANALOG CIRCUIT ANALYSIS
You can afford to get started with **EC-Ace,** a subset of the powerful **ECA-2** circuit simulator. Includes all the basics and built-in graphics.
- AC, DC, Temperature, Transient
- A full 525 pg. ECA-2 manual.
- Interactive, twice as fast as SPICE.

EC-Ace 2.31 IBM PC or Mac $145.
Call 313-663-8810 for FREE DEMO

Tatum Labs, Inc.
1478 Mark Twain Ct., Ann Arbor, MI 48103

Inquiry 693.

SOFTWARE/FINANCIAL

"THE FINANCIAL PLANNER" SOFTWARE
SAVE 40% Retail $99.95 -OUR PRICE $59.95 (+2.00 S/H)
PA residents add 6% Tx. Menu Driven program w/printed Manual.

- •Balance Checkbook
- •Prepare Budgets
- •Prepare Financial Statements
- •Loan Amortization Schedule
- •Manage Investments
- •Plan Savings & more

Specify Apple IIc, IIe, IIgs, IBM PC or Compatible.
CKS/MC/VISA SHIPPED UPS

SOFTECH INDUSTRIES, INC. *717-584-5191*
RD 1, Bx 117A, Dept B901, Hughesville, PA 17737

Inquiry 694.

SOFTWARE/FORECAST

FORECAST PRO
An excellent forecasting package that uses *artificial intelligence* to help both the beginner and the experienced forecaster achieve top-notch results. Time series analysis techniques include exponential smoothing, Box-Jenkins, & dynamic regression.

CALL NOW FOR A FREE DEMO DISK!

Business Forecast Systems, Inc.
68 Leonard Street, Belmont, MA 02178
(617) 484-5050 TELEX #710-3201382

Inquiry 695.

SOFTWARE/GEOLOGICAL

GEOLOGICAL CATALOG
Geological software for log plotting, gridding/contouring, hydrology, digitizing, 3-D solid modelling, synthetic seismogram, fracture analysis, image processing, scout ticket manager, over 50 programs in catalog. Macintosh too! Please call, or write, for Free Catalog!

RockWare, Inc.
4251 Kipling St., Suite 595, Wheat Ridge, CO 80033 USA
(303) 423-5645

SOFTWARE/GRAPHICS

TurboGeometry Library
Over 150 2&3 dimensional routines, includes Intersections, Transformations, Equations, HiddenLines, Perspective, Curves, Areas, Volumes, Clipping, Planes, Vectors, Distance, Polydecomp, IBM PC and Comp. MAC. MSDOS 2+. Turbo Pascal, Turbo C, MSC & Turbo Pascal MAC. 400 pg. manual, source code. $149.95 + 5.00 S&H. VISA, MC, Chk, PO. 30 Day guarantee.

Disk Software, Inc.
2116 E. Arapaho #487, Richardson, TX 75081
(214) 423-7288

Inquiry 696.

S E G S
SCIENTIFIC & ENGINEERING GRAPHICS SYSTEM

See "What's New" pg 82, BYTE June, 1988
Log, Data & Linear Axes; Curve Fitting & Smoothing 1-2-3 Interface; Numeric Spreadsheet. Supports all Video Standards, PC Printers & Plotters. 10 Curves w/5000 points each. Plus much more. Call Today.

Edmond Software
3817 Windover Drive 1-405-842-0058
Edmond, Oklahoma 73013 1-800-992-3425

Inquiry 697.

FPLOT PEN PLOTTER EMULATOR
Use your dot matrix or laser printer as an HP pen plotter. Fast hi-res output. Vary line width. Includes VPLOT virtual plotter utility to capture plotting commands. Supports NEC P5/P6, IBM Proprinter, Epson LQ/MX/FX, HP Laserjet. Uses Hercules, CGA, EGA or VGA for screen preview. $64 check or m.o.

FPLOT CORPORATION
Suite 605, 24-16 Steinway St., Astoria, NY 11103
212-418-8469

Inquiry 698.

GRAPHICS PRINTER SUPPORT
AT LAST! Use the PrtSc key to make quality scaled B&W or color reproductions of your display on any dot matrix, inkjet, or laser printer. GRAFPLUS supports all versions of PC or MS-DOS with IBM (incl. EGA, VGA), Tecmar, and Hercules graphics boards. $49.95.

Jewell Technologies, Inc.
4740 44th Ave. SW, Seattle, WA 98116
800-628-2828 x 527 (206) 937-1081

Inquiry 699.

SOFTWARE/GRAPHICS

FORTRAN PROGRAMMER?
Now you can call 2-D and 3-D graphics routines within your FORTRAN program.

GRAFMATIC: screen routines $135.
PLOTMATIC: plotter driver 135.
PRINTMATIC: printer driver 135.

For the IBM PC, XT, AT & compatibles. *We support a variety of compilers, graphics bds., plotters and printers.*

MICROCOMPATIBLES
301 Prelude Dr., Dept. B, Silver Spring, MD 20901 USA
(301) 593-0683

Inquiry 700.

SOFTWARE/LANGUAGES

FORTHWITH DRUMA FORTH-83
Powerful. Well designed. User friendly. Attractively priced. Enhance productivity. Reduce development time.
- No 64K limit, 16 bit speed to 320K, 1Mb+ memory.
- On-line doc/glossary, full DOS & file interface.
- Assembler, editor, examples, many utilities

15 day unconditional guarantee. From $79, S&H $2, VISA/MC. IBM PC/XT/AT & **all compatibles.** Other packages: **Inquire**

DRUMA INC.
6448 Hwy. 290 East E103, Austin, TX 78723
Orders: 512-323-0403 BBoard: 512-323-2402

Inquiry 701.

FORTRAN for Macintosh
Language Systems FORTRAN is a full-featured FORTRAN 77 compiler integrated w/MPW. Full ANSI FORTRAN 77 plus VAX-type extensions. SANE numerical calculations & data types incl. COMPLEX*16. 68000, 68020 and 68881 object code. Arrays greater than 32K. Link with Pascal, C, MacApp. $304 w/MPW via air. MC/VISA/Check. MAC+, SE, Mac II. HD req.

Language Systems Corp.
441 Carlisle Drive, Herndon, VA 22070
(703) 478-0181

Inquiry 702.

SUBPROGRAM LIBRARIES
Five volumes of source code: Math, Statistics, Graphics, DOS & BIOS & I/O functions. Spectroscopy. Up to 98% less user code with our fully tested library. Manuals with examples guarantee fast success. Portability insured for BASIC, PASCAL under MS-DOS, Mac-OS, VMS, HP300. Prices start $145 per volume. 30 day $ back. VISA/MC/P.O.

Scientific LOGICS, Inc.
21910 Alcazar Ave., Cupertino, CA 95014
Ph.# 408-446-3575 ***Compuserve 74017,663***

Inquiry 703.

SOFTWARE/LOTTERY

PC—LOTTO VER 2.1 (+CLUB)
$50 US REGISTERED COPY. INCLUDES ONE YEAR MEMBERSHIP IN PC-LOTTO CLUB, NEWSLETTER + A NEW VERSION ONE YEAR LATER. COMES WITH MOST U.S. AND CANADIAN LOTTOS, AUSTRALIA. SHAREWARE VERSION $8 US OR ASK PC-CLUBS, MAIN BBS, FREEWARE HOUSES. (IBM-PC comp)

LOTTOWARE
870 Gladiola Ave., Victoria B.C.
CANADA V8Z 2T6 (604) 479-8536

Inquiry 704.

SOFTWARE/MATHEMATICS

What? You've never *seen*
a complex function?
Try ***f(z)*** - The Complex Variables Graphing Package for PC's with CGA/EGA

"Let our animated screens show you what the printed page cannot."

Lascaux Graphics
(212) 654-7429

Inquiry 705.

THE BUYER'S MART

SOFTWARE/PACKAGING

HARD TO FIND COMPUTER SUPPLIES FOR SOFTWARE DEVELOPERS & POWER USERS
Cloth binders & slipcases like IBM's. Vinyl binders, boxes, and folders in many sizes. Disk pages, envelopes, & labels. Low quantity imprinting. Bulk disks. Everything you need to bring your software to market. Disk and binder mailers. Much more! Low Prices! Fast service. Call or write for a **FREE CATALOG.**

Anthropomorphic Systems, Limited
376 E. St. Charles Rd., Lombard, IL 60148
1-800-DEAL-NOW **312-629-5160**

Inquiry 706.

SAVE SAVE SAVE SAVE
LET'S TALK LABELS
We do disk labels (5¼" & 3½)
● Better ● Faster ● Cheaper ●
Because we specialize in disk labels. . . Let's Talk

We also have Tyvek Sleeves
Mailers ● Binders ● Vinyl Pages
We are a complete software packaging service.
Hice & Associates
9303 Cincinnati-Columbus Rd., West Chester, OH 45069
513-777-0133

Inquiry 707.

SOFTWARE SCIENTIFIC

DATA ACQUISITION & ANALYSIS ON PC'S
- Free application assistance. Tell us about your DSP, process control, A/D or D/A needs. Our expert engineering staff will provide you with a system solution to fit your needs and budget.
- A/D & IEEE 488 boards from MetraByte, Scientific Solutions and Analog Devices.
- Analysis software including PRIME FACTOR FFT subroutine library, FOURIER PERSPECTIVE II advanced linear systems analysis.
- Menu driven software from Unkel, Laboratory Technologies, Quinn-Curtis, and Golden. Scientific/engineering 2 & 3D graphics.

See **"What's New"** page 80, BYTE July, 1988
LOW PRICES—Satisfaction GUARANTEED
ALLIGATOR TECHNOLOGIES
P.O. Box 9706, Fountain Valley, CA 92708
Tel. (714) 850-9984 FAX. (714) 850-9987 MCI. ALLIGATOR

Inquiry 708.

POWERFUL EQN SOLVER
$99 RISK FREE OFFER WITH FREE WORD PROCESSOR!
• "A real Bargain" *IEEE* • "Dev. over 40 years by aerospace vets" *EE TIMES* • "Defines new functions" *Eng'g Tools* **CURVE™** • Graph results ACROSS SINGULARITIES • Change parameters/conditions • Fit 60th order curves to imported data • COMPLEX/real roots • Diff Eq • Indefinite Integrals • More • MS-DOS, 640k, graphics card
Call Today! 800/621-0849 x 330
8:30–5:30 PTime • VISA/MC/AMEX/Check
Curve System International
747 Moreno Ave., LA, CA 90049

Inquiry 709.

Spectra Calc Data Processing
Acquire and analyze data from commercial or custom analytical instrumentation. Fast real-time display, WYSIWYG plotting. Extremely fast applications for curve fitting, deconvolution, PLS algorithms etc. Spectral search and archive. Array programming language includes matrix, FFT, graphic commands.
GIC
395 Main St., Salem, NH 03079
800-862-6004 603-898-7600 FAX 603-898-6228

Inquiry 710.

ORDINARY/PARTIAL DIFFERENTIAL EQN SOLVER
FOR THE IBM PC & COMPATIBLES
MICROCOMPATIBLES INC.
301 Prelude Dr., Silver Spring, MD 20901
(301) 593-0683

Inquiry 711.

SOFTWARE/SCIENTIFIC

"powerful and easy to use..."
Ask for our *free* 16 page brochure with complete product descriptions and detailed technical application notes (and for a brief description of two of our products see "What's New", Byte, page 84, July/88).
MicroMath Scientific Software
2034 East 7000 South
Salt Lake City, Utah 84121-3144
(801) 943-0290

Inquiry 712.

Scientific/Engineering/Graphics Libraries
Turbo & Lightspeed Pascal, Modula-2, C
Send for FREE catalogue of software tools for Scientists and Engineers. Includes: Scientific subroutine libraries, device independent graphics libraries (including EGA, HP plotter and Laserjet support), scientific charting libraries, 3-D plotting library, data acquisition libraries, menu-driven process control software. Versions available for a variety of popular languages.
Quinn-Curtis
1191 Chestnut St., Unit 2-5, Newton, MA 02164
(617) 965-5660

Inquiry 713.

Scientific Software
Scientific CALCULATOR parallel processing & graphics, **Sci.NOTEPAD** free-form data management, **DIALSEARCH** literature searches, **SCI.GRAPHPAD** and **SCI.STATPAD** graphics-aided data analysis (log/semilog plots, error bars, curve fit, more). From $85-On 5¼ and 3½" MS-DOS disks. 30 day $ back. VISA/MC/PO. Also see our ad under LANGUAGES.
Scientific LOGICS Inc.
21910 Alcazar Ave., Cupertino, CA 95014
(408) 446-3575 Compuserv 74017,663

Inquiry 714.

KALMAN FILTERING SOFTWARE
Dr. Bierman's FORTRAN programs and source code libraries are still in use at JPL and vastly simplify use or development of Kalman Filter applications. These highly regarded algorithms and code implementations are compiled to run on PC/MS DOS-based machines or for your own development in source code. All code is fully documented.
- Bierman Estimator Program (Executable).....$250
- Bierman Estimator Program (Source Code).....$500
- Bierman Estimation Subroutine Library (Source Code)$1500

5¼" Floppies or 0 Track Tape
TAU CORPORATION 485 Alberto Way, Los Gatos, CA 95032
408 395-9191 • TELEX: 184302 TAU UT

Inquiry 715.

SOFTWARE/SECURITY

KEEP YOUR PC *PRIVATE*!
MicroLock PC Security Software protects MS-DOS files and programs from unauthorized access. MicroLock features unlimited passwords, Quick Encryption, Locks Directories, Hides files, Locks .EXE and .COM files, uses one simple control menu w/on-screen help!
Only $89.95! (+$3 s/h) 30 DAY MONEY BACK GUARANTEE
Check/Visa/MC
MicroNiche, Inc.
The Summit, Suite 110, 4350 Brownsboro Rd.
Louisville, KY 40207
Orders: (502) 893-4526 *FAX: (502) 893-4503*

Inquiry 716.

HANDS OFF THE PROGRAM®
- Locks Hard Disk. - Restricts Floppy Use.
- Protects Subdirectories.
- Normal Use of DOS Commands and Application Software.
- IBM PC, XT, AT and True Compatibles.
- DOS V2.0 and Higher. Hard Disk System.
- Keep Other People's HANDS OFF Your System
- **$89.95** VISA/MC

SYSTEM CONSULTING, INC.
314 Canterbury Dr., Pittsburgh, PA 15238
(412) 963-1624

Inquiry 717.

SOFTWARE/SORT

OPT-TECH SORT/MERGE
Extremely fast Sort/Merge/Select utility. Run as an MS-DOS command or CALL as a subroutine. Supports most languages and filetypes including Btrieve and dBASE. Unlimited filesizes, multiple keys and much more! MS-DOS **$149.** XENIX **$249.**
(702) 588-3737
Opt-Tech Data Processing
P.O. Box 678 - Zephyr Cove, NV 89448

Inquiry 718.

SOFTWARE/TAX PREP

W-2 & 1099 ON FLOPPY
The MAG COLLECTION of programs make an IRS/SSA FORMAT floppy from a data entry screen or imported ASCII file. Includes manual and application forms.
- Used nation wide
- Menus, user friendly
- Step-by-step data entry
- Prints W-2 & 1099
- Free phone support
- PC compatible

Illinois Business Machines Inc.
Department MAG
1403 Box 310 Troy Rd., Edwardsville, IL 62025
PH. # (618) 692-6060

Inquiry 719.

SOFTWARE/TOOLS

NATURAL LANGUAGE SOFTWARE
Use JAKE to create a front end to your database, game, or graphics program! JAKE translates English queries and commands into C function calls and data structures. JAKE offers context-sensitive semantic processing; interfaces easily; <64K mem.
$495. INTERACTIVE DEMO $10
ENGLISH KNOWLEDGE SYSTEMS, INC.
5525 Scotts Valley Dr. #22, Scotts Valley, CA 95066
(408) 438-6922

Inquiry 720.

STATISTICS

STATA
Statistics and graphics join to make **STATA** the most powerful package for the **PC.** No comparable program is as **fast,** friendly, and accurate. $20 Demo. Quantity discount available. Call toll-free for more information. **AX/VISA/MC.**
1-800-STATAPC
Computing Resource Center
10801 National Boulevard, Los Angeles, CA 90064
(213) 470-4341

Inquiry 721.

THE SURVEY SYSTEM
An easy-to-use package designed specifically for **questionnaire data.** Produces banner format, cross tabs & related tables, statistics (incl. regression) & bar charts. Codes and reports answers to open-end questions. All reports are camera-ready for professional presentations. CRT interviewing option.
CREATIVE RESEARCH SYSTEMS
15 Lone Oak Ctr., Dept. B, Petaluma, CA 94952
707-765-1001

STATISTICS CATALOG!
If you need statistics for IBM PC or Apple II, call us and let our technical advisors help you find the statistics programs you need.
Write or call now to get a FREE catalog of statistics and quality control software.
HUMAN SYSTEMS DYNAMICS
9010 Reseda Blvd., Ste. 222
Northridge, CA 91324
(800) 451-3030 (818) 993-8536 (CA)

Inquiry 722.

THE BUYER'S MART

STATISTICS

RESULTS NOT SIGNIFICANT?

Next time use EX-SAMPLE. Expert program estimates sample size using power analysis for comparisons of means, props, regression, ANOVA, chi-square, log-linear, LISREL, surveys, experiments, many more. Justify sample size to funding agencies, plan sampling budget. Can pay for itself in a single study. IBM/MS-DOS, $195+s/h. (50% educ. disc.). *VISA/MC/AMEX/PO*, 30-day guarantee. Call now for FREE brochure.

The Idea Works, Inc.
100 West Briarwood, Columbia, MO 65203
1-800-537-4866 **314-445-4554**

Inquiry 723.

NCSS

Professional, easy to use, menu driven statistical system. Used by over 5,000 researchers.

- 5.0 Statistical System —$99
- 5.1 Graphics (2D & 3D)—$59
- 5.3 Power Pac Supplement—$49
- 5.4 Exp. Design/QC—$49
- 5.5 Survival Analysis—$49

We accept checks, PO's, Visa, MC. Add $3 s/h.

NCSS-B
865 East 400 North, Kaysville, UT 84037
801-546-0445

Inquiry 724.

STATISTIX™ II

Comprehensive, powerful and incredibly easy-to-use. Full screen editor, transformations, linear models (ANOVA, regression, logit, PCA, etc), ARIMA, most standard stat procedures. Clear, well organized documentation. Satisfaction guaranteed. $169 PC DOS, $99 Apple II.

NH ANALYTICAL SOFTWARE
P.O. Box 13204, Roseville, MN 55113
(612) 631-2852

Inquiry 725.

EcStatic
$49.95

A full featured statistical package that's powerful, convenient, astonishingly easy to use and extraordinarily inexpensive. At last! A statistical package that gives you the tools you need, the clarity you want and at a price you can afford. Ideal for researchers, professionals, and students. Volume discounts available. *To order call or write to:*

SomeWare In Vermont, Inc.
P.O. Box 215, Montpelier, VT 05602
1-800-451-4580 (496-3173 in Vermont)

Inquiry 726.

StatPac Gold™

Voted World's Best Statistical & Forecasting Package in 1987 by PC World Magazine readers. Six times more votes than the next closest competitor. More comprehensive & easier to use than all others. Get the facts. Call now for your FREE brochure.

1-800-328-4907
Walonick Associates, Inc.
6500 Nicollet Ave. S., Minneapolis., MN 55423
(612) 866-9022

Inquiry 727.

TEXT RETRIEVAL

TEXT RETRIEVAL

GOfer, high speed text retrieval software for IBM PC compatible and Apple Macintosh computers. Highly acclaimed.

- No file conversion or indexing required.
- Searches for text in *any* file. (ASCII, EBCDIC, WordStar, etc.)
- RAM resident operation for immediate availability, also runs as a standard DOS application—Desk Accessory on the Macintosh
- Moves text across different file formats (DisplayWrite to WordStar, MS Word to WordPerfect, etc.).

ONLY $79.95! Call or write to order: (VISA, MC, COD, Check)

Microlytics
300 Main St., Suite 1591, East Rochester, NY 14445
(800) 828-6293 **(716) 377-0130 in NYS**

Inquiry 728.

TRANSLATORS

TRANSLATORS

	Soft. + Docu.	Docu. only
• FORTRAN IV to C	$474.	$68.
• PL/I (Subset G) to C	$474.	$68.
• CMS-2M to Ada	$521.	$88.
• Generic METAMORPHOSIS*	$387.	$34.

SEND USA CHECK + $12. s/h or call for order and data sheets, custom translator quotation and other services.

*Rule-driven translator featuring do-it-yourself source and target language definition.

J.H. Shannon Associates, Inc.
P.O. Box 597, Chapel Hill, NC 27514 **(919) 929-8863**

Inquiry 729.

UTILITIES

THEY SIMPLY NEVER FAIL
MIRROR-DISC SOFTWARE
WITH ALTERNATE READ

OPERATING SYSTEMS	= XENIX, UNIX, DX10
HARDWARE	= Two discs, Cartridge tape, UPS
OPTIONS	= Data Compression, File optimization
SPECIFICATIONS	= THE ULTIMATE DATA INTEGRITY

DISCOM®
Slotlaan 15, 4902 AD Oosterhout
The Netherlands

Inquiry 730.

Enhanced DOS Commands

Get directory listings of all files that *don't* match a template. Search all directories for files matching a template. New commands and new versions of existing commands, all with lots of variable options. Plus all commands accept special codes to reduce repetitive entries. Get the most from DOS with these time-saving routines. For MS-DOS/PCDOS 2.0 and higher. $29.95

Driscoll Graphics
135 E. Church, P.O. Box 625, Clinton, MI 49236

Inquiry 731.

MATCH PRINTERS TO PC

For less than $30 **MatchFont** and **Match-a-Printer** are great for foreign and scientific writings. Get all the characters you need from most programs and printers (Apple & Epson printers, daisywheels, etc.). Greek, French, Italian, Spanish, German, Swedish, Japanese, graphics. . . You name it! To receive a **FREE** demo disk use the inquiry # below or write to:

MATCH SOFTWARE
6426 Coldwater Canyon, North Hollywood, CA 91606-1113

Inquiry 732.

COPY AT TO PC

The 1.2mB drive has long been known to READ but NOT reliably WRITE on 360kB floppies. With **"CPYAT2PC"™** 1.2mB drives CAN reliably WRITE 360kB floppies saving a slot for a second hard disk or backup tape. "CPYAT2PC" (Not Copy Protected) offers 'the preferable SOFTWARE SOLUTION.' *ONLY $79+$4* S/H VISA/MC/COD UPS B/R

MICROBRIDGE COMPUTERS
655 Skyway, San Carlos, CA 94070
Order toll free **1-800-523-8777**
415-593-8777 (CA) **212-334-1858 (NY)**
TELEX EZLNK 62873089 FAX 415-593-7675

Inquiry 733.

The NOVA UTILITIES

Twelve advanced DOS programs that are on every user's wish list. Disk editor, file recovery, point-and-shoot window directory manager, encrypt and compress files, DOS command line qualifiers, find, view, delete, move, copy, more! *Less than $6 per program* at only **$69.95** complete with 100+ page manual. *MC, Visa Welcome.*

NOVA SOFTWARE, Inc.
P.O. Box 37464, Albuquerque, NM 87176 **(505) 836-8400**

Inquiry 734.

UTILITIES

Recover deleted files fast!

Disk Explorer now includes automatic file recovery. You type in the deleted file's name, Disk Explorer finds and restores it. Disk Explorer also shows what's really on disk; view, change or create formats, change a file's status, change data in any sector. MS-DOS **$75** U.S. Check/Credit card welcome.

QUAID SOFTWARE LIMITED
45 Charles St. E. 3rd Fl.
Toronto, Ontario, Canada M4Y 1S2
(416) 961-8243

LOGGER®

Logger, for IBM-PC and compatibles, tracks and reports: User, Time on, Time off, Directories used, Programs used, Program start/end time, and calculates totals. Tracks directories/files: Opened, Created, Renamed, Deleted. Completely transparent. **Retails for $74.95** with quantity discounts available.

System Automation Software, Inc.
8555 16th St., Silver Spring, MD 20910
1-800-321-3267 or **1-301-565-8080**

Inquiry 735.

FasTrieve®

FasTrieve, for IBM-PC and compatibles, indexes your wordprocessing documents to instantly (< 1 sec.) retrieve text using your search expressions (boolean statements, phrases, spelling variations). Retrieved text can be edited, printed, and saved to disk. **Retails for $99.** Discounts available.

System Automation Software, Inc.
8555 16th St., Silver Spring, MD 20910
1-800-321-3267 or **1-301-565-8080**

Inquiry 736.

$79.95!!

Order the RED Utilities now! Programs include: Disk cache speeds hard and floppy disks. Printer spooler. Batch file compiler speeds batch files. Path command for data files. Wild card exceptions. Sort directories. Over 10 more programs. IBM PC. Visa/MC. Send for free catalog.

The Wenham Software Company
5 Burley St., Wenham, MA 01984 (508) 774-7036

Inquiry 737.

WORD PROCESSING

FARSI / GREEK / ARABIC / RUSSIAN

Hebrew, all European, Scandinavian, plus either Hindi, Punjabi, Bengali, Gujarati, Tamil, Thai, Korean, Viet, or IPA. Full-featured multi-language word processor supports on-screen foreign characters and NLQ printing with no hardware modifications. Includes Font Editor. $355 dot matrix; $150 add'l for laser; $19 demo. S/H in U.S. incl'd. Req. PC, 640K, graphics. 30 day Guarantee. MC/VISA/AMEX

GAMMA PRODUCTIONS, INC.
710 Wilshire Blvd., Suite 609, Santa Monica, CA 90401
213/394-8622 Tlx: 5106008273 Gamma Pro SNM

Inquiry 738.

PC-Write™ Shareware Ver. 2.71

Fast, full featured word processor/text editor for IBM PC. With spell check, screen clip, mailmerge, split screen, ASCII files, macros. Easy to use. Supports 400 printers - LaserJet+ and PostScript. Software, User Guide, and Tutorial on 2 disks for $16. Try it, then register with us for only $89 and get User Manual, 1 year tele-support, newsletter and 2 upgrades. 90-day guarantee. VISA/MC.

***Quicksoft* 1-800-888-8088 CALL TODAY!**
219 First N., #224-BYTC, Seattle, WA 98109

Inquiry 739.

Mail Order Electronics - Worldwide

Jameco ELECTRONICS

Mail-Order Electronics

24 HOUR ORDER HOTLINE 415-592-8097

ALL OTHER INQUIRIES (7AM-5PM PST) 415-592-7108

NEC V20 & V30 CHIPS

Replace the 8086 or 8088 in Your IBM PC and Increase Its Speed by up to 30%!

Part No.		Price
UPD70108-5	(5MHz) V20 Chip	$ 7.49
UPD70108-8	(8MHz) V20 Chip	$10.75
UPD70108-10	(10MHz) V20 Chip	$14.95
UPD70116-8	(8MHz) V30 Chip	$11.95
UPD70116-10	(10MHz) V30 Chip	$19.95

7400

Part No.	1-9	10+	Part No.	1-9	10+
7400	.29	.19	7485	.69	.59
7402	.29	.19	7486	.45	.35
7404	.29	.19	7489	1.95	1.85
7405	.35	.25	7490	.49	.39
7406	.39	.29	7493	.45	.35
7407	.39	.29	74121	.39	.29
7408	.35	.25	74123	.49	.39
7410	.29	.19	74125	.55	.45
7414	.49	.39	74126	.55	.45
7416	.35	.25	74143	4.95	4.85
7417	.35	.25	74150	1.35	1.25
7420	.29	.19	74154	1.35	1.25
7430	.29	.19	74158	1.49	1.39
7432	.39	.29	74173	.79	.69
7438	.39	.29	74174	.59	.49
7442	.49	.39	74175	.59	.49
7445	.79	.69	74176	.79	.69
7446	.89	.79	74181	1.95	1.85
7447	.89	.79	74189	1.95	1.85
7448	1.95	1.85	74193	.79	.69
7472	.39	.29	74198	1.85	1.75
7473	.39	.29	74221	.99	.89
7474	.39	.29	74273	1.95	1.85
7475	.49	.39	74365	.59	.49
7476	.45	.35	74367	.59	.49

74LS

74LS00	.26	.16	74LS165	.75	.65
74LS02	.28	.18	74LS166	.89	.79
74LS04	.28	.18	74LS173	.39	.29
74LS05	.28	.18	74LS174	.39	.29
74LS06	.59	.49	74LS175	.39	.29
74LS07	.59	.49	74LS189	3.95	3.85
74LS08	.28	.18	74LS191	.59	.49
74LS10	.26	.16	74LS193	.69	.59
74LS14	.49	.39	74LS221	.69	.59
74LS27	.35	.25	74LS240	.59	.49
74LS30	.28	.18	74LS243	.69	.59
74LS32	.28	.18	74LS244	.69	.59
74LS42	.49	.39	74LS245	.79	.69
74LS47	.89	.79	74LS259	.99	.89
74LS73	.39	.29	74LS273	.89	.79
74LS74	.35	.25	74LS279	.49	.39
74LS75	.39	.29	74LS322	3.49	3.39
74LS76	.39	.29	74LS365	.49	.39
74LS85	.59	.49	74LS366	.49	.39
74LS86	.29	.19	74LS367	.49	.39
74LS90	.49	.39	74LS368	.49	.39
74LS93	.49	.39	74LS373	.79	.69
74LS123	.49	.39	74LS374	.79	.69
74LS125	.49	.39	74LS393	.89	.79
74LS138	.49	.39	74LS590	5.95	5.85
74LS139	.49	.39	74LS624	1.95	1.85
74LS154	1.19	1.09	74LS629	2.49	2.39
74LS157	.45	.35	74LS640	1.09	.99
74LS158	.39	.29	74LS645	1.09	.99
74LS163	.49	.39	74LS670	.99	.89
74LS164	.59	.49	74LS688	2.39	2.29

74S/PROMS*

74S00	.25	74S188*	1.49
74S04	.25	74S189	1.49
74S08	.29	74S196	1.49
74S10	.25	74S240	1.39
74S32	.29	74S244	1.19
74S74	.29	74S253	.59
74S85	.89	74S287*	1.49
74S86	.29	74S288*	1.49
74S124	1.49	74S373	1.49
74S174	.49	74S374	1.49
74S175	.49	74S472*	2.95

74F

74F00	.25	74F139	.59
74F04	.25	74F157	.59
74F08	.25	74F193	2.95
74F10	.25	74F240	.69
74F32	.25	74F244	.69
74F74	.29	74F253	.59
74F86	.39	74F373	.79
74F138	.59	74F374	.79

CD—CMOS

CD4001	.19	CD4076	.59
CD4008	.59	CD4081	.22
CD4011	.19	CD4082	.22
CD4013	.29	CD4093	.35
CD4016	.29	CD4094	.89
CD4017	.49	CD40103	1.49
CD4018	.59	CD40107	.49
CD4020	.59	CD4510	.69
CD4024	.45	CD4511	.69
CD4027	.35	CD4520	.75
CD4030	.35	CD4522	.79
CD4040	.65	CD4538	.79
CD4049	.29	CD4541	.89
CD4050	.29	CD4543	.79
CD4051	.59	CD4553	3.95
CD4052	.59	CD4555	.79
CD4053	.59	CD4559	7.95
CD4063	1.49	CD4566	1.95
CD4066	.29	CD4583	.59
CD4067	1.49	CD4584	.49
CD4069	.19	CD4585	.69
CD4070	.25	MC14411P	7.95
CD4071	.22	MC14490P	4.49
CD4072	.22		

MICROPROCESSOR COMPONENTS

MISCELLANEOUS CHIPS

Part No.	Price
D765AC	3.95
WD9216	3.95

Z80, Z80A, Z80B SERIES

Z80	1.19
Z80-CTC	1.29
Z80-PIO	1.29
Z80A	1.29
Z80A-CTC	1.65
Z80A-DART	4.95
Z80A-PIO	1.89
Z80A-SIO/0	3.95
Z80B	2.75
Z80B-CTC	3.95
Z80B-PIO	3.95

6500/6800/68000 SER.

6502	2.65
65C02 (CMOS)	7.75
6520	1.95
6522	2.95
6532	5.49
6551	2.95
65C802 (CMOS)	15.95
6800	1.95
6802	2.95
6810	1.25
6821	1.75
6840	3.49

6500/6800/68000 Cont.

6845	2.75
6850	1.95
6852	.75
6854	1.19
MC68000L8	9.95
MC68000L10	11.95
MC68010L10	49.95
MC6802IRC12B	99.95

8000 SERIES

8031	3.95
80C31	9.95
8035	1.49
8073	6.95
8080A	2.25
8085A	2.49
8086	3.95
8086-2	6.95
8087 (5MHz)	99.95
8087-1 (10MHz)	229.95
8087-2 (8MHz)	159.95
8088	4.95
8088-2	6.95
8116	4.95
8155	2.49
8155-2	3.49
8156	2.95
8203	6.95
8212	2.29
8224	2.25

8000 SERIES Cont.

8228	1.95
8237-5	4.25
8243	1.75
8250A	4.95
8250B (For IBM)	5.95
8251A	1.69
8253-5	1.95
8254	3.95
8255A-5	2.95
8259-5	2.25
8272	3.95
8279-5	2.95
8741	9.95
8742	19.95
8748 (25V)	7.95
8748H (HMOS) (21V)	9.95
8749	9.95
8751 (3.5-8MHz)	39.95
8751H (3.5-12MHz)	44.95
8755	13.95

DATA ACQUISITION

ADC0804LCN	2.79
ADC0808CCN	5.95
ADC0809CCN	3.69
ADC1205CCJ-1	19.95
DAC0808LCN	1.75
DAC1008LCN	5.95
AY-3-1015D	4.95
AY-5-1013A	1.95

MICROPROCESSOR SALE!

Part No.		Price
8052AHBASIC	CPU w/BASIC Interpreter	$24.95
MC68008L8	32-Bit MPU (8-Bit Data Bus)	$9.95
MC68701	8-Bit EPROM Microcomputer	$14.95
MC68705P3S	8-Bit EPROM Microcomputer	$9.95
MC68705U3S	8-Bit EPROM Microcomputer	$10.95
80286-10	16-Bit Hi Performance MPU	$69.95
80287-8	Math Co-processor (8MHz)	$244.95
80287-10	Math Co-processor (10MHz)	$309.95
80387-16	Math Co-proc. (16MHz) GRID ARRAY	$474.95
80387-20	Math Co-proc. (20MHz) GRID ARRAY	$749.95

DYNAMIC RAMS

Part No.			Price
*4116-15	16,384 x 1	(150ns)	1.39
4128-20	131,072 x 1	(200ns) (Piggyback)	3.25
*4164-100	65,536 x 1	(100ns)	3.49
*4164-120	65,536 x 1	(120ns)	2.95
*4164-150	65,536 x 1	(150ns)	2.59
*4164-200	65,536 x 1	(200ns)	1.75
*TMS4416-12	16,384 x 4	(120ns)	7.75
*41256-80	262,144 x 1	(80ns)	13.49
*41256-100	262,144 x 1	(100ns)	12.49
*41256-120	262,144 x 1	(120ns)	11.99
*41256-150	262,144 x 1	(150ns)	11.49
*41464-15	65,536 x 4	(150ns) (4464)	12.95
*511000P-10	1,048,576 x 1	(100ns) 1 Meg	39.95
*514256P-10	262,144 x 4	(100ns) 1 Meg	59.95

STATIC RAMS

*2016-12	2048 x 8	(120ns)	4.49
2018-45	2048 x 8	(45ns)	6.95
2102	1024 x 1	(350ns)	.89
2114N	1024 x 4	(450ns)	.99
2114N-2L	1024 x 4	(200ns) Low Power	1.49
21C14	1024 x 4	(200ns) (CMOS)	.49
5101	256 x 4	(450ns) (CMOS)	2.95
*6116P-3	2048 x 8	(150ns) (CMOS)	4.19
*6116LP-3	2048 x 8	(150ns) LP CMOS	5.99
*6264LP-12	8192 x 8	(120ns) LP CMOS	10.95
*6264P-15	8192 x 8	(150ns) (CMOS)	9.95
*6264LP-15	8192 x 8	(150ns) LP CMOS	10.25
6514	1024 x 4	(350ns) (CMOS)	3.75
*43256-15L	32,768 x 8	(150ns) Low Power	15.95
*62256LP-12	32,768 x 8	(120ns) LP CMOS	16.95

EPROMS

TMS2516	2048 x 8	(450ns) 25V	6.95
TMS2532	4096 x 8	(450ns) 25V	5.95
TMS2532A	4096 x 8	(450ns) 21V	4.49
TMS2564	8192 x 8	(450ns) 25V	6.95
TMS2716	2048 x 8	(450ns) 3 Voltage	6.95
1702A	256 x 8	(1µs)	4.95
2708	1024 x 8	(450ns)	6.95
2716	2048 x 8	(450ns) 25V	3.75
2716-1	2048 x 8	(350ns) 25V	4.25
27C16	2048 x 8	(450ns) 25V (CMOS)	4.25
2732	4096 x 8	(450ns) 25V	3.95
2732A-20	4096 x 8	(200ns) 21V	4.25
2732A-25	4096 x 8	(250ns) 21V	3.95
27C32	4096 x 8	(450ns) 25V (CMOS)	4.95
2764-20	8192 x 8	(200ns) 21V	4.25
2764-25	8192 x 8	(250ns) 21V	3.59
2764A-25	8192 x 8	(250ns) 12.5V	3.69
2764-45	8192 x 8	(450ns) 21V	3.39
27C64-15	8192 x 8	(150ns) 12.5V (CMOS)	5.95
27128-20	16,384 x 8	(200ns) 21V	6.95
27128-25	16,384 x 8	(250ns) 21V	5.95
27128A-25	16,384 x 8	(250ns) 12.5V	5.25
27C128-25	16,384 x 8	(250ns) 21V (CMOS)	5.95
27256-20	32,768 x 8	(200ns) 12.5V	6.95
27256-25	32,768 x 8	(250ns) 12.5V	5.49
27C256-25	32,768 x 8	(250ns) 12.5V (CMOS)	6.25
27512-20	65,536 x 8	(200ns) 12.5V	10.95
27512-25	65,536 x 8	(250ns) 12.5V	9.95

EEPROMS

2816A-25	2048 x 8	(250ns) 5V Read/Write	6.25
2817A	2048 x 8	(350ns) 5V Read/Write	7.95
2865A-30	8192 x 8	(300ns) 5V Read/Write	9.95
52B13 (21V)	2048 x 8	(350ns) 5V Read Only	1.49

COMMODORE CHIPS

Part No.	Price
LAG570	9.95
WD1770	8.95
SI3052P	1.25
6504A	1.19
6507	2.95
6510	12.95
6522	2.95
6525	4.95
6526	14.95
6532	5.49
6545-1	3.95
6560	10.95
6567	24.95
6569	15.95
6572	10.95
6581 (12V)	12.95
6582 (9V)	14.95
8502	7.95
8564	4.95
8566	9.95
8701	9.95
8721	14.95
8722	13.95
*251104-04	12.95
310654-05	9.95
318018-03	12.95
318019-03	12.95
318020-04	12.95
325302-01	14.95
325572-01	17.95
*82S100PLA**	15.95
901225-01	15.95
901226-01	15.95
901227-03	15.95
901229-05	15.95

*No specs. available
**Note: 82S100PLA = U17 (C-64)

74CCMOS

74C00	.29	74C174	.49
74C02	.29	74C175	.49
74C04	.29	74C221	1.79
74C08	.29	74C240	1.19
74C10	.19	74C244	1.79
74C14	.49	74C373	1.95
74C32	.29	74C374	1.95
74C74	.49	74C912	7.95
74C85	1.49	74C915	1.39
74C86	.29	74C920	4.95
74C89	3.95	74C921	4.95
74C90	.99	74C922	3.95
74C154	2.95	74C923	3.95
74C173	.59	74C925	5.49

MISC. COMPONENTS

TANTALUM CAPACITORS

TM.1/35 .1µf @ 35V	.19	TM4.7/35 4.7µf @ 35V	.45
TM1/35 1µf @ 35V	.19	TM6.8/35 6.8µf @ 35V	.49
TM2.2/35 2.2µf @ 35V	.25	TM10/35 10µf @ 35V	.59

POTENTIOMETERS

Values available (insert ohms into space marked "XX"): 500Ω, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 1MEG

43PXX ¾ Watt, 15 Turn .99 | 63PXX ½ Watt, 1 Turn .89

TRANSISTORS AND DIODES

PN2222	.13	PN2907	.13	1N4004	.12
2N2222A	.29	2N4401	.12	1N4148	.07
2N3055	.65	1N270	.25	1N4735	.29
2N3904	.12	1N751	.15	C106B1	.49

SWITCHES

JMT123 SPDT, On-On 1.19 | 206-8 SPDT, 16-pin DIP 1.29

MPC121 SPDT, On-Off-On 1.19 | MS102 SPST, Momentary .39

D-SUB CONNECTORS

DB25P Male, 25-pin .69 | DB25S Female, 25-pin .75

LEDS

XC556R T1¾, Red .13 | XC556Y T1¾, Yellow .17

XC556G T1¾, Green .17 | XC556C T1¾, Clear/Red .17

IC SOCKETS

Low Profile		Wire Wrap (Gold) Level #2	
8LP	.11	8WW	.59
14LP	.12	14WW	.65
16LP	.13	16WW	.69
24LP	.25	24WW	1.19
28LP	.27	28WW	1.39
40LP	.29	40WW	1.89

Soldertail Standard (Gold & Tin) & Header Plug Sockets Also Available

74HC HI-SPEED CMOS

Part No.	Price	Part No.	Price
74HC00	.19	74HC175	.59
74HC02	.19	74HC221	.89
74HC04	.19	74HC240	.69
74HC08	.19	74HC244	.79
74HC10	.25	74HC245	.79
74HC14	.29	74HC253	.49
74HC30	.25	74HC259	.49
74HC32	.29	74HC273	.59
74HC74	.29	74HC373	.69
74HC75	.35	74HC374	.69
74HC76	.35	74HC595	1.29
74HC85	.55	74HC688	1.49
74HC86	.35	74HC943	8.95
74HC123	.69	74HC4040	.89
74HC125	.49	74HC4049	.39
74HC132	.49	74HC4050	.39
74HC138	.45	74HC4060	.99
74HC139	.45	74HC4511	1.19
74HC154	1.49	74HC4514	1.79
74HC163	.49	74HC4538	1.19
74HC174	.59	74HC4543	1.19

74HCT — CMOS TTL

74HCT00	.17	74HCT139	.39
74HCT02	.17	74HCT157	.29
74HCT04	.19	74HCT174	.35
74HCT08	.17	74HCT175	.39
74HCT10	.17	74HCT240	.69
74HCT32	.19	74HCT244	.59
74HCT74	.29	74HCT245	.69
74HCT86	.25	74HCT373	.49
74HCT138	.39	74HCT374	.49

LINEAR

DS0026CN	1.95	LM1458N	.35
TL074CN	.99	LM1488N	.45
TL084CN	.89	DS14C88N (CMOS)	1.19
AF100-1CN	8.95	LM1489N	.45
LM307N	.39	DS14C89N (CMOS)	1.19
LM309K	1.25	LM1496N	.69
LM311N	.39	MC1648P	2.95
LM317T	.65	LM1871N	1.95
LM318N	.99	LM1872N	1.95
LM319N	1.29	LM1896N-1	1.49
LM323K	3.49	ULN2003A	.75
LM324N	.35	XR2206	3.95
LM338K	4.49	XR2211	2.95
LM339N	.39	XR2243	1.95
LF347N	1.49	26LS29	2.95
LM348N	.69	26LS31	.99
LM350T	2.95	26LS32	.99
LF351N	.39	26LS33	1.49
LF353N	.49	LM2901N	.25
LF355N	.79	LM2907N	1.29
LF356N	.79	LM2917N (8 pin)	1.79
LF357N	.89	MC3419CL	3.95
LM358N	.49	MC3446N	.99
LM360N	1.95	MC3450P	.49
LM361N	1.49	MC3470P	1.19
LM380N-8	.99	MC3471P	.99
LM386N-3	.89	MC3479P	3.95
LM387N	1.09	MC3486P	1.19
LM393N	.39	MC3487P	.99
LM399H	3.49	MC3900N	.49
LF411CN	.79	LM3905N	1.25
TL497ACN	1.49	LM3909N	.89
NE540H (C540H)	.99	LM3914N	1.79
NE555V	.29	LM3916N	1.49
XRL555	.59	NE5532	.69
LM556N	.45	NE5534	.69
NE558N	.79	7805K (LM340K-5)	1.39
LM565N	.89	7812K (LM340K-12)	1.39
LM567V	.75	7815K (LM340K-15)	1.59
NE592N	.75	7805T (LM340T-5)	.45
LM741CN	.29	7812T (LM340T-12)	.45
LM747CN	.49	7815T (LM340T-15)	.45
MC1350P	.89	7905K (LM320K-5)	1.49
MC1377P	2.29	7905T (LM320T-5)	.49
MC1398P	4.95	75472	.49
LM1414N	.99	75477	1.29
		MC145106P	1.95
		MC145406P	2.95

PARTIAL LISTING • OVER 4000 COMPONENTS AND ACCESSORIES IN STOCK! • CALL FOR QUANTITY DISCOUNTS

*RAM'S SUBJECT TO FREQUENT PRICE CHANGES

Circle 128 on Reader Service Card

low available...Jameco's NEW 1989 Catalog
with 74 pages of Computer Peripherals, Components & More!

MEMBER MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc


RS232 QUICK TESTER



The QTSS quickly determines the proper RS232 configuration required to interface two peripherals. Simply slide the switches and determine by the LEDs which configuration works best.

QTSS ..... ~~$49.95~~ $29.95

JAMECO SOLDERLESS BREADBOARD SOCKETS




Part No.	Dim. L" x W"	Contact Points	Binding Posts	Price
JE20	6½ x ¾	200	0	$ 2.95
JE21	3¼ x 2⅛	400	0	$ 4.95
JE22	6½ x 1⅜	630	0	$ 5.95
JE23	6½ x 2⅛	830	0	$ 7.95
JE24	6½ x 3⅛	1,360	2	$14.95
JE25	6½ x 4¼	1,660	3	$22.95
JE26	6⅞ x 5¾	2,390	4	$27.95
JE27	7¼ x 7½	3,220	4	$37.95

COMPUTER PERIPHERALS

Jameco IBM PC/XT/AT Compatible Motherboards

- Award BIOS ROMs included



JE1001

JE1001 4.77/8MHz (PC/XT) .... $ 89.95
JE1002 4.77/10MHz (PC/XT) ... $109.95
***JE1007** 6/8/10/12MHz (AT) $249.95
*Limited Quantity Available


Jameco Computer Power Protection



JE1190

JE1190 Power Base. $29.95
JE1191 6-Outlet Power Strip $11.95

Jameco IBM PC/XT/AT Compatible Keyboards



JE1016 Pictured

JE1015 Standard AT layout (XT/AT) .. $59.95
JE1016 Enhanced layout (XT/AT) ... $69.95

DATA BOOKS

104100	NSC Linear Data Book-Vol. I (88).	$14.95
104200	NSC Linear Data Book-Vol. II (88).	$ 9.95
104300	NSC Linear Data Book-Vol. III (88).	$ 9.95
210830	Intel Memory Handbook (88).	$17.95
230843	Intel Microsystem Hndbk. Set (88).	$24.95

IBM PC/XT 10MHz Turbo Compatible Kit With 640K RAM

JE1002	4.77/10MHz Turbo Motherboard (Zero-K RAM – includes AMI BIOS ROM).	$109.95
JE1014	Turbo Flip-Top Case.	69.95
JE1015	XT/AT Compatible Keyboard	59.95
JE1021	5.25" DSDD Disk Drive (Beige Bezel).	89.95
JE1031	Mini 150W Power Supply	69.95
JE1071	Multi I/O with Controller and Graphics.	119.95
AMBER	12" Monochrome Amber Monitor.	99.95
4164-120	Parity RAM (2 chips).	5.90
41256-120	512K RAM (18 chips).	215.10
41464-12	128K RAM (4 chips).	51.80



Regular List $892.45

SAVE $192.50! NEW

JE3003 IBM Comp. PC/XT 10MHz Turbo Kit **$699.95**

IBM COMPATIBLE DISPLAY MONITORS



12" Amber Monochrome – TTL Input, High Resolution (PC/XT/AT)
AMBER $99.95

14" RGB Color – CGA Compatible Amber/Green/Color Switchable, 640 x 200 Resolution (PC/XT/AT)
CTX2410 ..... $279.95 CTX2410


14" EGA Color - EGA/CGA Compat., 720 x 350 Max. Resolution (PC/XT/AT)
TM5154 ..... $399.95

14" EGA Monitor and EGA Card - EGA compatible, 720 x 350 Max. Resolution – displays up to 16 colors (PC/XT/AT)
JE1059 ..... $519.95

14" Multiscan Color - VGA/PGC/EGA compatible, 800 x 600 Max. Resolution (PC/XT/AT)
TM5155 ..... $549.95

IBM PC/XT/AT COMPATIBLE CARDS

Graphic Display Cards MGA, CGA or EGA!



JE1050

JE1050	Mono Graphics Card w/Printer Port (PC/XT/AT).	$59.95
JE1052	Color Graphics Card w/Printer Port (PC/XT/AT).	$49.95
JE1055	EGA Card with 256K Video RAM (PC/XT/AT).	$159.95
JE1071	Multi I/O with Drive Controller and Mono Graphics (PC/XT).	$119.95

Multifunction, I/O and Expansion Cards


JE1060	I/O Card with Serial, Game, Parallel Printer Port and Real Time Clock (PC/XT).	$59.95
JE1061	RS232 Serial Half Card (PC/XT/AT).	$29.95
JE1065	I/O Card with Serial, Game and Parallel Printer Port (AT).	$59.95
JE1078	Expand to 384K (zero-K on-board) Multifunc. w/Serial, Game, Parallel Printer Port & Real Time Clock (PC/XT)	$69.95
JE1081	2MB of expanded or extended memory (zero-K on-board) (AT).	$119.95
JE1082	3MB of expanded or extended memory, parallel printer port, serial port and game port (zero-K on-board) (AT).	$169.95

Floppy and Hard Disk Controller Cards

JE1040	360KB Floppy Disk Drive Controller Card (PC/XT).	$29.95
JE1041	20/40MB Hard Disk Controller Card (PC/XT).	$79.95
JE1043	360K/720K/1.2MB Floppy Disk Cont. Card (PC/XT/AT)	$49.95
JE1045	360K/720K/1.2MB Floppy/Hard Disk Controller Card (AT).	$149.95

COMPUTER PERIPHERALS

***Zuckerboard* 30Meg Hard Disk Drive Board for Tandy 1000, 1000A, 1000SX, 1200, 3000 and 3000HL**



SALE

• 30 Megabytes formatted capacity • Uses only one slot • Pre-formatted with MS-DOS
T30MB 30MB Hard Disk ~~$599.95~~ $399.95



Seagate 20,30 40 and 60MB Half Height Hard Disk Drives
ST225K (Pictured)

ST225	20MB Drive only (PC/XT/AT).	$224.95
ST225XT	20MB w/Controller (PC/XT).	$269.95
ST225AT	20MB w/Controller (AT).	$339.95
ST238	30MB Drive only (PC/XT/AT).	$249.95
ST238XT	30MB w/Controller (PC/XT).	$299.95
ST238AT	30MB w/Controller (AT).	$389.95
ST251	40MB Drive only (PC/XT/AT).	$429.95
ST251XT	40MB w/Cont. Card (PC/XT).	$469.95
ST251AT	40MB w/Controller Card (AT).	$539.95
ST277	60MB Drive only (PC/XT/AT).	$499.95
ST277XT	60MB w/Controller (PC/XT).	$549.95
ST277AT	60MB w/Controller Card (AT).	$639.95

40MB Tape Back-Up for IBM PC/XT/AT

DJ10 40MB Tape Back-Up. $349.95
TB40 40MB Tape Cartridge. $24.95




Jameco 5.25" PC/XT & AT Compatible Disk Drives
JE1022 (Pictured)

JE1020	360K Black Bzl. (PC/XT/AT)	$ 89.95
JE1021	360K Beige Bzl. (PC/XT/AT)	$ 89.95
JE1022	1.2MB Beige Bzl. (PC/XT/AT)	$109.95

3.5" PC/XT/AT Compatible Disk Drives

MF353B	3.5" 720KB (Bezels and Installation Kit included) (PC/XT/AT) ~~$129.95~~	$109.95
MF355B	3.5" 1.44MB (Bezels and Installation Kit included) (PC/XT/AT) ~~$149.95~~	$129.95

***Datatronics* 2400/1200/300 Modems**



NEW, Pocket Version!
• Hayes command compatible • Bell 103/212A compatible • Auto-dial/auto-answer • FCC approved 1-year warranty • Includes MaxiMite Communication Software (except 1200P)

1200P	1200/300 Baud Pocket Modem.	$ 99.95
1200H	1200/300 Baud Internal Modem.	$ 69.95
2400S	2400/1200/300 Internal Modem.	$129.95
1200C	1200/300 Baud External Modem.	$ 99.95
2400E	2400/1200/300 External Modem	$169.95

TEST EQUIPMENT



***Metex* M4650:**
- Handheld, high accuracy
- 4½ Digit LCD
- Manual ranging with Overload Protection
- Audible continuity tester
- Tests: AC/DC Voltage, Resistance, Continuity Capacitance, Frequency
- One Year Warranty
- Size: 7"L x 3½"W x 1½"H

M4650 .... $99.95

U.S. Funds Only
Shipping: Add 5% plus $1.50 Insurance
(May vary according to weight)

California Residents: Add 6%, 6½% or 7% Sales Tax

$20 Minimum Order

IBM is a registered trademark of International Business Machines

MasterCard

Mail Order Electronics - Worldwide
Jameco ELECTRONICS

VISA®

Data Sheets – 50¢ each
Prices Subject to Change

Send $2.00 Postage for a FREE 1989 CATALOG

FAX Numbers: 415-592-2503 or 415-595-2664

Telex: 176043

©1988 Jameco Electronics 10/88

1355 Shoreway Rd., Belmont, CA 94002 • *24 HR. ORDER HOTLINE 415-592-8097* • All Other Inquiries (7am-5pm PST) 415-592-7108

INTERFACE CARDS for PC/AT and PS/2



COMMUNICATION DATA ACQUISITION & CONTROL

FOR A FREE CATALOG CALL

1-800-553-1170

QUA TECH INCORPORATED

478 E. Exchange St., Akron, OH 44304
TEL: (216) 434-3154 FAX: (216) 434-1409
TLX: 5101012726

Circle 213 on Reader Service Card

RS-232 FOR PS/2



MODELS 50, 60, 80

- DCE/DTE Selectable
- Transfers to 19.2 K baud
- Address Selectable
- Interrupt Selectable

1-800-553-1170

QUA TECH INCORPORATED

478 E. Exchange St., Akron, OH 44304
TEL: (216) 434-3154 FAX: (216) 434-1409
TLX: 5101012726

Circle 214 on Reader Service Card

9-Track Tape Drives: Yes!

for IBM PC/XT/AT/386 *and* PS/2



Interchange tapes from mainframes.

Important features:

- 800, 1600, 3200, 6250 BPI
- EBCDIC/ASCII conversion
- IBM & ANSI labeled tapes
- Network backup
- DOS, XENIX, Microport
- Highest quality customer service

For quick delivery we stock all major manufacturers' tape drives, including Cipher, Kennedy, M4 Data, Qualstar.


Prices start at $3,755. Call Today!

Overland Data, Inc.
5620 Kearny Mesa Rd. • San Diego, CA 92111
Tel: (619) 571-5555 • FAX: (619) 571-0982

Circle 190 on Reader Service Card

NEW

PARALLEL PORT FOR PS/2



MODELS 50, 60, 80

- LPT1, LPT2, LPT3
- Optional Serial Port
- OEM Pricing Available

1-800-553-1170

QUA TECH INCORPORATED

478 E. Exchange St., Akron, OH 44304
TEL: (216) 434-3154 FAX: (216) 434-1409
TLX: 5101012726

Circle 215 on Reader Service Card

RS-422 FOR PS/2



MODELS 50, 60, 80

- Two Channel
- Transfers to 256 K baud
- Address Selectable
- Interrupt Selectable

1-800-553-1170

QUA TECH INCORPORATED

478 E. Exchange St., Akron, OH 44304
TEL: (216) 434-3154 FAX: (216) 434-1409
TLX: 5101012726

Circle 216 on Reader Service Card

DYNAMIC RAMS

	1MBIT	100ns	$38.00
	514256	100ns	$59.00
	41464	150ns	$10.75
	41256	100ns	$12.75
	41256	120ns	$11.75
✓	41256	150ns	$10.85
	51258	100ns	$12.25
✓	4164	150ns	$ 2.95

* For high-speed, Zip, Plcc, Simm ..... Please Call !

PROCESSORS			E PROMS		
80387-16	16mHz	$430.00	27C101	250ns	$ 24.00
80287-10	10mHz	$268.00	27C512	200ns	$ 15.00
80287-8	8mHz	$230.00	27512	250ns	$ 12.95
80287-6	6mHz	$159.00	27C256	250ns	$ 5.50
8087-1	10mHz	$205.00	27256	250ns	$ 4.95
8087-2	8mHz	$142.00	27128A	250ns	$ 5.25
8087	5mHz	$ 99.00	27C64A	200ns	$ 4.95
V-30	8mHz	$ 12.75	2764	250ns	$ 3.50
V-20	10mHz	$ 17.00	S. RAMS		
V-20	8mHz	$ 8.50	43256	120ns	$ 16.95
			4364	150ns	$ 13.50

I.C. EXPRESS

15358 Valley Blvd. City of Industry,CA 91746 Tel:818-369-2688
ORDER TOLL FREE (Mon-Fri 8-5 PST)
(800) 892-8889 • (800) 882-8181
outside california inside california
CALL FOR CURRENT PRICES & VOLUME DISCOUNTS.
Price Shown for cash. MasterCard/Visa add 3%. Prices are subject to change.
Minimum order $10.00. Shipping & Handling: UPS Ground $5.00, Air $7.00 (1 lb.)
ALL MERCHANDISE IS 100% GUARANTEED WITH PROMPT DELIVERY.

Circle 117 on Reader Service Card

16-BIT RESOLUTION ANALOG-TO-DIGITAL CONVERTER 12,000 SAMPLES/SEC for IBM PC, XT & AT SINGLE PIECE PRICE $475

We manufacture a broad line of data acquisition and control hardware and software for Apple and IBM computers.

Call for quotes on custom hardware or complete systems.

LAWSON LABS, INC.
5700 RAIBE ROAD
COLUMBIA FALLS, MT 59912
800-321-5355 or 406-387-5355

Circle 140 on Reader Service Card

IMAGING CARD



DV-01 GRAY SCALE FRAME GRABBER

Composite video in/out
256 x 240 resolution
Digitize/display at frame speed
256 gray levels in
16 Meg. color palette out
PC/XT/AT compatible

$849.00 Complete with software
VISA/MC Demo Disk available

Control Vision
P.O. Box 596, Pittsburg, KS 66762
(316) 231-6647

Circle 69 on Reader Service Card

The BEST for LESS

29¢ EA

Quality 5¼" DS/DD Diskettes Min. 100

Guaranteed Two-for-One Replacement
if found initially defective within six months
FREE sleeves, tabs, labels

5¼" COLOR (Min. 100)	39¢
5¼" HIGH DENSITY (Min. 50)	69¢
Brand Box 5¼" (Min. 10)	$3.99
Brand Box COLOR 5¼" with FREE Plastic Case (Min. 10)	$4.99
3½" DS/DD (Min. 50)	$1.09

100% Lifetime Warranty

Shipping: $4.50 per min. order/$2.00 each addtl. lot
MC/VISA Only

1-800-537-1600
Operator No. 227

MEP

Dept. No. 1523 P.O. Box 61000
San Francisco, CA 94161

Circle 161 on Reader Service Card

BYTE LISTINGS YOUR WAY!

It's easy. Now there are three ways to get source-code listings that go with BYTE articles—on disk, in print or on line.

LISTINGS ON DISK

BYTE listings on disk are right for you if you want to compile or run programs quickly. Also included on disk are the month's BIX highlights specific to your machine format.

LISTINGS IN PRINT

This print supplement contains source-code listings described in the issues of BYTE.

LISTINGS FROM BIX

(BYTE Information Exchange) By joining BIX, you can download BYTE source-code listings at standard BIX rates. See BIX informational ad listed in Reader Service index in this issue.



FOR DIRECT ORDERING CALL TOLL FREE: 800-258-5485

Call: M–F, 8:30 a.m. to 4:30 p.m. Eastern Time

(603-924-9281 for New Hampshire residents)

For credit card orders only.

ON DISK-

*** Including the Month's BIX Highlights Specific To Your Machine Format.**

Disks of listings from December 1985 to present are available at the prices stated at right. Please mark the appropriate format and note the issue date below. If you are ordering a subscription, please note the issue date on which you would like it to begin.

Month _____

Year _____

	IN USA: Single Month (one disk)	IN USA: Annual Subscription (13 disks)	OUTSIDE USA: Single Month (one disk)	OUTSIDE USA: Annual Subscription (13 disks)
5¼ inch: ☐ IBM PC* ☐ Apple II ☐ Kaypro 2 CP/M ☐ MS-DOS 8 Sector* ☐ TI Professional	☐ $8.95	☐ $69.95 (Save $46.40)	☐ $10.95	☐ $89.95 (Save $52.40)
3½ inch: ☐ Apple Macintosh* ☐ Atari ST* ☐ Amiga* ☐ IBM PS/2*	☐ $9.95	☐ $79.95 (Save $49.40)	☐ $11.95	☐ $99.95 (Save $55.40)

IN PRINT

1988 Supplement Issues

☐ January through March $6.95 in USA $7.95 outside USA

Monthly supplements replace quarterly supplements starting in April. Indicate the month you're ordering in the space below.

Month _____

Year _____

$2.50 per issue in USA
$3.50 per issue outside USA

Annual Subscriptions:
$19.00 in USA
$22.00 outside USA

Please note month and year you would like the subscription to begin.

Month _____

Year _____

1987 Supplement Issues

IN USA:

☐ January through March 1987 for only $6.95.
☐ April through June 1987 for only $6.95. (Includes 1986 Index).
☐ July through September 1987 for only $6.95.
☐ October through December 1987 for only $6.95.
☐ 1987 subscription only $18.00.

OUTSIDE USA:

☐ January through March 1987 for only $7.95.
☐ April through June 1987 for only $7.95.
☐ July through September 1987 for only $7.95.
☐ October through December 1987 for only $7.95.
☐ 1987 subscription only $21.00.

1986 Supplement Issues

IN USA:

☐ January through June 1986 for only $8.95.
☐ July through September 1986 for only $6.95.
☐ October through December 1986 for only $6.95.
☐ 1986 Annual Subscription for only $18.00.

OUTSIDE USA:

☐ January through June for only $9.95.
☐ June through September for only $7.95.
☐ October through December for only $7.95.
☐ 1986 Annual Subscription for only $21.00.

FOLD HERE

COMBINED DISK AND PRINT SUBSCRIPTION

Bundled together, giving you the convenience of disk-based source-code plus the ease of reference of print.

If you are ordering a subscription, please note the issue date on which you would like it to begin.

	IN USA: Annual Subscription	OUTSIDE USA: Annual Subscription
5¼ inch: ☐ IBM PC ☐ Apple II ☐ Kaypro 2 CP/M ☐ MS-DOS 8 Sector ☐ TI Professional	☐ $89.95 (Save $58.35)	☐ $109.95 (Save $75.35)
3½ inch: ☐ Apple Macintosh ☐ Atari ST ☐ Amiga ☐ IBM PS/2	☐ $99.95 (Save $61.35)	☐ $119.95 (Save $78.35)

FOLD HERE

Please complete in full.

OCTOBER

Name _____

Address _____

City _____ State _____ Zip _____

County or Parish _____ Country _____

Credit Card # _____

Exp. Date _____ Signature _____ Date _____

Please allow 4-8 weeks for delivery.

☐ Check enclosed
☐ MasterCard
☐ VISA
☐ U.S. Funds enclosed (If ordering from outside the U.S. please remit in U.S. funds drawn on a U.S. bank. Thank you.)

BYTE

FOLD
HERE

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 10 PETERBOROUGH, NH

POSTAGE WILL BE PAID BY ADDRESSEE

BYTE Listings
One Phoenix Mill Lane
Peterborough, NH 03458-9990

FOLD
HERE

SPECIAL

GENERIC CADD 3.0
Includes:
Auto Dimensioning
Dot Plot
Drafting Enhancement 1
Drafting Ehnancement 2

$95

SAVE UP TO 70%

"It PAYS to BUY! MHI!

SINCE 1984

PRODUCTS NOT LISTED ... CALL!

CAD...etc.
PC & MAC

New Orders: **1-800-621-3999**

AST Premium
286/386
Call

ZENITH 1490
FlatScreen
$579

DRAFIX
1 Plus or 3D Module
Call

MITSUBISHI
Diamond Scan 40/70 Mb Disk
$477 $439

VENTURA PUB 1.1 $455
PAGE-MAKER $429

SWEET-P 600
6 Pen Plotter
$598

DESIGN CAD
Standard or 3D
$149

SMART MODEM
2400B Int.
$115

PANASONIC
1091i-m2
$195

NOVELL
No-Key
$89

PRINTERS

AST TurboLaser/PS 3Mb	$3100
Canon BJ-130	$689
Citizen 180-D	$157
MSP-15E	$295
MSP-40	$269
MSP-45	$389
MSP-50	$345
MSP-55	$440
Premiere 35	$439
Tribute 124	$439
Tribute 224	$579
Diconix 150	$299
HP LaserJet II	$1690
JDL 850 Series	Call
NEC LC890	Call
Panasonic 1080i-m2	$155
1091i-m2	$195
Others	Call
Toshiba 321-SL	$465
341-SL	$609
351-SX	$888
Others	Call

MONITORS

Amdek 1280 & Card	$639
210A	$87
722EGA	$431
Hitachi	Call
Cornerstone	Call
Mitsubishi Diamond Scan	$477
Others	Call
Moniterm Viking	Call
NEC Multisync II	$565
Multisync GS	$185
Others	Call
RasterOps 1648s	$1995
1948s	$2949
Samsung	Call
Sigma Designs LaserView	Call
Sony Multiscan 1303	$495
Zenith 1490 Flatscreen	$579

SOFTWARE

AutoCad	Call
AutoSketch	$59
BoeingGraph	$195
By-Line	$169
Carbon Copy Plus	$103
Clipper	$355
Copy II PC	$18
Corefast	$87
Dac Easy 3.0	$58
dBase III+	$355
DesignCad	$149
Desklink	$92
DesqView	$69
Drafix 1 Plus	$149
Drafix 3D Mod & Options	Call
Dollars & Sense	$96
Draw Applause	$264
DDS Back-Up Plus	$33
Easy Exral	$54
Excell PC	$281
FastBack	$75
FastBack Plus	$85
FormTool	$52
Freelance Plus	$293
Fox Base Plus	$179
GEM Draw Plus	$159

LIGHTING Disk SpeedUp
Increase your Hard Disk Speed as much as 40%!!!
$69

Generic Cadd 3.0	$48
Generic Cadd Others	Call
Harvard Graphics	$255
Harvard Tot Proj Mgr	$317
In House Acct	$107
Laplink Plus	$74
Lighting Hard Disk Speedup	$69
Lotus 123 2.01	$283
Lucid 3d (new Ver.)	$103
Managing Your Money	$113
MathCad 2.0	$199
MS-Dos 3.3	$95
Norton Util 4.0	$45
PageMaker	$429
Paradox 2.0	$391
PC Tools Deluxe	$35
PathMinder	$55
Peachtree Accounting II	$145
PFS: First Choice	$79
PFS: First Publisher	$52
PFS: Professional File	$129
PFS: Professional Plan	$51
PFS: Professional Write	$102
Plan Perfect	$185
Q&A	$177
Q&A Write	$115
Quattro	$132
Rapid File	$172
R:Base for DOS	$409
ShipMate(tm) (UPS Manifest)	$199
SideKick Plus	Call
Smart Sysmen	$418
Sprint	$115
Tops	$101
Turbo Basic	$57
Ventura Publishing 1.1	$455
VersaCad & Libraries	Call
Windows	Call
WordPerfect 5.0	Call
X-Tree Pro	$58

DIGITIZERS & PLOTTERS

Calcomp 1023-GT	Call
1043-GT	$5990
Digitizers	Call
Enter Sweet-p 600	$598
Others	Call
Houston Instruments	Call
DMP 41/42	Call
DMP 51MP	$3550
DMP 51/52MP	$3200/2700
DMP 52	$2300
DMP 56A	$3800
DMP 61	Call
DMP 62	Call
MP Options	Call

HITACHI Digitizer 10 Year Warranty
HDG-1212D-4
Includes:
4-Butt Cursor, 1-Butt Pen & Mouse Emulator.
$398

Hitachi (Ten Year Warranty)	
HDG-12x12D-4	$398
HDG-12x12D-12	$486
HDG-15x15D-4	$598
HDG-15x15D-12	$659
Ioline	Call
JDL 850 Series	Call
Kurta IS 12x12	$285
IS 12x17	$485
Summagraphics 12x12 Plus	$344
18x12 Pro w/4 Butt & Stylus	$569
Mac Bit Pad 12x12, 4But,Sty	$299

CAD CORNER SPECIAL
AST Premium 286
DiamondScan Monitor
Summagraphics 12x12 Plus
Intel 80287 Chip
$3360

ups manifest ShipMate™ $199

DRIVES, MODEMS & FAX

Mitsubishi 40/70 Mb Hard Drive	
1/2 ht AT, 23ms	$439
Panasonic FAX Board	$689
Seagate ST225 w/card	$260
ST238 30Mb w/card	$285
Smart Modem 1200B int w/sw	$58
2400B int w/sw	$115
Toshiba 3.5 XT/AT 720k Drive	$89
5.25 XT/AT 360k Drive	$75
US Robotics Courier 2400	$299

BOARDS & NETWORKS

Adage AD10/4	$1370
AD10/8L	$2040
ArcNet	Call
Artist 8	$1178
10/16	$1920
12	$2320
AST	Call
ATI EGA Wonder	$169
VIP VGA	$249
EtherNet Plus	Call
Genoa VGA 600x800	$259
VGA 760x1024	$379
Hercules Graphics Plus	$169
Intel AboveBoard 286/512k	$359
AboveBoard PS 286/512k	$388
Paradise EGA 480	Call
VGA Plus	Call
VGA Pro	Call
RasterOps Color Draw 24	$319
ColorBoard 104	$2484
ColorBoard 108	$1162
Sigma Designs VGA	$209
Tops Flashcard	$143
Verticom	Call
Video 7 Vega Deluxe	$177

COMPUTERS

AST Premium 286 & 386	Call
NEC Multispeed	$1079
Multispeed EL II	$1423
Multispeed HD	$2209
Toshiba Laptops	Call
Accessories	Call

intel coprocessors genuine!

8087-2 (<=8MHz)	$132
80287-8 (<10MHz)	$205
80287-10 (=>10MHz)	$239
80387-16	$397
80387-20	$588
80387-25	Call
80387SX	Call

MOUSE

Logitech C7 Serial or Bus	$65
HiRez Bus	$83
Bus & Paint	$83
Serial & Publisher	$104
MicroSoft Serial	$95
PC Mouse	Call

HELPERS

Logical Connection 256/512k	Call
OTHERS	Call
ScanMan	Call

NEW! Optical Disk Interface / 40ms

Filesize up to 21 GigaBytes and limited by Disk Only. Speed resembles a 40ms Hard Drive. OptiDriver supports most Optical drives including ATG Gigadisk, ISI 525WC, LMSI LD-1200, Maxtor TXT 800S, Mitsubishi MW-5UI, Optimem 1000, Optotech 5984, Panasonic LF-5000, Ricoh RO-5040WL, Sony WDD-3000. Host Adapters supported include Adaptec, Future Domain, Rancho Technology, Scientific Micro Systems, and Western Digital. OptiDriver is an applications interface for attaching optical disk drives to an IBM PC/XT/AT or compatible computer system. Low memory usage, approximately 50kb, is required for the master program. NASA is now a proud user of this revolutionary interface. Kit includes OptiDriver, Host Adapter, and Manual. Installs as drive "O" with batch file.

$525 $695 list

Volume Bids Wecome!

VISA
MASTERCARD
PO's
Just Call First.

MHI Warehouse, Inc.
8129 N. 35th Ave. #2-306
Phoenix, AZ 85051
New Orders:
1-800-621-3999
Order Info: 602-997-8877
Fax: 602-943-3833

Pre-approved P.O.'s are welcome. Prices reflect cash discount and are subject to change without notice. Product compatibility, warranties, & claims are responsibility of manufacturer only. All returns are subject to a restocking fee. Personal/Company checks delay shipping. AZ orders only add 6.7% tax. Orders are processed same Day. International orders Call (602) 861-1090.



The Bible Library™

29 titles: 9 bibles + 20 reference works on one CD-ROM laser disc. The most comprehensive Bible study tool available for the minister and layman $495

CD-ROM/WORM OUTLET
Save While Supplies Last

AMDEK DRIVE $639
HITACHI DRIVES . . . . . 2 for 1 Sale
MS DOS & MAC S/W DISCOUNTED: Groliers, McGraw-Hill Science, Supermap, U.S. Atlas Geovision, Comstock — 449 photos. PC-SIG (25,000 programs), Public Domain — Alde (5,000 arced programs).

CALL 1-800-543-1734 ANYTIME
(716) 852-6711 One Day Service
C.O.D./AMEX/MC/VISA
JASON ENTERPRISE
Dept. D, 5459 Main Street
Williamsville, NY 14221

Circle 129 on Reader Service Card

Power Software

Batcom — Batch file compiler compiles your ".bat" files to ".exe" files to make them faster, more professional, and more capable. **$49.95.**

REDCache — speeds hard disks by up to 7 times and floppy disks by up to 55 times. LIM EMS supported. **$39.95.**

Spool — allows you to use your computer while your printer prints long documents. LIM EMS supported. **$39.95.**

RED Utilities — Contains the three programs above plus protection from accidental hard disk formatting, sorted directories, text searching, DOS wild card exceptions, and much more. For IBM PC. **$79.95.**

Check, COD, Visa, MasterCard.

Wenham Software Co.
5 Burley St.
Wenham, Ma. 01984
(508)-774-7036 . **FREE** catalog.
Dealer inquiries invited.

Circle 274 on Reader Service Card

TRANSLATE BASIC TO PASCAL



P-TRAL, Woodchuck Industries' program for IBM PC and MS-DOS compatibles translates Microsoft BASIC source code to Turbo Pascal source. Comes with full documentation and tutorial. $179.00

P-Tral is also available for the Apple II series. Write or call for more details.

WOODCHUCK INDUSTRIES, INC.
340 WEST 17 STREET Ste 2B NY, NY 10011
(212) 206-6490 / 924-0576

Circle 278 on Reader Service Card

ZSTEM

VT220 VT240 D400

TERMINAL EMULATION

KEA SYSTEMS LTD.
#412 - 2150 West Broadway
Vancouver, B.C. CANADA, V6K 4L9
Tel: 604-732-7411 Telex: 04-352848 VCR
FAX: 604-732-0715
Order Toll Free (800) 663-8702

KEA SYSTEMS

Circle 134 on Reader Service Card



Sure it's insured?

SAFEWARE® Insurance provides full replacement of hardware, media and purchased software. As little as $39/yr. covers:
• Fire • Theft • Power Surges
• Earthquake • Water Damage • Auto Accident

For information or immediate coverage call:

1-800-848-3469

In Ohio call 1-614-262-0559

SAFEWARE

SAFEWARE, *The Insurance Agency Inc.*

Circle 233 on Reader Service Card

"INDISPENSABLE"

Jerry Pournelle, Byte, 8/87

Vopt is the fast, safe disk organizer. It will quickly eliminate the file fragmentation that slows your disk operations.

Vopt includes Vmap for viewing the organization of your disks plus numerous other utilities that test and report on the efficiency of your system.

Call for a free demo disk!

$59.95 $3 shipping/handling CA add 6.5% sales tax.

GOLDEN BOW SYSTEMS
2870 Fifth Ave., Suite 201
San Diego, CA 92103
800/284-3269

Circle 105 on Reader Service Card



PC488A $145/195

LOW COST PC/XT/AT INTERFACE FOR IEEE-488 (GPIB/HPIB)


- Includes **INSTALLABLE DOS DEVICE DRIVERS** and software support for **BASIC**
- Optional language support for **C, PASCAL, FORTRAN** and **ASSEMBLY** - $50
- Selectable base I/O address, IRQ and DMA
- **CONTROLLER / TALKER / LISTENER** capability
- Customer support via dedicated 24 hours B&C Microsystems **BULLETIN BOARD**
- Quantity discounts available

VISA MC AMEX *Call today for datasheet!!*

B&C MICROSYSTEMS

355 West Olive Ave, Sunnyvale, CA 94086
PH: (408)730-5511 FAX: (408)730-5521 TELEX: 984185

Circle 29 on Reader Service Card



! not only a printer buffer !

THIS IS THE MOST SOPHISTICATED
PRINTER BUFFER – MULTIPLEXOR – SWITCH

WITH TWO SEPARATE INPUTS (SERIAL AND PARALLEL) AND TWO SEPARATE OUTPUTS (SERIAL AND PARALLEL) CAN BE USED LIKE STANDARD BUFFER... WITH ANY INPUT TO ANY OUTPUT... BUT ALSO YOU CAN CONNECT 2 COMPUTERS TO 1 PRINTER, OR 1 COMPUTER TO 2 PRINTERS, OR 2 COMPUTERS AND 2 PRINTERS... AND MORE = 1 COMPUTER TO 3 PRINTERS OR 3 COMPUTERS TO 1 PRINTER.
HIGH CAPACITY – 64 KB TO 256 KB AND – 256 KB TO 1 MB (MODELS A AND B). PAUSE, COPY AND RESET FUNCTIONS. SERIAL PORTS WITH 7 OR 8 BITS WORD LENGTH, 1 OR 2 STOP BIT, PARITY, XON/XOFF, DTR, RTS.

DCB-A-64K $ 195 DCB-B-256K $ 255 [*]

[*] Power supply and parallel cables are included.

ALSO, WE HAVE THE MOST COMPLETE DATA CONVERTER UNIT. CONVERTS RS232 SERIAL TO CENTRONICS PARALLEL OR VICE VERSA, JUST BY MOVING JUMPERS. BAUD RATE AND PROTOCOL FULLY PROGRAMABLE. FROM 150 TO 19200 BAUDS INCLUDES: DTR, RTS, XON/XOFF, PARITY, etc

DCU $ 80 [**]

[**] Power supply and cables NOT included



serial<>parallel
bi–directional converter

INTECTRA

INTECTRA Inc.–Dept.232
2629 TERMINAL BLVD
MOUNTAIN VIEW-CA-94043
(415) 967–8818 TX 345545

Circle 276 on Reader Service Card

6809 Single Board Computer



6809 MPU, 2 serial ports, 4 parallel ports, RAM, EPROM, real-time clock, watchdog timer, 44-pin 4.5" × 6.5" PCB
EXPANSION MODULES: RAM, EPROM, CMOS RAM/battery, analog I/O, serial I/O, parallel I/O, counter/timer, IEEE-488, EPROM programmer, floppy disks, cassette, breadboard, keyboard/display.

WINTEK

Wintek Corp.
1801 South Street
Lafayette, IN 47904
317-742-8428

Compu$ave

MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association Inc.

1-800-877-8855

INTERNATIONAL ORDERS ARE WELCOME

BOARDS

v. Dig. Slave	545	Orchid Designer	329
by Slave	599	Panasonic Fax	642
T 4 Port	299	**Paradise 480 Auto**	**169**
T 5251-11E	545	**Paradise VGA+**	**249**
T Hot Shot 286	349	**Paradise VGA Pro**	**352**
l VGA Wonder. SAVE		STB VGA EM 512K	299
l EGA Wonder	**195**	**Sigma VGA H**	**242**
CA RAM AT	142	**Video 7 V RAM**	**485**
noa VGA HiRes	**392**	**Video 7 Vega VGA**	**252**
ist/Computone/Intel/Metheus/Number 9			CALL
adram/Talltree/West. Digital/Verticom/VML			CALL

DISK DRIVES

C 150 Mb	1,445	**Seagate 20M Kit**	**262**
niscribe 40M	295	**Seagate 30M Kit**	**279**
niscribe 6053	545	**Seagate 251**	**359**
niscribe 6085	649	Seagate ST251-1	429
sCard 20M	**518**	**Seagate 4096**	**599**
sCard 40M	655	Toshiba 3.5" Kit	89
T/Archive/Alloy/Genoa/Iomega/Micropolis			CALL
aynard/Maxtor/Tallgrass/Tecmar			CALL

SOFTWARE

rbon Copy+ 5.0	**108**	**Microsoft Word 4.0**	**209**
Base III Plus	**374**	**Multimate Advan. II**	**249**
stback Plus	**92**	**Paradox 2.0**	**429**
rst Publisher 2.0	**75**	**Quattro**	**139**
rvard Graph 2.1	**259**	**Top for DOS**	**105**
crosoft Excel/PC	**289**	**WordPerfect 5.0**	**239**
crosoft Works	**99**	**Ventura Publisher**	**495**
achtree Complete	**155**	**R:BASE for DOS**	**448**

COMPUTERS

Acer 20 Mhz	CALL	**Toshiba 1000**	**769**
AST Model 80	1599	**Toshiba T1200F**	**1495**
AST Model 386	CALL	**Toshiba T1200H**	**2249**
Intel 25 MHz	CALL	**Toshiba 3100/20**	**2995**
NEC EL II	1465	**Toshiba 3200**	**3799**
Packard Bell 12 Mhz.	1279	**Toshiba 5100**	**4899**
Samsung 20 Mhz	2899	Zenith 183 - 20 Mb	1949
Samsung Laptops	SAVE	Zenith Supersport	1625
Sharp	CALL	Zenith Supersport 286	3395
Acer 80386:16 MHz/0 Wait/1 Mb Ram / 40 Mb			3299
Mitsubishi 286: 12 MHz / 40 Mb Hard Drive			1925
NEC Powermate Portable 286/640k/20M			**2645**
NEC Powermate Portable 286/640k/40M			**3095**
Sperry PC IT 512k/44M HD/Keyboard			2795
Samsung S500 AT: 10MHz/40M Drive			1565
Televideo 386: 16 MHz/2m/1.2M Drive			2595
Wyse 2108: 8 MHz/512k/1.2M Drive			**1195**
Wyse 2112: 12.5 MHz/1M/1.2M Drive			**1699**
Wyse 2214: 12.5 MHz/0 Wait/1.2 Drive			**1895**
Wyse 386: 16 MHz/1M/1.2M Drive/0 Wait			**2795**
Unisys 386: 16 MHz/1M/1.2M Drive/0 Wait			2599
Altos & Other Models			CALL

TERMINALS

Altos V	485	**Televideo 965**	**412**
Adds 1010	299	**Wyse 30**	**289**
IBM 3151	**389**	**Wyse 50**	**355**
Kimtron KT-70 PC	359	**Wyse 60**	**395**
Televideo 905	**289**	**Wyse 85G**	**379**
Televideo 955	**375**	**Wyse 99GT**	**469**
Visual/CIE/Link/Qume/Falco			CALL

PLOTTERS

Calcomp 1023GT	**3785**	Houston 62	4495
Calcomp 5902	**3395**	HP 7475	1395
Calcomp 1044GT	**10,245**	HP 7550 A	2895
Enter SP 1800	3095	HP 7595	7795
Houston DMP 52	2399	Ioline 3700	3065
Houston 41/42	2110	Ioline 4000	3995
Houston 56A	3850	**Roland 980**	**1195**
Houston 61	**3025**	**Roland 880**	**929**
Numonics/Taxan/Versatec/JDL/Other Models			CALL

DIGITIZERS

Calcomp12 x12	365	Logitech HiRes Mouse	92
Calcomp 44 x 60	3745	**Kurta IS 3**	**CALL**
Calcomp36 x 48	3195	**Kurta IS 8.5 x 11**	**249**
GTCO 24 x36	**1945**	**Kurta IS 12 x 12**	**315**
GTCO 36 x 48	**2395**	**Kurta IS 12 x 17**	**535**
Hitachi 11 x 11	439	Summa 12 x 12 +	355
Logitech C7 Mouse	79	Summa 12 x 18	599

MODEMS

ATI ETC	159	Novation Parrot	85
Anchor 2400E	**145**	Practical 1200I	65
AST 9600	779	Prometheus 2400B/2	119
Avatex 1200 Ext.	95	Prometheus 2400G	149
Hayes 1200	**279**	Racal-Vadic 2400VP	399
Hayes 2400	**415**	USR Courier 2400	299
Incomm T2400	235	USR 2400E	345
Migent Pocket	109	**USR HST 9600**	**649**
Multitech 224 EH	**388**	Ven-Tel 18000	939
Multitech 224 EC	**305**	Zoom 2400 HC	139
Avatex/Case/Everex/UDS/Other Models			CALL

PRINTERS

Alps Allegro 24	362	**NEC 5300**	**689**
Alps 324 E	745	NEC P5XL	835
Canon BJ 130	**675**	NEC P9XL	1038
Citizen120D	142	Panasonic 1080M2	165
Citizen 180D	165	Panasonic 1091M2	191
Citizen MSP40	312	Panasonic 1524	549
Citizen MSP55	489	Panasonic 1595	435
Fujitsu DL3400	512	**Star NX1000**	**173**
Okidata 390	**464**	**Toshiba P351SX**	**935**
Okidata 391	**645**	**Canon 8II**	**1565**
NEC P2200	**330**	**NEC LC 890**	**3165**
NEC 5200	**519**	HP Lazer Jet II	SAVE
Brother/C.Itoh/Data Products/Data South			CALL
Diconix/Epson/Genicom/QMS/OTC/TI			CALL

MONITORS


Amdek 310A	69	PGS LM 300	539
Amdek 1280	645	Samsung TTI	79
Intercolor 19"VGA	1595	Sigma Laser 19"	1765
Mitsubishi 1381A	**509**	Tatung Multiscan	475
Mitsubishi 20" Auto	CALL	Taxan 770+	515
NEC Multisync II	**575**	Thomson 4160 RGB	209
NEC Multisync +	**915**	Thomson EGA	319
NEC Multisync XL	**2095**	Wyse 650 VGA	489
NEC Multisync GS	**179**	Wyse 700	678
PGS Ultra Synch	522	Zenith 1490	598
Seiko 1430: 14", Multiscan, 1024x768, .26mm			649

SCANNERS

Datacopy 730	1095	PGS LS-300 /w OCR	965
AST / HP / Taxan / PC Hand Scanner			CALL

HOURS: MON-FRI 7 AM-6 PM, SAT: 9 AM- 2 PM. Address: 4207 S. 37th St. Phoenix AZ 85040. Prices reflect cash discounts and are subject to change without notice. We do not guarantee compatibility. Major credit cards and selected PO's are accepted. RMA required for all returns.

ARIZONA SALES: (602)437-4855 - CUSTOMER SERVICE (602)437-4856 - FAX (602)437-9685.

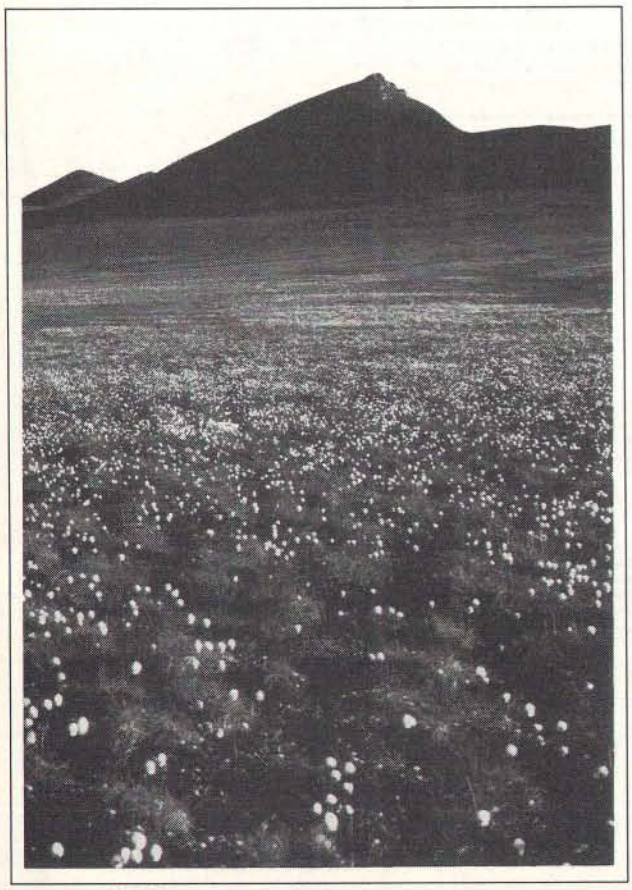

Dennis & Debbie Miller

The Grand Canyon of the Arctic

In Alaska there's a place as magnificent and rare as the Grand Canyon—the Coastal Plain of the Arctic National Wildlife Refuge. Oil companies want permission from Congress to drill there (even though the odds are four in five that no oil exists). That's like damming the Grand Canyon for hydropower.

Approval to drill will destroy what's left of Alaska's north coast and deny future generations the beauty of our most spectacular Arctic wilderness. To learn how you can help us preserve it, write or call: Sierra Club, 730 Polk Street, San Francisco, CA 94109, (415) 776-2211.

SIERRA CLUB



This could be the most productive phone number you call today. Toll free.

1(800)531-5369

(Or, if you prefer to FAX your order—1 (512) 344-2985.)

TrippLite® Battery Back-Ups

Protect your equipment and data by providing safe shut down time for your computer systems and other sensitive equipment during black or brown-outs. Data loss from one black-out can cost you hundreds, if not thousands of dollars.
These units feature AC line spike and noise suppressors, status indicator lights and heavy gel-cell batteries—a regulated battery charger automatically restores battery to full charge when AC power returns.



BC-200 200-W $239.00 | BC-325 325-W $299.00 | BC-750 750-W $599.00 | SC-BC-2000 2000-W $1299.00 | BC-1200 1200-W $799.00 | BC-450 450-W $399.00

This complete TrippLite® Series offers reliable battery back-up at an extremely low price.

TrippLite® Voltage Regulator—Line Conditioners



LS-600 $79.00 | LC-1200 $149.00 | LC-1800 $199.00

TrippLite® Line Stabilizer/Conditioners automatically adjust varying input voltage to provide *full voltage support* during a low voltage condition while suppressing spikes and line noise.

OMNI Power Director



CC16-P $79.95

TrippLites' ISOBAR command console provides the highest level of surge and noise suppression of any console unit on the market today.
Features include 6 outlets, 5 lighted power switches, protection indicator light, 15 amp circuit breaker and 12-foot power cord.

Hard Drive Cases




SDH-2H $99.00

This sturdy metal cabinet is capable of handling up to two ½ height hard disk drives — comes complete with fan, switching power supply and mounting hardware. (Drive cables not included) 14⅞"W X 13⅞"D X 2⅝"H.

Cable Assemblies





PC/AT Parallel Printer Cables

Stock #	Length	Price
PPC301-6	6 ft.	$ 6.95
PPC301-10	10 ft.	7.95
PPC301-15	15 ft.	11.95
PPC301-25	25 ft.	17.95
PPC301-6RA	6 ft.	12.95

DB-25 - 25 Line Cables Male-Male

Stock #	Length	Price
25MM-6	6 ft.	$ 6.95
25MM-10	10 ft.	7.95
25MM-25	25 ft.	17.95
25MM-50	50 ft.	33.95
25MM-100	100 ft.	62.95

POPULAR CABLES

Stock#	Description	Price
MEC-6	Monitor Ext.	$5.95
KEC-6	Keyboard Ext.	3.95
ACPC-03	Power Adapter	4.95
ATM-6	AT Modem Cable	5.95
call	Other cables available	

DB-25 - 25 Line Cables Male-Female

Stock #	Length	Price
25MF-6	6 ft.	$ 6.95
25MF-10	10 ft.	7.95
25MF-25	25 ft.	17.95
25MF-50	50 ft.	33.95
25MF-100	100 ft.	62.95

Eprom Programmer



EW-904 $179.95

You can program your own EPROMS with this EPROM programmer—it can program up to 4, 16K thru 512K EPROMS simultaneously—easy to use software is included.

Eprom Eraser



LA-6T $79.95

You can erase your EPROMS quickly and easily at home or workplace with this easy to use EPROM eraser with built-in timer.
It features an adjustable exposure time with alarm and is static protected.
Without timer (not shown). LA-6A $59.95

Switchboxes



These sturdy metal switchboxes allow you to share computers, printers and other peripherals quickly and easily. They have gold-plated contacts and are EMI-RFI protected.

DB-25 25 Line Switchboxes

Stock #	Description	Price
AB25-2	Two position	$19.95
AB25-3	Three position	25.95
AB25-4	Four position	28.95
AB25-5	Five position	38.95
AB25-6	Six position	59.95
AB25-X	Cross over	29.95

Centronics 36 Line Switchboxes

Stock #	Description	Price
AB36-2	Two position	$23.95
AB36-3	Three position	29.95
AB36-4	Four position	34.95
AB36-5	Five position	44.95
AB36-X	Cross over	37.95

We carry a complete line of switchboxes for your different requirements. Call for more information!

Altex Electronics, Inc.

"Your Electronics Supply House"

TERMS: Minimum order $10.00. We accept Mastercard, Visa, and American Express at no additional charge. For C.O.D. orders, add $2.20. For orders under $100.00, add $3.00 handling and actual UPS shipping charges. For orders over $100.00, we pay handling charge—you pay actual UPS shipping charges plus insurance. Purchase orders accepted from approved accounts. All returns require an RMA# and are subject to a restocking fee. Texas residents add 7.5% sales tax. Prices subject to change and we are not responsible for typographical errors.

Store Hours: 8:00-6:00 M-F, 10:00-2:00 SAT CST
10731 Gulfdale, San Antonio, Texas 78216

Circle 15 on Reader Service Card

VMEbus
Multibus I & II
S-100 bus

To achieve performance, you need a performance bus. To find out the latest information on any of the above buses, you need

SUPERMICRO

the magazine for integrators and users of VME, Multibus, and S-100.

SUPERMICRO, PO Box 2089, Provo, UT 84603

To find out how you can receive a trial issue, circle the number below.

Circle 249 on Reader Service Card



UNIVERSAL E(E)PROM PROGRAMMER $495 (Kits from $165)

- **No personality modules;** Menu driven device selection.
- Built-in Eraser/Timer option ($50); Conductive foam pad.
- Direct technical support; **Full 1 year warranty.**
- Stand alone duplication & verify (27XX parts).
- **Quick pulse algorithm** (27256 under 60 sec).
- 27xx to 1 Mbit; 25xx; 68xx; CMOS; **EEPROMS.**
- 8741,-2,-4,-8,-8H,-9,-9H,-51,-C51,-52,-55, 9761 & more.
- **IBM-PC, Apple, CPM or Unix driver; Autobaud RS232.**
- Offset/split Hex, Binary, Intel & Motorola 8,16,32 bit.
- **Manual with complete schematics.**

VISA MC AMEX *Call today for datasheets !!*

B&C MICROSYSTEMS

355 WEST OLIVE AVE. SUNNYVALE, CA 94086
PH: (408) 730-5511 FAX: (408) 730-5521 TELEX: 984185

Circle 30 on Reader Service Card

Circle 86 on Reader Service Card

BASF

5¼"	PACKAGED 10 PER BOX		
	2 Boxes	5 Boxes	10 Boxes
DOUBLE SIDE	6.95	6.60	6.30
HIGH DENSITY	10.25	9.75	9.35
MF-1D	12.95	12.50	11.95
MF-2D	15.50	14.95	14.50
MF-2HD	41.95	40.95	39.95

Old Reliable the Diskette Connection™

Delaware 1-800-451-1849 P.O. BOX 10247, WILMINGTON, DE. 19850
Oklahoma 1-800-654-4058 P.O. BOX 1674, BETHANY, OK. 73008
Nevada 1-800-621-6221 P.O. BOX 12396, LAS VEGAS, NV. 89112

TELEX#4933362 —— FAX#405-495-4598

maxell®

OPTICAL DISKS CALL


		Packed 10/Box	2 Box	5 Box	10 Box
5¼"*	MD-2D		7.95	7.60	7.30
	MD-2HD		15.20	14.60	13.95
3½"*	MF1DD	~	12.95	12.60	12.25
	MF2DD	~	17.95	17.65	17.25
	MF2HD	~	39.95	39.00	37.75
8"*	FD1-1200	~	19.95	19.20	18.45
	FD2-1200	~	23.65	22.75	21.80

Old Reliable the Diskette Connection™

Delaware 1-800-451-1849 P.O. BOX 10247, WILMINGTON, DE. 19850
Oklahoma 1-800-654-4058 P.O. BOX 1674, BETHANY, OK. 73008
Nevada 1-800-621-6221 P.O. BOX 12396, LAS VEGAS, NV. 89112

Minimum order $25.00 "No Surcharge on Visa MasterCard." COD orders add $3.00. Surface Shipping UPS add $3.00 per 100 for 3½" or 5¼", add $4.00 per 100 for 8." U.S. Mail delivery add 5%. "Prices subject to change without Notice."

SMART SWITCHES



. . . at your command

Master Switch is sophisticated yet flexible. Several computers can access one another or share printers and modems. Use serial or parallel interfaces, up to nine ports. The buffer is expandable up to one megabyte. Access a job control menu from each computer to view the queue or cancel, hold, and release jobs. Many other features.

MasterNet software allows computer networking and electronic mail capabilities for PCs.

Other solutions from ROSE

- Printer Sharing
- Protocol Conversion
- Buffering
- Micro to mainframe
- Multiplexers
- Modems
- Manual Switches
- Cables

We design a variety of quality products for computer networking and data communication solutions guaranteed to work.

Dealer and OEM inquiries are welcome.

ROSE ELECTRONICS P.O. BOX 742571 HOUSTON, TX 77274 CALL FOR CATALOG 713 933 7673

Circle 230 on Reader Service Card (DEALERS: 231)

Dealers!

Network-OS LAN Systems - Includes Boards, Cabling, Terminators and Software. Two-user hardware and software for under $1,000 list!

Close-Up Remote Communications - Support your customer without leaving your office. Authored by **Cogitate** for Norton-Lambert!

Context Sensitive Help for *DataFlex, RM/COBOL, Clipper* and *dBase III* - Puts your application's documentation "on line."

DataFlex Database Management - True Multi-User database for MS/PC-DOS, Unix and Xenix. Site licensing available.

Dump/Restore-XT - Seven utilities for the MS/PC-DOS user.

Call or write today for our catalog and pricing!

COGITATE, INCORPORATED
"A Higher Form of Software"
24000 Telegraph Road
Southfield, MI 48034
(313) 352-2345/Telex: 386581
Visa/MasterCard Accepted

Circle 56 on Reader Service Card

Take the byte out of data loss with Verbatim

A Kodak Company

DataLifePlus™ & DataLife®

5¼"	2 Box	5 Box	10 Box
Double Side Double Density	7.95	7.60	7.30
DataLifePlus Teflon & PC Formatted	9.50	8.95	8.65
HIGH DENSITY Preformatted for AT	14.65	13.90	13.30

(Packed 10/Box)		2 Box	5 Box	10 Box
3½"	Single Side	11.95	11.50	10.95
	Double Side	16.50	15.95	15.50
	High Density	42.95	41.95	39.95

Old Reliable the Diskette Connection™

Delaware 1-800-451-1849 P.O. BOX 10247, WILMINGTON, DE. 19850
Oklahoma 1-800-654-4058 P.O. BOX 1674, BETHANY, OK. 73008
Nevada 1-800-621-6221 P.O. BOX 12396, LAS VEGAS, NV. 89112

TELEX(4933362) —— FAX(405-495-4598)

CHIP SHOP

CALL FOR THE LOWEST PRICES

SAME DAY SHIPMENT

4164	8087
4128	80287
41256	80387

1 meg chips
V20, V30 and more

SABINA INTERNATIONAL, INC.
Phone 1-800-2 SABINA
Phone 1-714-594-6336
FAX 714-595-4008

Circle 232 on Reader Service Card

REAL WORLD I/O

For PC/XT/ATs



DG24 • 24-line digital I/O; 10 MHz 8255. $95
AD500 • 8 channel 12-bit (plus sign) integrating A/D; programmable gains of 1, 10, & 100. Hi-Z input and 7 digital lines. $239
AD100 • Single channel version of AD500 with 10 digital lines. $149
AD200 • 4 channel, 125 uS, 12-bit A/D board. $239
ADA300 • 8 channel, 25 uS, 8-bit A/D; single D/A; 24 TTL I/O lines (10 MHz 8255). $239
DA600 • Fast settling dual 12-bit D/A. $169
PD200 • Prototype/development board with address decoder, buffer; 100+ page application/project manual. $99
XB40 • External connection/prototype board with cable. $49

All boards include BASIC, Pascal, C, and Forth drivers. 30 day return; 1 year warranty. Call for "Real World Interfacing" application notes.

Real Time Devices, Inc.
P.O. Box 906 State College, PA 16804
(814) 234-8087

Circle 228 on Reader Service Card

Circle 85 on Reader Service Card

3M *FREE! Headcleaning Kit

DS-DD	Quantity Discounts Available	DS-HD
.69	5.25" 3M Diskettes	1.45
1.49	3.50" 3M Diskettes	4.45
1.99	8.00" 3M Diskettes	2.25
.85	3M Mark Q PC "Formatted" Disks	
.47	3M Highland Box Diskettes	
.52	3M No Logo Bulk, w/tyvek, labels w/p	

DC-1000 ..... 12.65 DC-300XLP 19.45
DC-2000 ..... 17.05 DC-600A 21.45
3M Mag. Tapes 2400' W-T-S 12.50
3M Mag. Tapes 1200' W-T-S 9.25

14.95 Data Defender 050 For 50 - 3½" Data Defender 070 for 70 - 5¼" w/keys 14.95

BASF *FREE Plastic Library Box

DS-DD	Quantity Discounts Available	DS-HD
.59*	5.25" BASF Diskettes	.89
1.29	3.50" BASF Diskettes	4.45
1.79	8.00" BASF Diskettes	1.99



COLOR-CODED MODULAR FILING CASE/78 FOR $5.95 EA. WITH EACH PURCHASE OF 60.

BASF 5.25" DS/DD Diskettes!

BASF Mag. Tapes 2400' W-T-S 11.95
BASF Mag. Tapes 1200' W-T-S 7.99
BASF No-Logo 5.25" DS/DD ..... .42

	MD2-DMP 5.25" DS/DD	MD2-HDMP 5.25" DS/HD	MF2-DDM 3.50"DS/DD
maxell *IN PLASTIC BOX	.72*	1.49*	1.59
Verbatim DataLife *FREE DataLifePlus Offer Inside	.72*	1.30*	1.49
COLOR DISKS KAO from the Surface Scientists	.72* *IN PLASTIC BOX	1.59*	3.49 2MB
FUJI	.72	1.49	1.59

Nashua CALL FOR BEST PRICES!

BULK Box of TEN 5.25" DS/DD with sleeves, labels and w/p tabs 3.35

Black Disks		Color Disks
.29	5.25" DS/HD/48 TPI	.39
.69	5.25" DS/HD "AT"	.79
1.09	3.50" DS/HD/135 TPI	1.19

FREE SLEEVES, LABELS AND W/P TABS

RIBBONS STORAGE

—Please call for information—

TERMS: VISA, Mastercard or AMEX. COD only add $3.00. Prepaid orders deduct 2% cash discount. PO's accepted from recognized institutions and corporations on Net 30. Bank draft, T/T or L/C acceptable. **Shipping:** $4/100 or fewer disks. Reduced shipping charges on larger quantities. Price quoted for case (100 disks) quantities less than a case add 5%.

WE BEAT ANY PRICE!

Toll Free Order Line: 1-800-523-9681
Information Line: 1-801-255-0080
TLX-9102404712 FAX-801-572-3327

DISKCOTECH
DISKCO TECHNOLOGIES, INC.
213 Cottage Avenue
P.O. Box 1339 Sandy, Utah 84091

Motion Control & Data Acquisition



A card in your **PC** creates the fast **LAB 40** bus which supports up to 8 modules.
User Friendly Packages for PC/XT/AT.
• **Intelligent DC Servo:** Joystick, numeric control, motion record/playback, **C** calls. Up to 16 axes. Two axis package w/motors $1550 (USA).
• **4-Axis Stepper** w/source code & motor $316.
• **Scope/FFT** 650KHz A/D 4 ch. w/source $525.
***Modules:** 8 & 12 bit A/D, Relay, Stepper, Clock, Servo & Amps, **Prog Controller** (Forth, A/D, EEPROM, 68HC11, RS-232/422/485, LAB 40).
*Adapter for RS-232 for **Mac** and others.
***Free** immediate technical support & literature.
Call (415) 755-1978 or our BBS (415) 755-1524.

75 Southgate,
Daly City, CA 94015
Computer Continuum
(415) 755-1978 Telex: 3727438

Circle 256 on Reader Service Card

NEW! VERS. 2.0

BIGMOUTH™

***REAL VOICE** Digital Recording for your PC, XT, AT or Compatible*

◆**VOICE MAIL SYSTEM**
◆**TELEMARKETING**
- Inbound & Outbound
◆**SMARTEST ANSWERING MACHINE**
◆**AUTODIALER—DATABASE**
◆**VOICEPAD™**
- Voice for your Programs
◆**PROGRAMMER'S TOOLKIT**
- (optional $79.00)

*½ card, software, cables, and **speaker***

$269.00 + 5 s/h

(415) 652-9600
Talking Technology, Inc.
4383 Piedmont Ave. Suite B
Oakland, CA 94611

NEW! INSTANT TERMINAL

"EXACT TERMINAL EMULATION AND COMMUNICATIONS SOFTWARE"

- PRECISE EMULATION OF THE DEC VT52, VT100, VT102, VT220
- EXPANSION MODULES FOR OVER 40 EXACT EMULATIONS
- 9 FILE TRANSFER PROTOCOLS.
- EASY TO USE, QUICK TO INSTALL, AND MUCH MORE
- IBM PC, XT, AT, PS/2

FOR INFORMATION 800/548-9777

ONLY $97.50

SOFTRONICS
303/593-9540
TELEX 450236

Circle 243 on Reader Service Card

UNIPRO™

UNIVERSAL PROGRAMMER AND MEMORY/TTL IC TESTER FOR PC/XT/AT



E(E)PROM (16K-1MB)
PAL (20 & 24 pins)
BIPOLAR
8741/42/48/49/50 CPU
87(C)51/44 CPU
DYNAMIC/STATIC RAM & TTL TESTER
Option: 4 Socket adaptor

only **$585** complete

Other products available. Individual programmers for E(E)PROM (up to 1MB), PAL, BIPOLAR, 8748 series, 8751 series, Memory/TTL Tester, and gang programmers with 4, 8, & 16 sockets. Also industrial quality EPROM Eraser with timer and safety switch is available (erases 30 of 28 pin eproms at a time).

OEM & Distributor welcome.
10% educational discount

473 Sapena Ct. #24
Santa Clara, CA 95054
Order Line - outside CA
1-800-541-1975
Tech Line (408) 727-6995
FAX (408) 727-6996

XELTEK VISA M/C AMEX

Circle 279 on Reader Service Card

9-Track Tape Subsystem for the IBM PC/XT/AT



Now you can exchange data files between your IBM PC and any mainframe or minicomputer using IBM compatible 1600 or 6250 BPI 9-Track tape. System can also be used for disk backup. Transfer rate is up to 4 magabytes per minute on PCs and compatibles. Subsystems include 7" or 10½" streaming tape drive, tape coupler card and DOS compatible software. For more information, call us today!

QUALSTAR®

9621 Irondale Ave., Chatsworth, CA 91311
Telephone: (818) 882-5822

Circle 217 on Reader Service Card

OPTICAL DISKS

LASERDRIVE LIMITED

as featured in PC WEEK 4/26/88
- 800MB storage on single disk
- connecting to any host via SCSI interface
- Plug'n Play to any operating system

only **$4995** Limited time only

PANASONIC LS5000
$2495 - 200 MB

OPTICAL MEDIA
For IBM & Panasonic Optical Drives - **$52**

We carry a full line of 51/4" & 12" Optical Drives

SKAN TEKNOLOGIES, INC.
optical storage systems
(212) 809-5570 (516)295-2237

Circle 241 on Reader Service Card

IBM COMPATIBLES GUARANTEED LOWEST PRICES / HIGHEST QUALITY

CAT™ 8MHZ
BASE SYSTEM
- 256K (Opt. 640K) • 150 Watt Power Supply • AT Style Keyboard
- 4.77 or 8 MHZ Keyboard Selectable • FDC
- 8087 Socket • 360K Floppy Drive

$399.00

10MHZ ADD $25.00

COMPLETE SYSTEM CALL FOR PRICE
1 Year Warranty



CAT™ 286-10
BASE SYSTEM
- 512K Exp. to 1 MEG • 200 Watt Power Supply • AT Style Keyboard
- Western Digital Controller • 1.2 Meg Floppy • Legal Bios w/manuals • Systems Documentation • 1 yr war. • Clock/Calc

$929.00

386 SYSTEM CALL

COMPLETE SYSTEM CALL FOR PRICE
11.3 Nortons SI



OPTION A	OPTION B	OPTION C	OPTION A AT	OPTION B AT	OPTION C AT
12" Mono Amber Monitor Graphics Card w/par port $546.00	640 x 200 Color Monitor Graphics Card w/par port $716.00	12" Mono Amber Monitor Graphics Card w/par port 20 Meg Hard Drive $819.00	12" Mono Amber Monitor Graphics Card w/par port $1076.00	640 x 200 Color Monitor Graphics Card w/par port $1299.00	12" Mono Amber Monitor Graphics Card w/par port 20 Meg Hard Drive $1399.00

GUARANTEED LOWEST PRICED PERIPHERALS — CALL (800) 654-7762

PRINTERS BY
6FT PARALLEL CABLE 14.00

EPSON

LX 300	199	LQ 500	339
LX86E	329	LQ850	529
LX286E	429	LQ1050	749
LX800	439	FX850	349
LQ2500	839	FX1050	499

PANASONIC

KXP1080I	144CPS	199	180D 180CPS 9 Pin 10" 179
KXP1091I	192CPS	229	MSP15E 160CPS 9 Pin 15" 369
KXP1092I	240CPS	379	MSP40 250CPS 9 Pin 10" 369

CITIZEN

Tractors — Sheet Feeders — Cables — Ribbons Available

VIDEO CARDS

Vega Video 7	179.00
Everex EGA 640 x 350	129.00
Vega VGA PS2 Compatible	349.00
Everex VGA 640 x 400, 17 VGA Modes	249.00
Everex PGA 640 x 480, 256/4096 Colors	629.00
MEAD Monographics w/par port Hercules comp.	58.00
MEAD Color graphics w/par port Hercules comp.	58.00

ODD'S & END'S FROM MEAD

150 Watt Power Supply Direct PC Replacement	54.00
200 Watt Power Supply Direct AT Replacement	79.00
Dos 3.2 w/GW Basic	69.00
Everex Ram Expansion for AT or XT starting at	59.00

Seagate HARD DRIVES
1 YEAR WARRANTY
SETUP INSTRUCTIONS

COMPLETE KITS

ST125 20Meg 40 Mil ½ Ht	299.00
ST225 20Meg w/cont. & Cables	269.00
ST238 30Meg w/cont. & Cables	299.00
ST251 40Meg ½ HT 40 Mil w/software	379.00
ST251-1 40Meg, 28 Mil Sec	479.00
ST277R 60MB 40 Mil ½ Ht	489.00
ST4026 20Meg Full Ht 40 Mil	279.00
ST4038 30Meg 40 Mil Full Ht	299.00
ST4053 40MB 28 Mil Full Ht	519.00
ST4096 80Meg Full HT w/software	649.00

MODEMS BY EVEREX

EV-920 EverCom 12 300/1200 bps Bitcom Software	74.00
EV-940 EverCom 24 2400 Baud Int. Bitcom Software	139.00
EV-945 External 2400 Baud	199.00

For error correcting add $10.00

Hayes Compatible Major Manufacturers

1200 Baud Internal w/Software	69.00
1200 Baud External fully Hayes Compatible	99.00
2400 Baud Internal ½ card w/software	129.00
2400 Baud External Fully Hayes Compatible	129.00

TAPE BACKUPS BY EVEREX

40MB	Mini Cartridge, 1.8MB/min, XT	359.00
40MB	Mini Cartridge, 3.6MB/min, AT	359.00
40MB	Streaming Cassette, 5MB/min w/cont	539.00
60MB	Streaming Cassette, 5MB/min w/cont	619.00
60MB	Streaming Cartridge, 5MB/min w/Full cont	779.00
125MB	Streaming Cartridge, 5MB/min w/Full cont	989.00

External Add **195.00**

CONTROLLERS BY
WESTERN DIGITAL

WX-1 8 Bit ½ Sized for XT	69.00
WA-2 16 Bit Full Sized Hard/Floppy	119.00
WD-27X 8 Bit R11 ½ Size	79.00
WAH 16 Bit Hard Drive Controller ...ONLY	129.00
RA2 16 Bit R11 Hard/Floppy for AT	159.00
MEAD Floppy Disk Controller for XT	29.00
MEAD 1.2 Meg & 360K Controller for XT	59.00
Hard/Floppy Cable Set	5.00

MONITORS BY SAMSUNG
EGA INTERFACE 139.00
COLOR OR MONO INTERFACE 69.00

1252	12" Amber w/Tilt & Swivel Base	79.00
1257	12" Amber Flat Screen 720 x 350	89.00
1464	14" Color 640 x 200, 16 colors	239.00
1453	14" EGA 640 x 350. 64 colors/.31	369.00
CN4551	Multisync EGA 720x480	479.00

IBM CGA/VGA/PGA/EGA Compatible

FLOPPY DRIVES FROM
FROM YOUR LOW PRICE LEADER

360K ½ Ht. PC Compatible	69.00
1.2 Meg Mitsubishi Black Face	79.00
720K 3½" Epson Drive w/5¼" mounting	89.00
1.44 Meg Sony 3½" Drive w/5¼" mounting	139.00
360K Tandon TM100-2 Full Ht.	89.00
160K Tandon TM100-1 Full Ht	39.00

COPROCESSORS BY
INTEL

Intel 8087 5Mhz	99.00
Intel 8087 8Mhz	149.00
Intel 80287 6Mhz	179.00
Intel 80287 8Mhz	239.00
Intel 80287 10Mhz	289.00
Intel 80387 16Mhz	429.00
Intel 80387 20Mhz	699.00

LARGE QUANTITIES AVAILABLE

OVERSTOCKED AT OUT COST

LETTER QUALITY PRINTER
DAISYWHEEL PRINTER MANUFACTURED BY C.ITOH

Why pay $1149 for a C.Itoh

STARWRITER™ F-10

When our 40 cps letter quality daisywheel printer from the same manufacturer is only

$299.00 ea. 100 for $249 ea.



OPTIONS	
• 6 ft. Serial Cable	$ 19.00
• AT or XT RS232/Serial Interface	39.00
• Bidirectional Tractor	149.00
• Cut Sheet Feeder	199.00

STANDARD FEATURES
- 40 CPS • Accepts Paper to 15 inches • Form Length and Pitch Set from Conrol Panel
- Industry compatible ribbon, printwheels and control commands • RS232 Serial Interface

RAM UPGRADES
1 YR. WARRANTY



4164	150 NS	2.95	**41256**	100 NS	12.75	Simm Sipp Zipp	
4164	120 NS	3.25	**41256**	80 NS	13.75	**256 x 9** 100 NS	129.00
4164	100 NS	3.45	**4464**	150 NS	13.95	**256 x 9** 120 NS	119.00
41256	150 NS	11.45	**1Meg x 1**	120 NS	37.00	**1Meg x 8** 120NS	449.00
41256	120 NS	11.75	**1Meg x 1**	100 NS	39.00	**1Meg x 9** 120NS	499.00

10 MEG HARD DISK KIT
Includes Controller & Cables
• ½ Height • 80 Msec
Brand New/Major Manufacturer
Mead 159.00

40 MEG HARD DISK
AT COMPATIBLE
• Full Height • 40 Msec
• 30 Day Warranty
Mead 279.00 10 for 249.00 ea

MOUSE
MICROSOFT COMPATIBLE
• 3 Button
• Mechanical w/Software • Serial
Mead 29.00

TAPE CASSETTE/CARTRIDGE
DC1000, 3M....9.00
DC300XCL 45Meg..14.00 **DC300A Used..7.00**
CJ500.....19.00 **CJ600.....24.00**

800-654-7762
SALES: 7 a.m.-6 p.m. PST

702-294-0204
CUSTOMER SERVICE / ORDER STATUS:
9 a.m.-4 p.m. PST

FAX 702-294-1168

MEAD COMPUTER

1000 Nevada Hwy. • Unit 101 • Boulder City, NV 89005

NO SURCHARGE FOR MC/VISA

TERMS:
MC • VISA • COD • CASH
Purchase Orders from Qualified Firms
Personal Checks • AE add 4%
20% Restocking Fee on Non-Defective Returns

VISA MasterCard AMERICAN EXPRESS Card

SHIPPING: (min. 6.25) UPS

Trademarks are Registered with their respective Co.s. Prices Subject to Change

DATA ACQUISITION, COMMUNICATIONS & INDUSTRIAL CONTROL INTERFACES
for IBM PC/XT/AT & PS/2, MICROCHANNEL, Apple II & MACINTOSH Computers

Send Today for Your Free Handbook!



MBC MetraByte® Corporation
440 Myles Standish Blvd., Taunton, MA 02780
508-880-3000 TLX: 503989 FAX: 508-880-0179

Circle 286 on Reader Service Card

HARD DISK CONTROLLERS

ADAPTEC	
PC/XT Controller ST506/412	$45
2070 PC/XT to 506/412 RLL	$69
2071 PC/XT to ST506 RLL (1 drive)	$59
2072 PC/XT RLL	$79
2370 PC/XT to ST506 RLL	$99
3530 SCSI to Tape CMC 36	$78
4000 SCSI to ST506/412	$89
4000A SCSI to ST506/412	$129
4070 SCSI to ST506/412 RLL	$98
4520 SCSI to ESDI	$98
5500 SCSI to ST506/412	$125
5580 SCSI to SMD	$175
XEBEC	
S1410 SASI Controller	$89
S1420 SASI to 5¼" Floppy & Hard Disk Controller	$29
Apple II, II+, IIE Host Adapter	$29
OTHERS	
DTC 510A SASI controller	$98
DTC 5187 AT to ST506/412, No Floppy	$98
Konan DJ-210 3½" SASI to ST506/412 (Xebec 1410 clone)	$89
WD 1002-SHD Xebec Compatible SASI Controller	$109
Western Digital 1003WAH	$119
Manuals	$8 each
Cables Available	Ask for Pricing
Hard Drives 20–380 MB	**Call**

Computer Surplus Store
715 Sycamore Dr. • Milpitas, CA 95035
Phone: 408-434-1060
Fax: 408-434-0931
Twx: 1561447
"We Buy and Sell"

Circle 66 on Reader Service Card



OPERATING SYSTEM UNDER $20

F68HC11 = MC68HC11 + MAX FORTH

LOW COST ★ LOW POWER CMOS ★ SINGLE CHIP OR EXPANDED OPERATION ★ HLL RESIDENT FORTH ★ FAST DEBUG ★ 5 PARALLEL ★ 2 SERIAL ★ WATCH DOG TIMER ★ 8 CH OF 8 BIT A/D ★ SUPPORTS RS232, 422, 485. F68HC11 OPERATING SYSTEM UNDER $20 AT 1K PCS. NMIX0022PS — COMPLETE DEVELOPMENT SYSTEM WITH MANUALS $265. VISA-MC ACCEPTED.

NEW MICROS INC.
1601 CHALK HILL RD.
DALLAS, TX 75212
214/339-2204

Circle 185 on Reader Service Card

BUY QUALITY FOR LESS!
DYSAN

5¼" DS/DD 39¢
100% CERTIFIED
LIFETIME WARRANTY
Price based on quantity of 250 in bulk includes Tyvek sleeves and label kits.

800-222-0490
In NJ 201-462-7628
FAX 201-462-5658

● 24 HOUR SHIPMENT ●
MEGASoft
P.O. Box 710, Freehold, NJ 07728
Full service duplication facility

Circle 158 on Reader Service Card

MAXELL
100% CERTIFIED
5¼" BULK DISKS

5¼" DS/DD 59¢

3½" DS/DD 1.09
Price based on quantity of 300 includes sleeves, labels and tabs.

800-222-0490
In NJ 201-462-7628
FAX 201-462-5658

● 24 Hour Shipment ●
MEGASoft
P.O. Box 710, Freehold, NJ 07728

Circle 159 on Reader Service Card

ICs PROMPT DELIVERY!!!
SAME DAY SHIPPING (USUALLY)
QUANTITY ONE PRICES SHOWN for AUG. 9, 1988

OUTSIDE OKLAHOMA: NO SALES TAX

640K MOTHERBD UPGRADE: Zenith 150, IBM PC/XT, Compaq Portable & Plus; hp Vectra

DYNAMIC RAM				
SIMM	1048Kx9	85 ns	$550.00	
1Mbit	1048Kx1	100 ns	38.50	
41256	256Kx1	60 ns	14.25	
41256	256Kx1	80 ns	13.75	
41256	256Kx1	100 ns	13.50	
51258	* 256Kx1	100 ns	12.95	* STATIC COLUMN DRAM
41256	256Kx1	120 ns	12.75	
41256	256Kx1	150 ns	11.75	
41264	+ 64Kx4	120 ns	18.95	+ 2-PORT VIDEO RAM
EPROM				
27C1000	128Kx8	200 ns	$37.50	80387-16
27C512	64Kx8	200 ns	13.95	80287-8
27256	32Kx8	250 ns	7.25	$245.00
27128	16Kx8	250 ns	6.60	80387-20
STATIC RAM				
43256L-10	32Kx8	100 ns	$18.95	8087-2
6264P-12	8Kx8	120 ns	13.50	$160.00

OPEN 6½ DAYS, 7:30 AM-10 PM: SHIP VIA FED-EX ON SAT.
WE EXPORT ONLY TO CANADA, GUAM, PUERTO RICO & VIRGIN ISLANDS

SAT DELIVERY INCLUDED ON FED-EX ORDERS RECEIVED BY:
Th: Std Air $6/3 lb
Fr: P-1 $10.25/1 lb

MasterCard/VISA or UPS CASH COD
Factory New, Prime Parts µP∞
MICROPROCESSORS UNLIMITED, INC.
24,000 S. Peoria Ave.
BEGGS, OK. 74421 **(918) 267-4961**
No minimum order. Please note that prices are subject to change. Shipping & insurance extra, & up to $1 for packing materials. **Orders received by 9 PM CST can usually be delivered the next morning, via Federal Express Standard Air @ $6.00, or guaranteed next day Priority One @ $10.25!**

Circle 169 on Reader Service Card

HD64180 Single Board
Protyping / Control Computer
Get your 64180 project going quickly!



The SBC100 is a complete computer powered by a wall transformer. Available C compiler, assembler, linker and debugger run on a PC. Has battery-backed RAM, battery-backed clock, power fail interrupt, SBX bus connectors, serial and parallel I/O, prototype area for up to 20 IC's. Only $295 including serial cable, power supply, 32k of battery backed RAM and schematics.

Z-World
1772A Picasso Avenue
Davis, CA 95616
(916) 753-3722
"Z80 Family Specialists"
In Germany: iSystem 08131/1687

Circle 284 on Reader Service Card

"C"
for Z80 and HD64180 Microprocessor Programming.

Source level debugging on a remote target!

Investigate our powerful PC-based, C compiler for embedded Z80 and HD64180 microprocessors... a compiler written for microprocessor engineers. Only $495.00.

- Remote source debugger. $195.00.
- Additional products: assemblers, linkers, single board computers.

Z-World
1772A Picasso Avenue
Davis, CA 95616
916 753-3722
Fax: 916 753-5141

In Germany:
iSystem Tel: 08131/1687
"Z80 Specialists"

Circle 285 on Reader Service Card

9-TRACK MAG. TAPE SUBSYSTEM* FOR THE IBM PC/XT/AT AND...



For information interchange, backup and archival storage, AK Systems offers a 9-track, IBM format-compatible ½" magnetic tape subsystem for the IBM PC, featuring:

- **IBM format 1600/3200 and 800 cpi.**
- **Software for PC-DOS, MS-DOS, XENIX.**
- **Also for AT&T, DEC, VAX, VME, S-100, RS-232, IEEE 488.**

AKSystems
20741 Marilla St.
Chatsworth, CA 91311
(818) 709-8100
TWX: 910-493-2071

*formerly IBEX Mainstreamer

Write, phone or TWX for information.

Circle 13 on Reader Service Card

TIMELINE INC.

ORDER DESK ONLY

Continental U.S.A. **(800) 872-8878** | Inside California **(800) 223-9977** | L.A. & Technical Info **(213) 217-8912** | **OEM INQUIRIES WELCOME**

HITACHI DOT MATRIX
LIQUID CRYSTAL DISPLAY



• 40 character x 2 lines • 5v power required • C-MOS/TTL compatible signal level • Built-in RAM for display data storage • Multiple instruction set (based on 13 commands) • Built-in C-MOS LCD driver & controller • Easy "Microprocessor" interface • Low power consumption • 5x7 dot matrix formation with cursor, alphanumerics & special symbols • 96 ASCII character generator (plus 64 katakana) • 8 programmable characters • ribbon cable connector already prewired

Physical size 3⅛"L x 1⅜"W x ¼"D

2 for $25

*ADAPTEC 4000A CONTROLLER $79

I/O for the ST412-506 Interface Using MFM Encoding

*DC 600 STYLE TAPES $15 ea.

10,000 ftpi ea. 19.95 3-9 17.95 ea. 10+ (minimum order 2)

* 1.2 MB-OKIDATA $69

Reads/writes 360K • Half Height floppy for AT.
1.2 MB • DS/DD • 96 tpi

AST™ RAMPAGE AT $59 INCREDIBLE!



MEMORY EXPANSION CARD FOR YOUR IBM PC/AT

Can be expanded to 2Mb memory. This card can do EMS and EEMS as well as extended memory. We bought these bulk pack from an OEM, so no AST box or manual. We supply our own manual. Comes with software for printer spooler and Ramdisk. 1 year warranty. RAMPAGE™ card available with O-K memory only. Serial/parallel port card available separately at a very good price.

ROBOTIC LENS with infrared sensors (auto focus) $24.95

A HOBBYISTS DREAM



Great source of optical and electro-mechanical parts and systems including the basis for an infrared communications system. Contains f1.4 - 12 to 72 mm (6x) zoom lens with auto focusing capability. DC motor driven or manual zoom and focus systems with precision gear reduction units, mechanical clutches, and high quality DC motors. DC rotary actuator controlled iris diaphram unit. Option Available: Infrared distance measuring system (focusing unit) with control electronics $10.00.


HIGH RESOLUTION AMBER MONITOR 7" DIAGONAL SCREEN

NEW! IN BOX

ZENITH $29.95

MODEL DJ7NKZ

22 MHZ TYPICAL BANDWIDTH

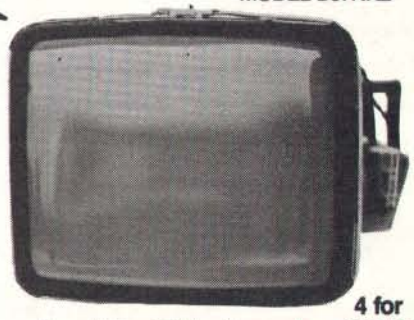


- Flat faceplate
- 900 lines at center 650 lines at corners
- Operates from 12VDC at 1.4 amp
- Vertical input is 47 to 63 Hz
- Horizontal frequency: 15 Khz (adjustable)


For split video (TTL inputs) operation. Not composite video.

4 for $99.00

DISPLAY MODES
VGA GRAPHICS:

800 x 560 x 16 colors
320 x 200 x 256 colors



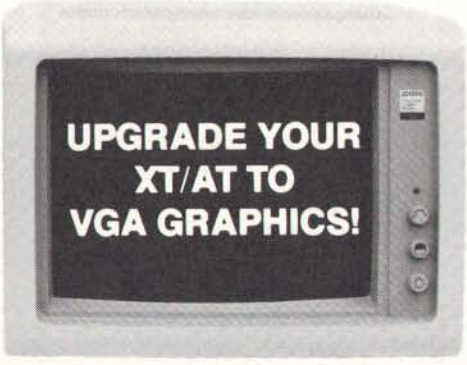

$649

VGA COLOR GRAPHICS PACKAGE

ALSO:
640 x 480 x 16 colors
640 x 350 x 16 colors
640 x 200 x 16 colors
640 x 200 black & white
320 x 200 x 4 colors
Hercules Graphics
40 and 80 column character mode

The manufacturer of this monitor SET THE STANDARD FOR COLOR GRAPHICS. The card is an ATI improved VIP CARD. The package comes with user friendly manual and step-by-step instructions. One year warranty on the monitor, two year warranty on the card.

CALL FOR QUANTITY DISCOUNTS.

- 13" color screen
- Max resolution (800x560)
- Bandwidth: 17 Mhz
- Software selectable to VGA, EGA, CGA, MDA, HGA
- Anti-reflective, coated non-interlaced flicker free screen
- .31 dot pitch

TIME LINE

1490 W. ARTESIA BLVD, GARDENA, CA 90247

Continental U.S.A. **(800) 872-8878**

Inside California **(800) 223-9977** VISA MasterCard L.A. Area & Technical Info. **(213) 217-8912**

15% Restocking fee for returned orders.

NO SURCHARGE FOR CREDIT CARD ORDERS!

Minimum Order: $25.00. Shipping & handling charges via UPS Ground: $.50/lb. UPS Air: $1.00/lb. **Minimum Charge:** $4.00. We accept cashiers checks, MC or VISA. No personal check COD's. California residents add 6½% sales tax. We are not responsible for typographical errors. All merchandise subject to prior sale. Phone orders welcome. **Foreign Orders require special handling. Prices subject to change without notice.**

Circle 265 on Reader Service Card

BIOS SOURCE CODE

The **XT BiosKit** is a 270 page book with a diskette containing source code in C, plus utility programs to help you create a Bios. Now you can have a Bios with documentation for your own applications: modify boot-up, eliminate the keyboard, install security features, etc. Only $99 complete. The **AT BiosKit** is only $199, or get both Bioskits for $279.

— XT-AT HANDBOOK —


The **XT-AT Handbook** is full of hardware and software information in a shirt pocket size book. Over 70 pages covering 38 subjects, including connectors, I/O maps, controller programming, DOS and DEBUG commands, board dimensions, character codes, hard disk drive types, and much more. Only $9.95 each qty 1-4, five or more, $5 each.

Annabooks
12145 Alta Carmel Ct. 250, Suite 262
San Diego, California 92128
(619) 271-9526

Circle 21 on Reader Service Card

EPROM PROGRAMER

FOR PC $129.95



- 2716 to 1 MEG
- Updateable to 32 MEG
- Programs 2764 A in 10 Seconds
- Menu Driven Software
- External 40 PIN ZIF (PC only)
- Adapter 8748, 49, 51, 52, 55, TMS 7742 $50 PC only
- 1 Year Warranty
- 10 Day Money Back Guarantee
- Available for **APPLE II** $92.50
- For More Information Call

VISA | MC

NEEDHAM'S ELECTRONICS
4535 Orange Grove, Sacramento, CA 95841
(916) 924-8037 (M-F) 8 AM to 5 PM PST

Circle 183 on Reader Service Card

Make Money With Your PC

A Revolutionary Software System, designed for maximum profits with minimum setup, now transforms any IBM PC/XT/AT or compatible computer into a secure, reliable Bulletin Board and Information Host System.

Subscription Systems throughout the free world are presently being used in dial-a-date and matchmaking applications, for multi-user databases and multiple listing endeavors, on-line order taking, along with scores of other lucrative telecommunications tasks.

To learn more about this unique, self-perpetuating opportunity that can adapt to both voice and data environments, contact: PC/WORKS at (805) 654-0721 or FAX (805) 650-0195.

Circle 198 on Reader Service Card

8051 FAMILY EMULATORS



For info call:

Austria	02 22 38 76 38-0
Australia	02 654 1873
Denmark	02 65 81 11
Finland	See Sweden
France	01 69 412 801
Great Britain	01 464 2586
Israel	03 499034
Korea	02 784 7841
New Zealand	04 886 375
Norway	See Sweden
Portugal	01 83 56 70
Spain	03 217 2340
Switzerland	01 740 41 05
West Germany	08 131 16 87
Sweden	040 92 24 25
U.S.A.	408 866 1820

nohau CORPORATION
51 E. Campbell Ave., #107E
Campbell, CA 95008
(408) 866-1820

Circle 184 on Reader Service Card

Fix common problems fast!


You don't need to be an expert to diagnose and correct problems involving PC setup. All you need is HELPME™ software! More than 300 tests. On-screen help for understanding and correcting identified problems. Quick identification of system configuration and compatibility. $99 plus shipping and handling. MC and VISA accepted. California Software Products, Inc., 525 N. Cabrillo Park Drive, Santa Ana, CA 92701
(714) 973-0440.

Circle 47 on Reader Service Card
(DEALERS: 48)

Satellite Communication

MICROSAT II

Expansion Board



$700

IMMEDIATE DELIVERY

- For IBM PC/XT/AT and compatible.
- Satellite data receiver - 9600 baud.
- Satellite bulletin board.
- Satellite video and audio option - Add $200

PERSONAL SPACE COMMUNICATIONS
707 Johnson Road, Blaine WA 98230
(604)597-6298 TLX 04-508306 FAX (604)597-6214

Circle 201 on Reader Service Card

RAMCHECK®

THE MEMORY TESTER



ONLY $249 (Reseller 1—$199; 2—$179)

Stop throwing away suspected memory chips. With today's high memory chip prices you can easily justify RAMCHECK's cost after testing only 20 memory chips. RAMCHECK boasts a built-in 8088 powerful processor for testing every cell of a 64K/256K DRAM chip in just 2.3 seconds. Thousands sold worldwide.

"...an indispensable tool for handling memory chips."

Made in USA By: INNOVENTIONS,® Inc.
(713) 879-6226
10804 Fallstone Rd., Suite 214, Houston, TX 77099


Circle 301 on Reader Service Card

PAL/EPROM PROGRAMMER CARD

For PC/XT/AT Systems

NEW -- VERSION 2 OF SOFTWARE AND HARDWARE

-Programs 20 and 24 Pin MMI, NS, TI, AMD, ALTERA, CYPRESS, RICOH, and PANATEC PALS. Supports EPLD, polarity, RA, and shared product term types.
-Functions Include: Read, Write, Verify, Protect, Edit, Print, and File load and save of program.
-JEDEC supported.
-Software Included



$475

100MHZ LOGIC ANALYZER CARD

For PC/XT/AT Systems

$1199



-24 Channels at 25Khz-25Mhz
-6 Channels at 100 Mhz
-Internal Clock up to 100 Mhz
-External Clock up to 25 Mhz
-Threshold Voltage TTL, ECL, or variable from -10 to +10v
-Can Stack Multiple Boards
-All Software Included

CALL NOW FOR ORDERS AND TECHNICAL INFO (201) 994-6669

Link Computer Graphics, Inc. 4 Sparrow Dr., Livingston, NJ 07039. TLX: 9102409305 LINK COMPUTER

Circle 141 on Reader Service Card

Terminal Emulation



TEK 4105 EM4105 *$349*

- *Tektronix 4105*
- *Tektronix 4010*
- *VT220, VT102*
- *Picture files*
- *VGA and EGA support*
- *High resolution hardcopy*

VT220 EM220 *$169*

- *VT220, VT102 emulation*
- *File transfer*
- *132 column modes*
- *Color support*
- *Hot key*


Diversified Computer Systems, Inc.
3775 Iris Avenue, Suite 1B
Boulder, CO 80301 (303) 447-9251
FAX: 303-447-1406

Trademarks: VT102, VT220 -- DEC; Tektronix — Tektronics Inc.

Circle 88 on Reader Service Card

The Amazing A-BUS

NEW

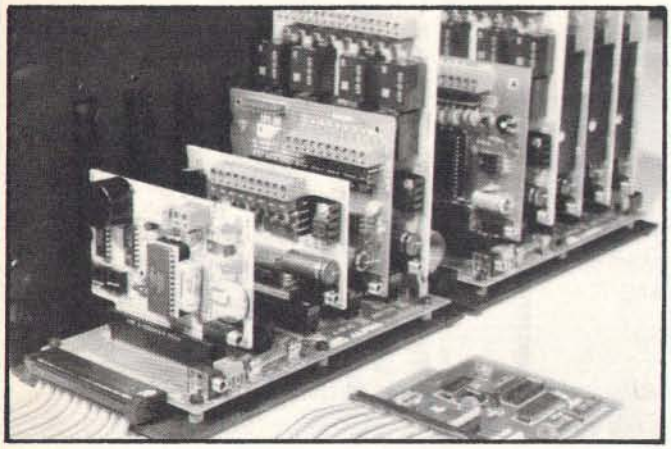

An A-BUS system with two Motherboards
A-BUS adapter (IBM) in foreground

Plug into the future

With the A-BUS you can plug your PC (IBM, Apple, TRS-80) into a future of exciting new applications in the fields of control, monitoring, automation, sensing, robotics, etc.

Alpha's modular A-BUS offers a proven method to build your "custom" system today. Tomorrow, when you are ready to take another step, you will be able to add more functions. This is ideal for first time experimenting and teaching.

A-BUS control can be entirely done in simple BASIC or Pascal, and no knowledge of electronics is required!

An A-BUS system consists of the A-BUS adapter plugged into your computer and a cable to connect the Adapter to 1 or 2 A-BUS cards. The same cable will also fit an A-BUS Motherboard for expansion up to 25 cards in any combination.

The A-BUS is backed by Alpha's continuing support (our 11th year, 50000 customers in over 60 countries).

The complete set of A-BUS User's Manuals is available for $10.

About the A-BUS:

- All the A-BUS cards are very easy to use with any language that can read or write to a Port or Memory. In BASIC, use INP and OUT (or PEEK and POKE with Apples and Tandy Color Computers)
- They are all compatible with each other. You can mix and match up to 25 cards to fit your application. Card addresses are easily set with jumpers.
- A-BUS cards are shipped with power supplies (except PD-123) and detailed manuals (including schematics and programming examples).

Relay Card — RE-140: $129

Includes eight industrial relays. (3 amp contacts. SPST) individually controlled and latched. 8 LED's show status. Easy to use (OUT or POKE in BASIC). Card address is jumper selectable.

Reed Relay Card — RE-156: $99

Same features as above, but uses 8 Reed Relays to switch low level signals (20mA max). Use as a channel selector, solid state relay driver, etc.

Analog Input Card — AD-142: $129

Eight analog inputs. 0 to +5V range can be expanded to 100V by adding a resistor. 8 bit resolution (20mV). Conversion time 120us. Perfect to measure voltage, temperature, light levels, pressure, etc. Very easy to use.

12 Bit A/D Converter — AN-146: $139

This analog to digital converter is accurate to .025%. Input range is −4V to +4V. Resolution: 1 millivolt. The on board amplifier boosts signals up to 50 times to read microvolts. Conversion time is 130ms. Ideal for thermocouple, strain gauge, etc. 1 channel. (Expand to 8 channels using the RE-156 card).

Digital Input Card — IN-141: $59

The eight inputs are optically isolated, so it's safe and easy to connect any "on/off" devices, such as switches, thermostats, alarm loops, etc. to your computer. To read the eight inputs, simply use BASIC INP (or PEEK).

24 Line TTL I/O — DG-148: $65

Connect 24 input or output signals (switches or any TTL device) to your computer. The card can be set for: input, latched output, strobed output, strobed input, and/or bidirectional strobed I/O. Uses the 8255A chip.

Clock with Alarm — CL-144: $89


Powerful clock/calendar with: battery backup for Time, Date and Alarm setting (time and date); built in alarm relay, led and buzzer; timing to 1/100 second. Easy to use decimal format. Lithium battery included.

Touch Tone® Decoder — PH-145: $79


Each tone is converted into a number which is stored on the board. Simply read the number with INP or POKE. Use for remote control projects, etc.

A-BUS Prototyping Card — PR-152: $15


3½ by 4½ in. with power and ground bus. Fits up to 10 I.C.s




ST-143




CL-144



RE-140



IN-141



AD-142

Smart Stepper Controller — SC-149: $299

World's finest stepper controller. On board microprocessor controls 4 motors simultaneously. Incredibly, it accepts plain English commands like "Move arm 10.2 inches left". Many complex sequences can be defined as "macros" and stored in the on board memory. For each axis, you can control: coordinate (relative or absolute), ramping, speed, step type (half, full, wave), scale factor, units, holding power, etc. Many inputs: 8 limit & "wait until" switches, panic button, etc. On the fly reporting of position, speed, etc. On board drivers (350mA) for small steppers (MO-103). Send for SC-149 flyer.

Remote Control Keypad Option — RC-121: $49
To control the 4 motors directly, and "teach" sequences of motions.

Power Driver Board Option — PD-123: $89
Boost controller drive to 5 amps per phase. For two motors (eight drivers).

Breakout Board Option — BB-122: $19
For easy connection of 2 motors. 3 ft. cable ends with screw terminal board.

Stepper Motor Driver — ST-143: $79

Stepper motors are the ultimate in motion control. The special package (below) includes everything you need to get familiar with them. Each card drives two stepper motors (12V, bidirectional, 4 phase, 350mA per phase).

Special Package: 2 motors (MO-103) + ST-143: **PA-181: $99**

Stepper Motors — MO-103: $15 or 4 for $39

Pancake type, 2¼" dia, ¼" shaft, 7.5°/step, 4 phase bidirectional, 300 step/sec, 12V, 36 ohm, bipolar, 5 oz-in torque, same as Airpax K82701-P2.

Current Developments

Intelligent Voice Synthesizer, 14 Bit Analog to Digital converter, 4 Channel Digital to Analog converter, Counter Timer, Voice Recognition.

A-BUS Adapters for:

IBM PC, XT, AT and compatibles. Uses one short slot.	AR-133...$69
Tandy 1000, 1000 EX & SX, 1200, 3000. Uses one short slot.	AR-133...$69
Apple II, II+, IIe. Uses any slot.	AR-134...$49
TRS-80 Model 102, 200 Plugs into 40 pin "system bus"	AR-136...$69
Model 100. Uses 40 pin socket. (Socket is duplicated on adapter).	AR-135...$69
TRS-80 Mod 3,4,4D. Fits 50 pin bus. (With hard disk, use Y-cable).	AR-132...$49
TRS-80 Model 4P. Includes extra cable. (50 pin bus is recessed).	AR-137...$62
TRS-80 Model I. Plugs into 40 pin I/O bus on KB or E/I.	AR-131...$39
Color Computers (Tandy). Fits ROM slot. Multipak. or Y-cable.	AR-138...$49

A-BUS Cable (3 ft, 50 cond.) — CA-163: $24

Connects the A-BUS adapter to one A-BUS card or to first Motherboard.

Special cable for two A-BUS cards: CA-162: $34

A-BUS Motherboard — MB-120: $99

Each Motherboard holds five A-BUS cards. A sixth connector allows a second Motherboard to be added to the first (with connecting cable CA-161: $12). Up to five Motherboards can be joined this way to a single A-BUS adapter. Sturdy aluminum frame and card guides included.

Add $3.00 per order for shipping.
Visa, MC, checks, M.O. welcome.
CT & NY residents add sales tax.
C.O.D. add $3.00 extra.
Canada: shipping is $5
Overseas add 10%

a Sigma Industries Company

ALPHA Products
242-B West Avenue, Darien, CT 06820

Technical info: (203) 656-1806
Orders only (Except in CT) 800 221-0916
Connecticut orders: (203) 348-9436
All lines open weekdays 9 to 5 Eastern time

Circle 14 on Reader Service Card

Circle 87 on Reader Service Card

DISKS To Go

WE OFFER:
1. Same Day Service - All orders shipped, insured, within 24 hrs
2. Guaranteed Satisfaction - Lifetime warranty, 30-day return guarantee
3. In-stock Inventory - No delays, no disappointments
4. No Minimum Order - Quantity discounts also available
5. Pre-Approved Purchase Orders and Visa & MasterCard Accepted

AND GREAT PRICES!

5.25 Black Disks, DS/DD . .	.36 ea.
5.25 Color Disks. 8 Colors Available, DS/DD	.46 ea.
5.25 Black Disks, DS/HD .	.82 ea.
5.25 Color Disks, 8 Colors Available, DS/HD	.94 ea.
3.5 Blue or Gray Disks, DS/DD	1.12 ea.
3.5 Color Disks, 5 Colors Available, DS/DD	1.28 ea.
3.5 High Density, Black only	3.80 ea.

100% certified and tested.
Error free lifetime warranty. All disks include generic white box, Tyvek sleeves, labels, write protect tabs, shrink wrapped.

LABELS To Go

CONTINUOUS FORM LABELS

Size	Across	Box Qty.	Price/1,000
2 3/4 x 7/16	1 across	10,000	$1.95
2 3/4 x 7/16	4 across	20,000	$1.95
2 1/2 x 15/16	1 across	5,000	$2.18
2 1/2 x 15/16	3 across	15,000	$1.98
2 3/4 x 2 3/4*	1 across	2,500	$12.00
2 3/4 x 1-7/16	1 across	5,000	$3.00
3 x 15/16	4 across	20,000	$2.00
3.3 x 15/16	4 across	20,000	$2.05
3 1/2 x 15/16	1 across	5,000	$1.90
3 1/2 x 15/16	2 across	10,000	$1.90
3 1/2 x 15/16	3 across	15,000	$1.90
3 1/2 x 15/16	4 across	20,000	$1.90
4 x 15/16	1 across	5,000	$3.21
4 x 15/16	3 across	15,000	$3.21
4 x 1-7/16	1 across	5,000	$3.25
4 x 1-7/16	3 across	15,000	$3.25

Prices quoted for full boxes only.
* Designed for the 3 1/2" disk.

"The Quality Disk & Label Specialist Since 1982"
1040 Broadway
Westville, NJ 08093
609-456-6996
FAX# 609-456-7172
All products assembled in the U.S.A.
All orders F.O.B. Westville, NJ
C.O.D. orders add $2.20

American Semiconductor

Complete units as low as $35./mo.



XT, AT, & 386 Compatibles
Not a Lease—You own it
★ 2,500 Service Centers!
★ Instant Credit!
★ Technical Support!
Call for Details
1-800-825-SAVE

Circle 19 on Reader Service Card

8051 SIMULATOR
for the IBM PC/XT/AT $99

The 8051SIM software package assists in the debug of 8051 family programs. A screen oriented, menu command driven program, 8051SIM simulates the Intel 8051 family of single chip microcomputers. This learning tool also speeds up the development process.

8031 DryICE $199

The 8051 Dry ICE is a hardware/software package that allows you to dump and modify memory; execute and trace 8051 family code in your target system. Hardware connects between target system and any serial port.

HTE HiTech Equipment Corporation
9560 Black Mountain Road
San Diego, CA 92126
(619) 566-1892

Circle 113 on Reader Service Card

Cross-32 Meta Assembler

Table based **macro** cross-assembler using the manufacturer's assembly mnemonics.

Includes manual and MS-DOS assembler disk with tables for *all* of the following processors:

1802	64180	65C02	65816
6801	6805	6809	68HC11
680X0	80X86	COP400	COP800
8048	8051	8085	8096
TMS320	TMS370	Z8/Z80	...MORE

Users can create tables for other processors!

Generates listing, symbol table and binary, Intel, or Motorola hexcode.

Free worldwide airmail shipping & handling.

Check, MO, VISA or MC: US$199 or CN$249

Universal Cross-Assemblers
POB 384, Bedford, NS
Canada B4A 2X3
(902) 864-1873

Circle 267 on Reader Service Card



GANG/SET (E)EPROM MULTIPROGRAMMERS™
Model 135-E $995.00
Others from $345*

- Model 135 is a SET Programmer, GANG Duplicator, & UNIVERSAL Device Programmer.
- Programs virtually all 24, 28, & 32-pin (E)PROMs.
- RAM expandable to 2MegaByte.
- Optional support for 40-pin EPROMs, Bipolar PROMs, 40-pin Micros, & (E)PLD/GAL/FPLA's.
- DATA I/O* protocal compatibility.
- 18-Month WARRANTY & 12-Month FREE Device Updates.

1-800-523-1565
In Florida: 1-407-994-3520

BYTEK® BYTEK Corporation
1021 S. Rogers Cir., Boca Raton, FL 33487
FAX: (407) 994-3615 Telex: 4998369 BYTEK

* (U.S. Prices only) *DATA I/O is a registered Trademark of DATA I/O

Circle 44 on Reader Service Card

A HIGH QUALITY RS232-RS422 BIDIRECTIONAL CONVERTER AT A LOW PRICE

Changes RS232 Data Streams into RS422 Compatible Data Streams

Model AA1709




List $89.00 (one to three) over 100 $ 59.90

Converts RS232 links to long distance RS422 standards on cable lengths to 4,000 feet, while having high noise immunity for use in industrial environments. This module makes it possible for RS232 equipped devices, such as an IBM personal computer, to interface with an RS422 equipped device. Included in the many uses of this converter is the ability to communicate with Anaheim Automation's own step motor motion controls. The unit includes a power supply. Call or write for brochure.

ANAHEIM AUTOMATION
910 E. Orangefair Lane, Anaheim, CA 92801
(714) 992-6990 Telex: 2978217 MCI FAX: 714-992-0471

Circle 22 on Reader Service Card

TurboFlow $69
Flowchart drawing for IBM PC/XT/AT/PS2



$89 with Logitech mouse!



- Pop-up icon menus
- Variable size symbols
- Paper size to 34" x 44"
- Hercules mono, CGA, EGA
- HP-GL, DM/PL, SweetP Plotters
- Automatic PANning to scan drawing quickly
- IBM/EPSON, NEC, OKIDATA, HP LaserJet

Daytron Electronics Inc.
610 S. sherman #104, Richardson, Tx 75081
Add s&h ($4 USA, $20 foreign), Texas residents add 8% sales tax
Order Today! 1-214-669-2137
Money-back guarantee

Circle 75 on Reader Service Card

Priority One

The ultimate in VGA performance. V-RAM VGA from Video 7 combines 100% VGA hardware compatibility with the superior performance of VRAM technology to give high-speed operation (see below).

V-RAM VGA is 100% hardware compatible with the IBM PS/2 Display Adapter. It even offers the high-bandwidth monochrome mode and other VGA registeres not documented by IBM.

- 100% IBM PS/2 VGA compatible
- Works in PC/XT/ATs and PS/2 model 30
- 15 pin analog video connector
- 256K VRAM memory expandable to 512K


$554.99 Retail $799.00

VRAM


Video Random Access Memory (VRAM) was developed to meet the high-speed requirements of high resolution video applications. VRAM adds speed by eliminating the wait states caused by slower DRAM chips. Until now, VRAM technology was only available on specialized, high-priced graphics boards. But by developing anew chip—the V7VGA—Video Seven was able to bring high technology down to a sensible price.

5 YEAR WARRANTY!


VIDEO SEVEN
V•RAM VGA™

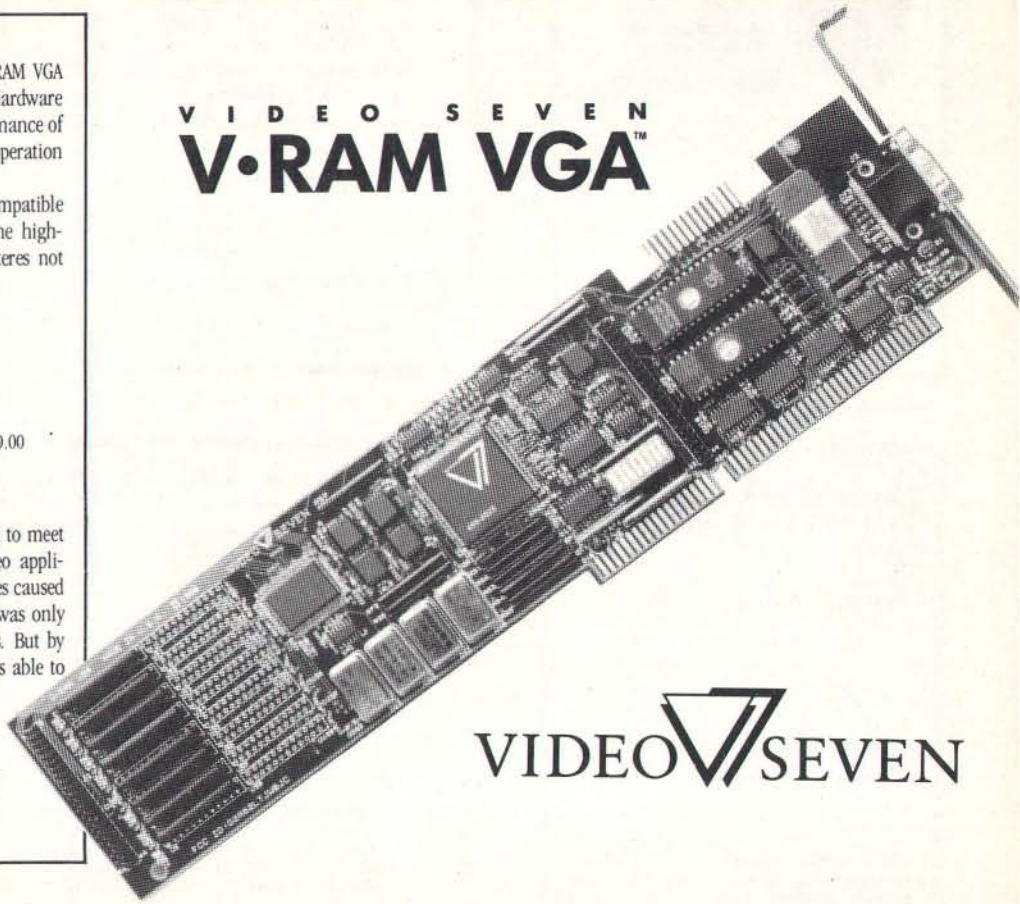


VIDEO SEVEN

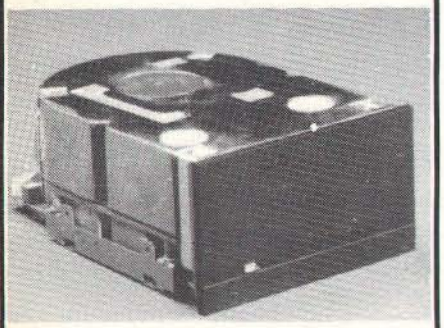

QUANTUM
42.7 Mbyte
Hard Disk $279

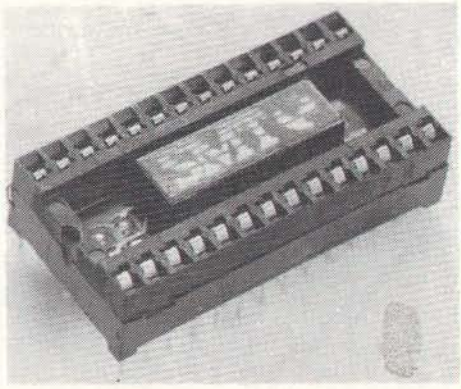

No-Slot
Clock $29.99



1200 bps Internal Modem
Hayes Compatible $49.99

MORE SPECTACULAR SPECIALS

NEC MultiSync II	$599.99	Taxan 123 Green	$69.99
NEC MultiSync GS	$199.99	Taxan 124 Amber	$74.99
NEC MultiSync+	$899.99	Orchid Tiny Turbo	$249.99
NEC MultiSync XL	$1954.99	Video 7 VEGA VGA	$249.99
Taxan 770 Plus	$499.99	Video 7 Fast Write	$399.99

PRODUCT AND PRICING MAY NOT BE AVAILABLE IN RETAIL STORES

Proud member of abcd The Microcomputer Industry Association

MMC MICROCOMPUTER MARKETING COUNCIL

MEMBER DIRECT MARKETING ASSOCIATION

PRIORITY ONE ELECTRONICS

21622 Plummer St., Chatsworth, CA 91311

MasterCard **(800) 423-5922** VISA
FAX (818) 709-4362

- Same Day Shipping
- Money Back Guarantee (call for details)
- No credit card surcharge - limited to stock on hand

Circle 205 on Reader Service Card

Tango™ Sets The Pace!

Tango's ease-of-use, rich functionality and crisp output have brought *tens of thousands* of boards to life, quickly and affordably.



Start-to-finish design tools include:

Tango-Schematic	With Library Manager.	$495
Tango-PCB	1 mil Grid, 9 Layers, Gerber Output.	$495
Tango-Route	Autoroutes 90+%, Fast!,	$495
Tango-Tools	8 Money-Saving Utilities.	$295

Let's discuss *your* design needs Toll-Free, or order a full function Evaluation Pkg, just $10. VISA/MC.

800 433-7801 619/695-2000 Satisfaction guaranteed.

ACCEL Technologies, 7358 Trade St., San Diego, CA 92121

Circle 8 on Reader Service Card

Okidata ML 82A and ML 83A Printers:

IBM EMULATION "PLUS"

Epson Compatability/Letter Quality

PC-WRITER™



ONLY **$99.00**

plus shipping & sales tax (Calif. addresses)

Money back guarantee

- FULL EMULATION OF THE IBM PC GRAPHICS PRINTER
- LETTER QUALITY PRINTING
- ELITE CHARACTER PITCH
- SUBSCRIPTS/SUPERSCRIPTS
- DOT ADDRESSABLE GRAPHICS
- FRONT PANEL FEATURE SELECTION

To Order: (714) 261-0228

Dealer Information Available

RAINBOW TECHNOLOGIES, INC.

18011-A Mitchell So., Irvine, CA 92714


(714) 261-0228 Telex: 386078

Circle 227 on Reader Service Card

FREE!

Turn-key PC Systems Handbook

NEW 1988 Fall/Winter Edition



Save Time and Money

Over 1000 Hard-to-find Hardware and Software Items of Special Interest to Technical PC Users:

144 Pages Available Now

In a hurry? Call 203-786-5151 Ext 101

- RS 232/IEEE 488 Networks
- Stepping & Servo Motor Controls
- Ruggedized PC's
- Rack Mtg. 80286 & 80386
- Laboratory Automation
- 1 MHZ A/D
- Digital Scopes to 200 MHZ
- High Speed Bus Adapters
- Waveform Synthesizers
- Data Loggers
- PC Bus Expansion Chassis
- And Much More

A How-to-Handbook that enables you to configure the BEST products from the world's leading PC hardware and software vendors into risk free turn-key system solutions that meet your needs.

Toll Free Hotline for application assistance and convenient one stop shopping at competitive prices. 100% Satisfaction Guaranteed.

Call or write for a FREE handbook today!

203-786-5151 Ext. 101 (9:00 AM to 5:00 PM E.S.T)

CyberResearch Inc.

P.O.Box 9565, New Haven, CT 06536

Fax: 203-786-5023 Telex: 9102501037

Circle 71 on Reader Service Card

A MUST for Computers

VIZIFLEX SEELS



The Ideal Keyboard Cover!

Protect your computer and **eliminate** down-time caused by liquid spills, contaminants, environmental hazards, etc. with VIZIFLEX SEELS - the **only** keyboard cover that:

- **Remains securely in-place** during the operation of the keyboard and will not interfere with computer performance in any way.
- **Is designed to "form-fit"** to the exact contours of the keyboard to provide superior tactile sensitivity & feel for individual keys.
- **Consists of Ultraflex™ material, a transparent, flexible "film"** which allows all "markings" to be clearly visible.

VIZIFLEX SEELS are the **only** keyboard covers for your computer!

VIZIFLEX SEELS, INC.

16 E. Lafayette St., Hackensack, NJ 07601 (201) 487-8080

Circle 271 on Reader Service Card

PROGRAMMERS

FOR IBM PC/XT/AT



- Select Device with vender name & type number directly
- Enable user to set up Program Pulse Width. Vpp. Vcc. Over-program Pulse Width & Iteration Counts.
- Capable of set & 8/16/32-bits wide—word programming.

XP6000A	Adapter & cable installs in PC for connecting programmer externally	$55
XP6001	1-socket 1M-bits EPROMs programmer	$160
XP6002	8-socket 1M-bits EPROMs programmer	$375
XP6003	1-socket MCS-48 micros programmer	$215
XP6004	1-socket MCS-51 micros programmer	$270
XP6014	4-sockets 1M-bits EPROM programmer	$260
AT-101/A	EPROM Eraser erases 30 24-pin ICs with timer	$195

2 YEARS GUARANTY + 30 DAYS MONEY BACK WARRANTY

Xender Corporation

2824, KENNEDY BLVD., FL., JERSEY CITY, NJ 07306

TEL: 201-659-8291 Tlx: 910 240 4444 CHAMPION

Fax: 201-864-9737

Xender

Circle 280 on Reader Service Card

DATA ACQUISITION TO GO

INTERFACE FOR ANY COMPUTER

FREE IBM SOFTWARE




Connects via RS-232. Fully IBM compatible. Built-in BASIC. Stand alone capability. Expandable. Battery Option. Basic system: 16 ch. 12 bit A/D, 2 ch. D/A, 32 bit Digital I/O. Expansion boards available. Direct Bus units for many computers.

(201) 299-1615

P.O. Box 246, Morris Plains, NJ 07950

ELEXOR

Circle 90 on Reader Service Card



Find out how our whole family of EMU-TEK graphics terminal emulation software makes good sense for the work you do. Call today for more information.

FTG DATA SYSTEMS

(714) 995-3900

(800) 962-3900 (800) 972-3900 (Calif.)

10801 Dale St., Suite M-2

Stanton, CA 90680

Circle 98 on Reader Service Card

$499.00

the LOGIC™ LAB



the LOGIC™ LAB is a complete logic development system

- Complete System Including Programmer, Sample GAL Devices, Software and all Cabling.
- Programs GAL Devices Including 16V8, 16Z8, 20V8, & 39V18.
- Allows Prototyping of 42 different standard PLD's.
- Includes Updated Equation Assembler Software.
- Accepts All Standard JEDEC Download Files.
- Software Updatable.
- 30 Day Money Back Guarantee.

* Visa and Master Card Accepted *

CALL FOR FREE DEMO DISK

Programmable Logic Technologies, Inc.

P.O. Box 1567
Longmont, CO 80501
Ph. (303) 772-9059

GAL is a registered trademark of Lattice Semiconductor Corporation

Circle 206 on Reader Service Card

Get the whole story on graphics terminal emulation.



To find out more about software that lets your PC emulate TEKTRONIX™ 4105/6/7/9 and DEC VT100™ terminals, call or write:

GRAFPOINT

4340 Stevens Creeks Blvd., Suite 280, San Jose, CA 95129 (408) 249-7951

Circle 106 on Reader Service Card

Daisywheel Printer...$198

Satisfaction Guaranteed! Since 1975

Turbo-XT
$398



- 4.77 & 10 MHz
- 640K Motherboard with 256K
- 8 slots • 8087 socket
- 150W power supply

Turbo-286
$998



- 1 MB Motherboard with 640K
- 6 or 10 MHz switchable
- 8 slots • 80287 socket
- 200 watt power supply
- 1.2 floppy disk drive
- Hard disk/floppy controller


Option A...Add $148
- High resolution amber monitor
- Graphics card & printer port

Option B...Add $258
- Hi-res RGB color monitor
- Graphics card & Printer port

Option C
- Hard disk drive

30 MB for XT	40 MB for XT	40 MB For AT
add $298	add $398	add $348

Amdek 310A $98
Best selling hi-resolution non-glare amber monitor



intel Math Coprocessors


8087 $98	8087-2 $138
8087-1 $198	80287-6 $178
80287-8 $228	80287-10 $288
80387-16 $468	80387-20 $728

Mouse
With Software **$29**



LogiTech mouse	$78
Mouse systems mouse	$98
Microsoft mouse	$108
Fastrap trackball	$98
Deluxe joystick	$24

1200 Baud Modem $58



1200 baud external	$88
2400 baud ½ card internal	$128
2400 baud external	$168

30 MB Hard Disk
Complete kit with controller

CMS **$298**



10 MB PC/XT Kit	$188
20 MB PC/XT Kit	$248
20 MB Card	$398
40 MB for AT	$348
40 MB PC/XT Kit	$398
Mountain 40 MB Tape	$398

360K Disk Drive
Half height, Direct Drive **$68**




Tandon TM100-2 full height	$89
1.2 MB for AT	$98
5¼" drive for PS/2	$218
720K 3½" disk drive	$98
1.44 MB 3½" disk drive	$128

No Slot Clock $48



DIGITAL RESEARCH MS-DOS 4.0 ..... $88


VGA Package
Monitor & Card **$648**



- 800 x 560
- Up to 256K brillant colors

Hi-res EGA card 640x480	$128
EGA monitor 640x350	$378
VGA AutoSync 800 x 560	$498
NEC MultiSync II 800x560	$598
RGB color monitor 640x240	$258
Vega VGA card	$278
Paradise VGA card	$278

Daisywheel Printer
26 CPS **$198**
40 CPS **$298**



Diablo compatible, 1 year warranty
Parallel Interface I interface

EPSON 9 Pin
$198 LX-800



Near Letter Quality
FX-850, FX-1050, EX-800 .... Call

EPSON 24 Pin
$369 LQ-500




Letter Quality Printers
LQ-850, LQ-1050, LQ-2500 .. Call

HEWLETT PACKARD LaserJet II
$1748



Super 89 in 1 Font Cartridge	$398
Extra Toner Cartridge	$98
PDP 4 MB RAM card w/OK	$198
1 MB $348 2 MB $648 4 MB $1148	

HP DeskJet **$698**



PDP 128K RAM $98
Extra ink cartridge $18

Laser Printer
$1198



1.5 MB RAM Card	$398
Toner cartridge	$58

OKIDATA



Okidata 320	$358
Okidata 321	$498
Okidata 390	$498
Okidata 391	$688

Place orders toll free!
Continental U.S.A. 1-800-421-5500
Inside California 1-800-262-1710
All others 1-213-973-7707
Fax machine 1-213-675-2522

JADE COMPUTER

4901 W. Rosecrans Ave Box 5046
Hawthorne California 90251-5046

Prices at our eight store locations will be higher on some items.

California
Torrance, Santa Ana, Woodland Hills
Kearny Mesa, Sunnyvale
Texas
Addison, Houston
Georgia
Smyrna

MMC MICROCOMPUTER MARKETING COUNCIL

We accept checks, credit cards or purchase orders from qualified firms and institutions. No surcharge on credit card orders. CA., TX. & GA. residents add sales tax. Prices & availability subject to change without notice. Shipping & handling charges via UPS ground 50¢/lb. UPS air $1.00/lb. Minimum charge $3.00.

VISA MasterCard AMERICAN EXPRESS

Circle 85 on Reader Service Card

DiskMASTER®
The Ultimate Diskette Value ...



Discover the Difference ...
2 FOR 1 LIFETIME WARRANTY

- ✓ Pkg'd in 6 different colors, bulk or boxed **COLOR**
- ✓ 100% tested and certified
- ✓ Guaranteed clipping level of 65% or above
- ✓ Includes tyvek envelopes (not paper), write protect tabs and user labels
- ✓ Quality at affordable prices

5-1/4" - 48 TPI DS-DD		DS-HD 96 TPI IBM-AT Compatible
.49	BULK COLOR OR GRAY	.90
.59	BOXED COLOR	.99

CENTECH® *America's Premium Quality Color Diskettes*

- ✓ TIMELESS WARRANTY
- ✓ 75%+ clipping level guaranteed
- ✓ Each disk 100% tested and certified
- ✓ 18 COLORS for data organization
- ✓ Pkgs. include sleeves, w/p tabs, & ID labels

5-1/4" - 48 TPI DS-DD		DS-HD 96 TPI IBM-AT Compatible
.84	PLASTIC STORAGE BOX COLOR	1.39
.63	BULK COLOR	1.15
3-1/2" - 135 TPI DS-DD COLOR		3-1/2" - 135 TPI BLACK DS-HD
1.75	PLASTIC STORAGE BOX	4.50

BASF

5-1/4" 48 TPI DS-DD		DS-HD 96 TPI IBM-AT Compatible
.64		.94
3-1/2" DS-HD 4.50		3-1/2" DS-DD 1.34

Call for best prices on Data Cartridges & Pelikan Ribbons

5-1/4" - 48 TPI DS-DD		DS-HD 96 TPI IBM-AT Compatible
.72		1.48

Nashua

5-1/4"- 48 TPI DS-DD		DS-HD 96 TPI IBM-AT Compatible
.47	 BOXED	*.84*

BULK

32¢ 5-1/4" DS/DD 48 TPI Exceeds ANSI specifications + 6¢ FOR TYVEK

ORDERING INFORMATION

TERMS: P.O. orders accepted, government and schools on net 30. **SHIPPING:** U.S. orders add $3.00 per 100 diskettes or fraction thereof, add $3.00 for COD orders.
PRICE PROMISE: We will better any lower delivered price on the same products and quantities advertised nationally.

MasterCard AMERICAN EXPRESS VISA

Toll Free Order Line: **1-800-233-2477**
Information Line: **1-801-561-0092**

DISC INTERNATIONAL
SUPPLY COMPANY
1376 W. 8040 S. / WEST JORDAN, UT 84088
HRS: 8 AM TO 5 PM (MTN. TIME)

the **HUSKY™**

EPROM
PLD
MICRO
GANG
SET



PC based PROGRAMMER
$599.00*
*modules not included.
From A Name You Can Trust

LOGICAL DEVICES, INC.
1201 N.W. 65th Place, Ft. Lauderdale, FL 33309
1-800-331-7766 (305) 974-0967
Telex 383142 Fax (305) 974-8531

Circle 142 on Reader Service Card
(DEALERS: 143)

PALMERASE™
World's Smallest UV Eraser
$49.95



PALMERASE™ can erase 20, 24, 28, and 40pin EPROMs in less than 3 minutes! Also, larger erasers are available to handle EPLDs, MICROs and other UV erasable devices. Please call today for more information on an eraser that's right for you.

LOGICAL DEVICES, INC.
1201 N.W. 65th Place, Ft. Lauderdale, FL 33309
1-800-331-7766 • in Florida: (305) 974-0967

Circle 144 on Reader Service Card
(DEALERS: 145)

ON TARGET ASSOCIATES

Products and Services
for Design and Manufacturing Engineers.

PS/2
- Micro Channel Design Consulting
- Prototype Cards
- Newsletter
- ASIC's
- Extender Cards
- Adapter Bracket Sets
- Burn-in Mother Boards

We will move your PC/XT/AT products to the Micro Channel, or create your new design.

CALL: (408) 980-7118
for our Free catalog

ON TARGET
TARGET
TARGET

...the PS/2 leaders.

PS/2 and Micro Channel are trademarks of IBM Corp.

Circle 187 on Reader Service Card

IEEE-Z

Easiest IEEE 488(GPIB/HPIB) Interfaces for your PC, PS/2, Macintosh, HP and more!

- Controllers
- Converters
- Extenders
- Buffers
- Boards



Please see our ad on page 140.

Call or send for your *FREE* Technical Guide

iOtech (216) 439-4091

25971 Cannon Road • Cleveland, Ohio 44146
Telex 6502820864 • Fax (216) 439-4093

Circle 123 on Reader Service Card

SAVE ON **9 TRACK TAPE SYSTEM**
FOR IBM PC/XT/AT



- Mainframe to PC Data Transfer
- High Speed Backup
- All Software, Complete System
- Service and Support, easy Installation

call **(818) 343-6505** or write to:
Contech Computer Corp.
P.O. Box 153 Tarzana, Calif. 91356

CONTECH

Circle 68 on Reader Service Card



RS-232/422

Make your computer into a serial data analyser by plugging in our hardware/software:

COMSCOPE

No internal changes required, just plug into two serial ports on your IBM XT/AT or compatible and run our software (we have extra serial ports available). Provides data code conversion & capturing, saving to disk files. For passive data collection or generating messages and capturing reply. At this price there is no excuse not to have one! C/ w 120V adaptor.....$399

INDUSTRIAL AUTOMATION INC.
P.O. Box 8019 Blaine, WA 98230 FAX: 604-946-0343
Phone: 604-946-4523 or 604-270-9614

Circle 287 on Reader Service Card

California Digital

17700 Figueroa Street ● Carson, California 90248





Color Monitor Better Than EGA

~~$1095~~ **$289**

Ideal for CAD/CAM and Desk Top publishing applications. The Roland CD/240 color monitor has a resolution of 720 pixels by 400 lines on a .31mm dot pitch 12" non-glare screen. VGA specifications in text mode EGA in graphic mode.
Comparable monitor and card packages retail at over $1095. California Digital has made a special purchase and is able to offer the CD/240 and 132 column VGA/EGA graphic card for only $389.



$895 AT Compatible

The Eclipse 286/12 is everything you ever wanted in an IBM/AT compatible. Complete with 512 K/byte of memory, (expandable to 1 Meg.) 101 key keyboard, your choice of either 1.2 meg. 5¼" or 3½" floppy drive, clock/calendar and hard disk controller that supports upto 140 Megabytes of Winchester storage.
Eight card slots along with a 200 watt power supply gives you plenty of expansion capacity.
This 100% IBM/AT compatible will run all programs writter for AT's and PC's. The Eclipse 286/12 is a super value at only $895.

Options available:
Hard disk drives ● Addtional Floppy Drives
Monitors ● Video Cards ● Modems ● Memory



$119 2400 Baud Modem

2400 baud with forward error correcting make the Moxon MAX/2400 an unbelievable value at only $119.
Fully compatible with the Hayes command set and CCITT V.22 standards. Error correcting, autobauding and "adaptive equalization" allow the MAX/2400 to maintain reliable data transmission over marginal phone lines.
Manufactured by Maxon Systems, one of the Worlds largest producers of consumer electronics. Orginally priced at $295. While supplies last California Digital is offering the MAX/2400 at only $119.

Smarteam 2400



$239

The Smarteam 2400 offers all the features of the Hayes Smart Modem 2400 for a fraction of the price. Now is your opportunity to purchase a 2400 baud modem for only $239. **Also available:** The MiniTeam 1200 at only $129.

MODEMS

Avatex 1200E external, Hayes compatible	$89
CTS 1200 baud modem	89
Hayes Smartmodem 2400 baud modem	529
Smarteam 2400 Hayes Compatible	259
Smarteam 1200 Hayes Compatible, 300/1200	119
Smarteam 1200B IBM 1200 baud card	119
UltraLink 1200 data and voice, Bell 202	59
U.S. Robotics 2400 baud Direct, internal	139
U.S. Robotics 9600 bps. Courier HST	759
Signalman Mark VI, 300 baud internal PC	35

20" Analog Color



~~$1895~~ **$659**

Ever try gathering a classroom of students around a 12 inch monitor? This 20 inch analog RGB monitor is the ideal solution. High screen resolution of 1200 pixels by 950 lines allow extra fine detail without the dots looking like golf balls. 256 colors and VGA compatible.
Super value originally sold for over $2000. Only 350 available.

40 Meg. Tape Back-up


$239 ~~$659~~



Head Crash, Power Spikes or just poor disk maintenance...
Don't loose data because you didn't back up. The All/40 is an inexpensive way to save and restore files in the event that your data has been distroyed.
This 40 megabyte half height tape back is manufactured by North Americas largest producer of data retrieval equipment.
No need to purchase a separate tape controller... the ALL/40 attaches directly to your existing floppy disk controller. Supplied software allows your computer to back up any time **Day or Night.** Come back in the morning and 40 megabytes of irreplacable data has been stored on one Scotch DC/2000 data cassette. Back up entire hard disk, modified files only, or by file name. Loss of data is inevitable but when you are backed up on an ALL/40 its not a catastrophe.

Hitachi 11 by 17 Plotter


$695 ~~$895~~



The Hitachi 672/XD is a four color 11 by 17 (B size) plotter with superior accuracy and repeatability (.3mm). The 672 accepts HPGL 7475 commands and is both Centronics parallel and RS232C compatible.
The 672 plots at a fast eight inches per second in axial direction and eleven inches at an angle of 45 degrees. The plotter also features a self contained digitizing function that allows data to be entered into your computer from printed graphs and blue prints. Four different color pens are supplied with the plotter but a wide variety of technical pens are available.

21 Megabyte Gold Card

~~$449~~ **$379**



The Gold Card from Silicon Valley Computers features shock mounted automatic head unloading, 15 watt drive coupled with a 2K/byte sector buffer and advanced OMTI controller for maximum reliability. 30,000 hour MTBF and full 2 year warranty -- the best cost per megabyte hardcard available.
Also available the 30 Meg. Gold Card at only $419.



	One	Two	Ten
TEC501 ½ height sgl.side	49	39	35
TANDON 65L/2 360K, ½ ht.	79	75	72
TANDON 101/4 full ht. 96 TPI.	99	89	79
FUJITSU 5¼" half height	95	89	82
MITSUBISHI new 501 half ht.	119	109	105
MITSUBISHI 504A AT comp.	149	139	135
TEAC FD55BV half height	109	99	89
TEAC FD55FV 96 TPI, half ht.	119	109	105
TEAC FD55GF for IBM AT	149	139	135
PANASONIC 455 Half Height	109	99	89
PANASONIC 475 1.2 Meg./96	119	115	109
Switching power supply			49
Dual enclosure for 5¼" drives			59
3½" DISK DRIVES			
SONY MP-53W 720K/Byte	129	125	119
SONY MP-73W, 2 Meg.	159	149	call
TEAC 35FN 720 K/Byte	129	119	115
TEAC 35HN/30, 2 Meg.	159	149	145
5¼" form factor kit			20
8" DISK DRIVES			
QUME 842 double sided	189	179	175
QUME 841 single sided	119	109	99
SHUGART 851R dbl. sided	319	309	299
REMEX RFD4000 dbl. sided	189	179	165
OLIVETTI 851	189	179	165

NEC/8500 Laptop

$319 ~~$995~~



The NEC PC/8500 laptop computer incorporates a 25 line liquid crystal display and modem that plugs directly into any RJ/11 wall jack. An auto log/on feature instructs the 8500 to phone the users host computer and automatically send password and log/on information. The computer also includes both serial and Centronics parallel ports packaged in this six pound laptop.
This is the ideal computer for Realtors, insurance people or any individual that requires immediate access to remote information. ROM based telecommunication software, spreadsheet and Wordstar also make the 8500 a great computer for students. Files can be transferred from this CP/M computer to any other including the IBM/PC.

Heath H/89 Computer

$179



Hard to believe... but we found a stash of brand new Zenith/Heath Model H/89 computers. These computers feature the Zilog Z-80 CPU and operate under CP/M. The unit incorporates a 12 inch green screen, three serial ports and one 5¼" disk drive.
Zenith's original price was $1895. We have 350 units available for sale, while supplies last we are offering the H/89 at only $179. Word processing and communication software included.

40 Megabyte Hard Disk Kit

Forty megabyte internal hard disk drive, controller and cables all for only $397.
The kit includes the a 40 millisecond Miniscribe 3650 drive and a half slot Western Digital controller.

$397



Five Inch Winchester Disk Drives

Price does not include controller.	each	two+
SEAGATE 225 20 Meg. ½ Ht.	239	229
SEAGATE 238 30 Meg. RLL	259	249
SEAGATE 251/1 51 M. 28mS.	459	445
SEAGATE 4096 96 M. 35mS.	659	639
MINISCRIBE 8425 25 M 65ms.	239	227
MINISCRIBE 3650 50M 61 ms.	419	399
MINISCRIBE 6085 90 meg.	795	779
MINISCRIBE 3053 25 ms. ½ ht.	459	439
FUJITSU 2242 55 M. 35mS.	1299	1229
FUJITSU 2243 86 M. 35mS.	1695	1619
RODIME RO-204E 53 Meg.	895	859
MAXTOR XT1140 140 Meg.	1595	1550
MAXTOR XT2190 192 Meg.	1919	1875
TOSHIBA MK56 70 M. 30mS.	1289	1229
CONTROL DATA WREN "V"	call	

● Winchester Controllers for IBM/PC ●	
XEBEC 1220 with floppy controller	159
DTC 5150CX	119
OMTI 5527 RLL controller	99
ADAPTEC 2070 RLL controller	99
ADAPTEC 2372A 1/1 interleaf	159
WESTERN DIGITAL WD/1002WX2	89
WESTERN DIGITAL 1003WAH or WA2	139
WESTERN DIGITAL 1007/WA2 ESDI	239
● SCSI/SASI Winchester Controllers ●	
XEBEC 1410A 5¼" foot print	239
WESTERN DIGITAL 1002-05E 5¼"	229
OMTI 20L	89
● Winchester Accessories ●	
Dual floppy enc. and powersupply	59
Winchester enclosure and supply	139
Switching power supply	49

MMC MICROCOMPUTER MARKETING COUNCIL DIRECT MARKETING ASSOCIATION

master charge VISA

8:00 AM to 5:00 PM Pacific Time

Every year since 1973, customers from virtually every nation in the free World have chosen California Digital for their data processing requirements. **If its computer, California Digital has it...** complete minisystem or just one microchip. California Digital offers over 10,000 unique computer products. Regardless of how specialized your data processing requirements... California Digital is your one stop shopping solution.

TECHNICAL & CALIFORNIA
(213) 217-0500
TOLL FREE ORDER LINE
(800) 421-5041

Telefax ● (213) 217-1951

IC's IC's, Parts, Components...Shipped Fast!
West Coast's Largest Selection...Call for More

COMPAQ® 386/20 compatible Memory Expansion Modules

Fully compatible with Compaq Deskpro 386/20, 386/25, coming 386S...

CALL ACP for the Best Price!



DYNAMIC RAM

SIMM 1 Mb x 9/IBM, 100ns	$ 550.00	41464 64k x 4, 100ns	call.
SIMM 1 Mb x 8/APPL, 120ns	450.00	41464 64k x 4, 120ns	call.
SIMM 256k x 9/IBM, 120ns	130.00	41464 64k x 4, 150ns	call.
SIMM 256k x 8/APPL, 120ns	110.00	4164 64k x 1, 100ns	3.75
1MBIT 1Mb x 1, 100ns	38.00	4164 64k x 1, 120ns	3.35
1MBIT 1Mb x 1, 120ns	35.00	4164 64k x 1, 150ns	2.95
*51258 256k x 1, 80ns	13.95	4416 16k x 4, 120ns	8.95
*51258 256k x 1, 100ns	11.95	4[illegible]	8.95
41256 256k x [illegible]			8.95
4125[illegible]			
41[illegible]			
4125[illegible]			
4125[illegible]			39.00
4125[illegible]		1 Mb x 1 ZIP, 100ns	39.00
41256 256k [illegible]	95	1 Mb x 1 SOJ, 100ns	42.00
41256 256k x 1, 80ns	12.95	1 Mb x 1 PLCC, 100ns	42.00
41256 256k x 1, 100ns	12.50	256k x 1 ZIP, 120ns	12.95
41256 256k x 1, 120ns	10.95	256k x 1 PLCC , 120ns	13.95
41256 256k x 1, 150ns	10.50	256k x 1 SOJ, 120ns	13.95
+41264 64k x 4, 120ns	19.95		
+41264 64k x 4, 150ns	16.95		

SIMMS!

+Dual Port RAM, Video RAM
**51258's-static column RAM for Compaq 386 or comptble*
For High Speed, ZIP, PLCC, More....Call!!

PROCESSORS

80387-20	$ 729.
80387-16	469.
80287-10	285.
80287-8	235.
80287-6	159.
8087-1 (8 MHz)	189.
8087-2 (10 MHz)	145.
8087 (5 MHz)	99.
80386-16/20	call.
80386-16	499.
80386-20	799.
V-30 8 MHz	12.95
V-20 10 MHz	12.95
V-20 8 MHz	10.95
8088-1	6.50

STATIC RAMS

62256-32kx8,120ns	$ 14.95
6264-8kx8,150ns	9.95
62C64,150ns	10.95
6116, 2kx8,150ns	7.95

E PROMS

27C101 128kx8,200ns	23.95
27C101 128kx8,250ns	22.95
27C512 64kx8,150ns	15.95
27C512 64kx8, 200ns	14.95
27512 200ns	13.95
27512 250ns	12.95
27C256 32kx8, 150ns	8.95
27C256 32kx8, 200ns	5.95
27256 150ns	8.95
27256 200ns	5.95
27256 250ns	5.50
27C128 250ns	5.95
27128A 16kx8, 150ns	8.95
27128A 16kx8, 200ns	5.75
27128A 16kx8, 250ns	4.95
27C64 8kx8, 150ns	5.95
27C64 8kx8, 200ns	4.95
2764 150ns	5.95
2764 200ns	4.95
2764 250ns	3.95
2732A 250ns	4.95
2732A 21V 200ns	5.95

8000's

7220	$ 8.95	8088	5.95
80C31	5.95	81C55	4.95
80C35	3.95	8155-2	3.95
8035	2.39	8155	2.95
8039	2.49	8203	14.95
8049	1.95	8214	3.95
80C85A	3.95	8226	2.95
8085A	2.95	8237A-5	4.50
8086-2	5.95	82C51A	3.95
8086	4.95	8251A	2.95
8088-1	6.50	82C53-5	3.95
		8253-5	2.95
		82C55A-5	3.95
		8255A-2	3.95
		8255A-5	2.95
		8259A	2.95
		8259C-5	2.95
		8279-5	3.95
		8283	3.95
		8284A	2.95
		8286	3.95
		8287	3.95
		8288	4.95
		8748	7.95
		8749	9.95
		8755	14.95

68000 SERIES

68000/8MHz	$12.95	68020/16MHz	$249.95
68010/8MHz	19.95	68450	49.95
68010/10MHz	39.95	68881/12MHz	179.95
68020/12MHz	149.95	68881/16MHz	219.95

74F SERIES

74F00	$ .35	74F153	$ .59	74F243	$1.29
74F02	.35	74F157	.59	74F244	1.29
74F04	.35	74F158	.59	74F245	1.29
74F08	.35	74F160	.59	74F251	.79
74F10	.35	74F161	.59	74F258	.79
74F11	.35	74F163	.59	74F280	2.89
74F20	.35	74F174	.69	74F373	1.49
74F32	.35	74F175	.69	74F374	1.49
74F64	.49	74F181	1.99	74F379	1.99
74F74	.49	74F189	2.99	74F399	2.99
74F86	.49	74F219	4.99	74F521	2.99
74F109	.49	74F240	1.29	74F533	2.99
74F139	.49	74F241	1.29	74F534	2.99
74F151	.59				

74HC SERIES

74HC00	$.25	74HC125	$.50	74HC174	$.65
74HC02	.25	74HC132	.50	74HC175	.65
74HC04	.25	74HC133	.50	74HC240	1.29
74HC08	.25	74HC138	.55	74HC244	1.29
74HC09	.25	74HC139	.55	74HC245	1.29
74HC10	.25	74HC148	.75	74HC368	.65
74HC11	.25	74HC151	.65	74HC373	1.29
74HC14	.25	74HC153	.65	74HC374	1.29
74HC20	.25	74HC154	3.75	74HC4020	.99
74HC32	.25	74HC157	.65	74HC4060	.99
74HC74	.35	74HC161	.65	74HC4066	.99
74HC85	.65	74HC166	1.15	74HC4075	.89
74HC112	.65	74HC173	.65	74HC4078	1.49

7400 SERIES

7400	$.18	7474	$.35	74157	$.65
7402	.18	7475	.35	74158	.65
7404	.18	7476	.35	74173	.65
7405	.18	7485	.35	74174	.65
7406	.35	7486	.35	74175	.65
7407	.35	7490	.35	74176	.65
7408	.25	7493	.35	74181	1.75
7410	.25	7495	.35	74189	2.95
7414	.35	74121	.35	74193	.65
7420	.25	74123	.45	74195	.65
7426	.25	74125	.45	74198	1.65
7427	.25	74126	.45	74221	.75
7430	.25	74148	.65	74273	1.75
7432	.25	74150	1.20	74365	.50
7438	.25	74151	.65	74366	.50
7442	.30	74153	.65	74367	.50
7446	.85	74154	1.20	74368	.50
7447	.95				

Z80 SERIES

Z80CPU	$1.49	Z80ASIO/0	$4.95
Z80CTC	1.49	Z80ASIO/1	4.95
Z80DART	4.49	Z80ASIO/2	4.95
Z80PIO	1.49	Z80ADART	4.99
Z80ACPU	1.99	Z80BCPU	2.99
Z80ACTC	1.99	Z80BCTC	3.99
Z80APIO	1.99	Z80BPIO	3.99

BIPOLAR PROMS/PALS

82S123	$ 1.29	74S189	$1.69
82S126	1.99	74S287	1.99
82S129	1.99	74S288	1.99
82S137	2.99	74S471	4.99
82S181	7.99	74S472	6.99
82S191	11.99	PAL 16L8	4.99
74S188	1.29	PAL 20L8	9.95

LINEAR

CA3086	$1.19	LM566	$1.10	LM3900	.45
CA3089	1.19	LM567	.75	LM3909	1.25
CA3403	1.19	LM723	.30	LM3911	1.95
LF347N	1.49	LM733	.30	LM3914	2.75
LF348N	1.49	LM741	.30	LM3915	2.75
LF356H	1.99	LM747	.60	LM3916	2.75
LF441	1.69	LM748	.65	LM4024	3.95
LM301	.30	LM1414	1.49	LM4044	3.95
LM309K	1.00	LM1886	3.29	LM4136	1.50
LM317K	2.95	LM1330	1.95	LM4558	.75
LM317T	1.75	LM1350	1.25	LM7555	2.50
LM318	1.15	LM1358	1.95	LM7556	2.50
LM319	.95	LM1372	2.25	LM7660	2.95
LM320T-XX	.60	LM1408L8	2.50	LM7663	2.95
LM320K-XX	1.35	LM1458	.40	LM78H05	6.95
LM323K	4.25	LM1488	.60	LM78H12	6.95
LM324	.35	LM1489	.60	LM8038	3.75
LM335D2	1.19	LM1889	2.50	MC3423	1.49
LM336D2	1.19	LM2003	.75	MC3459	2.69
LM337H	2.49	LM2206	3.75	MC3470	2.99
LM337K	4.95	LM2111	1.19	MC3480	6.99
LM338K	6.95	LM2211	2.75	MC3486	1.69
LM340T-XX	.60	LM2240	1.75	MC3487	1.69
LM340K-XX	1.35	LM2900	1.19	LM3524	1.99
LM358	.45	LM2901	1.19	TDA1170	5.49
LM376	1.69	LM2917	1.29	TDA1180	5.99
LM380	.95	LM3045	1.19	TL074	1.65
LM386	.95	LM3054	1.99	TL081	.75
LM393	.65	LM3079	1.49	TL082	.85
LM497	2.50	LM3130	.95	TL084	1.25
LM565	.30	LM3140	.95	ULN2003	1.19
LM556	.45	LM3160	1.95	ULN2064	1.79
LM558	.85	LM3161	1.95	ULN2074	1.99
LM564	2.75	LM3162	1.95	ULN2081	1.49
LM565	1.50	LM3852	1.49	ULN2981	1.99

Call ACP Toll-Free!!!

since 1976
the Nation's TOP Computer Supplier!!!
...just call ACP!

MEMBER MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.

74LS SERIES

74LS00	$.19	74LS125	$.45	74LS241	$.99
74LS02	.19	74LS126	.49	74LS242	.99
74LS03	.19	74LS138	.45	74LS243	.99
74LS04	.19	74LS139	.45	74LS244	.99
74LS05	.19	74LS153	.59	74LS245	.99
74LS08	.19	74LS154	1.29	74LS257	.69
74LS09	.19	74LS157	.40	74LS258	.69
74LS10	.19	74LS158	.40	74LS259	.99
74LS14	.35	74LS161	.49	74LS273	.99
74LS27	.28	74LS163	.49	74LS322	1.79
74LS30	.25	74LS164	.49	74LS323	1.79
74LS32	.28	74LS165	.49	74LS365	.59
74LS47	.99	74LS166	.99	74LS366	.59
74LS73	.35	74LS173	.49	74LS367	.59
74LS74	.35	74LS174	.49	74LS368	.99
74LS75	.35	74LS175	.49	74LS373	.99
74LS76	.35	74LS189	3.95	74LS374	.99
74LS85	.49	74LS190	.49	74LS393	.99
74LS86	.28	74LS191	.49	74LS624	1.89
74LS90	.45	74LS192	.49	74LS629	1.89
74LS93	.45	74LS193	.49	74LS640	1.89
74LS107	.45	74LS195	.49	74LS641	1.89
74LS109	.45	74LS221	.65	74LS670	.99
74LS123	.49	74LS240	.99	74LS688	1.89

Advanced Computer Products, Inc.

Mail Order: P.O. Box 17329 Irvine, CA 92713
Retail: 1310-B E. Edinger, Santa Ana, CA 92705

for Fast Service Order by Phone!

NEW PHONE FOR ALL USA
800-FONE ACP
800-366-3227 • 714-558-8813

MasterCard VISA AMERICAN EXPRESS

- $25.00 Minimum MAIL ORDER
- No Surcharge for VISA or Mastercard
- Volume purchasing agreements available
- Orders subject to availability
- Pricing subject to change without notice
- Supply limited on certain items
- ACP Retail store pricing may vary. Not responsible for typos.
- Limited warranties and other conditions may apply

Call for our NEW 1988 Catalog...

ACP's Break thru Prices!!

Since 1976...The Nation's TOP Computer Supplier

MEMBER MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.



NEC Silentwriter® LC890 Postscript® Laser Printer *Sale!*

Includes the same resident fonts as the Laserwriter.

3395.

SPECIAL!!
AST® Internal 1200 Baud Modem
software included...

79.

Quantum Theory!

We made a truckload purchase from the factory and while the supply lasts we are offering them at this unbelievable price...

sale



295.

Quantum Q540 42.6Mb

Unformatted, 40ms, perfect for 286 & 386 AT's

ACP...famous since 1976 for delivering the Best Deals!!

Special Purchase AMDEK EPSON COMM QUADRAM

CLOSEOUTS!

While Stock Lasts!

- **Bulk DS/DD 5-1/4" Diskettes** box of 100 ..... each **32¢**
- **Quadram Quadsprint Card** upgrade PC/XT to 10 MHz ..... sale **79.**
- **Sixpack Compatible** Quadram Silver Board, 0K ..... sale **98.**
- **Liberty Card,** EMS, 0K ..... sale **98.**
- **1200 Baud Internal Modem** with software ..... sale **69.**
- **Sharp PC5000 Portable** ..... sale **149.**
- **OmniPak! 1200 Baud Modem** serial/parallel/clock/game/RAM ..... sale **99.**
- **Diablo 620 Printer** ..... sale **199.**
- **Mindset Personal Computer** 360K/floppy/mouse/joy/MS-DOS 2.0 .. **219.**



MEMORY LOSS?

Don't feel like the Lone Ranger... we are also suffering from loss of memory. ACP sells more Memory Upgrade IC's than other mail order supplier...But!...the present shortage is driving us up a wall!. We can't get them at the right price, but we are getting them. PLEASE BEAR WITH US...as the market price comes down, so will our price!

Selling Chips? ***Call us, we're buying.***

New! **RAY-O-VAC® Introductory Price..... 9.95 AT Replacement Battery**

Direct replacement for real-time clocks, AT/286/386

PC COMPATIBLE DRIVES

ACP Advanced Cards/IBM
Monographics/HGA w/print port ... 55.
Colorgraphics w/printer port ... 55.
SuperEGA,Genoa compatible ... 169.
SuperVGA,1024x768 ... 339.
Diamond Multi I/O,2s,p,g,c/XT ... 139.
XT Six-Pak compatible/0K ... 89.
XT 286 Accelerator card ... 269.
XT Multi I/O w/floppy contr ... 69.
XT dual Floppy controller ... 29.
XT Serial I/O card ... 29.
XT/AT Parallel I/O card ... 29.
AT Serial I/O card ... 39.
XT/AT Game adapter port ... 29.
XT/AT EPROM programmer ... 149.
AT 3.5Mb w/Multi I/O, 0K ... 199.
AT SuperMULTI I/Ow/floppy ... 119.
PS/2 Multi I/O ... 99.
PS/2 Floppy controller 1.4Mb ... 89.
HP Laserjet 1Mb Ram card ... 349.

MOTHERBOARDS
XT Turbo w/BIOS, 8MHz ... 89.
XT Turbo w/BIOS, 10MHz ... 99.
AT 286 w/BIOS, 10 MHz ... 289.
AT Baby w/BIOS, 12MHz ... 299.
AT 386 w/BIOS, 16MHz ... 1499.

HARDWARE

AST Research
Xformer/286, 512K, 10MHz ... 699.
Advantage 2/386,mod.80,1Mb ... 725.
Advantage 2/286,PS/2,0K ... 349.
Advantage Premium 286,512K ... 389.
Rampage 2/286,PS/2,512K ... 499.
Rampage 286, 512K ... 489.
AST Sixpakplus, 0K ... 119.

ATI Technologies
EGA Wonder 800 ... 199.
VGA/VIP ... 319.
2400etc int. Modem w/MNP-5 ... 188.

GENOA
Super EGA ... 199.
Super VGA ... 299.

GULFSTREAM
EZ-FAX Board w/software ... 1188.

HERCULES
Color Card/ CGA ... 149.
Graphics Card Plus ... 174.

INTEL
Inboard 386/PC to 386 ... 975.
Inboard 386/AT to 386 ... 1059.
Above Board 2,PS/2 mod50/60 ... 299.
Above Board 286,AT,512K ... 329.
Above Board PS/286,model 30 ... 349.
8087 (5MHz) ... 102.
8087-1 (10MHz) PS/2 ... 205.
8087-2 (8MHz) ... 158.
80287-6 (6MHz) ... 185.
80287-8 (8MHz) ... 255.
80287-10 (10MHz) ... 309.
80387-16 (16MHz) ... 549.
80387-20 (20MHz) ... 799.

ORCHID Technology
Tiny Turbo 286 -*REDUCED!* ... 289.
Designer VGA Board ... 299.
RAMQUEST 50/PS/2, 2Mb ... 699.

PARADISE
Autoswitch 480 ... 199.
VGA Plus ... 299.

QUADRAM
Quad386XT ... 747.
Prosync(640x480,752x410) ... 269.
MicrofazerII buffer w/64K ... 239.
Quadsprint XT accellerator ... 98.
Liberty EMS XT card, 0K ... 98.
Silver Quadboard, Sixpak comp. ... 98.

VIDEO 7
VEGA Deluxe ... 199.
Vega VGA ... 299.

INPUT DEVICES

Advanced PC Keyboards
5160 84key XT/ATswitchable ... 59.
5161 101key XT/ATswitchable ... 79.

CH Products
Mach II Joystick-IBM ... 39.
Mach II Joystick-Apple ... 39.
Mach III Joystick-IBM ... 49.
Mach III Joystick-Apple ... 49.
Gamecard III ... 39.

KEYTRONICS
KB101 101key/AT ... 89.
KB5151 84key deluxe ... 119.

KRAFT
IBM PC/XT/AT Joystick ... 33.
Mouse PC/XT/AT serial ... 89.

LIGHTGATE
Felix for PC/XT/AT ... 159.

LOGITECH
Bus Mouse PC/XT/AT ... 99.
Serial Mouse PC/XT/AT ... 99.
Serial Mouse PS/2 ... 99.

MICROSOFT
Bus Mouse w/PC Paintbrush ... 105.
Serial Mouse w/PC Paintbrush ... 105.
Serial PS/2 w/PC Paintbrush ... 118.

MSC Technologies
PC Mouse serial PC/XT/AT ... 98.
PS/2 Mouse serial ... 98.
PC Mouse bus PC/XT/AT ... 98.

SUMMAGRAPHICS
SummaSketch ... 449.

FLOPPY DISK DRIVES

SONY
31/2"Micro Floppy 1.44Mb ... 149.

TEAC
55BV 360K Floppy/PC/XT/AT ... 89.

TOSHIBA AMERICA
FDD4403 31/2" Micro 760K ... 129.
31/2" Micro 1.44Mb w/kit ... 139.
ND04D 360K FloppyPC/XT ... 84.
ND04E-G 360K Floppy AT gray ... 84.
ND08DE-G 1.2Mb AT gray ... 110.

HARD DISK DRIVES

MICROPOLIS
1333A 53Mb Full ht., 30ms ... 649.
1335 85Mb Full ht.,65ms ... 849.

MINISCRIBE
3650 43Mb Half ht.,61ms ... 389.
6053 53Mb Full ht.,28ms ... 649.
6085 85Mb Full ht.,28ms ... 849.
8438 38Mb Half ht.,65ms.RLL ... 299.

PLUS Development
Plus20 Hardcard, 20Mb,49ms ... 549.
Plus40 Hardcard, 40Mb,39ms ... 719.

SEAGATE
ST225 25Mb,65ms. w/WD cont ... 299.
ST138 38Mb Newl 31/2" ... call.
ST238 38Mb,65ms.w/WD RLL ... 398.
ST251 51Mb,40ms. ... 449.
ST251-1 51Mb,28ms. ... 499.
ST4038 38Mb,40ms-*REDUCED!* ... 469.
ST4096 96Mb,28ms-*REDUCED!* ... 799.

WESTERN DIGITAL
FilecardPS30 PS/2mod.25/30 ... 389.
Filecard30 ... 449.
1006RAH Contr. 1:1interleave ... 199.
1003RAH Controller RLL/AT ... 187.
1003WA2 Floppy/Hard/AT ... 149.
1002-27X Controller RLL/XT ... 98.
1002-WX1 Controller /XT ... 89.

BACKUP DEVICES

ALPHAMICRO
VCR Video tape backup card ... 349.

IOMEGA
Bernoulli 20Mb 51/4" internal ... 945.
Bernoulli dual20Mb 51/4"ext ... 1699.
Bernoulli dual20Mb 8"ext. ... 1895.
Tri-pak 20Mb cartridge,51/4" ... 189.
Tri-pak 20Mb cartridge, 8" ... 255.
PC3B Adapter card PC/XT/AT ... 189.
PS4 AdapterPS/2mod.50,60,80 ... 299.

IRWIN
110D XT/AT 10Mb backup(int) ... 199.
120D XT 20Mb backup(int) ... 369.
145C AT 40Mb backup(int) ... 499.
245P PS/2 40Mb backup ... 479.

TALLGRASS Technologies
1020i AT 20Mb backup(int) ... 338.
1020i XT 20Mb backup(int) ... 338.
1040i AT 40Mb backup(int) ... 599.
1040i XT 40Mb backup(int) ... 599.
Call for External Pricing!

COMPUTERS

Advanced 386 Clones w/0K
Advanced386/16base system ... 1795.
Advanced386/16 w/40Mb ... 2195.
Advanced386/16w/80Mb ... 2495.

Advanced 286 Clones w/0K
Advanced286/10base system ... 849.
Advanced286/10 w/20Mb ... 1099.
Advanced286/10 w/40Mb ... 1299.

Advanced XT Clones w/0K
AdvancedXT base system ... 489.
AdvancedM/XTw/mono/20Mb ... 999.
call for options & details.....

AST Research
Premium286Model140,40Mb ... 2995.
Premium Workstation ... 2195.
Premium386Model340,40Mb ... 4699.
call for all AST models.....

COMPAQ
Portable III Model 20 ... call.
Deskpro286 Model 20 ... call.
Deskpro386 Model 40 ... call.
Portable386 Model 40 ... call.

EPSON
Equity I+ ... call.
Equity II+ ... call.
Equity III+ ... call.

HYUNDAI
Hyundai286 ... call.
HyundaiXT ... call.
Hyundai PC LAN Terminal ... call.

NEC
Multispeed EL backlit LCD ... call.
Multispeed HD, 20Mb ... call.

SHARP
4501 Laptop single floppy ... 699.
4502 dual floppy, 640K ... 1295.
4520 Laptop, 20Mb ... 2195.
PC7100 Portable, 20Mb ... 2195.
PC7221 Portable286, 20Mb ... 2895.

TOSHIBA
T1000 Laptop, single floppy ... 779.
T1200F Laptop, dual floppy ... 1395.
T3100 Laptop 286, 20Mb ... 2995.
T3200 286 full keybd,40Mb ... 3995.
T5100 386, EGA, 40Mb ... 4995.

NETWORKS

3COM
Ethernet card ... 399.
Ethernet II card ... 399.

WESTERN DIGITAL
StarLan/Novell starter kit ... 1077.
(network for less than $400/node)
Ethernet Plus adapter board ... 239.
ViaNet LAN software ... 120.
Starhub ... 329.

MODEMS

Advanced MODEMS
1200baud w/software(int) ... 79.
1200baud External ... 89.
1200baud Pocket MODEM ... 99.
2400baud w/software(int) ... 149.
2400baud External ... 159.

HAYES
Smartmodem 1200B w/sw(int) ... 299.
Smartmodem 1200 External ... 299.
Smartmodem 2400B w/sw(int) ... 447.
Smartmodem 2400 External ... 447.

MIGENT
Pocket MODEM 1200 ... 129.

PROMETHEUS
2400G External ... 199.
2400B/2 w/software (int) ... 149.
2400PS PS/2 w/software(int) ... 299.
1200B/2 w/software(int) sale! ... 79.

MONITORS

AMDEK
VIDEO 310A 12" amber TTL ... 99.
410A 12" amber grn or white ... 153.
1280 13" graphics(1280x800) ... 799.
LaserDrive CD ROMfw/Mic'soft ... 899.

IBM MONITORS
8503 12" Mono(640X480) ... 228.
8512 14" Color analog ... 527.
8513 12" EGA(640x480) ... 595.
8514 16" Hi-res(1024x768) ... 1395.

MAGNAVOX
Multiscan 14" multimode ... 399.
CGA 13" color ... 288.
TTL Mono 12" grn or amber ... 89.

NEC
Multisync II 13" TTL/analog ... 595.
Multisync Plus 15" VGA/EGA ... 945.
Multisync XL 20"(1024x768) ... 2275.
Monograph sys (1024x1024) ... 1555.

SAMSUNG/LTI
Flatscreen 12" amber TTL ... 99.
Mono 12" amber TTL ... 88.
CGA 14" RGB Color ... 288.
EGA 14" EGA/CGA Color ... 395.

SONY
CPD1302 13" Multiscan color ... 699.
CPD1303 13" EGA ... 569.

WYSE
WY30 14" terminal ... 349.
WY50 14" terminal ... 419.
WY60 14" terminal ASCII ... 519.

PRINTERS

DICONICS/KODAK
150P Portable printer(par) ... 339.
300P w/wide carriage(par) ... 539.

EPSON
LX800 80column, 180cps ... 209.
EX800,FX286e,FX86e,LQ850,
LQ1050,LQ1000 ... call.
ACP is your full line Epson dealer

HEWLETT PACKARD
Laserjet Series II ... 1799.
Deskjet w/laser quality ... 895.
Scanjet flatbed scanner ... 1549.

IBM PRINTERS
Proprinter II, 240cps ... 435.
Proprinter X24, 240cps 24pin ... 635.
Proprinter XL24, 240cps 24pin ... 835.

NEC
P2200, 24pin(360x360dpi) ... 399.
P565XL Color,100cpsNLQ ... 1095.
P660 Pinwriter, 65cpsNLQ ... 599.
LC890 Silentwriter Laser ... 3395.

OKIDATA
ML393,180cpsNLQ ... 995.
ML182+, parallel ... 245.
ML192+, parallel ... 319.
ML193+, parallel ... 469.
Laserline 6 (req.IBM int.) ... 1399.

PANASONIC
KX-P1080i, 160cps draft,par ... 185.
KX-P1091i, 192cps draft,par ... 198.
KX-P1092i, 240cps draft,132 ... 339.
KX-P1524, 24pin, 80cpsNLQ ... 595.

SEIKOSHA
SL80A1, 24pin ... 366.
SL130A1, 24pin ... 749.
SBP10A1, 18pin, 800cps ... 3299.
SK3000A1, 9pin, 300cps,s/p ... 399.
SK3005A1, 9pin, 300cps,132 ... 499.

TOSHIBA
P321SL, 24pin, 216cps ... 499.
P341SL, 24pin, 216cps ... 699.
P351SX,(color add $179) ... 1099.
Pagelaser 12, High volume ... call.

PLOTTERS

HOUSTON INSTRUMENTS
DMP41 or 42 ... 2399.
DMP51 or 52 ... 3099.
SCANCAD ... 2499.
DMP56A ... 4399.

ROLAND
DXY880, 8 pen AB size ... 1088.
DXY980 ... 1488.

ACCESSORIES

COMPUTER ACCESSORIES
P1S Power Director ... 89.
P2S 4 outlet stand alone ... 62.
F20 Print Saver ... 289.
A200 PC Data Display Module ... 888.

KENSINGTON
Masterpiece Power Center ... 98.
Masterpiece Plus ... 108.
System Saver IIe ... 69.
System Saver IIgs ... 119.
Printer Muffler, 80column ... 39.

MICROCOMP. ACCESSORIES
51/4" Rolltop Diskette File ... 29.
31/2" Rolltop Diskette File ... 22.
PC Vacuum Cleaner ... 39.
CRT Valet (12"x12") ... 119.
Underdesk Keyboard Drawer ... 49.

FLIP n' FILE
FNF MiniXT,100 51/4",smoke ... 10.
FNF MicroXT,100 31/2",smoke ... 11.
FNF Maxi,50 8", smoke ... 15.
FNF Micro,25 31/2", smoke ... 8.
Universal Printer Stand ... 9.

DISKETTES-lifetime warranty
5 1/4" DS/DD Diskettes PC/XT360K
Maxell MD2-D ... 11.
Verbatim Datalife DS/DD ... 12.
Fuji MD2D ... 11.
Advanced Color w/plastic box ... 8.
5 1/4" DS/HD High Density AT1.2Mb
Maxell MD2-DD ... 23.
Verbatim DatalifeHD ... 23.
Fuji MD2HD ... 22.
3 1/2" High Density Disks(1.44Mb)
Maxell ... 49.
Verbatim Datalife ... 49.
Fuji ... 49.
Sony ... 49.

PRINTER BUFFERS
Advanced 64K parallel buffer ... 129.
Advanced 64K AB buffer ... 169.

SWITCH BOXES
Advanced 2-position AB, 3636 ... 29.
Advanced 2-position AB, 2525 ... 29.
Advanced par/ser converter ... 69.
Advanced ser/par converter ... 69.
BuffaloSX PC share (up to 7) ... 499.
Logical Connection 256K ... 499.

INTELLICOM
Longlink-Parallel ... 199.
Longlink-Serial ... 199.
Quicklink-Par to Ser-64K ... 149.
Quicklink-Par to Par-64K ... 149.
Megalink-4prt Buff-Par & Ser ... 299.

TRIPPLITE
Isobar4 surge supp w/4 outlets ... 59.
Isobar8 surge supp w/8 outlets ... 69.
Line Conditioner w/4 outlets ... 149.
Backup Power Supply, 450w ... 399.
Backup Power supply, 675w ... 575.
Backup Power Supply, 1000w ... 999.
Backup Power Supply, 2000w ... 1299.

GOLDSTAR DVM/SCOPES
DM 6135-3.5 DVM ... 49.95
DM 6235-3.5 DVM ... 52.95
DM 6335-3.5 DVM ... 59.95
DM 6133-3.5 DVM ... 59.95
OS-7020-20MHz Scope ... 419.
OS-7040-40MHz Scope ... 699.

MEMORY UPGRADES
64K or 256K Upgrades(set of 9) ... call.
1Mb SIMM's or Ram's ... call.

SOFTWARE

ncp=not copy protected
cp=copy protected

ALDUS-ncp
Pagemaker/IBM ... 499.
Pagemaker/MAC ... 379.
Freehand/MAC ... call.

ALPHA SOFTWARE-ncp
Advanced Keyworks1.0 ... 175.
Alpha/three1.0 ... 232.

AMER. SMALL BUSINESS-ncp
Design CAD 3D 3.0 ... 168.

ANSA
Paradox v1.1 ... 329.
Paradox v2.0 w/EMS&EEMS ... 424.

ASHTON TATE-ncp
dBaseIII plus 1.1 ... 422.
Rapidfile 1.2 ... 219.
Multimate Advantage!! 1.0 ... 275.
Applause Presentation pkg ... call.

BORLAND-ncp
Sidekick plus ... 139.
Sidekick 1.0 sale! old vers. ... 19.
Turbo BASIC 1.0 ... 69.
Turbo PASCAL 4.0 ... 69.
Turbo C 1.5 ... 69.
Reflex 1.14 ... 99.
Quattro ... 149.
Eureka ... 99.

BRODERBUND-cp
Print Shop ... 40.
Graphics Library 1 or 2 ... 23.
Toy Shop ... 37.
Memory Mate 2.0-ncp ... 45.

COMPUSERVE
Subscription kit ... 29.
Groilers Online Encyclopedia ... 34.

COMPUTER ASSOCIATES-ncp
Supercalc 4 v1.1 ... 339.
Superproject plus v3.0 ... 339.

CROSSTALK COMM-ncp
Crosstalk XVI v3.61 ... 99.
Crosstalk MK4 v1.01 ... 139.

DAC SOFTWARE-ncp
DAC Easy Light v1.0 ... 49.
DAC Easy Accounting v2.0 ... 69.

DIGITAL RESEARCH-ncp
GEM Draw plus v2.01 ... 185.
GEM Desktop Publisher ... 270.

EXECUTIVE SYSTEMS-ncp
XTREE v2.0 ... 45.
XTREE Professional v1.0 ... 89.

FUNK SOFTWARE-ncp
Sideways v3.2 ... 42.
InWord v1.0 ... 59.

5th GENERATION-ncp
Fastback Plus ... 99.

FOX SOFTWARE
Foxbase+ single user ... 220.

GENERIC-ncp
Generic CADD 3.0 ... 65.

LIFETREE-ncp
Volkswriter 3 Plus ... 160.
Total Word v1.0 ... 259.

LOTUS
Hal ... 99.
Lotus 123/Hal Bundle ... call.
Manuscript ... 349.

MECA-cp
Managing your Money,Tobias ... 129.

MICROLYTICS
Gofer ... 45.
Wordfinder ... 65.

MICROPRO-ncp
Wordstar Professional Rel 4 ... 269.
Wordstar 2000 Rel 3 ... 199.

MICRORIM-ncp
R:BASE 5000 ... 369.
R Base SystemV ... 469.

MICROSOFT-ncp
Windows 386 ... 139.
Windows 2.03 ... 66.
Quick C v1.0 ... 69.
Quick BASIC ... 69.
Word v4.0 ... 219.
Excel v2.0/AT ... 319.

NORTON-ncp
Utilities 4.0 ... 69.
Commander ... 49.
Guides(assem,C,bas, or pascal) ... 59.

PAPERBACK SOFTWARE
VP Planner sale! ... 49.
VP Expert ... 69.

SURPASS SOFTWARE-ncp
Surpass v1.0 ... 299.

SYMANTEC-ncp
Q & A v2.0 ... 219.
Q & A Write ... 139.
Grand View ... 175.

TRAVELING SOFTWARE
Laplink Plus ... 86.

TURNER HALL-ncp
SQZ! Plus ... 65.
Note-it Plus(Lotus123 notes) ... 55.
Cambridge Spreadsheet Anlst ... 75.
4Word (123 Wordprocessing) ... 65.

XEROX
Ventura ... 499.

WORDPERFECT-ncp
WordPerfect v5.0 ... 240.
WordPerfect Library v1.1 ... 65.
WordPerfect Executive ... 125.
DataPerfect v2.0 ... 299.

MasterCard VISA AMERICAN EXPRESS

Advanced Computer Products, Inc.

Mail Order: P.O. Box 17329 Irvine, CA 92713
Retail: 1310-B E. Edinger, Santa Ana, CA 92705

for Fast Service Order by Phone!

NEW PHONE FOR ALL USA
800-FONE ACP
800-366-3227 • 714-558-8813

- $25.00 Minimum MAIL ORDER
- No Surcharge for VISA or Mastercard
- Volume purchasing agreements available
- Orders subject to availability
- Pricing subject to change without notice
- Supply limited on certain items
- ACP Retail store pricing may vary. Not responsible for typos.
- Limited warranties and other conditions may apply

Call for our NEW 1988 Catalog...

JDR Microdevices®

MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.

▪ 30 DAY MONEY BACK GUARANTEE ▪ 1 YEAR WARRANTY ON ALL PRODUCTS ▪ TOLL-FREE TECHNICAL SUPPORT

STATIC RAMS

PART	SIZE	SPEED	PRICE
2112	256x4	450ns	2.99
2114	1024x4	450ns	.99
2114L-2	1024x4	200ns	1.49
TC5516	2048x8	250ns	3.95
TMM2016-200	2048x8	200ns	3.25
TMM2016-150	2048x8	150ns	3.29
TMM2016-100	2048x8	100ns	4.29
HM6116-4	2048x8	200ns	4.95
HM6116-3	2048x8	150ns	5.95
HM6116-2	2048x8	120ns	6.45
HM6116LP-4	2048x8	200ns	5.95
HM6116LP-3	2048x8	150ns	6.45
HM6116LP-2	2048x8	120ns	6.95
HM6264LP-15	8192x8	150ns	9.95
HM6264LP-12	8192x8	120ns	10.95
HM43256LP-15	32768x8	150ns	12.95
HM43256LP-12	32768x8	120ns	14.95
HM43256LP-10	32768x8	100ns	19.95

▪ CALL TO CONFIRM CURRENT PRICES ▪

DYNAMIC RAMS

PART	SIZE	SPEED	PRICE
4116-200	16384x1	200ns	.89
4116-150	16384x1	150ns	.99
MK4332	32768x1	200ns	6.95
4164-150	65536x1	150ns	2.89
4164-120	65536x1	120ns	3.19
4164-100	65536x1	100ns	3.95
TMS4164	65536x1	150ns	2.89
TMS4416	16384x4	150ns	8.95
41128-150	131072x1	150ns	5.95
TMS4464-15	65536x4	150ns	10.95
TMS4464-12	65536x4	120ns	11.95
41256-150	262144x1	150ns	12.45
41256-120	262144x1	120ns	12.95
41256-100	262144x1	100ns	13.45
41256-80	262144x1	80ns	13.95
HM51258-100	262144x1	100ns	13.95
1 MB-120	1048576x1	120ns	34.95
1 MB-100	1048576x1	100ns	37.95

▪ CALL TO CONFIRM CURRENT PRICES ▪

EPROMS

PART	SIZE	SPEED	Vpp	PRICE
2708	1024x8	450ns	25V	4.95
2716	2048x8	450ns	25V	3.49
2716-1	2048x8	350ns	25V	3.95
2732	4096x8	450ns	25V	3.95
2732A	4096x8	250ns	21V	3.95
27C64	8192x8	250ns	12.5V	4.95
2764	8192x8	450ns	12.5V	3.49
2764-250	8192x8	250ns	12.5V	3.69
2764-200	8192x8	200ns	12.5V	4.25
MCM68766	8192x8	350ns	21V	15.95
27128	16384x8	250ns	12.5V	4.95
27128A-200	16384x8	200ns	12.5V	5.95
27C256	32768x8	250ns	12.5V	7.95
27256	32768x8	250ns	12.5V	5.95
27256-200	32768x8	200ns	12.5V	7.95
27512	65536x8	250ns	12.5V	11.95
27C512	65536x8	250ns	12.5V	12.95
27C101-20	131072X8	200ns	12.5V	34.95

▪ CALL TO CONFIRM CURRENT PRICES ▪

CO-PROCESSORS

8087	5 MHz	99.95
8087-2	8 MHz	159.95
8087-1	10 MHz	229.95
80287	6 MHz	179.95
80287-8	8 MHz	249.95
80287-10	10 MHz	309.95
80387-16	16 MHz	499.95
80387-20	20 MHz	799.95
80387-25	25 MHz	999.95



intel 5 YEAR WARRANTY

INCLUDES MANUAL & SOFTWARE GUIDE

CALL FOR VOLUME QUOTES
ORDER TOLL FREE

MICROPROCESSORS

6500

6502	2.25
6502A	2.69
6502B	4.25
65C02*	7.95
6520	1.65
6522	2.95
6522A	5.95
6526	13.95
6532	5.95
6545A	3.95
6551	2.95
6551A	6.95
* CMOS	

6800

6800	1.95
6802	2.95
6803	3.95
6809	2.95
68B09	5.99
6809E	2.95
68B09E	5.49
6810	1.95
6820	2.95
6821	1.25
68B21	1.85
6840	3.95
6845	2.75
68B45	4.95
6847	4.75
6850	1.95
68B50	1.75
6883	22.95
68000	9.95

8000

8031	3.95
8035	1.49
8039	1.95
8052AH BASIC	34.95
8080	2.49
8085	1.95
8085A-2	3.75
8086	6.49
8088	5.99
8088-1	12.95
8088-2	7.95
8155	2.49
8156	2.95
8155-2	3.95
8741	9.95
8742	29.95
8748	7.95
8749	9.95
8755	14.95
80286	79.95
80286-8	249.95

8200

8205	3.29
8212	1.49
8216	1.49
8224	2.25
8228	2.25
8237	3.95
8237-5	4.75
8238	4.49
8243	1.95
8250	6.95
8251	1.29
8251A	1.69
8253	1.59

8200

8253-5	1.95
8254	2.79
8255	1.49
8255-5	1.59
8256	15.95
8259	1.95
8259-5	2.29
8272	4.39
8274	4.95
8275	16.95
8279	2.49
8279-5	2.95
8282	3.95
8283	3.95
8284	2.25
8286	3.95
8287	3.95
8288	4.95

Z-80

Z80-CPU	1.25
Z80A-CPU	1.29
Z80B-CPU	2.75
Z80A-CTC	1.69
Z80B-CTC	4.25
Z80A-DART	5.95
Z80B-DART	6.95
Z80A-DMA	5.95
Z80A-PIO	1.89
Z80B-P10	4.25
Z80A-SIO/0	5.95
Z80B-SIO/0	12.95
Z80A-SIO/1	5.95
Z80A-SIO/2	5.95
Z80B-SIO/2	12.95
Z8671BASIC	9.95

HIGH-TECH SPOTLIGHT

SCSI HOST ADAPTOR $49.95

A LOW POWER, SHORT SLOT CARD FOR PC COMPATIBLES THAT CAN CONTROL UP TO SEVEN SCSI DEVICES.THIS POPULAR STANDARD OFFERS SPEED, EXPANDABILITY AND THE ADVANTAGES OF USING A DEVICE INDEPENDENT BUS. INCLUDES CABLES.
MCT-SCSI

V-20 SERIES

SPEED UP YOUR PC BY 10 TO 40%!

- HIGH SPEED ADDRESS CALCULATION IN HARDWARE
- PIN COMPATIBLE WITH 8088
- SUPERSET OF 8088 INSTRUCTION SET
- LOW POWER CMOS

V20*	5 MHz	8.95	V20*	8 MHz	10.95
V20*	10 MHz	12.95	V30	8 MHz	13.95

VOLTAGE REGULATORS

7805T	.49	7812K	1.39
7808T	.49	7905K	1.69
7812T	.49	7912K	1.49
7815T	.49	78L05	.49
7905T	.59	78L12	.49
7908T	.59	79L05	.69
7912T	.59	79L12	1.49
7915T	.59	LM323K	3.49
7805K	1.59	LM338K	4.49

PALS

16L8	2.95
16R8	2.95
16R6	2.95
16R4	2.95

UARTS

AY5-1013	3.95
AY3-1015	4.95
TR1602	3.95
2651	4.95
IM6402	3.95
IM6403	9.95
INS8250	6.95
NS16450	10.95

MISCELLANEOUS

ADC0804	2.99	9334	1.75
ADC0809	3.85	9368	2.85
DAC0800	3.29	9602	.69
DAC0808	1.95	ULN2003	.79
DAC1022	5.95	MAX232	7.95
MC1408L8	1.95	MC3470	1.95
8T28	1.29	MC3487	2.95
8T97	.59	AY5-3600 PRO	11.95
DP8304	2.29		

INTERSIL

ICL7107	10.95
ICL7660	1.99
ICL8038	3.85
ICM7207A	5.95
ICM7208	15.95

30 DAY MONEY-BACK GUARANTEE
TOLL-FREE TECHNICAL SUPPORT

74LS00 TTL LOGIC

74LS00	.16	74LS112	.29	74LS241	.69
74LS01	.18	74LS122	.45	74LS242	.69
74LS02	.17	74LS123	.49	74LS243	.69
74LS03	.18	74LS124	2.75	74LS244	.69
74LS04	.16	74LS125	.39	74LS245	.79
74LS05	.18	74LS126	.39	74LS251	.49
74LS08	.18	74LS132	.39	74LS253	.49
74LS09	.18	74LS133	.49	74LS257	.39
74LS10	.16	74LS136	.39	74LS258	.49
74LS11	.22	74LS138	.39	74LS259	1.29
74LS12	.22	74LS139	.39	74LS260	.49
74LS13	.26	74LS145	.99	74LS266	.39
74LS14	.39	74LS147	.99	74LS273	.79
74LS15	.26	74LS148	.99	74LS279	.39
74LS20	.17	74LS151	.39	74LS280	1.98
74LS21	.22	74LS153	.39	74LS283	.59
74LS22	.22	74LS154	1.49	74LS290	.89
74LS27	.23	74LS155	.59	74LS293	.89
74LS28	.26	74LS156	.49	74LS299	1.49
74LS30	.17	74LS157	.35	74LS322	3.95
74LS32	.18	74LS158	.29	74LS323	2.49
74LS33	.28	74LS160	.29	74LS365	.39
74LS37	.26	74LS161	.39	74LS367	.39
74LS38	.26	74LS162	.49	74LS368	.39
74LS42	.39	74LS163	.39	74LS373	.79
74LS47	.75	74LS164	.49	74LS374	.79
74LS48	.85	74LS165	.65	74LS375	.95
74LS51	.17	74LS166	.95	74LS377	.79
74LS73	.29	74LS169	.95	74LS390	1.19
74LS74	.24	74LS173	.49	74LS393	.79
74LS75	.29	74LS174	.39	74LS541	1.49
74LS76	.29	74LS175	.39	74LS624	1.95
74LS83	.49	74LS191	.49	74LS640	.99
74LS85	.49	74LS192	.69	74LS645	.99
74LS86	.22	74LS193	.69	74LS670	.89
74LS90	.39	74LS194	.69	74LS682	3.20
74LS92	.49	74LS195	.69	74LS688	2.40
74LS93	.39	74LS196	.59	74LS783	22.95
74LS95	.49	74LS197	.59	25LS2521	2.80
74LS107	.34	74LS221	.59	26LS31	1.95
74LS109	.36	74LS240	.69	26LS32	1.95

LINEAR COMPONENTS

TL071	.69	LM380	.89	XR2206	3.95
TL072	1.09	LM383	1.95	XR2211	2.95
TL074	1.95	LM386	.89	LM2917	1.95
TL081	.59	LM393	.45	CA3046	.89
TL082	.99	LM394H	5.95	CA3146	1.29
TL084	1.49	LM399H	5.95	MC3373	1.29
LM301	.34	TL494	4.20	MC3470	1.95
LM309K	1.25	TL497	3.25	MC3480	8.95
LM310	1.75	NE555	.29	MC3487	2.95
LM311	.59	NE556	.49	LM3900	.49
LM311H	.89	NE558	.79	LM3909	.98
LM311K	3.49	NE564	1.95	LM3911	2.25
LM312H	1.75	LM565	.95	LM3914	1.89
LM317T	.69	LM566	1.49	LM3915	1.89
LM318	1.49	LM567	.79	MC4024	3.49
LM319	1.25	NE570	2.95	MC4044	3.99
LM323K	3.49	NE590	2.50	RC4136	1.25
LM324	.34	NE592	.98	RC4558	.69
LM331	3.95	LM723	.49	LM1360	1.49
LM334	1.19	LM733	.98	75107	1.49
LM335	1.79	LM741	.29	75108	1.49
LM336	1.75	LM747	.69	75110	1.95
LM338K	4.49	MC1330	1.69	75150	1.95
LM339	.59	MC1350	1.19	75154	1.95
LF347	2.19	LM1458	.35	75188	1.25
LF353	.59	LM1488	.49	75189	1.25
LF356	.99	LM1489	.49	75451	.39
LF357	.99	LM1496	.85	75452	.39
LM358	.59	ULN2003	.79	75477	1.29

HIGH SPEED CMOS LOGIC

74HC00	.21	74HC244	.85	74HCT138	.35
74HC04	.25	74HC245	.85	74HCT139	.55
74HC08	.25	74HC273	.69	74HCT157	.59
74HC14	.35	74HC367	.69	74HCT161	.79
74HC32	.35	74HC373	.69	74HCT240	.89
74HC74	.35	74HC390	.79	74HCT244	.89
74HC138	.45	74HC374	.69	74HCT245	.99
74HC139	.45	74HC4040	.89	74HCT273	.99
74HC154	1.09	74HCT00	.25	74HCT373	.99
74HC157	.55	74HCT04	.27	74HCT374	.99
74HC161	.65	74HCT08	.25	74HCT393	.99
74HC164	.65	74HCT32	.27	74HCT4040	.99
74HC175	.59	74HCT74	.45	74HCT4060	1.49

STANDARD CMOS LOGIC

4001	.19	4028	.65	4069	.19
4011	.19	4040	.69	4070	.29
4013	.35	4042	.59	4081	.22
4015	.29	4044	.69	4093	.49
4016	.29	4046	.69	14411	9.95
4017	.49	4047	.69	14433	14.95
4018	.69	4049	.29	14497	6.95
4020	.59	4050	.29	4503	.49
4021	.69	4051	.69	4511	.69
4023	.25	4052	.69	4518	.85
4024	.49	4053	.69	4528	.79
4025	.25	4060	.69	4538	.95
4027	.39	4066	.29	4702	9.95

7400 SERIES LOGIC

7400		74121	.29	74F240	1.29
7400	.19	74123	.49	74S00	.29
7402	.19	74125	.45	74S02	.29
7404	.19	74150	1.35	74S04	.29
7406	.29	74151	.55	74S08	.35
7407	.29	74153	.55	74S10	.29
7408	.24	74154	1.49	74S32	.35
7410	.19	74157	.55	74S74	.49
7411	.25	74159	1.65	74S86	.35
7414	.49	74161	.69	74S112	.50
7416	.25	74164	.85	74S124	2.75
7417	.25	74166	1.00	74S138	.79
7420	.19	74175	.89	74S153	.79
7430	.19	74367	.65	74S157	.79
7432	.29			74S158	.95
7438	.29	74F/74S		74S163	1.29
7442	.49	74F00	.35	74S175	.79
7445	.69	74F02	.35	74S195	1.49
7447	.89	74F04	.35	74S240	1.49
7473	.34	74F08	.35	74S241	1.49
7474	.33	74F10	.35	74S244	1.49
7475	.45	74F32	.35	74S280	1.95
7476	.35	74F64	.55	74S287	1.69
7483	.50	74F74	.39	74S288	1.69
7485	.59	74F86	.55	74S299	2.95
7586	.35	74F138	.79	74S373	1.69
7489	2.15	74F139	.79	74S374	1.69
7490	.39	74F253	.89	74S471	4.95
7493	.35	74F157	.89	74S571	2.95

JDR MICRODEVICES AND THE JDR MICRODEVICES LOGO ARE REGISTERED TRADEMARKS OF JDR MICRODEVICES. IBM, AT, PS/2 ARE TRADEMARKS OF INTERNATIONAL BUSINESS MACHINES.

Circle 131 on Reader Service Card

CRYSTALS

32.768 KHz	.95
1.0 MHz	2.95
1.8432	2.95
2.0	1.95
2.4576	1.95
3.579545	1.95
4.0	1.95
5.0	1.95
5.0688	1.95
6.0	1.95
6.144	1.95
8.0	1.95
10.0	1.95
10.738635	1.95
12.0	1.95
14.31818	1.95
16.0	1.95
18.0	1.95
18.432	1.95
20.0	1.95
22.1184	1.95

OSCILLATORS

1.0MHz	5.95
1.8432	5.95
2.0	5.95
2.4576	5.95
2.5	5.95
4.0	4.95
5.0	4.95
5.0688	4.95
6.0	4.95
6.144	4.95
8.0	4.95
10.0	4.95
12.0	4.95
14.31818	1.95
15.0	1.95
16.0	4.95
18.432	4.95
20.0	4.95
24.0	4.95

DISCRETE

1N751	.49	2N4403	.25
IN5402	.25	2N6045	1.75
IN4004	10/1.00	MPS-A13	.40
IN4148	25/1.00	TIP31	.49
KBP02	.55	4N26	.69
PN2222	.10	4N27	.69
2N2222	.10	4N28	.69
2N2907	.25	4N33	.89
2N3055	.79	4N37	1.19
2N3904	.10	MCT-2	.59
2N3906	.10	MCT-6	1.29
2N4401	.25	TIL-111	.99

CAPACITORS

TANTALUM

1.0µf	15V	.12
6.8	15V	.42
10	15V	.45
22	15V	.99
1.0µf	35V	.45
2.2	35V	.19
4.7	35V	.39
10	35V	.69

DISC

10pf	50V	.05
22	50V	.05
33	50V	.05
47	50V	.05
100	50V	.05
220	50V	.05
.001µf	50V	.05
.005	50V	.05
.01	50V	.07
.05	50V	.07
.1	12V	.10
.1	50V	.12

ELECTROLYTIC

RADIAL

1µf	50V	.14
4.7	50V	.11
10	50V	.11
47	35V	.13
100	16V	.15
100	50V	.23
220	35V	.20
470	25V	.30
2200	16V	.70
4700	25V	1.45

AXIAL

1µf	50V	.14
10	16V	.14
10	50V	.16
22	16V	.14
47	50V	.19
100	35V	.19
470	50V	.29
1000	16V	.29
2200	16V	.70
4700	16V	1.25

SOLDER STATION

UL APPROVED

- ADJUSTABLE HEAT SETTING
- TIP TEMPERATURE READOUT
- REPLACEMENT TIPS AVAILABLE $2.95

168-2C


$49.95



FULL 1 YEAR WARRANTY ON EVERY PRODUCT!

WIREWRAP PROTOTYPE CARDS

FR-4 EPOXY GLASS LAMINATE WITH GOLD PLATED EDGE-CARD FINGERS AND SILK SCREENED LEGENDS.



FOR PS/2

JDR-PR32	32 BIT PROTOTYPE CARD	69.95
JDR-PR16	16 BIT WITH I/O DECODING LAYOUT	49.95
JDR-PR16PK	PARTS KIT FOR JDR-PR16 ABOVE	15.95
JDR-PR16V	16 BIT FOR VIDEO APPLICATIONS	39.95

FOR AT

JDR-PR10	16BIT WITH I/O DECODING LAYOUT	34.95
JDR-PR10PK	PARTS KIT FOR JDR-PR10 ABOVE	12.95

FOR XT

IBM-PR1	WITH +5V AND GROUND PLANE	27.95
IBM-PR2	AS ABOVE WITH I/O DECODING LAYOUT	29.95

POWER SUPPLIES

APPLE TYPE SUPPLY

- APPLE CONNECTOR
- +5V @ 6A, +12V @ 3A, -5V @ 1A, -12V @ 1A

PS-A $49.95



FLOPPY DRIVE SUPPLY

- +5V @ 2.5A, +12V @ 2A, -12V @ .1A
- +5V @ 5A, IF +12 NOT USED

PS-ASTEC $24.95



75 WATT SUPPLY

- UL APPROVED
- +5V @ 7A, +12V @ 3A, -5V @ 300MA, -12V @ 250MA

PS-1558 $34.95

MICRO SUPPLY

- UL APPROVED, 144 WATTS
- +5V @ 18A, +12V @ 4A, -12V @ 500MA

PS-1554 $29.95

GENDER CHANGERS

GENDER-FF	FEMALE-MALE	7.95
GENDER-MM	MALE-MALE	7.95
GENDER-MF	MALE-FEMALE	7.95
GENDER-NM	NULL MODEM	8.95
GENDER-JB	JUMPER BOX	8.95
GENDER-MT	MINITESTER	14.95



BIT RATE GENERATORS

MC14411	9.95
BR1941	4.95
4702	9.95
COM5016	16.95
COM8116	8.95
MM5307	4.95

BYPASS CAPACITORS

.01xx	CERAMIC DISC	100/5.00
.01xx	MONOLITHIC	100/10.00
.1xx	CERAMIC DISC	100/6.50
.1xx	MONOLITHIC	100/12.50

CLOCK CIRCUITS

MC146818	5.95	MM58174	9.95
MM58167	9.95	MSM5832	2.95


DISK CONTROLLERS

1771	4.95	2797	29.95
1791	9.95	8272	4.39
1793	9.95	UPD765	4.39
1795	12.95	MB8876	12.95
1797	12.95	MB8877	12.95
2791	19.95	1691	6.95
2793	19.95	2143	6.95

"SNAPABLE" HEADERS

CAN BE SNAPPED APART TO MAKE ANY SIZE HEADER, ALL WITH .1" CENTERS

1x40	STRAIGHT LEAD	.99
1x40	RIGHT ANGLE LEAD	.49
2x40	2 STRAIGHT LEADS	2.49
2x40	2 RIGHT ANGLE LEADS	2.99




RS-232 BREAKOUT BOX

FOR TROUBLESHOOTING SERIAL COMMUNICATIONS

- OPEN/CLOSE INDIVIDUAL CIRCUITS
- 20 JUMPERS CROSS-CONNECT ANY TWO CIRCUITS
- 10 LEDS SHOW CIRCUIT ACTIVITY

GENDER-BO $34.95



IDC CONNECTORS/RIBBON CABLE

DESCRIPTION	ORDER BY	CONTACTS					
		10	20	26	34	40	50
SOLDER HEADER	IDHxxS	.82	1.29	1.68	2.20	2.58	3.24
RIGHT ANGLE SOLDER HEADER	IDHxxSR	.85	1.35	1.76	2.31	2.72	3.39
WIREWRAP HEADER	IDHxxW	1.86	2.98	3.84	4.50	5.28	6.63
RIGHT ANGLE WIREWRAP HEADER	IDHxxWR	2.05	3.28	4.22	4.45	4.80	7.30
RIBBON HEADER SOCKET	IDSxx	.63	.89	.95	1.29	1.49	1.69
RIBBON HEADER	IDMxx	--	5.50	6.25	7.00	7.50	8.50
RIBBON EDGE CARD	IDExx	.85	1.25	1.35	1.75	2.05	2.45
10' PLASTIC RIBBON CABLE	RCxx	1.60	3.20	4.10	5.40	6.40	7.50

FOR ORDERING INSTRUCTIONS, SEE D-SUBMINIATURE CONNECTORS BELOW

EPROM ERASERS

SPECTRONICS CORPORATION

Model	Timer	# of Chips	Intensity (uW/Cm²)	Unit Cost
PE-140	NO	9	8,000	$ 89
PE-140T	YES	9	8,000	$139
PE-240T	YES	12	9,600	$189



DATARASE **$34.95**

- ERASES 2 EPROMS IN 10 MINUTES
- VERY COMPACT, NO DRAWER
- METAL SHUTTER PREVENTS UV LIGHT FROM ESCAPING



JOYSTICK

- SET X-Y AXIS FOR AUTO CENTER OR FREE MOVEMENT
- FIRE BUTTON FOR USE WITH GAME SOFTWARE
- COMPATIBLE WITH IBM, APPLE II, IIE, IIC, ATARI & VIC 20/64

GC-10

$19.95



D-SUBMINIATURE CONNECTORS

DESCRIPTION		ORDER BY	CONTACTS					
			9	15	19	25	37	50
SOLDER CUP	MALE	DBxxP	.45	.59	.69	.69	1.35	1.85
	FEMALE	DBxxS	.49	.69	.75	.75	1.39	2.29
RIGHT ANGLE PC SOLDER	MALE	DBxxPR	.49	.69	--	.79	2.27	--
	FEMALE	DBxxSR	.55	.75	--	.85	2.49	--
WIREWRAP	MALE	DBxxPWW	1.69	2.56	--	3.89	5.60	--
	FEMALE	DBxxSWW	2.76	4.27	--	6.84	9.95	--
IDC RIBBON CABLE	MALE	IDBxxP	1.39	1.99	--	2.25	4.25	--
	FEMALE	IDBxxS	1.45	2.05	--	2.35	4.49	--
HOODS	METAL	MHOODxx	1.05	1.15	1.25	1.25	--	--
	PLASTIC	HOODxx	.39	.39	--	.39	.69	.75

ORDERING INSTRUCTIONS:
INSERT THE NUMBER OF CONTACTS IN THE POSITION MARKED "xx" OF THE "ORDER BY" PART NUMBER LISTED. EXAMPLE : A 15 PIN RIGHT ANGLE MALE PC SOLDER WOULD BE DB15PR.

MOUNTING HARDWARE 59¢


IC SOCKETS/DIP CONNECTORS

DESCRIPTION	ORDER BY	CONTACTS								
		8	14	16	18	20	22	24	28	40
SOLDERTAIL SOCKETS	xxST	.11	.11	.12	.15	.18	.15	.20	.22	.30
WIREWRAP SOCKETS	xxWW	.59	.69	.69	.99	1.09	1.39	1.49	1.69	1.99
ZIF SOCKETS	ZIFxx	--	4.95	4.95	--	5.95	--	5.95	6.95	9.95
TOOLED SOCKETS	AUGATxxST	.62	.79	.89	1.09	1.29	1.39	1.49	1.69	2.49
TOOLED WW SOCKETS	AUGATxxWW	1.30	1.80	2.10	2.40	2.50	2.90	3.15	3.70	5.40
COMPONENT CARRIERS	ICCxx	.49	.59	.69	.99	.99	.99	.99	1.09	1.49
DIP PLUGS (IDC)	IDPxx	.95	.49	.59	1.29	1.49	--	.85	1.49	1.59

FOR ORDERING INSTRUCTIONS SEE D-SUBMINIATURE CONNECTORS ABOVE

SHORTING BLOCKS

5/$1.00



LITHIUM BATTERIES

- 6.8V FOR 286/386 COMPUTERS
- MOTHERBOARD CONNECTOR
- ADHESIVE VELCRO STRIP FOR EASY MOUNTING

LITHIUM 6.8V $11.95



LITHIUM-3V 3V COIN TYPE LITHIUM BATTERY $1.95
3V-MHW BATTERY HOLDER $1.49

VISA

MasterCard

JDR MICRODEVICES, 110 KNOWLES DRIVE, LOS GATOS, CA 95030
LOCAL (408) 866-6200 FAX (408) 378-8927 TELEX 171-110

RETAIL STORE: 1256 SOUTH BASCOM AVE., SAN JOSE, CA (408) 947-8881
HOURS: M–F 10–7 SAT. 9–5 SUN. 12–4

TERMS: MINIMUM ORDER $10.00 FOR SHIPPING AND HANDLING INCLUDE $2.50 FOR UPS GROUND AND $3.50 UPS AIR. ORDERS OVER 1 LB. AND FOREIGN ORDERS MAY REQUIRE ADDITIONAL SHIPPING CHARGES—PLEASE CONTACT THE SALES DEPARTMENT FOR THE AMOUNT. CA RESIDENTS MUST INCLUDE APPLICABLE SALES TAX. PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE. WE ARE NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS. WE RESERVE THE RIGHT TO LIMIT QUANTITIES AND TO SUBSTITUTE MANUFACTURER. ALL MERCHANDISE SUBJECT TO PRIOR SALE. A FULL COPY OF OUR TERMS IS AVAILABLE UPON REQUEST. ITEMS PICTURED MAY ONLY BE REPRESENTATIVE.

MMC MICROCOMPUTER MARKETING COUNCIL

ORDER TOLL FREE 800-538-5000

COPYRIGHT 1988 JDR MICRODEVICES

CONTINENTAL U.S. AND CANADA

MMC MICROCOMPUTER MARKETING COUNCIL of the Direct Marketing Association, Inc.

JDR Microdevices®

• 30 DAY MONEY BACK GUARANTEE • 1 YEAR WARRANTY ON ALL PRODUCTS • TOLL-FREE TECHNICAL SUPPORT

2400 BAUD MODEMS



$129.95



$169.95

PROMETHEUS

SAVE TIME AND TELEPHONE CHARGES WITH A HIGH SPEED 2400 BAUD MODEM FROM JDR.

INTERNAL 2400 BAUD

- AUTO DIAL ANSWER
- SELF TEST ON POWER-UP
- TOUCHTONE OR PULSE DIALING
- HAYES & BELL SYSTEMS COMPATIBLE
- FULL OR HALF DUPLEX
- MIRROR II COMMUNICATIONS SOFTWARE INCLUDED

MCT-24I		$129.95
MCT-12I	1200 BAUD 1/2 CARD	$69.95
MCT-24M	2400 BAUD FOR PS/2	$249.95

EXTERNAL 2400 BAUD

- 2400/1200/300 HAYES COMPATIBLE
- 8 EASY-TO-READ STATUS LED'S
- CALL PROGRESS MONITORING & ADJUSTABLE VOLUME
- 2ND PHONE JACK FOR VOICE COMMUNICATIONS
- REQUIRES SERIAL PORT & CABLE (OPTIONAL)

MCT-24E		$169.95
MCT-12E	1200 BAUD EXTERNAL	$99.95

APPLE/MACINTOSH MODEMS

MACINTOSH 2400 BAUD EXTERNAL AS ABOVE WITH CABLE AND PROCOM-M SOFTWARE.

MCT-24EM		$199.95
MCT-24A	APPLE II 2400 BAUD MODEM	$179.95
MCT-12A	APPLE II1200 BAUD MODEM	$139.95

POCKET MODEM

$99.95



YOU'LL NEVER BE FAR FROM YOUR DATA WITH THIS 6 OUNCE HAND-HELD POCKET MODEM

- 1200/300 BAUD
- BATTERY & AC POWER
- SERIAL INTERFACE (DB25)
- 4 STATUS INDICATORS

MCT-12P

KEYBOARDS

MODULAR CIRCUIT TECHNOLOGY

ENHANCED STYLE LAYOUT

- AUTOSENSE FOR XT OR AT COMPATIBLES
- LED INDICATORS
- AUTO REPEAT FEATURE
- SEPARATE CURSOR PAD

MCT-5339 $79.95

84 KEY LAYOUT

- SOFTWARE AUTOSENSE FOR XT OR AT COMPATIBLES
- LED INDICATORS
- AUTO REPEAT

MCT-5060 $59.95

MAXI-SWITCH KEYBOARDS

WITH TACTILE FEEDBACK

MAX-5339	ENHANCED STYLE LAYOUT	$84.95
MAX-5060	84 KEY LAYOUT	$64.95

AUDIBLE "CLICK" KEYBOARD

- ENHANCED STYLE, 101 KEY KEYBOARD
- LED INDICATORS
- AUTO REPEAT

K-103-A $84.95

HANDY SCANNER

$249.95



INSTANT SCANNING OF IMAGES UP TO 4" WIDE

- 100, 200, 300, 400 DPI BOTH DIRECTIONS
- B&W AND 3 HALF-TONE MODES
- 32 LEVELS OF GRAY SCALE
- HERCULES, CGA AND EGA COMPATIBLE
- INCLUDES HALO DPE AND IMAGE EDITOR SOFTWARE

HS-3000

LOGITECH HIREZ MOUSE

$129.95



HIGH RESOLUTION BUS MOUSE FOR BETTER RESPONSE AND LESS HAND MOVEMENT, IDEAL FOR CAD WORK

- 320 DPI
- INCLUDES DRIVER, TEXT EDITOR & POP-UP MENUS
- NO PAD, POWER SUPPLY OR PORT REQUIRED

LOGITECH 3-BUTTON MOUSE

PC MAGAZINE EDITORS CHOICE! ALL MODELS HAVE SERIAL SUPPORT (COM1/COM2), 200 D.P.I. RESOLUTION, LOTUS 1-2-3 SHELL, SELF-INSTALLING SOFTWARE AND "POINT EDITOR"

LMOUSE		$79.95
LMOUSE-P	SERIAL MOUSE W/LOGIPAINT	$99.95
LMOUSE-BP	BUS MOUSE W/LOGIPAINT	$99.95
LMOUSE-BPL	BUS MOUSE W/PUBLISHER PKG	$139.95
LMOUSE-BPC	BUS MOUSE W/LOGIPAINT/CAD	$149.95

CALL OUR 24-HOUR BBS:

(408) 374-2171

FOR TECHNICAL SUPPORT, CONFERENCING, TIPS AND MORE

CITIZEN PRINTER

$219.95



A RELIABLE, FAST AND INEXPENSIVE ALL PURPOSE PRINTER THAT'S LOADED WITH FEATURES

- 9 PIN DOT MATRIX PRINT HEAD
- 180 CPS DRAFT MODE, 29 CPS NLQ MODE
- CENTRONICS PARALLEL INTERFACE, SERIAL OPTIONAL
- DUAL PITCH, DOUBLESTRIKE, ITALICS & SUPERSCRIPT
- EPSON FX & IBM GRAPHICS
- COMPRESSED, EXPANDED & EMPHASIZED PRINT
- DOT ADDRESSABLE GRAPHICS IN SIX DENSITIES

CITIZEN-180D

RC-180D REPLACEMENT RIBBON CARTRIDGE 6.95

MOLDED CABLES

CBL-PRINTER	PC PRINTER CABLE	$9.95
CBL-PRINTER-25	AS ABOVE - 25 FOOT	$15.95
CBL-PRINTER-RA	RIGHT ANGLE PRINTER	$15.95
CBL-DB25-MM	DB25 MALE TO DB25 MALE	$9.95
CBL-DB25-MF	DB25 MALE TO DB25 FEMALE	$9.95
CBL-9-SERIAL	9 PIN TO 25 PIN SERIAL	$6.95
CBL-KBD-EXT	KEYBOARD EXTENSION	$7.95
CBL-CNT-MM	36 PIN CENTRONICS-M/M	$14.95
CBL-HD-20	20 PIN HARD DISK CABLE	$3.95
CBL-HD-34	34 PIN HARD DISK CABLE	$4.95
CBL-HD-34D	34 PIN DUAL HARD DISK	$6.95
CBL-FDC-EXT	37 PIN EXTERNAL FLOPPY	$9.95

VGA COMPATIBLE PACKAGE

$649.00





- 800 X 560 MAXIMUM RESOLUTION
- 640 X 480 IN 16 COLORS
- 320 X 200 IN 256 COLORS
- IBM STYLE, ANALOG MONITOR
- FULLY VGA, EGA, CGA, HERCULES & MONOCHROME COMPATIBLE

NEC MULTISYNC II $599.95

- AUTO FREQUENCY ADJUSTMENT
- RESOLUTION AS HIGH AS 800 X560

CASPER EGA $399.95

- 640 X 200/350 RESOLUTION
- .31 MM DOT PITCH
- 14" BLACK MATRIX SCREEN
- 16 COLORS

CASPER RGB $279.95

- COLOR GREEN AMBER SWITCH
- .39MM DOT PITCH
- 640 X 240 RESOLUTION
- 14" NON-GLARE SCREEN

SAMSUNG MONO $129.95

- 12" NON-GLARE LOW DISTORTION AMBER SCREEN
- 720 X 350 RESOLUTION
- SWIVEL BASE

MONITOR STANDS

MODEL MS-100 $12.95


- TILTS AND SWIVELS

MODEL MS-200 $39.95

- TILTS AND SWIVELS
- BUILT-IN SURGE SUPRESSOR
- INDEPENDENTLY CONTROLS UP TO 5 AC OUTLETS

TOWER CASE

$299.95



SAVE DESKSPACE AND ADD STYLE TO YOUR OFFICE WITH THIS SLEEK UPRIGHT DESIGN

- ACCOMODATES ALL SIZES OF MOTHERBOARDS
- 250 WATT POWER SUPPLY INCLUDED
- MOUNTS FOR 3 FLOPPY & 4 HARD DRIVES
- TURBO & RESET SWITCH
- SPEED DISPLAY, POWER & DISK LED'S
- MOUNTING HARDWARE, FACEPLATES & SPEAKER INCLUDED

CASE-100

CASE-FLIP	FOR 8088 MOTHERBOARDS	$34.95
CASE-SLIDE	FOR 8088 MOTHERBOARDS	$39.95
CASE-70	FOR 286 MOTHERBOARDS	$89.95
CASE-JR	MINI-286 W/POWER SUPPLY	$149.95

POWER SUPPLIES



135 WATT $59.95

- UL APPROVED
- IBM XT COMPATIBLE
- +5V 15A, +12V 4.2A, -5V .5A, -12V .5A

PS-135

PS-150 150W MODEL $69.95

200 WATT $89.95

- U.L. APPROVED
- IBM AT COMPATIBLE
- +5V 22A, +12V 8A, -5V .5A, -12V .5A

PS-200


PS-250 250 WATT MODEL $129.95

JDR MICRODEVICES AND THE JDR MICRODEVICES LOGO ARE REGISTERED TRADEMARKS OF JDR MICRODEVICES. IBM, AT, PS/2 ARE TRADEMARKS OF INTERNATIONAL BUSINESS MACHINES.

Circle 131 on Reader Service Card

1.44 MB 3½" DRIVE

$149.95



- ULTRA HIGH DENSITY
- ALSO WORKS WITH 720K DISKS

FDD-1.44X BLACK FACEPLATE
FDD-1.44A BEIGE FACEPLATE

1/2 HEIGHT FLOPPY DISK DRIVES

FD-55B	5-1/4" TEAC DS/DD 360K	**$99.95**
FD-55G	5-1/4" TEAC DS/HD 1.2M	**$129.95**
M2551A	5-1/4" FUJITSU DS/DD 360K	**$89.95**
M2553K	5-1/4" FUJITSU DS/HD 1.2M	**$119.95**
FDD-360	5-1/4" DS/DD 360K	**$69.95**
FDD-1.2	5-1/4" DS/HD 1.2M	**$109.95**
FDD-3.5A	3-1/2" MITSUBISHI DS/DD(BEIGE)	**$129.95**
FDD-3.5X	3-1/2" MITSUBISHI DS/DD(BLACK)	**$129.95**

TAPE BACK-UP DRIVES

AR5240X	ARCHIVE TAPE DRIVE -XT'S & AT'S	**$369.95**
AR5540A	FASTER TAPE DRIVE -AT'S ONLY	**$369.95**
AR340	40 MB TAPE CARTRIDGES	**$24.95**

DISKETTES

N-MD2D	BOX OF 10 5-1/4" 360K DS/DD	**$6.95**
N-MD2H	BOX OF 10 5-1/4" 1.2 MB DS/HD	**$13.95**
N-3.5DS	BOX OF 10 3-1/2" 720K DS/DD	**$16.95**
N-3.5HD	BOX OF 10 3-1/2" 1.44 MB DS/HD	**$49.95**
N-MD2DBULK	360K DS/DD (MIN. 50 DISKS)	**EA. 49¢**

DRIVE ACCESSORIES

FD-ARAIL	MTG. RAILS FOR AT COMPATIBLE	**$2.95**
FD-55FP	BEIGE FACEPLATE FOR TEAC DRIVES	**$2.95**
FD-55MHW	HALF-HEIGHT MOUNTING HARDWARE	**$2.95**
FD-5Y	Y-POWER ADAPTOR FOR DRIVES	**$2.95**

Seagate HARD DISKS

Whatever your hard disk needs, we have reliable, high quality Seagate drives at the lowest prices available. Buy them alone, or with an MCT disk controller for even greater savings!



SIZE	MODEL	AVG. SPEED	HEIGHT	DRIVE ALONE	WITH MCT CONTROLLER HDC	RLL	AFH	AFH-RLL
20MB	ST-225	65 ms	Half	$225	$269	-	$339	-
30MB RLL	ST-238	65 ms	Half	$249	-	$299	-	$389
40MB	ST-251	40 ms	Half	$429	$469	-	$539	-
40MB	ST-251-1	28 ms	Half	$529	$569	-	$639	-
60MB RLL	ST-277	40 ms	Half	$499	-	$549	-	$639
30MB	ST-4038	40 ms	Full	$559	$603	-	$659	-
80MB	ST-4096	28 ms	Full	$895	$939	-	$995	-

INBOARD 386/PC

$895.00

intel



UPGRADE YOUR XT TO A 386 FOR LESS THAN $900
- 16 MHZ PROCESSOR REPLACES 8088
- 1 MB MEMORY INSTALLED
- EXPAND TO 3 MB WITH PIGGYBACK CARD
- 5 YEAR WARRANTY

PCIB 1200
PIGGYBACK MEMORY BOARDS

PCIB1210	I MB INSTALLED	**$649.00**
PCIB1220	2 MB INSTALLED	**$1195.00**

NEW!! SIGMA VGA CARD

$279.50



100% REGISTER COMPATIBLE VGA DISPLAY CARD
- VGA, EGA, CGA, HGC & MDA COMPATIBLE
- 320 X 200 IN 256 COLORS
- 640 X 480, 800 X 600 IN 16 COLORS
- 80 X 25, 132 X 44 TEXT MODES
- SUPPORTS STANDARD DIGITAL & ANALOG MONITORS
- UTILITY SOFTWARE INCLUDED

MCT-VGA

INTERFACE CARDS

BY MODULAR CIRCUIT TECHNOLOGY

DRIVE CONTROLLERS

FLOPPY DISK CONTROLLER — **$29.95**
SINGLE SLOT CONTROL OF 4 FLOPPIES
- INTERFACES UP TO 4 FDD'S TO AN IBM PC OR COMPATIBLE
- SUPPORTS DS/DD AND DS/QD W/ DOS 3.2

MCT-FDC

1.2 MB FLOPPY CONTROLLER — **$69.95**
ADD VERSATILITY AND CAPACITY TO YOUR XT
- SUPPORTS 2 DRIVES, CAN MIX 360K AND 1.2 MB
- ALLOWS DATA TO FLOW FREELY FROM XT'S TO AT'S

MCT-FDC-1.2

FLOPPY/HARD CONTROLLER — **$139.95**
XT SYSTEM SHORT OF SLOTS? THIS CARD FREES ONE UP!
- INTERFACES UP TO 2 FDD'S & 2 HDD'S, CABLING FOR 2 FDD/1HDD
- SUPPORTS BOTH DS/DD & DS/QD W/DOS 3.2

MCT-FH

286/386 FLOPPY/HARD — **$149.95**
FLOPPY/ HARD DISK CONTROL IN A TRUE AT DESIGN
- SUPPORTS UP TO 2 360K /720K/ 1.2 MB FDD'S
- SUPPORTS 2 HDD'S USING STANDARD TABLES

MCT-AFH

HARD DISK CONTROLLER — **$79.95**
HARD DISK CONTROL AT AN ECONOMICAL PRICE
- SUPPORTS 16 DRIVE SIZES INCLUDING 10,20,30 & 40 MB
- DIVIDE 1 LARGE DRIVE INTO 2 LOGICAL DRIVES

MCT-HDC

RLL CONTROLLER — **$119.95**
TRANSFER DATA 50% FASTER
- SUPPORTS UP TO 2 RLL HARD DRIVES
- DESIGNED FOR XT COMPATIBLES

MCT-RLL

286/386 FLOPPY/HARD RLL — **$199.95**
IMPROVE SPEED AND STORAGE OF YOUR AT COMPATIBLE
- SUPPORTS UP TO 2 RLL HARD DISCS AND 2 FLOPPIES
- SUPPORTS 360/720/ 1.2 MB FLOPPIES IN 5.25" & 3.5"

MCT-AFH-RLL

MULTIFUNCTION CARDS

MULTI I/O FLOPPY CONTROLLER — **$79.95**
A PERFECT COMPANION FOR OUR MOTHERBOARDS
- SUPPORTS UP TO TWO 360K FLOPPIES, 720K W/ DOS 3.2
- SERIAL, PARALLEL, GAME PORT, CLOCK/CALENDAR

MCT-MI0
MIO-SERIAL—2ND SERIAL PORT — $15.95

MULTI I/O CARD — **$59.95**
USE WITH MCT-FH FOR MINIMUM OF SLOTS USED
- SERIAL PORT, CLOCK/ CALENDAR WITH BATTERY
- PARALLEL PORT ADDRESSABLE AS LPT1 OR LPT2

MCT-I0

286/386 MULTIFUNCTION — **$139.95**
ADDS UP TO 3 MB OF RAM TO YOUR AT
- USER EXPANDABLE TO 1.5 MB OR 3 MB WITH OPTIONAL PIGGYBACK BOARD (0K INSTALLED)
- INCLUDES SERIAL AND PARALLEL PORT

MCT-AMF

MCT-AMF-MC	PIGGYBACK BOARD	$29.95
AMF-SERIAL	2ND SERIAL PORT	$24.95

286/386 MULTI I/O CARD — **$59.95**
USE WITH MCT-AFH MINIMUM OF SLOTS USED
- SERIAL, PARALLEL AND GAME PORTS
- USES 16450 SERIAL SUPPORT CHIPS FOR HIGH SPEED OPS

MCT-AI0
AI0-SERIAL 2ND SERIAL PORT — $24.95

MEMORY CARDS

576K RAM CARD — **$59.95**
A CONTIGUOUS MEMORY SOLUTION IN A SHORT SLOT
- USER SELECTABLE CONFIGURATION UP TO 576K
- USES 64K & 256K RAM CHIPS (0K INSTALLED)

MCT-RAM

EXPANDED MEMORY CARD — **$129.95**
2MB OF LOTUS INTEL MICROSOFT MEMORY FOR AN XT
- CONFORMS TO LOTUS INTEL EMS
- USER EXPANDABLE TO 2 MB
- CAN BE USED AS EXPANDED OR CONVENTIONAL MEMORY, RAMDISK AND SPOOLER

MCT-EMS

MCT-AEMS	286/386 VERSION	$139.95

DISPLAY ADAPTORS

MONOCHROME GRAPHICS — **$59.95**
TRUE HERCULES COMPATIBILITY SUPPORTS LOTUS 1-2-3
- PARALLEL PRINTER PORT CONFIGURES AS LPT1 OR LPT2
- USES VLSI CHIPS TO ENSURE RELIABILITY

MCT-MGP

EGA ADAPTOR — **$149.95**
100% IBM COMPATIBLE PASSES IBM EGA DIAGNOSTICS
- 256K OF VIDEO RAM ALLOWS 640 X 350 IN 16 OF 64 COLORS
- COMPATIBLE WITH COLOR AND MONOCHROME ADAPTORS
- HERCULES COMPATIBLE

MCT-EGA

COLOR GRAPHICS ADAPTOR — **$49.95**
COMPATIBLE WITH IBM GRAPHICS STANDARDS
- SUPPORTS RGB, COLOR, & COMPOSITE MONOCHROME
- 640/320 X 200 RESOLUTION, LIGHT PEN INTERFACE

MCT-CG

MONOGRAPHICS MULTI I/O — **$119.75**
TOTAL SYSTEM CONTROL FROM A SINGLE SLOT!
- CTRL 2 FLOPPIES, SERIAL, PARALLEL, GAME PORT, CLOCK CAL
- RUN COLOR GRAPHICS SOFTWARE ON A MONOCHROME MONITOR

MCT-MGMI0

286/386 MONOGRAPHICS I/O — **$99.95**
VIDEO DISPLAY AND I/O FUNCTIONS IN ONE CARD
- 720 X 348 RESOLUTION, 80 & 132 COLUMN TEXT
- PARALLEL , SERIAL & GAME PORTS

MCT-MGAIO

BARGAIN HUNTER'S CORNER

MULTIFUNCTION CARD

- INCLUDES FULL ONE YEAR WARRANTY
- XT COMPATIBLE
- 0-384K DYNAMIC RAM USING 4164'S
- SERIAL PORT & PARALLEL PRINTER PORT
- GAME CONTROLLER PORT
- CLOCK/CALENDAR
- SOFTWARE FOR RAM DISK, PRINT SPOOLER AND CLOCK/CALENDAR

MCT-MF **ONLY $59.95**
SPECIAL ENDS 11/30/88

VISA
MasterCard
MMC MICROCOMPUTER MARKETING COUNCIL

JDR MICRODEVICES, 110 KNOWLES DRIVE, LOS GATOS, CA 95030
LOCAL (408) 866-6200 FAX (408) 378-8927 TELEX 171-110

RETAIL STORE: 1256 SOUTH BASCOM AVE., SAN JOSE, CA (408) 947-8881
HOURS: M–F 10–7 SAT. 9–5 SUN. 12–4

TERMS: MINIMUM ORDER $10.00 FOR SHIPPING AND HANDLING INCLUDE $2.50 FOR UPS GROUND AND $3.50 UPS AIR. ORDERS OVER 1 LB. AND FOREIGN ORDERS MAY REQUIRE ADDITIONAL SHIPPING CHARGES—PLEASE CONTACT THE SALES DEPARTMENT FOR THE AMOUNT. CA RESIDENTS MUST INCLUDE APPLICABLE SALES TAX. PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE. WE ARE NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS. WE RESERVE THE RIGHT TO LIMIT QUANTITIES AND TO SUBSTITUTE MANUFACTURER. ALL MERCHANDISE SUBJECT TO PRIOR SALE. A FULL COPY OF OUR TERMS IS AVAILABLE UPON REQUEST. ITEMS PICTURED MAY ONLY BE REPRESENTATIVE

ORDER TOLL FREE 800-538-5000

CONTINENTAL U.S. AND CANADA

COPYRIGHT 1988 JDR MICRODEVICES

BUILD YOUR OWN SYSTEM!

OVER 20,000 JDR SYSTEMS HAVE ALREADY BEEN BUILT. EASY TO ASSEMBLE IN JUST 2 HOURS WITH A SCREWDRIVER. SAVE MONEY AND LEARN MORE ABOUT YOUR COMPUTER AT THE SAME TIME!



VIDEO INSTRUCTIONS

$4.95 WITH KIT PURCHASE

A JDR EXCLUSIVE! 20-MIN. VHS OR BETA TAPE SHOWS YOU STEP-BY-STEP HOW TO BUILD AN XT COMPATIBLE SYSTEM. W/O KIT $19.95

10 MHz TURBO 8088

$661.00

■ INCLUDES SERIAL PORT, 2 PARALLEL PORTS, CLOCK/CALENDAR AND GAME ADAPTOR ■ RUNS COLOR GRAPHICS ON A MONOCHROME MONITOR. ■ MOTHERBOARD ■ 256K RAM MEMORY ■ 135 WATT POWER SUPPLY ■ FLIP-TOP CASE ■ 84 KEY KEYBOARD ■ 360K FLOPPY DRIVE ■ MONOGRAPHICS I/O CARD ■ MONOCHROME MONITOR

12 MHz MINI-286

$1232.75

■ 12 MHZ MINI-286 MOTHERBOARD ■ 512K RAM MEMORY ■ MINI CASE WITH POWER SUPPLY ■ 84 KEY KEYBOARD ■ MONOCHROME MONITOR ■ 1.2 MB FLOPPY DRIVE ■ FLOPPY / HARD CONTROL ■ GRAPHICS ADAPTOR

16 MHz 1 Mb 386

$2348.65

■ MYLEX 386 MOTHERBOARD ■ 1 MB RAM ON BOARD ■ 200 WATT POWER SUPPLY ■ CASE ■ ENHANCED KEYBOARD ■ 1.2 MB FLOPPY DRIVE ■ FLOPPY/HARD CONTROLLER ■ MONOGRAPHICS CARD ■ MONOCHROME MONITOR

MOTHERBOARDS

TURBO 4.77/8 MHz — $99.95

■ XT COMPATIBLE ■ NORTON SI 1.7 ■ 4.77 OR 8 MHZ OPERATION WITH 8088-2 AND OPTIONAL 8087-2 CO- PROCESSOR ■ FRONT PANEL LED SPEED INDICATOR AND RESET SWITCH SET SUPPORTED ■ CHOOSE NORMAL/TURBO MODE OR SOFTWARE SELECT PROCESSOR SPEED

MCT-TURBO

MCT-XMB STANDARD MOTHERBOARD $87.95

10 MHz TURBO SINGLE CHIP 8088 — $129.95

■ XT COMPATIBLE ■ NORTON SI 2.1 ■ USES LESS POWER, IMPROVES RELIABILITY ■ KEY SELECTABLE SPEED, 4.77 MHZ OR 10 MHZ ■ 2.3 TIMES FASTER THAN A STANDARD ■ RESET SWITCH, KEYLOCK, AND SPEED / POWER INDICATORS SUPPORTED

MCT-TURBO-10

80286 6/10 MHz — $379.95

■ AT COMPATIBLE ■ LANDMARK AT SPEED 10 MHZ ■ NORTON SI 10.3 ■ 8 SLOTS (TWO 8-BIT, SIX 16-BIT) ■ HARDWARE SELECTION OF 6 OR 10 MHZ ■ FRONT PANEL LED INDICATOR ■ SOCKETS FOR 1MB OF RAM AND 80287 ■ ONE WAIT STATE ■ BATTERY BACKED CLOCK ■ KEYLOCK SUPPORTED ■ RESET SWITCH

MCT-286

12 MHz MINI-286 — $399.95

■ AT COMPATIBLE ■ LANDMARK AT SPEED 13.2 MHZ ■ NORTON SI 11.6 ■ 6 MHZ, 10 MHz (0/1 WAIT STATE), 12 MHZ (1 WAIT STATE) ■ ZYMOS ASICS FOR FEWER CHIPS, GREATER RELIABILITY ■ SUPPORTS 512K-1024K MEMORY ■ RECHARGEABLE HIGH CAPACITY NI-CAD BATTERY ■ SIX 16-BIT SLOTS, TWO 8-BIT SLOTS ■ MOUNTS IN STANDARD XT CASE

MCT-M286-12

MCT-M286 6 /10 MHZ MINI 80286 BOARD $389.65

16 MHz MYLEX 386 — $1699.00

■ 1 MB RAM ON BOARD ■ 8 SLOTS (TWO 8-BIT, SIX 16-BIT) ■ USES AMI BIOS ■ SUPPORTS 80287 MATH CO-PROCESSOR ■ SUPPORTS 80387 WITH ADAPTOR ■ 64KB CACHE FOR NEAR Ø WAIT STATE ■ 20 MHZ VERSION AVAILABLE


MCT-386MB

MCT-386MB-4 FOUR MB MEMORY INSTALLED $2999.00

MCT-386MB-MCB MATH CO-PROCESSOR ADAPTOR BOARD $149.00

16 MHz MYLEX MINI 386

$1249.00



■ LANDMARK AT SPEED 23.2 MHZ ■ NORTON SI 18.7 ■ 64KB HIGH SPEED DIRECT MAPPED STATIC RAM CACHE ■ 1 MB OR 2 MB MEMORY ON STD. MEMORY BOARD ■ UP TO 8 MB OF 32-BIT MEMORY ON PIGGYBACK MEMORY BOARD, FOR TOTAL OF 10 MB ■ AMI BIOS WITH 32 BIT EGA SUPPORT ■ SOCKETED FOR 80387 MATH CO-PROCESSOR ■ ONE 8-BIT, FOUR 16-BIT AND ONE 32-BIT SLOTS ■ DALLAS CMOS /CLOCK DEVICE ON BOARD W/ BATT.

MCT-386 JR (MEMORY CARD REQUIRED)

MCT-386JR20 20 MHZ VERSION $1695.00

MCT-386JR-M 1 TO 2 MB MEMORY CARD (REQUIRED) Ø INSTALLED $159.00

MCT-386JR-M8 8 MB PIGGYBACK MEMORY BOARD ØK INSTALLED $159.00

NEW! MODULAR PROGRAMMERS

THE IDEAL SYSTEM FOR DEVELOPERS. ALL MODULES USE A COMMON HOST ADAPTOR CARD

HOST ADAPTOR CARD — $29.95

■ A UNIVERSAL INTERFACE FOR ALL THE PROGRAMMING MODULES ■ USER SELECTABLE PROGRAMMABLE ADDRESSES PREVENT ADDRESSING CONFLICTS ■ MENU-DRIVEN SOFTWARE PACKAGE ■ INCLUDES MOLDED CABLE

MCT-MAC

UNIVERSAL MODULE — $499.99

■ PROGRAMS EPROMS, EEPROMS, PALS, BI-POLAR PROMS 8748 & 8751 SERIES DEVICES ■ TESTS TTL, CMOS, DYNAMIC & STATIC RAMS

MCT-MUP

DIGITAL IC MODULE — $129.95

■ TESTS TTL, CMOS, DYN. & STATIC RAM ■ AUTO SEARCH

MCT-MIC



EPROM MODULE — $119.95

■ PROGRAMS 24-32 PIN EPROMS, CMOS EPROMS AND EEPROMS FROM 16K TO 1024K

MCT-MEP

MCT-MEP-4 FOUR-EPROM PROGRAMMER $169.95

MCT-MEP-8 EIGHT-EPROM PROGRAMMER $259.95

PAL MODULE — $249.95

■ PROGRAMS MMI, NS, TI 20 & TI 24 PIN DEVICES

MCT-MPL

8748 MODULE — $179.95

■ PROG. 8741, 8742, 8748, 8749 & 8750 EPROMS & PROMS.

MCT-MMP

BI-POLAR MODULE — $259.95

■ PROG. AMD, MMI, NS, TI & SIGNETICS BI-POLAR PROMS

MCT-MBP

JDR Microdevices®

MMC MICROCOMPUTER MARKETING COUNCIL

JDR MICRODEVICES. 110 KNOWLES DRIVE. LOS GATOS, CA 95030

LOCAL (408) 866-6200 FAX (408) 378-8927 TELEX 171-110

VISA MasterCard

ORDER TOLL FREE 800-538-5000

COPYRIGHT 1988 JDR MICRODEVICES

BBS (408) 374-2171

CONTINENTAL U.S. AND CANADA

Circle 131 on Reader Service Card

EPROM PROGRAMMER

$349



THE EP-1'S A GREAT VALUE AND HERE's WHY:

- READS, PROGRAMS, COPIES OVER 350 EPROM AND EEPROMS FROM 30 MFG'S INCLUDING 2716-27513,2804-28256,27011
- READS/ WRITES INTEL, MOTOROLA, STRAIGHT HEX & BINARY
- OPTIONAL HEADS PROGRAM INTEL 874X,8751,87C51,8755
- MENU-DRIVEN CHIP SELECTION BY MFG & P/N;NO MODULES
- FAST, SLOW, QUICK PULSE PROGRAMMING ALGORITHMS
- SPLITS FILES BY BASE ADDRESS AND ODD/EVEN (16 & 32 BIT)
- ALL INTELLIGENCE IN UNIT; Z80 MICROPROCESSOR BASED
- 5, 12.5, 21.25 V PROGRAMMING FOR CMOS & -A SUFFIX PARTS
- FREE PC-DOS SOFTWARE
- RS232 TO ANY COMPUTER
- GOLD TEXTOOL ZIF SOCKET
- 8 BAUD RARES TO 38,400
- MONEY BACK GUARANTEE
- ONE YEAR WARRANTY
- 2 FREE FIRMWARE UPDATES
- SAME DAY SHIPMENT
- CHECKSUMS SUPPORTED
- UV ERASERS FROM $34.95

CALL TODAY FOR MORE INFORMATION

800/225-2102


BP MICROSYSTEMS

10681 HADDINGTON #190, HOUSTON, TX 77043

713/461-9430 TLX: 1561477 FAX: 713/461-7413

Circle 43 on Reader Service Card

UNIVERSAL LOGIC PROGRAMMER



- PROGRAMS, READS, DUPLICATES, TESTS AND SECURES HUNDREDS OF 20- AND 24-PIN DEVICES
- 23 UNIVERSAL PIN DRIVERS WITH INDEPENDENT DAC, ADC & SLEW FUNCTIONS PROGRAM ALMOST ANY LOGIC DEVICE
- MENU DRIVEN OPERATION IS EASY TO LEARN AND QUICK TO OPERATE
- CONNECTS TO ANY IBM COMPATIBLE COMPUTER VIA PARALLEL PRINTER PORT
- EDITS FUSE DATA & TEST VECTORS WITH FULL SCREEN EDITOR
- TESTS WITH VECTORS & SECURES AFTER PROGRAMMING
- SUPPORTS ALL POPULAR PLD DEVELOPEMENT SOFTWARE
- GOLD TEXTOOL ZIF IC SOCKET
- ONLINE HELP FUNCTION
- MONEY BACK GUARANTEE
- SELF CALIBRATING
- TOLL-FREE TECH SUPPORT
- JEDEC FILE IN/OUTPUT
- UPDATABLE VIA FLOPPY
- ONE YEAR WARRANTY
- EPROM PROGRAMMERS ALSO
- SAME DAY SHIPMENT
- JUST $798

CALL FOR FREE DEMO DISK 800/225-2102

BP MICROSYSTEMS

10681 HADDINGTON #190 HOUSTON, TX 77043

713/461-9430 TLX: 1561477 FAX: 713/461-7413

Circle 43 on Reader Service Card

3M 5¼" DSDD **.72 ea.**
3½" DSDD **1.49 ea.**

JVC 5¼" DSDD **.54 ea.**
3½" DSDD **1.49 ea.**

SONY 5¼" DSDD **.73 ea.**
3½" DSDD **1.69 ea.**

Prices based on Min 100 Diskettes

BULK 5¼" DSDD **.27 ea.** Min 800
3½" DSDD **1.09 ea.** Min 100

Sleeves & Labels Included

Lifetime Warranty 100% Certified

Shipping at Cost - Same Day

716-298-5035

FAX # 716-297-2749

DATA DIRECT

Prices may be subject to change without notice

Circle 72 on Reader Service Card

RS-232C INTERFACE AND MONITORING EQUIPMENT CATALOG FROM B&B ELECTRONICS

WRITE or CALL for YOUR *FREE* COMPREHENSIVE B & B ELECTRONICS CATALOG TODAY!



Order direct from manufacturer TODAY... and SAVE

Pages and pages of photographs and illustrated, descriptive text for B&B's complete line of RS-232 converters, RS-422 converters, current loop converters, adapters, break-out boxes, data switches, data splitters, short haul modems, surge protectors, and much, much more. Most products meet FCC Part15J.

Your RS-232 needs for quality, service and competitive prices will be more than met by B&B ELECTRONICS.

Manufacturer to *you*, no middleman!

Money-back guarantee! Same-day shipment! One-year warranty on products! Technical support available.

Write For Your FREE Catalog Today!

B&B electronics MANUFACTURING COMPANY

1502K Boyce Memorial Drive • P.O. Box 1040 • Ottawa, IL 61350

Phone: 815-434-0846

Circle 28 on Reader Service Card

VOICE IN A BOX

$80.00 each *Or as low as $30.00 in OEM quantity*



VOICE ON AN EPROM It is really an exciting product. Now you can put your voice or special sound effect in a box smaller than a cigarette package. Yes, it is **Voice in a Box.** More precisely, you store your voice on a Eprom or Rom chip, and plug in the chip on our Voice Playback Board (VPB). That is it! You can now instantly playback the high-quality digitized voice again and again.

Applications:

There are thousands of them in use now for promotional voice messages. It is ideal for voice announcement, advertisement, sound effects, voice instructions, and security. For us, we record our child's voice on a chip and have it ready anytime we like to hear the sweet "ma-ma." We call it a "Voice-Photo." Take a picture of your loved one's voice and the sound memory is there for you to recall. We even have people talking about putting their will on the chip!

The Voice Playback Board (VPB) is for playback of the voice on a chip. To record and program the voice you need the following on an IBM PC XT/AT Compatible System:

Voice Development Software (VDS)$195.00
Digital Voice Card (DVC) for PC ... $95.00
Includes Software drivers and sample programs
Microphone (600 r impedience) ... $12.00
Speaker (4 r, 1W with enclosure) ... $9.00

The VDS development software allows you to record, playback your digitized voice on a PC XT/AT, and compatible. It also allows you to merge up to 16 voice segments to a voice data file. The data file can then be programmed into an Eprom Chip using commercial available PC based Eprom Programmers.

CALL (416) 859-0370 TO ORDER FROM THE U.S. 1-800-263-7487

COMPUTER AGE LTD.
P.O. BOX 730
NOBLETON, ONT. L0G 1N0
FAX 1-(416) 859-0772

Circle 62 on Reader Service Card

DATA CARTRIDGES

600 A	Min 5	**19.95 ea.**
300 XLP	Min 5	**19.65 ea.**
2000	Min 5	**17.50 ea.**

EPSON ORIGINAL RIBBONS

MX, FX, RX 80 series..	Min 4 doz.	**4.49 ea.**
MX, FX, RX 100 series.	Min 4 doz.	**5.89 ea.**
LQ 1000.....	Min 4 doz.	**6.29 ea.**

Call for pricing on LASER CARTRIDGES COMPUTER TAPE, RIBBONS

716-298-5035

FAX # 716-297-2749

DATA DIRECT

Prices may be subject to change without notice

Circle 73 on Reader Service Card



System 1800 Basic System $950 (MADE IN U.S.A. with quality)

- Intel 80286 CPU
- Fully compatible with IBM AT
- 6/8 MHz selectable, 8 slots
- 512K on 1M mother board
- 195 watt power supply 110/220
- Clock/Calen., Everex HD/FD cont.
- FCC class "B" approved
- 48 Hour factory high temp. dynamic burn-in
- 1.2 MEG Teac Dr., Maxi switch AT Keyboard
- Runs Autocad, Lotus, Xenix, Nowell, all prop. Software
- 200 pages of documentation (written in U.S.A.)
- 80287 CO-Processor socket
- 40,000 units installed with customer report on file
- Made in U.S.A. by Everex with 1 year warranty

Mono Sys. (Basic Sys. + Evergraphics 132 col. w/ps., 14" Everex Flat Mon.) $1130
EGA Sys. (Basic Sys. + Everex EGA card + 14" Everex EGA (.31mm) Mon.) $1475
Super EGA Sys. (Basic Sys. + Everex EGA card + NEC II/Nanao 8060 (.31mm) Mon.) $1700
System 1800 10MHz '286' 0 wait 512K, 2S, 1P, KB, Base system $1150
System 1700 12MHz '286' 0 wait 1 meg RAM, KB, Base system $1345
System 3000 16MHz '386' 0 wait, 1 meg, KB, Base system $1995

Upgrade Options: (Call for Everex products not listed).

A. Seagate 20M/40M/72M Harddisk $250/$425/$725
B. 3½" dr. 720K/1.44K ..... $125/$145
C. Everex EMS 3MB ..... $ 95
D. Everex POCKET 1200 B. Modem $129
E. Everex Super EGA (800 x 600) $189
F. Vega VGA card $289
G. Genoa Super EGA (800 x 600) $219
H. Panasonic 1080i printer $199

Schwab Computer Center
"The Everex Store" – Authorized Everex Dealer
3282 El Camino Real, Santa Clara, CA 95051
408-241-1210
Fax # 408-241-1279
Daily UPS M–F 10–7; SAT 11–4 VISA/MC/AE
Prices change without notice

Circle 235 on Reader Service Card



KADAK's engineers bring years of practical real-time experience to over 600 installations world-wide.

This *real time* MULTITASKING KERNEL simplifies *real life* product development

- No royalties
- Full source code included
- * C interface
- Preemptive scheduler
- Intertask messages
- Terminal Handler
- * Dynamic memory allocation
- * Event Manager
- * Semaphore Manager
- * Resource Manager
- * Buffer Manager

AMX 68000 operates on any 68000/10/20 system

Manual only $75 US
AMX 68000 $1600 US
* Options — ask for price list.
(Shipping/handling extra)

Also available for 8080, Z80, 8086/186/286

KADAK Products Ltd.
206 - 1847 W. Broadway
Vancouver, B.C. Canada V6J 1Y5
Telex: 04-55670
Fax: (604) 734-8114
Telephone: (604) 734-2796

Circle 132 on Reader Service Card

Bullet Modem



- **Turbo 2400 bps + MNP Class 5 Up to 4,800 bps.....$395**
- **Up to 19,200 bps.....$1,195**
- **100% Error Free Data**
- **PSTN & Leased Lines, AT Command**

E•TECH

E-Tech Research
3333 Bowers Avenue, # 165
Santa Clara, CA 95054
(408) 982-0270, FAX (408) 982-0272
Leader in High Performance Modems

Circle 94 on Reader Service Card

EDITORIAL INDEX BY COMPANY

Index of companies covered in articles, columns, or news stories in this issue
Each reference is to the first page of the article or section in which the company name appears

INQUIRY #	COMPANY	PAGE
751	ABSOFT	67
801	ACIUS	133
	ADDISON-WESLEY	50
852	ADOBE SYSTEMS	89
810	ADVANCE MICRO RESEARCH	67
884	AMSTRAD	185
782	APOLLO COMPUTER	67
853	APPLE COMPUTER	89
753	APPLIED LOGIC SYSTEMS	67
800	AST RESEARCH	133
789	AT&T DATA SYSTEMS	67
	AT&T/SUN	11
758	AUTODESK	67
898	BLACKSHIP TRADING	164
888	BORLAND	
891	INTERNATIONAL	101, 119, 151,
934		209, 223
941		
899	BUS COMPUTER SYSTEMS	164
889	CALTEX SOFTWARE	215
	CAP INTERNATIONAL	11
	CARNEGIE-MELLON UNIVERSITY	11
769	CENTURY SOFTWARE	67
900	CLUB AT	164
892	CNS	201
901	COMPUADD	164
	COMPUTER SCIENCE PRESS	50
790	COMTERM	67
896	DATACOPY	194
902	DATAWORLD	164
883	DELL COMPUTER	179
	DESTINY TECHNOLOGIES	230
856	ENYART DEVELOPMENT	89
885	EPSON AMERICA	185
785	FACE TECHNOLOGIES	67
955	FISHER INTERNATIONAL SYSTEMS	129
	FORRESTER RESEARCH	11
903	FORTRON	164
904	GATEWAY 2000	164
905	GCH SYSTEMS	164
754	GREENLEAF SOFTWARE	67
	HARVARD UNIVERSITY PRESS	50
906	HERTZ COMPUTER	164
939	HEWLETT-PACKARD	101
	HITACHI AMERICA	11
	HUGHES RESEARCH LABORATORIES	11
796	IBM	67, 157
777	ICOM SIMULATIONS	67
752	INFORMIX SOFTWARE	67
784	INTEL	67

COMING UP IN BYTE

PRODUCTS IN PERSPECTIVE:

As we go to press for October, here is the tentative lineup of articles on tap for November. While last-minute changes or delays can always occur, the following are those pieces we plan to bring to you.

In the **front of the book**, as usual, will be the Microbytes, Nanobytes, and What's New sections, along with Short Takes—next month on new laptops, languages, utilities, applications, and peripherals. On top of everything else, we'll have our columns: Jerry Pournelle's Computing at Chaos Manor, Ezra Shapiro's Applications Plus, Wayne Rash Jr. and Down to Business, Don Crabb's Macinations, Brock N. Meeks with COM1:, and Mark Minasi's OS/2 Notebook.

The **Product Focus** for November will be project management software. These programs are designed to assist you in keeping track of multiple jobs, schedules, tasks—whatever. How well do they work, and how easy are they to work with? Can something be a help to you if it can't be integrated into the way you do your job? If you've ever wondered if these programs could make your life easier but balked at the price tag, our November Product Focus might be just what you need to help you make up your mind.

System reviews for November include Compaq's new 386s and ALR's new 386 FlexCache machine.

We'll have a **hardware review** on Transputer boards for both IBM PC–compatible and Macintosh computers.

In the software department, our **software reviews** will look at Zortech's C++ and Gimpel Software's PC-Lint.

For **application reviews**, we'll take a look at a hard disk drive utility program from Gibson Research called SpinRite, Ashton-Tate's FullWrite Professional 1.0 word processor, and a new communications program from Crosstalk Communications called Remote².

IN DEPTH:

Our In-Depth section will focus on **parallel processing**. We've lined up articles on an entire range of related topics—all intended to work together to provide a comprehensive look at an area that has so far been endowed with more potential than anything else. Where is parallel processing now? Is it always going to be one of those areas that look so good from a distance but up close just seem to dissolve? In November, you'll have a chance to answer these questions for yourself. Not only will we have pieces on new parallel processing chips, but also on programming languages specially designed to take advantage of parallel processing technology. Things may be starting to take on a definite shape.

FEATURES:

We'll have articles detailing a new chip, **Rekursiv**; a method for performing **multiple regression analysis with Excel**; Part 2 of a piece on **PC power**, this time on backup; **Ciarcia's Circuit Cellar** covers the second part of his project on a supercomputer; in **Some Assembly Required**, David Betz talks about a new extendable, embedded language.

INQUIRY #	COMPANY	PAGE
761	JRSYSTEMS	67
956	KINETIC SOFTWARE	129
938	LASCAUX GRAPHICS	101
	LASERGO	230
795	MANZANA MICROSYSTEMS	67
764	MARKETBASE	67
	MARTIN MARIETTA LABORATORY	11
	MATHSOFT	11
	MCGRAW-HILL BOOKS	283
771	MERIDIAN TECHNOLOGY	67
907	MICRO EXPRESS	164
908	MICRO 1	164
	MICROELECTRONICS AND COMPUTER TECHNOLOGY	237
775	MICROSOFT	67, 101, 157
942		
937	MICROSPEED	101
895	MICROTEK LAB	194
	MIT PRESS	50
854	MULTISOFT	89
957	NATIONAL COMPUTER SECURITY CENTER	129
757	NATIONAL INSTRUMENTS	67
	NATIONAL SCIENCE FOUNDATION	11
783	NEC INFORMATION SYSTEMS	67, 230
897	NEW IMAGE TECHNOLOGY	194
909	NEW PC NETWORK	164
770	NOVELL	67
803	OPCODE SYSTEMS	133
	OPEN SOFTWARE FOUNDATION	11
	OXFORD COMPUTER	11
910	PACESETTER SYSTEMS	164
793	PACIFIC DATA PRODUCTS	67
763	PALISADE	67
	PETROCELLI BOOKS	50
765	POLARIS SOFTWARE	67
855	POLYTRON	89
936	PROXIMITY TECHNOLOGY	101
791	RACORE COMPUTER PRODUCTS	67
811	RAPID SYSTEMS	67
940	SALINON	101
786	SOUTHWORTH MUSIC SYSTEMS	67
911	SPEAR TECHNOLOGY	164
798	SPECTRAL INNOVATIONS	67
	STANFORD INSTITUTE OF MANUFACTURING AUTOMATION	11
	STANFORD UNIVERSITY	11
912	SUNTRONICS	164
794	SYMPHONY SYSTEMS	67
788	SYSGEN	67
767	TAXCALC SOFTWARE	67
	TEXAS INSTRUMENTS	11
935	THE WHITEWATER GROUP	101
893	THUNDERWARE	194
851	TOSHIBA AMERICA	89
760	TUTSIM PRODUCTS	67
913	UNIQ TECHNOLOGY	164
	UNIVERSITY OF CALIFORNIA AT BERKELEY	11
914	VALUE PLUS DISTRIBUTING	164
915	VIPC COMPUTERS	164
894	WARP 9 ENGINEERING	194
781	WELLS AMERICAN	67
772	WHITE CRANE SYSTEMS	67
916	WHOLE EARTH ELECTRONICS	164
802	WOLFRAM RESEARCH	133
778	WORLD SOFTWARE	67
776	Z-SOFT	67
917	ZEOS INTERNATIONAL	164
857	ZORTECH	67

Computers For The Blind

Talking computers give blind and visually impaired people access to electronic information. The question is how and how much?

The answers can be found in "The Second Beginner's Guide to Personal Computers for the Blind and Visually Impaired" published by the National Braille Press. This comprehensive book contains a Buyer's Guide to talking microcomputers and large print display processors. More importantly it includes reviews, written by blind users, of software that works with speech.

This invaluable resource book offers details on training programs in computer applications for the blind, and other useful information on how to buy and use special equipment.

Send orders to:
National Braille Press Inc.
88 St. Stephen Street
Boston, MA 02115
(617) 266-6160

$12.95 for braille or cassette, $14.95 for print. ($3 extra for UPS shipping)
NBP is a nonprofit braille printing and publishing house.

READER SERVICE

To get further information on the products advertised in BYTE, fill out the reader service card by circling the numbers on the card that correspond to the inquiry number listed with the advertiser. This index is provided as an additional service by the publisher, who assumes no liability for errors or omissions.

* Correspond directly with company

Alphabetical Index to Advertisers

Inquiry No.		Page No.
3	1ST CLASS EXPERT SYSTEMS	106
4	3RD WAVE	279
5	A + L MEIER VOGT	251
6	A + L MEIER VOGT	253
7	ABRA CADABRA SOFTWARE	98
8	ACCEL TECH	326
291	ACCU-SYS	267
9	ADOBE	108,109
10	ADVANCED COMP. PROD.	330,331
11	AETECH	280
12	AETECH	280
13	AK SYSTEMS	320
14	ALPHA PRODUCTS CO.	323
15	ALTEX ELECTRONICS	316
16	AMERICAN POWER CONV.	24
17	AMERICAN RESEARCH CORP.	95
18	AMERICAN RESEARCH CORP.	95
19	AMERICAN SEMICONDUCTOR	324
20	AMER. SMALL BUS. COMP.	131
*	AMPRO	199
21	ANNABOOKS	322
22	ANAHEIM AUTOMATION	324
23	ATI TECHNOLOGIES	155
24	ATI TECHNOLOGIES	259
25	ATRON	66
26	AUTODESK	150
27	AVOCET SYSTEMS	214
28	B & B ELECTRONICS	337
29	B & C MICRO	314
30	B & C MICRO	317
31	BAY TECHNICAL ASSOCIATES	32
32	BEST COMPUTER	246
33	BEST COMPUTER	246
*	BEST WESTERN	46
*	BINARY TECH	298
450	BIX	232,233
34	BLAISE	33
36	BOFFIN LTD.	127
37	BORLAND	CII
38	BORLAND	CII
39	BORLAND	1
40	BORLAND	1
41	BORLAND	71
42	BORLAND	71
43	BP MICROSYSTEMS	337
43	BP MICROSYSTEMS	337
*	BUYERS MART	300-309
*	BYTE BACK ISSUE	277
*	BYTE BACK ISSUE	344
*	BYTE BACK ISSUE/SALE	252
*	BYTE CIRCULATION	220
*	BYTE SUB. MESSAGE	98
*	BYTE SUB. SERVICE	92
*	BYTE SUB. SERVICE	203
44	BYTEK	324
45	CADAM	222
46	CADAM	222
*	CALIFORNIA DIGITAL	329
47	CALIFORNIA SOFTWARE	322
48	CALIFORNIA SOFTWARE	322
49	CAPITAL EQUIPMENT	122
53	CITIZEN AMERICA	189
*	CLEO SOFTWARE	200
51	CLUB AMERICAN TECH	82,83
296	CNS, INC.	204
297	CNS, INC.	204
54	COEFFICIENT SYSTEMS CO.	245
55	COGITATE	298
56	COGITATE	317
57	COMPACT DISK PRODUCTS	94
58	COMPUCOM	298
59	COMPUQUEST	298
60	COMPUSAVE	315
61	COMPUSERVE	287
62	COMPUTER AGE	337
63	COMPUTER BOOK CLUB, THE	97
*	COMPUTER CONTINUUM	318
64	COMPUTER MAIL ORDER	56,57
66	COMPUTER SURPLUS STORE	320
67	COMPUTERLANE UNLTD.	177
68	CONTECH	328
69	CONTROL VISION	312
70	COVOX	124
71	CYBER RESEARCH	326
72	DATA DIRECT	337
73	DATA DIRECT	337
74	DATACODE	52
75	DAYTRON ELECTRONICS	324
76	DB FAST	104
79	DELL COMP. (INT'L)	160,161
80	DELL COMP. (N. AMER.)	160-163
81	DIGITALK	36,37
82	DIGITALK	36,37
83	DISC INTERNATIONAL	328
85	DISKCOTECH	318
86	DISKETTE CONNECTION	317
87	DISKS TO GO	324
88	DIVERSIFIED COMP. SYS.	322
89	ECOSOFT	34
90	ELEXOR	326
91	ELLIS	114
92	EXEREX	26,27
93	EXEREX	26,27
94	E-TECH	337
294	FIVESTAR COMPUTERS	192,193
95	FLAGSTAFF ENGINEERING	100
96	FLAGSTAFF ENGINEERING	100
97	FOX SOFTWARE	23
98	FTG DATA	326
101	FUJITSU AMERICA	236
102	FUJITSU AMERICA	236
99	GATEWAY 2000	53
103	GENERAL PARAMETRICS	123
104	GENICOM	8,9
105	GOLDEN BOW	314
106	GRAFPOINT	326
107	GW INSTRUMENTS	40
108	HAMMERLY COMPUTER SERV.	79
109	HARD DRIVES INT'L	184
110	HARD DRIVES INT'L	184
289	HAYES MICRO PRODUCTS	269
111	HEWLETT-PACKARD	225
112	HEWLETT-PACKARD	227
113	HITECH EQUIP CORP.	324
114	HOLMES MICROSYSTEMS	30
115	HOLMES MICROSYSTEMS	30
116	HORSTMANN SOFTWARE	116
117	IC EXPRESS	312
118	IEEE	262
287	INDUSTRIAL AUTOMATION	328
301	INNOVENTIONS	322
*	INTECTRA	314
119	INTEGRAND	143
120	INTEL	144,144A
121	INTELLIGENCEWARE	99
122	IO TECH	140
123	IO TECH	328
124	ITRON	81
126	JADE COMPUTER	327
128	JAMECO	310,311
129	JASON ENTERPRISE	314
130	JENSEN & PARTNERS	85
*	J.D.R. MICRODEVICES	345-360
131	J.D.R. MICRODEVICES	332,333
131	J.D.R. MICRODEVICES	334-336
132	KADAK PROD.	337
133	KEA SYSTEMS	46
134	KEA SYSTEMS	314
135	KISS ENGINEERING	92
136	KNOWLEDGE GARDEN	263
137	LAHEY	122
138	LASER CONNECTION	17
139	LASER CONNECTION	19
140	LAWSON LABS	312
141	LINK COMPUTER GRAPHICS	322
142	LOGICAL DEVICES	328
143	LOGICAL DEVICES	328
144	LOGICAL DEVICES	328
145	LOGICAL DEVICES	328
146	LOGITECH	74,75
147	LOGITECH	74,75
148	LOGITECH	87
149	LOGITECH	87
150	MANNESMANN TALLY	145
151	MANNESMANN TALLY	145
152	MANX SOFTWARE SYSTEMS	125
153	MAP INFO SYSTEMS	18
154	MATHSOFT	69
290	MATRIX	254
*	MAXELL	7
*	MCGRAW-HILL CEC	273
*	MCGRAW-HILL NRI	241
155	MEAD COMPUTER	319
156	MEGA DRIVE	15
157	MEGA DRIVE	15
158	MEGASOFT	320
159	MEGASOFT	320
160	MEGATEL	54
161	MEP (MICRO ELEC. PROD.)	312
162	MERRITT COMPUTER PROD.	94
295	MESSE MUNCHEN INT'L.	113
286	METRABYTE	320
163	MICRO COMPUTER SQUARE	266
164	MICRO COMPUTER SQUARE	266
165	MICRO EXPRESS	281
166	MICRO EXPRESS	281
167	MICROCOM	22
168	MICRONICS	175
169	MICROPROCESSORS UNLTD.	320
*	MICROSOFT	146,147
*	MICROSOFT	206,207
*	MICROSOFT	299
170	MICROWAY	55
*	MICROWAY	282
171	MIRROR TECHNOLOGIES	135
172	MITSUBISHI	221
173	MITSUBISHI	221
174	MITSUBISHI	218,219
175	MITSUBISHI	218,219
176	MIX SOFTWARE	297
178	MONTGOMERY GRANT	121
179	M.H.I.	313
180	NANTUCKET	217
181	NATIONAL INSTRUMENTS	132
182	NATIONAL INSTRUMENTS	132
*	NEC INFO SYSTEMS	CIII
*	NEC INFO SYSTEMS	176
183	NEEDHAM'S ELECTRONICS	322
185	NEW MICROS	320
184	NOHAU CORP	322
186	OMEGA MICRO SYSTEMS	212
187	ON TARGET	328
*	ORACLE	77
188	ORION	64
189	OSBORNE MCGRAW-HILL	292
190	OVERLAND DATA	312
299	PACIFIC RIM SYSTEMS	96
300	PACIFIC RIM SYSTEMS	96
192	PARA SYSTEMS	93
193	PARSONS TECHNOLOGY	47
194	PATTON & PATTON	16
195	PC DESIGN	191
196	PC NETWORK	59
197	PC PLUS	190
198	PC WORKS	322
199	PERISCOPE	111
200	PERSOFT	73
201	PERSONAL SPACE COMM.	322
202	POLYTRON	296
203	PRINCETON DISKETTE	298
204	PRINCETON GRAPHIC SYS.	61
205	PRIORITY ONE	325
206	PROGRAMMABLE LOGIC	326
207	PROGRAMMERS SHOP	105
208	PROGRAMMER'S CONNECTION	39
209	PROGRAMMER'S PARADISE	62,63
211	PROTEUS TECHNOLOGY	41
213	QUA TECH	312
214	QUA TECH	312
215	QUA TECH	312
216	QUA TECH	312
*	QUAID SOFTWARE	58
217	QUALSTAR	318
218	QUANTUM	156
219	QUARTERDECK	128
220	QUARTERDECK	128
221	QUARTERDECK	138
222	QUARTERDECK	138
223	QUICKSOFT	28
224	QSET	54
225	RADIO SHACK	CIV
*	RAIMA	35
226	RAINBOW TECH	277
227	RAINBOW TECH	326
228	REAL TIME DEVICES	317
230	ROSE ELECTRONICS	317
231	ROSE ELECTRONICS	317
232	SABINA INT'L.	317
233	SAFEWARE	314
234	SANTA CRUZ OPERATION	169
235	SCHWAB COMP. CENTER	337
236	SCIENCE & ENGINEERING	115
238	SHAMROCK COMPUTER	257
298	SHARP	265
239	SIMPLE NET SYSTEMS	144B
240	SIMPLE NET SYSTEMS	144B
241	SKAN TEKNOLOGIES	318
242	SN'W ELECTRONICS	264
243	SOFTRONICS	318
*	SOFTWARE DEVELOP. SYS.	91
244	SOFTWARE SECURITY INC.	31
245	SOLUTION SYSTEMS	105
288	SPECTRUM	243
246	STATSOFT	118
247	SUMMAGRAPHICS	25
248	SUNTRONICS	112
249	SUPERMICRO	317
250	SUPERSOFT	60
251	SYSGEN	29
252	SYSTAT	208
253	SYSTAT	208
255	S.C. SYSTEMS	178
256	TALKING TECH	318
257	TALLGRASS TECHNOLOGIES	45
258	TALLGRASS TECHNOLOGIES	45
292	TANDON	148,149
293	TANDON	148,149
259	TATUNG	229
260	TATUNG	231
261	TELEMARKETING RESOURCES	107
262	TELEMARKETING RESOURCES	117
263	TELEMART	42,43
264	TELEMART	42,43
265	TIMELINE	321
127	TOP GUN SYSTEMS	213
*	TOSHIBA COMPUTERS	20,21
266	TOUCHBASE SYSTEMS	144D
267	UNIVERSAL CROSS-ASSBRS.	324
268	USERSOFT	136,137
269	VENTURA PERIPHERALS	182,183
270	VERBATIM CORP	51
*	VERMONT CREATIVE SFTW.	10
271	VIZIFLEX SEELS	326
272	WAREHOUSE DATA	103
273	WELLS AMERICAN	13
274	WENHAM SOFTWARE	314
275	WIESEMANN THEIS	126
276	WINTEK	314
277	WINTEK CORP.	5
278	WOODCHUCK IND.	314
279	XELTEK	318
280	XENDER	326
281	ZENITH DATA SYSTEMS	205
282	ZEOS INT'L LTD.	48,49
283	ZERICON	298
284	Z-WORLD	320
285	Z-WORLD	320

INTERNATIONAL SECTION 88IS1-52

No North American inquiries please.

311	ABC COMPUTER COMPANY	IS-49
312	ACER MULTITECH	IS-28,29
313	AL DOWNLOADING	IS-38
314	ALADDIN KNOWLEDGE SYS.	IS-10
315	ANALYTICAL ENGINES	IS-34
316	BCL	IS-34

READER SERVICE

Advertising Supplement included with this issue:
JDR Microdevices (U.S. and Canada Subscribers)

* Correspond directly with company.

Inquiry No.		Page No.
317	BIX	IS-45
318	BLUE CHIP TECHNOLOGY	IS-38
344	BYTE BITS	IS-32
*	BYTE MARKETING	IS-44
*	BYTE SUB. MESSAGE	IS-26
*	BYTE SUB. SERVICE	IS-42
319	CALEND	IS-33
320	CLARION	IS-43
321	COMPUADD	IS-41
322	COMPUTER ELEC. INFOSY	IS-21
359	CONTROL TELEMETRY	IS-42
323	CUBIX	IS-15
324	DATEX	IS-39
325	ELEKTRONIC EQUIP. COMP.	IS-48
326	ELONEX	IS-11
327	EQUIPU A.I.R. LTD.	IS-23
328	FACIT AB	IS-12,13
329	FLEMMING SOFTWARE	IS-34
330	FORMOSA	IS-47
331	GAMMA PRODUCTIONS	IS-18
332	GREY MATTER	IS-35
333	GSE	IS-37
334	GTCO	IS-2
335	HARRISON PRECISION	IS-24
336	INES	IS-36
337	IRIS	IS-16
338	INTERLOG SOFTWARE	IS-30
339	ISE DATA	IS-24
340	KESSLER	IS-38
341	LASER TEAM	IS-22
*	MCGRAW-HILL BOOKS	IS-51
342	MICRO TECHNOLOGY	IS-31
343	MICROPHAR	IS-40
345	NEOLEC	IS-22
346	NOVELL DEVELOPMENT	IS-52
347	OLIVETTI	IS-5
348	ORACLE	IS-9
349	PRECISION DATA	IS-32
350	SEMITECH MICRO ELECT.	IS-25
*	SOFTLINE CORPORATION	IS-19
352	S-100	IS-27
353	S-100	IS-27
354	TOOLS GMBH	IS-20
355	TRAFFIC SOFTWARE	IS-36
356	USA SOFTWARE	IS-7
357	WARREN POINT	IS-36
358	WAVE MATE INC.	IS-17

REGIONAL SECTIONS

Mid-Atlantic		88 M/AT 1-8
476	CAMBRIDGE DIRECT	88M/AT-8
477	COMPARE COMPUTERS	88M/AT-7
478	COMPARE COMPUTERS	88M/AT-7
479	CORTEX CORP.	88M/AT-6
480	D-DATA	88M/AT-4
481	NEURALWARE	88M/AT-1
482	OWL COMPUTER SERV.	88M/AT-5
483	SF MICRO	88M/AT-3

Midwest		88 MW 1-8
*	BYTE TIPS	88MW-4
487	CAMBRIDGE DIRECT	88MW-8
488	COMPARE COMPUTERS	88MW-3
489	COMPARE COMPUTERS	88MW-3
*	MCGRAW-HILL BOOKS	88MW-7
*	MICROCOMP.MKTG.COUN.	88MW-5
*	ROBT. TINNEY GRAPHICS	88MW-6
490	SPEAR TECHNOLOGY	88MW-1
491	Y.E.S. MULTINATIONAL	88MW-2

Northeast		88 NE 1-16
509	CAMBRIDGE DIRECT	88NE-16
510	COM TEK DATA	88NE-1
511	COMPARE COMPUTERS	88NE-6
512	COMPARE COMPUTERS	88NE-6
513	COMPUTER RES. CTR.	88NE-11
514	CORTEX CORP.	88NE-7
516	DRESSELHAUS COMP.PROD.	88NE-3
517	E.R.M. ASSOC.	88NE-15
518	E.R.M. ASSOC.	88NE-15
519	INTERFACE GROUP	88NE-13
*	MICROCOMP.MKTG.COUN.	88NE-12
*	MICROSMART	88NE-8,9
520	PC LINK	88NE-5
*	ROBT. TINNEY GRAPHICS	88NE-14
521	SPEAR TECHNOLOGY	88NE-4
522	UNIQ TECH	88NE-10

Pacific Coast		88 PC 1-12
526	3-F ASSOCIATES	88PC-12
527	ALTEC TECHNOLOGY	88PC-4
528	B & B ELECTRONICS	88PC-2
529	COMPUTOWN	88PC-9
530	KMS	88PC-11
531	KMS	88PC-11
*	MICROCOMP.MKTG.COUN.	88PC-6
532	MS ENGINEERING, INC.	88PC-7
533	MS ENGINEERING, INC.	88PC-7
534	NEURALWARE	88PC-5
535	NU-MEGA	88PC-10
*	ROBT. TINNEY GRAPHICS	88PC-8
536	SF MICRO	88PC-1
537	SURAH	88PC-3
538	SURAH	88PC-3

Southeast		88 SE 1-8
*	BYTE TIPS	88SE-2
*	COMP. FOR THE BLIND	88SE-4
495	D-DATA	88SE-8
496	KNAPCO	88SE-1
*	MCGRAW-HILL BOOKS	88SE-5
*	MICROCOMP.MKTG.COUN.	88SE-3
*	MICROMINT	88SE-6
*	ROBT. TINNEY GRAPHICS	88SE-7

Southwest		88 SW 1-8
500	3D COMPUTER CORP.	88SW-8
*	BYTE TIPS	88SW-2
*	COMP. FOR THE BLIND	88SW-4
501	GENERAL BUS. MACHINES	88SW-1
502	KMS	88SW-3
503	KMS	88SW-3
*	MCGRAW-HILL BOOKS	88SW-7
*	MICROCOMP.MKTG.COUN.	88SW-5
*	ROBT. TINNEY GRAPHICS	88SW-6

** Correspond directly with company.*

BYTE ADVERTISING SALES STAFF:

Dennis J. Riley, Director of Sales, One Phoenix Mill Lane, Peterborough, NH 03458, tel. (603) 924-9281
Jennifer L. Bartel, West Coast Sales Manager, 8111 LBJ Freeway, Suite 1350, Dallas, Tx 75251, tel. (214) 644-1111

NEW ENGLAND
ME, NH, VT, MA, RI, ONTARIO CANADA & EASTERN CANADA
John C. Moon **(617) 262-1160**
McGraw-Hill Publications
575 Boylston Street
Boston, MA 02116

ATLANTIC
NY, NYC, CT, NJ (NORTH)
Leah G. Rabinowitz **(212) 512-2096**
McGraw-Hill Publications
1221 Avenue of the Americas—36th Floor
New York, NY 10020

(203) 968-7111
McGraw-Hill Publications
Building A—3rd Floor
777 Long Ridge Road
Stamford, CT 06902

EAST
PA, NJ (SOUTH), MD, VA, W.VA, DE, D.C.
(215) 496-3833
McGraw-Hill Publications
Three Parkway
Philadelphia, PA 19102

SOUTHEAST
NC, SC, GA, FL, AL, TN
Thomas Tolbert **(404) 252-0626**
McGraw-Hill Publications
4170 Ashford-Dunwoody Road
Suite 420
Atlanta, GA 30319

MIDWEST
IL, MO, KS, IA, ND, SD, MN, KY, OH, WI, NB, IN, MI, MS
Bob Denmead **(312) 751-3740**
McGraw-Hill Publications
Blair Building
645 North Michigan Ave.
Chicago, IL 60611

SOUTHWEST, ROCKY MOUNTAIN
CO, WY, OK, TX, AR, LA
Karl Heinrich **(713) 462-0757**
McGraw-Hill Publications
7600 W. Tidwell Rd.—Suite 500
Houston, TX 77040

SOUTH PACIFIC
SOUTHERN CA, AZ, NM, LAS VEGAS
Jack Anderson **(714) 557-6292**
McGraw-Hill Publications
3001 Red Hill Ave.
Building #1—Suite 222
Costa Mesa, CA 92626

Tom Harvey **(213) 480-5243**
McGraw-Hill Publications
3333 Wilshire Boulevard #407
Los Angeles, CA 90010

NORTH PACIFIC
HI, WA, OR, ID, MT, NORTHERN CA, NV (except LAS VEGAS), UT, W. CANADA
Mike Kisseberth **(415) 362-4600**
McGraw-Hill Publications
425 Battery Street
San Francisco, CA 94111

Bill McAfee **(415) 349-4100**
McGraw-Hill Publications
951 Mariner's Island Blvd.—3rd Floor
San Mateo, CA 94404

BYTE BITS (2x3)
Dan Harper **(603) 924-6830**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

The Buyer's Mart (1x2)
Mark Stone **(603) 924-3754**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

Regional Advertising
(So. CA, Mid-Atlantic, New York/New England)
Elisa Lister **(603) 924-6830**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

(Southeast, Southwest)
Denise Vernier **(603) 924-9281**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

Liz Coyman **(603) 924-9281**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

Regional Advertising
(Pacific NW, Midwest, New York/New England)
Scott Gagnon **(603) 924-6830**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

BYTE Deck Mailings National
Ed Ware **(603) 924-6166**
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

A/E/C Computing Deck Computing for Engineers
Mary Ann Goulding
(603) 924-9281
BYTE Publications
One Phoenix Mill Lane
Peterborough, NH 03458

International Advertising Sales Staff:

Mr. Hans Csokor
Publimedia
Reisnerstrasse 61
A-1037 Vienna, Austria
222 75 76 84

Mrs. Gurit Gepner
McGraw-Hill Publishing Co.
PO Box 2156
Bat Yam, 59121 Israel
3 866 561 321 39

Ros Weyman
Serving Germany, Austria, & Switzerland
McGraw-Hill Publishing Co.
34 Dover St.
London W1X 4BR
England 01 493 1451

Mrs. Maria Sarmiento
Pedro Teixeira 8, Off. 320
Iberia Mart I
Madrid 4, Spain
1 45 52 891

Michael Karnig
Andrew Karnig & Associates
Finnbodavagen
S-131 31 Nacka, Sweden
8-44 0005

Mr. Alain Faure
McGraw-Hill Publishing Co.
128 Faubourg Saint Honore
75008 Paris
France
(1) 42-89-03-81

Karen Lennie
McGraw-Hill Publishing Co.
34 Dover St.
London W1X 4BR
England 01 493 1451

Emilio Zerboni
McGraw-Hill Publishing Co.
Via Flavio Baracchini 1
20123 Milan, Italy
(2) 89010103

Seavex Ltd.
400 Orchard Road, #10-01
Singapore 0923
Republic of Singapore
Tel: 734-9790
Telex: RS35539 SEAVEX

Seavex Ltd.
503 Wilson House
19-27 Wyndham St.
Central, Hong Kong
Tel: 5-260149
Telex: 60904 SEVEX HX

Hiro Morita
McGraw-Hill Publishing Co.
Overseas Corp.
Room 1528
Kasumigaseki Bldg.
3-2-5 Kasumigaseki,
Chiyoda-Ku
Tokyo 100, Japan
3 581 9811

Mr. Ernest McCrary
Empresa Internacional de Comunicacoes Ltda.
Rua da Consolacao, 222
Conjunto 103
01302 Sao Paulo, S.P., Brasil
Tel: (11) 259-3811
Telex: (100) 32122 EMBN

READER SERVICE

To get further information on the products advertised in BYTE, fill out the reader service card by circling the numbers on the card that correspond to the inquiry number listed with the advertiser. This index is provided as an additional service by the publisher, who assumes no liability for errors or omissions.

* Correspond directly with company

Index to Advertisers by Product Category

HARDWARE

360 ADD INS

Inquiry No.		Page No.
14	ALPHA PRODUCTS CO.	323
23	ATI TECHNOLOGIES	155
29	B & C MICRO	314
*	BINARY TECH	298
318	BLUE CHIP TECHNOLOGY	88IS-38
49	CAPITAL EQUIPMENT	122
*	COMPUTER CONTINUUM	318
69	CONTROL VISION	312
330	FORMOSA	88IS-47
334	GTCO	88IS-2
336	INES	88IS-36
120	INTEL	144,144A
122	IO TECH	140
123	IO TECH	328
140	LAWSON LABS	312
170	MICROWAY	55
*	MICROWAY	282
184	NOHAU CORP	322
199	PERISCOPE	111
201	PERSONAL SPACE COMM.	322
213	QUA TECH	312
214	QUA TECH	312
215	QUA TECH	312
216	QUA TECH	312
228	REAL TIME DEVICES	317
230	ROSE ELECTRONICS	317
231	ROSE ELECTRONICS	317
249	SUPERMICRO	317
256	TALKING TECH	318

361 DRIVES

Inquiry No.		Page No.
156	MEGA DRIVE	15
157	MEGA DRIVE	15
299	PACIFIC RIM SYSTEMS	96
300	PACIFIC RIM SYSTEMS	96
251	SYSGEN	29
292	TANDON	148,149
293	TANDON	148,149

362 HARDWARE PROGRAMMERS

Inquiry No.		Page No.
30	B & C MICRO	317
43	BP MICROSYSTEMS	337
43	BP MICROSYSTEMS	337
44	BYTEK	324
141	LINK COMPUTER GRAPHICS	322
144	LOGICAL DEVICES	328
145	LOGICAL DEVICES	328
183	NEEDHAM'S ELECTRONICS	322
206	PROGRAMMABLE LOGIC	326
279	XELTEK	318
280	XENDER	326

363 INSTRUMENTATION

Inquiry No.		Page No.
90	ELEXOR	326
107	GW INSTRUMENTS	40
287	INDUSTRIAL AUTOMATION	328
301	INNOVENTIONS	322
286	METRABYTE	320
188	ORION	64

364 KEYBOARDS/MICE

Inquiry No.		Page No.
335	HARRISON PRECISION	88IS-24
146	LOGITECH	74,75
147	LOGITECH	74,75
247	SUMMAGRAPHICS	25

365 MASS STORAGE

Inquiry No.		Page No.
13	AK SYSTEMS	320
*	MAXELL	7
156	MEGA DRIVE	15
157	MEGA DRIVE	15
190	OVERLAND DATA	312
217	QUALSTAR	318
257	TALLGRASS TECHNOLOGIES	45
258	TALLGRASS TECHNOLOGIES	45
270	VERBATIM CORP	51

*** MISCELLANEOUS**

Inquiry No.		Page No.
22	ANAHEIM AUTOMATION	324
31	BAY TECHNICAL ASSOCIATES	32
59	COMPUQUEST	298
62	COMPUTER AGE	337
70	COVOX	124
*	INTECTRA	314
119	INTEGRAND	143
132	KADAK PROD.	337
142	LOGICAL DEVICES	328
143	LOGICAL DEVICES	328
162	MERRITT COMPUTER PROD.	94
271	VIZIFLEX SEELS	326

366 MODEMS/MULTIPLEXORS

Inquiry No.		Page No.
24	ATI TECHNOLOGIES	259
*	CLEO SOFTWARE	200
58	COMPUCOM	298
94	E-TECH	337
289	HAYES MICRO PRODUCTS	269
114	HOLMES MICROSYSTEMS	30
115	HOLMES MICROSYSTEMS	30
135	KISS ENGINEERING	92
266	TOUCHBASE SYSTEMS	144D

367 MONITORS

Inquiry No.		Page No.
174	MITSUBISHI	218,219
175	MITSUBISHI	218,219
204	PRINCETON GRAPHIC SYS.	61
298	SHARP	265
260	TATUNG	231
281	ZENITH DATA SYSTEMS	205

368 NETWORK HARDWARE

Inquiry No.		Page No.
31	BAY TECHNICAL ASSOCIATES	32
55	COGITATE	298
323	CUBIX	88IS-15
516	DRESSELHAUS COMP. PROD.	88NE-3
124	ITRON	81
*	MICROSMART	88NE-8,9
201	PERSONAL SPACE COMM.	322

369 POWER SUPPLIES

Inquiry No.		Page No.
16	AMER. POWER CONVERSION	24
345	NEOLEC	88IS-22
192	PARA SYSTEMS	93

370 PRINTERS/PLOTTERS

Inquiry No.		Page No.
31	BAY TECHNICAL ASSOCIATES	32
53	CITIZEN AMERICA	189
517	E.R.M. ASSOC.	88NE-15
518	E.R.M. ASSOC.	88NE-15
328	FACIT AB	88IS-12,13
102	FUJITSU AMERICA	236
104	GENICOM	8,9
111	HEWLETT-PACKARD	225
112	HEWLETT-PACKARD	227
150	MANNESMANN TALLY	145
151	MANNESMANN TALLY	145
*	NEC INFO SYSTEMS	CIII
230	ROSE ELECTRONICS	317
231	ROSE ELECTRONICS	317
269	VENTURA PERIPHERALS	182,183
283	ZERICON	298

371 PRINTER RIBBONS

Inquiry No.		Page No.
*	BEST WESTERN	46

372 SCANNERS/DIGITIZERS

Inquiry No.		Page No.
95	FLAGSTAFF ENGINEERING	100
96	FLAGSTAFF ENGINEERING	100
337	IRIS	88IS-16
148	LOGITECH	87
149	LOGITECH	87
171	MIRROR TECHNOLOGIES	135
172	MITSUBISHI	221
173	MITSUBISHI	221

373 SOFTWARE SECURITY

Inquiry No.		Page No.
314	ALADDIN KNOWLEDGE SYS.	88IS-10
359	CONTROL TELEMETRY	88IS-42
343	MICROPHAR	88IS-40
226	RAINBOW TECH	277
244	SOFTWARE SECURITY INC.	31

374 SYSTEMS

Inquiry No.		Page No.
311	ABC COMPUTER CO.	88IS-49
291	ACCU-SYS	267
312	ACER MULTITECH	88IS-28,29
527	ALTEC TECHNOLOGY	88PC-4
17	AMERICAN RESEARCH CORP	95
18	AMERICAN RESEARCH CORP	95
19	AMERICAN SEMICONDUCTOR	324
*	AMPRO	199
32	BEST COMPUTER	246
33	BEST COMPUTER	246
51	CLUB AMERICAN TECH	82,83
321	COMPUADD	88IS-41
479	CORTEX CORP.	88M/A-6
514	CORTEX CORP.	88NE-7
79	DELL COMPS. (INT'L)	160,161
80	DELL COMPS. (N. AMER.)	160-163
325	ELEKTRONIC EQUIP. COMP.	88IS-48
326	ELONEX	88IS-11
92	EXEREX	26,27
93	EXEREX	26,27
294	FIVESTAR COMPUTERS	192,193
99	GATEWAY 2000	53
339	ISE DATA	88IS-24
160	MEGATEL	54
165	MICRO EXPRESS	281
166	MICRO EXPRESS	281
168	MICRONICS	175
532	MS ENGINEERING, INC.	88PC-7
533	MS ENGINEERING, INC.	88PC-7
347	OLIVETTI	88IS-5
482	OWL COMP. SERVICES	88M/AT-5
195	PC DESIGN	191
211	PROTEUS TECHNOLOGY	41
225	RADIO SHACK	CIV
227	RAINBOW TECH	326
235	SCHWAB COMPUTER CENTER	337
483	SF MICRO	88M/AT-3
536	SF MICRO	88PC-1
490	SPEAR TECHNOLOGY	88MW-1
521	SPEAR TECHNOLOGY	88NE-4
248	SUNTRONICS	112
259	TATUNG	229
*	TOSHIBA COMPUTERS	20,21
522	UNIQ TECH	88NE-10
358	WAVE MATE INC.	88IS-17
273	WELLS AMERICAN	13
276	WINTEK	314
282	ZEOS INT'L LTD.	48,49
284	Z-WORLD	320

SOFTWARE

375 APPLE2/MAC APPLICATIONS —Business/Office

Inquiry No.		Page No.
97	FOX SOFTWARE	23

376 IBM/MSDOS APPLICATIONS —Business/Office

Inquiry No.		Page No.
3	1ST CLASS EXPERT SYSTEMS	106
4	3RD WAVE	279
7	ABRA CADABRA SOFTWARE	98
320	CLARION	88IS-43
56	COGITATE	317
322	COMP. ELEC. INFOSYS.	88IS-21
76	DB FAST	104
98	FTG DATA	326
331	GAMMA PRODUCTIONS	88IS-18
105	GOLDEN BOW	314
180	NANTUCKET	217
346	NOVELL DEVELOPMENT	88IS-52
*	ORACLE	77
348	ORACLE	88IS-9
193	PARSONS TECHNOLOGY	47
194	PATTON & PATTON	16
221	QUARTERDECK	138
222	QUARTERDECK	138
223	QUICKSOFT	28
*	RAIMA	35
261	TELEMKTG. RESOURCES	107
262	TELEMKTG. RESOURCES	117

377 IBM/MSDOS APPLICATIONS —Scientific/Technical

Inquiry No.		Page No.
75	DAYTRON ELECTRONICS	324
89	ECOSOFT	34
329	FLEMMING SOFTWARE	88IS-34
116	HORSTMANN SOFTWARE	116
154	MATHSOFT	69
181	NATIONAL INSTRUMENTS	132
182	NATIONAL INSTRUMENTS	132
481	NEURALWARE	88M/AT-1
534	NEURALWARE	88PC-5
288	SPECTRUM	243
246	STATSOFT	118
252	SYSTAT	208
253	SYSTAT	208

378 IBM/MSDOS APPLICATIONS —Miscellaneous

Inquiry No.		Page No.
153	MAP INFO SYSTEMS	18

READER SERVICE

Advertising Supplement included with this issue:
JDR Microdevices (U.S. and Canada Subscribers)

* Correspond directly with company.

379 IBM/MSDOS—CAD

Inquiry No.		Page No.
8	ACCEL TECH	326
20	AMER. SMALL BUSINESS COMP.	131
26	AUTODESK	150
45	CADAM	222
46	CADAM	222
277	WINTEK CORP.	5

380 IBM/MSDOS—LAN

Inquiry No.		Page No.
41	BORLAND	71
42	BORLAND	71
324	DATEX	88IS-39
239	SIMPLE NET SYSTEMS	144B
240	SIMPLE NET SYSTEMS	144B
355	TRAFFIC SOFTWARE	88IS-36

381 IBM/MSDOS—LANGUAGES

Inquiry No.		Page No.
5	A + L MEIER VOGT	251
11	AETECH	280
12	AETECH	280
315	ANALYTICAL ENGINES	88IS-34
37	BORLAND	CII
38	BORLAND	CII
39	BORLAND	1
40	BORLAND	1
319	CALEND	88IS-33
296	CNS, INC.	204
297	CNS, INC.	204
81	DIGITALK	36,37
82	DIGITALK	36,37
91	ELLIS	114
333	GSE	88IS-37
108	HAMMERLY COMP. SERVICES	79
130	JENSEN & PARTNERS	85
137	LAHEY	122
152	MANX SOFTWARE SYSTEMS	125
*	MICROSOFT	146,147
170	MICROWAY	55
176	MIX SOFTWARE	297
268	USERSOFT	136,137
357	WARREN POINT	88IS-36

382 IBM/MSDOS UTILITIES

Inquiry No.		Page No.
6	A + L MEIER VOGT	253
25	ATRON	66
27	AVOCET SYSTEMS	214
34	BLAISE	33
47	CALIFORNIA S/W PROD.	322
48	CALIFORNIA S/W PROD.	322
74	DATACODE	52
113	HITECH EQUIP. CORP.	324
290	MATRIX	254
163	MICRO COMPUTER SQUARE	266
164	MICRO COMPUTER SQUARE	266
176	MIX SOFTWARE	297
535	NU-MEGA	88PC-10
202	POLYTRON	296
224	QSET	54
*	QUAID SOFTWARE	58
219	QUARTERDECK	128
220	QUARTERDECK	128
250	SUPERSOFT	60
127	TOP GUN SYSTEMS	213
*	VERMONT CREATIVE S/W	10
274	WENHAM SOFTWARE	314
278	WOODCHUCK IND.	314

383 IBM/MSDOS COMMUNICATIONS

Inquiry No.		Page No.
54	COEFFICIENT SYSTEMS CO.	245
88	DIVERSIFIED COMP. SYS.	322
106	GRAFPOINT	326
133	KEA SYSTEMS	46
134	KEA SYSTEMS	314
198	PC WORKS	322
200	PERSOFT	73
243	SOFTRONICS	318

384 OTHER—LANGUAGES

Inquiry No.		Page No.
327	EQUIPU A.I.R. LTD.	88IS-23
285	Z-WORLD	320

385 OTHER—CROSS DEVELOPMENT

Inquiry No.		Page No.
*	SOFTWARE DEV. SYS.	91
267	UNIV. CROSS-ASSEMBLERS	324

386 MAIL ORDER/ RETAIL

Inquiry No.		Page No.
500	3D COMPUTER CORP.	88SW-8
526	3-F ASSOCIATES	88PC-12
10	ADV. COMPUTER PRODS.	330,331
15	ALTEX ELECTRONICS	316
28	B & B ELECTRONICS	337
528	B & B ELECTRONICS	88PC-2
36	BOFFIN LTD.	127
*	BUYERS MART	300-309
*	CALIFORNIA DIGITAL	329
487	CAMBRIDGE DIRECT	88MW-8
476	CAMBRIDGE DIRECT	88M/AT-8
509	CAMBRIDGE DIRECT	88NE-16
510	COM TEK DATA	88NE-1
57	COMPACT DISK PRODUCTS	94
488	COMPARE COMPUTERS	88MW-3
489	COMPARE COMPUTERS	88MW-3
477	COMPARE COMPUTERS	88M/AT-7
478	COMPARE COMPUTERS	88M/AT-7
511	COMPARE COMPUTERS	88NE-6
512	COMPARE COMPUTERS	88NE-6
60	COMPUSAVE	315
64	COMPUTER MAIL ORDER	56,57
66	COMPUTER SURPLUS STORE	320
529	COMPUTOWN	88PC-9
67	COMPUTERLANE UNLTD	177
68	CONTECH	328
72	DATA DIRECT	337
73	DATA DIRECT	337
83	DISC INTERNATIONAL	328
85	DISKCOTECH	318
86	DISKETTE CONNECTION	317
87	DISKS TO GO	324
480	D-DATA	88M/AT-4
495	D-DATA	88SE-8
501	GEN. BUS. MACHINES	88SW-1
332	GREY MATTER	88IS-35
109	HARD DRIVES INT'L	184
110	HARD DRIVES INT'L	184
117	IC EXPRESS	312
118	IEEE	262
126	JADE COMPUTER	327
128	JAMECO	310,311
131	J.D.R. MICRODEVICES	332,333
131	J.D.R. MICRODEVICES	334-336
*	J.D.R. MICRODEVICES	345-360
530	KMS	88PC-11
531	KMS	88PC-11
502	KMS	88SW-3
503	KMS	88SW-3
496	KNAPCO	88SE-1
*	MCGRAW-HILL BOOKS	88IS-51
*	MCGRAW-HILL BOOKS	88MW-7
*	MCGRAW-HILL BOOKS	88SE-5
*	MCGRAW-HILL BOOKS	88SW-7
155	MEAD COMPUTER	319
158	MEGASOFT	320
159	MEGASOFT	320
161	MEP (MICRO ELECT. PROD.)	312
167	MICROCOM	22
*	MICROCOMP. MKTG.COUNCIL	88MW-5
*	MICROCOMP. MKTG.COUNCIL	88NE-12
*	MICROCOMP. MKTG.COUNCIL	88PC-6
*	MICROCOMP. MKTG.COUNCIL	88SE-3
*	MICROCOMP. MKTG.COUNCIL	88SW-5
*	MICROMINT	88SE-6
169	MICROPROCESSORS UNLTD.	320
170	MICROWAY	55
178	MONTGOMERY GRANT	121
179	M.H.I.	313
186	OMEGA MICRO SYSTEMS	212
520	PC LINK	88NE-5
196	PC NETWORK	59
197	PC PLUS	190
349	PRECISION DATA	88IS-32
203	PRINCETON DISKETTE	298
205	PRIORITY ONE	325
207	PROGRAMMERS SHOP	105
208	PROGRAMMER'S CONNECTION	39
209	PROGRAMMER'S PARADISE	62,63
*	ROBT. TINNEY GRAPHICS	88MW-6
*	ROBT. TINNEY GRAPHICS	88NE-14
*	ROBT. TINNEY GRAPHICS	88PC-8
*	ROBT. TINNEY GRAPHICS	88SE-7
*	ROBT. TINNEY GRAPHICS	88SW-6
232	SABINA INT'L	317
236	SCIENCE & ENGINEERING	115
350	SEMITECH MICRO ELECT.	88IS-25
238	SHAMROCK COMPUTER	257
241	SKAN TEKNOLOGIES	318
242	SN'W ELECTRONICS	264
*	SOFTLINE CORPORATION	88IS-19
245	SOLUTION SYSTEMS	105
537	SURAH	88PC-3
538	SURAH	88PC-3
352	S-100	88IS-27
353	S-100	88IS-27
255	S.C. SYSTEMS	178
263	TELEMART	42,43
264	TELEMART	42,43
265	TIMELINE	321
356	USA SOFTWARE	88IS-7
272	WAREHOUSE DATA	103
275	WIESEMANN & THEIS GMBH	126
491	Y.E.S. MULTINATIONAL	88MW-2

387 EDUCATIONAL/ INSTRUCTIONAL

Inquiry No.		Page No.
21	ANNABOOKS	322
317	BIX	88IS-45
*	BYTE BACK ISSUE	344
*	BYTE BACK ISSUE	277
*	BYTE BACK ISSUE/SALE	252
344	BYTE BITS	88IS-32
*	BYTE CIRCULATION	220
*	BYTE MARKETING	88IS-44
*	BYTE SUB. MESSAGE	98
*	BYTE SUB. MESSAGE	88IS-26
*	BYTE SUB. SERVICE	92
*	BYTE SUB. SERVICE	203
*	BYTE SUB. SERVICE	88IS-42
*	BYTE TIPS	88MW-4
*	BYTE TIPS	88SE-2
*	BYTE TIPS	88SW-2
63	COMPUTER BOOK CLUB, THE	97
*	COMPS. FOR THE BLIND	88SE-4
*	COMPS. FOR THE BLIND	88SW-4
71	CYBER RESEARCH	326
121	INTELLIGENCEWARE	99
519	INTERFACE GROUP	88NE-13
129	JASON ENTERPRISE	314
136	KNOWLEDGE GARDEN	263
*	MCGRAW-HILL CEC	273
*	MCGRAW-HILL NRI	241
295	MESSE MUNCHEN INT'L	113
189	OSBORNE MCGRAW-HILL	292

388 DESKTOP PUBLISHING

Inquiry No.		Page No.
9	ADOBE	108,109
138	LASER CONNECTION	17
139	LASER CONNECTION	19
341	LASER TEAM	88IS-22
*	MICROSOFT	206,207
354	TOOLS GMBH	88IS-20

389 RECRUITMENT

Inquiry No.		Page No.
*	MICROSOFT CORP.	299

* MISCELLANEOUS

Inquiry No.		Page No.
313	AL DOWNLOADING	88IS-38
316	BCL	88IS-34
513	COMP. RESOURCE CTR.	88NE-11
*	NEC INFO SYSTEMS	176
187	ON TARGET	328
233	SAFEWARE	314

390 OPERATING SYSTEMS

Inquiry No.		Page No.
185	NEW MICROS	320
218	QUANTUM	156
234	SANTA CRUZ OPERATION	169

391 ON-LINE SERVICES

Inquiry No.		Page No.
450	BIX	232,233
61	COMPUSERVE	287
342	MICRO TECHNOLOGY	88IS-31

	1985	1986	1987	1988
Jan.	$4.00			$6.00
Feb.	$4.00	$6.00	$6.00	
March	$4.00		$6.00	$6.00
April	$4.00		$6.00	
May	$4.00		$6.00	$6.00
June	$4.00	$6.00	$6.00	$6.00
July		$6.00	$6.00	$6.00
Aug.	$4.00	$6.00	$6.00	$6.00
Sept.	$4.00	$6.00	$6.00	
Oct.	$4.00			
Nov.	$4.00			
Dec.	$4.00	$6.00		

BACK ISSUES FOR SALE

SPECIAL ISSUES and INDEX

BYTE '83–'84 INDEX	$2.00
BYTE 1985 INDEX	$2.50
BYTE 1986 INDEX	$2.00
BYTE 1987 INDEX	$2.50
1985 INSIDE THE IBM PCs	$4.75
1986 INSIDE THE IBM PCs	$5.00
APPLICATIONS SOFTWARE TODAY SPECIAL	$4.00

Circle and send requests with payments to:

BYTE Back Issues
One Phoenix Mill Lane
Peterborough, NH 03458
(603) 924-9281

☐ Check enclosed *Payments from foreign countries must be made in US funds payable at a US bank.*
☐ VISA ☐ MasterCard

CARD # _____ EXP. DATE _____

SIGNATURE _____

The above prices include postage in the US. Please add $ .50 per copy for Canada and Mexico; and $2.00 per copy to foreign countries (surface delivery). Please allow 4 weeks for domestic delivery and 12 weeks for foreign delivery.

European customers please refer to Back Issue order form in International Advertising section of book.

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

TIPS SUBSCRIBERS ONLY!*

Use BYTE's Telephone Inquiry Processing System

Using TIPS can bring product information as much as 10 days earlier.

SEND FOR YOUR SUBSCRIBER I.D. CARD	1)	If you are a new subscriber or have lost your I.D. card, circle #1 on the Reader Service Card; **attach mailer label.** We will immediately send your personal TIPS subscriber card.
GET PREPARED	2)	Write your Subscriber Number, as printed on your Subscriber I.D. Card, in boxes in Step 5 below. (Do not add 0's to fill in blank boxes)
	3)	Write numbers for information desired in boxes in Step 7b below. (Do not add 0's to fill in blank boxes.)
CALL TIPS	4)	Now, on a Touch-Tone telephone dial: **(413) 442-2668** and wait for voice commands.
ENTER YOUR SUBSCRIBER AND ISSUE NUMBERS	5)	When TIPS says: "Enter Subscriber Number" (Enter by pushing the numbers and symbols [# or * enclosed in the boxes] on telephone pad ignoring blank boxes) Enter ☐☐☐☐☐☐☐☐☐#[#]
	6)	When TIPS says "Enter magazine code & issue code" Enter 1[#]1[0]8[#][#]
ENTER YOUR INQUIRIES	7a)	When TIPS says "Enter (next) Inquiry Number" Enter one inquiry selection from below (ignore blank boxes)
	b)	Repeat 7a as needed (maximum 17 inquiry numbers)

1. ☐☐☐#[#] 6. ☐☐☐#[#] 10. ☐☐☐#[#] 14. ☐☐☐#[#]
2. ☐☐☐#[#] 7. ☐☐☐#[#] 11. ☐☐☐#[#] 15. ☐☐☐#[#]
3. ☐☐☐#[#] 8. ☐☐☐#[#] 12. ☐☐☐#[#] 16. ☐☐☐#[#]
4. ☐☐☐#[#] 9. ☐☐☐#[#] 13. ☐☐☐#[#] 17. ☐☐☐#[#]
5. ☐☐☐#[#]

END SESSION	8)	End session by entering *[*]9[1][#][#]
	9)	Hang up after hearing final message If you are a subscriber and need assistance, call (603) 924-9281.

Available 24 Hours, 7 Days a Week

If you are not a subscriber fill out the subscription card found in this issue or, call BYTE Circulation 800-423-8272.
***Domestic and Canadian Subscribers Only!**

FREE Information Retrieval Service

To assist you in making your evaluations, purchasing decisions, or recommendations, you can request further information directly from the manufacturer or service company on products and services advertised in this issue. There is no charge, no obligation. Just complete and mail the attached self-addressed reply card, and we'll do the rest.

1 Circle numbers on reply card which correspond to numbers assigned to items of interest to you.

2 Check all the appropriate answers to questions "A" through "F".

3 Print your name and address and mail.

Fill out this coupon carefully. PLEASE PRINT. Requests cannot be honored unless the code is included. This card is valid for 6 months from cover date.

A. What is your primary job function? (Check one only)
1 ☐ Business Owner, General Management, Administrative
2 ☐ MIS/DP, Programming
3 ☐ Engineering/Scientific, R&D
4 ☐ Professional (law, medicine, accounting)
5 ☐ Other

B. How many people does your company employ?
1 ☐ 25 or fewer
2 ☐ 26–99
3 ☐ 100–499
4 ☐ 500–999
5 ☐ 1000 or more

C. Reason for request: (Check all that apply).
1 ☐ Business use for yourself
2 ☐ Business use for your company
3 ☐ Personal use

D. Your next step after information is received:
1 ☐ Purchase order
2 ☐ Evaluation
3 ☐ Specification/Recommendation

E. Please indicate the product categories for which you influence the selection or purchase at your (or your client's) company or organization. (Check all that apply).
1 ☐ Microcomputers
2 ☐ Peripherals
3 ☐ Software
4 ☐ Accessories and supplies

F. For how many microcomputers do you influence the purchase of products at your (or your client's) company or organization?
1 ☐ 1
2 ☐ 2–4
3 ☐ 5–9
4 ☐ 10 or more

Name _____

Title _____

Company _____

Address _____

City _____ *Country* _____

Code _____ *Telephone* _____

CIRCLE FOR FREE INFORMATION — OCTOBER 48ARSE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108
109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135
136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162
163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594
595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621
622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648
649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675
676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702
703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729
730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756
757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783
784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810
811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837
838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	654	855	856	857	858	859	860	861	862	863	864
865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891
892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918
919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945
946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972
973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999

PLACE POSTAGE HERE

BYTE

P.O. Box 929
Yardley
Birmingham
England, B25 85

FREE Information Retrieval Service

To assist you in making your evaluations, purchasing decisions, or recommendations, you can request further information directly from the manufacturer or service company on products and services advertised in this issue. There is no charge, no obligation. Just complete and mail the attached self-addressed reply card, and we'll do the rest.

1 Circle numbers on reply card which correspond to numbers assigned to items of interest to you.

2 Check all the appropriate answers to questions "A" through "F".

3 Print your name and address and mail.

PLACE POSTAGE HERE

BYTE
P.O. Box 929
Yardley
Birmingham
England, B25 85

Fill out this coupon carefully. PLEASE PRINT. Requests cannot be honored unless the code is included. This card is valid for 6 months from cover date.

A. What is your primary job function? (Check one only)
1 ☐ Business Owner, General Management, Administrative
2 ☐ MIS/DP, Programming
3 ☐ Engineering/Scientific, R&D
4 ☐ Professional (law, medicine, accounting)
5 ☐ Other

B. How many people does your company employ?
1 ☐ 25 or fewer
2 ☐ 26–99
3 ☐ 100–499
4 ☐ 500–999
5 ☐ 1000 or more

C. Reason for request: (Check all that apply).
1 ☐ Business use for yourself
2 ☐ Business use for your company
3 ☐ Personal use

D. Your next step after information is received:
1 ☐ Purchase order
2 ☐ Evaluation
3 ☐ Specification/Recommendation

E. Please indicate the product categories for which you influence the selection or purchase at your (or your client's) company or organization. (Check all that apply).
1 ☐ Microcomputers
2 ☐ Peripherals
3 ☐ Software
4 ☐ Accessories and supplies

F. For how many microcomputers do you influence the purchase of products at your (or your client's) company or organization?
1 ☐ 1
2 ☐ 2–4
3 ☐ 5–9
4 ☐ 10 or more

Name _____

Title _____

Company _____

Address _____

City _____ *Country* _____

Code _____ *Telephone* _____

CIRCLE FOR FREE INFORMATION — OCTOBER 48ARSE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54
55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81
82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108
109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135
136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162
163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189
190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216
217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243
244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270
271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297
298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324
325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378
379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405
406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432
433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459
460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486
487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513
514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540
541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594
595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621
622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648
649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675
676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702
703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729
730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756
757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783
784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810
811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837
838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864
865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891
892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918
919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945
946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972
973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999

TO MAKE YOUR WRITING MORE RIVETING, STOP USING DULL CHARACTERS.

24-wire print quality. 9-wire price.

Ho. Hum. Yawn. That's how people react when your writing fails to keep them glued to the page. But you'll get readers' attention and keep it, when you write with appealing, fully-developed characters. Like the ones created by our Pinwriter® P2200 printer.

The P2200's 24-wire print head produces crisp, fully-formed characters for a 9-wire price. Which means you get print quality that people will stop and read. At a price that won't stop you.

Of course, stand-out print quality is just one reason the P2200 is so outstanding.

It sprints through 55 letter quality CPS or 170 in draft mode. Dresses up memos, letters, etc., with up to 128 type variations. And, like all our Pinwriters, it works with more software packages than any other 24-wire printer.

For more information about the entire Pinwriter Family, call 1-800-343-4418. And discover what a little character development can do for your writing.




NEC PRINTERS. THEY ONLY STOP WHEN YOU WANT THEM TO.

NEC

C&C Computers and Communications

NEC Information Systems, Dept. 1610, 1414 Massachusetts Ave., Boxborough, MA 01719.

Tandy® Computers: The broadest selection of PCs in America.

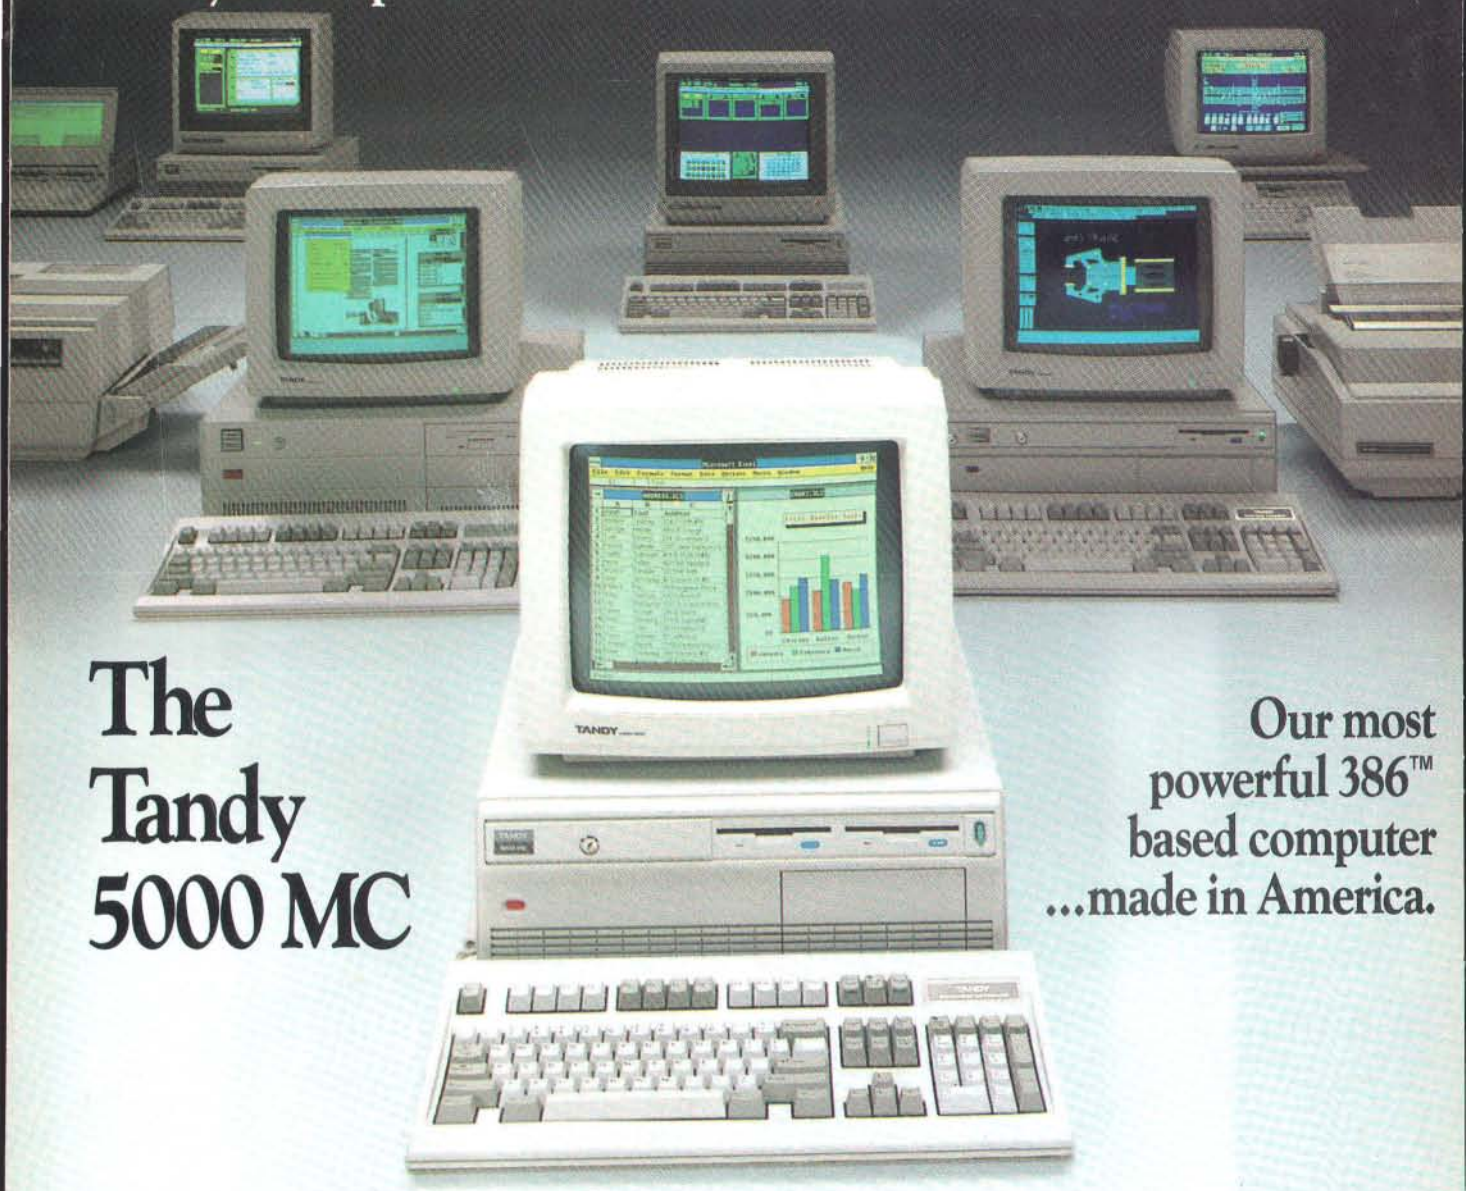

The Tandy 5000 MC

Our most powerful 386™ based computer ...made in America.

The new Tandy 5000 MC Professional System is pure performance, from the Intel® 80386 processor operating at 20 MHz to the memory cache controller that provides RAM-fast access to data.

With the 5000 MC, you have the high-performance platform needed to take the fullest advantage of industry-standard MS-DOS® applications, powerful new MS® OS/2 programs or multiuser SCO® XENIX® software.

Operating at 20 MHz, the 5000 MC cuts through the big jobs like database management, large spreadsheets and sophisticated graphics. Its IBM® Micro Channel™ compatible architecture allows multiple processors to use the same bus.

The system architecture also provides a radical increase in data-transfer rates when the Tandy 5000 MC is configured within a 3Com® workgroup or a multiuser environment.

The Tandy 5000 MC is the new alternative in personal computing—from the best-selling family of PC Compatibles made in America.

Tandy Computers: Because there is no better value.™

Intel/Reg. TM Intel Corp. IBM/Reg. TM and Micro Channel/TM IBM Corp. MS, MS-DOS and XENIX/Reg. TM Microsoft Corp. SCO/Reg. TM The Santa Cruz Operation. 3Com/Reg. TM 3Com Corp.

Radio Shack®
COMPUTER CENTERS
A DIVISION OF TANDY CORPORATION

Circle 225 on Reader Service Card